


$N=0$ $\begin{array}{c} i \quad t \quad OR \\ \hline 0 \quad 0 \end{array}$

$N=3$ $\begin{array}{c} i \quad top \quad ort \\ 1 \quad 2 \quad 0 \\ 2 \quad 5 \quad 0 \\ 3 \quad 9 \quad 0 \\ \hline 4 \quad \quad 3 \end{array}$

Bir dizideki elemanların
ortalamasını bulan
Algoritma

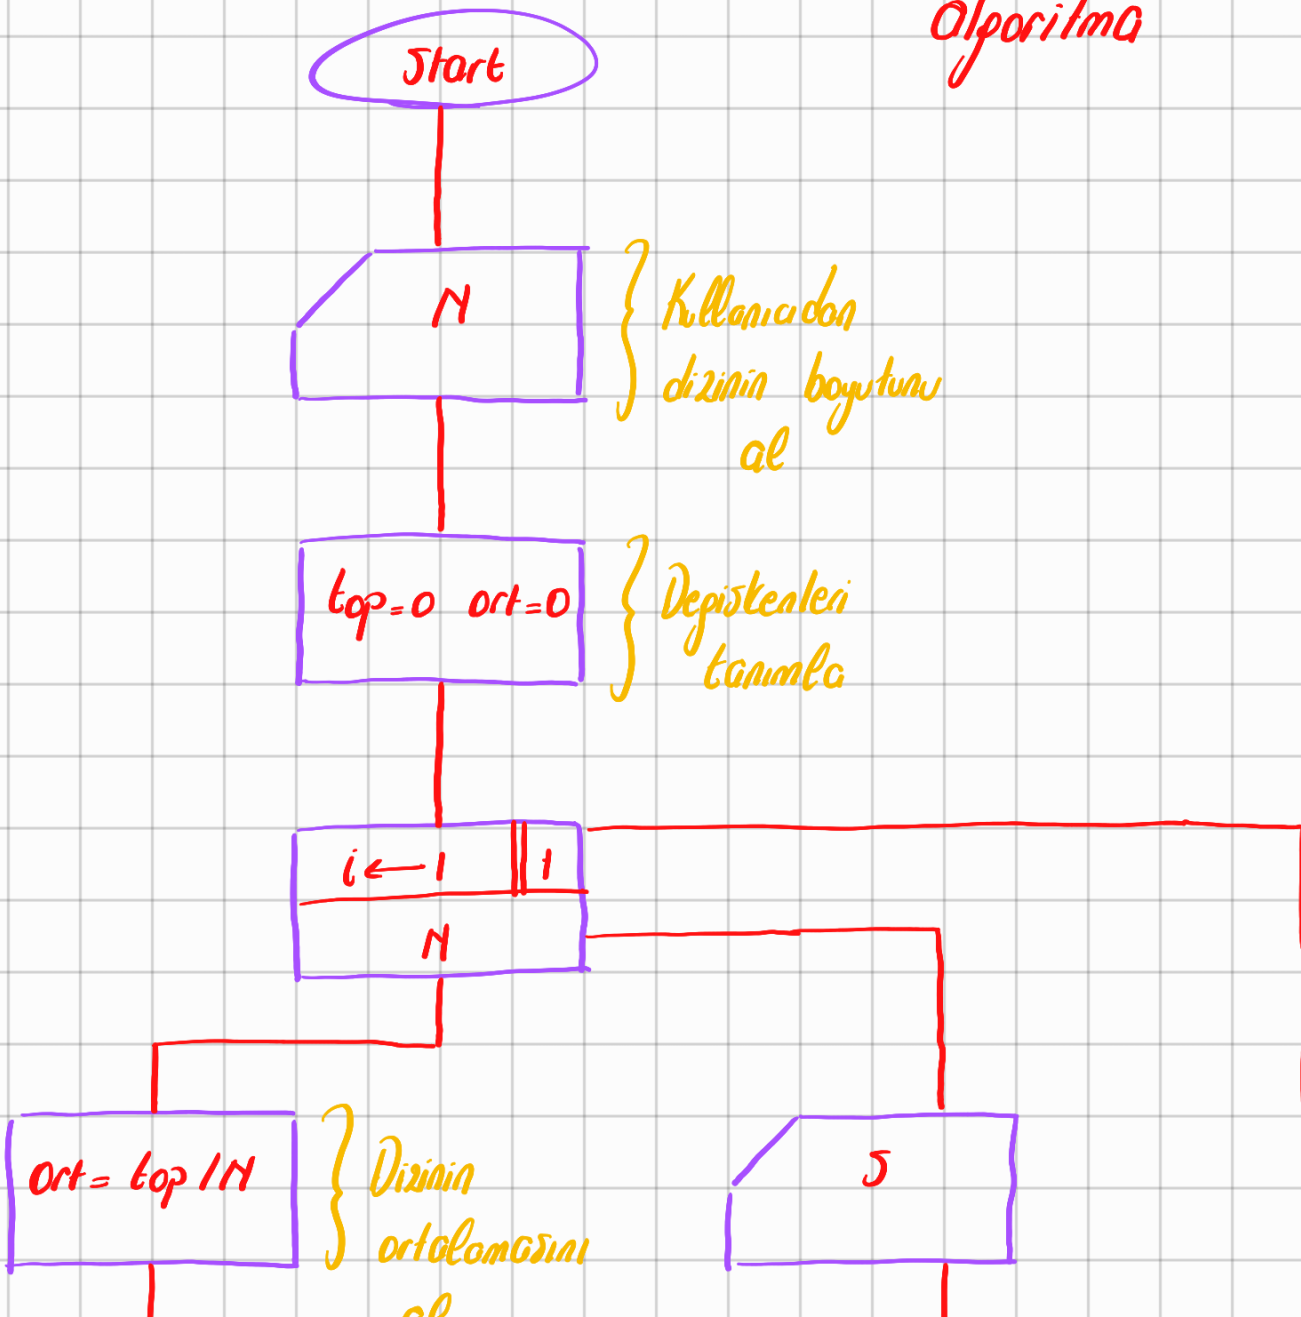

top, ort

top = top + 5

Stop

→ Diziyi topla

$$f(x) = \sum_{x=1}^N (1/x^2)$$

→ Bu problemi
gözen algoritma

Start

N


} Diziin
boyutunu al

x = 1
f = 0


x ≤ N


Diziyi

f = f + 1 / (x * x)

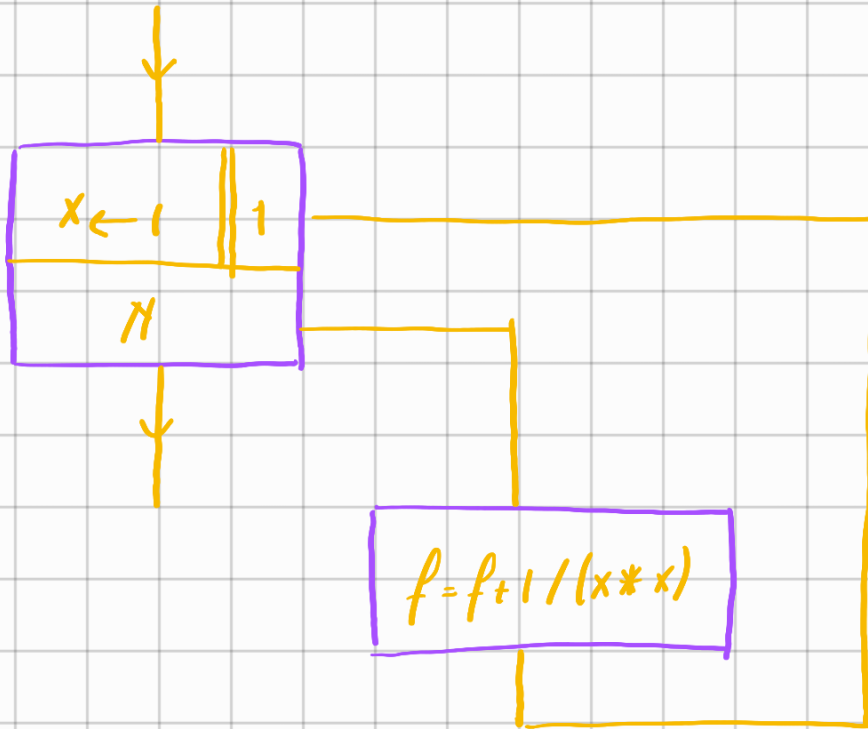

?

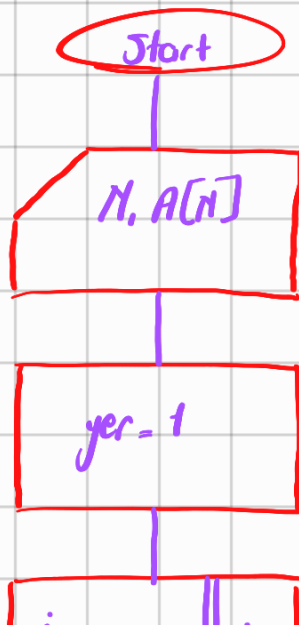


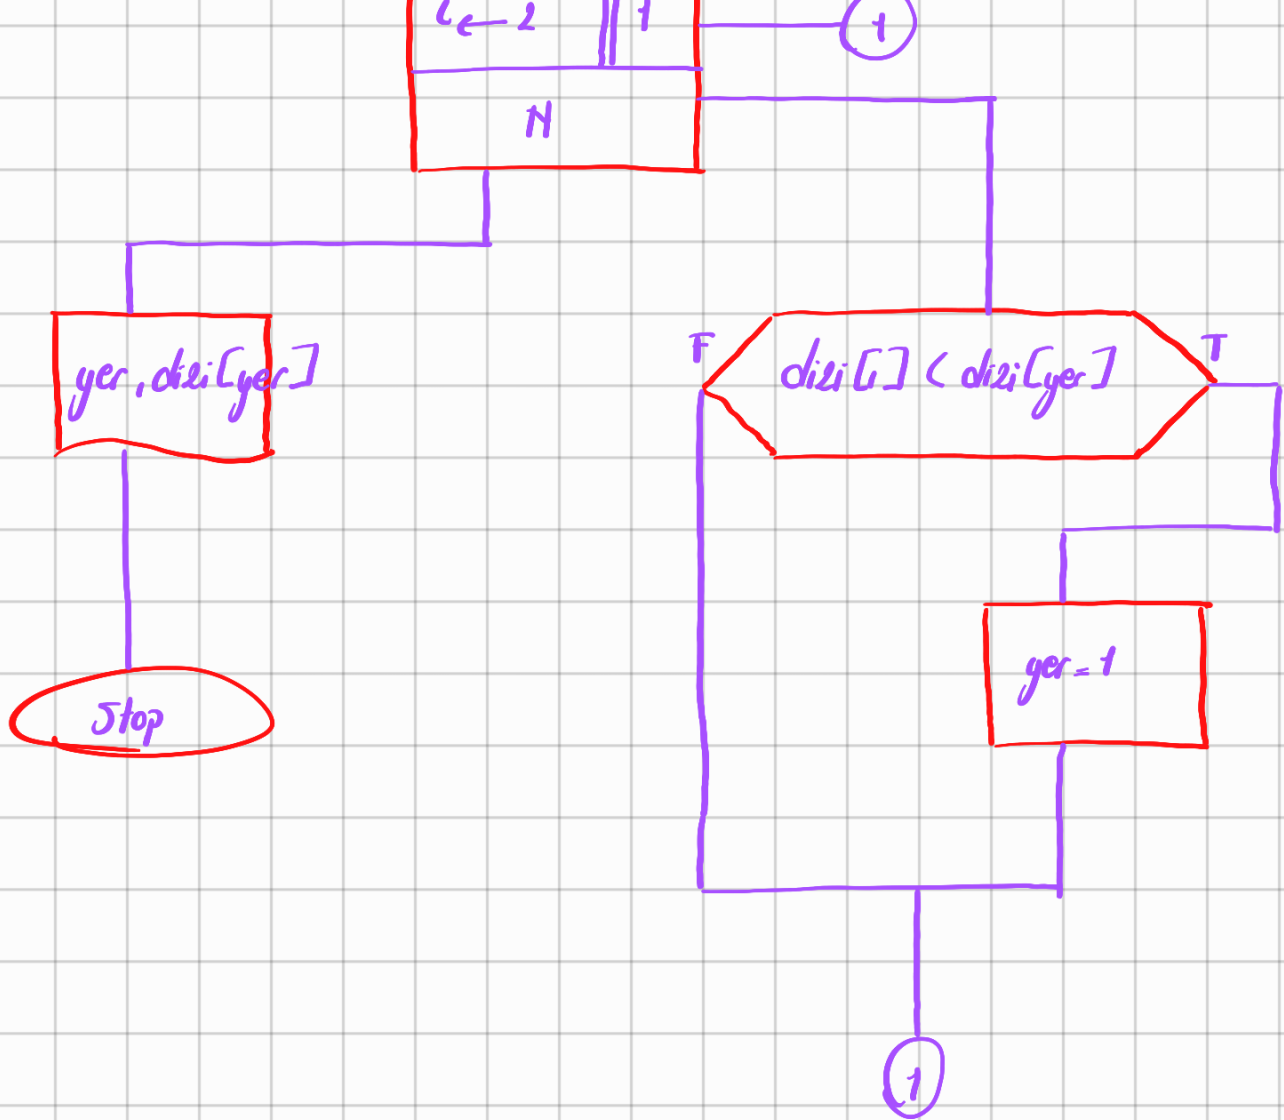

Array operations

- insert
- delete
- update
- search
- Min
- Max
- Sort
- AVG

finding minimum element

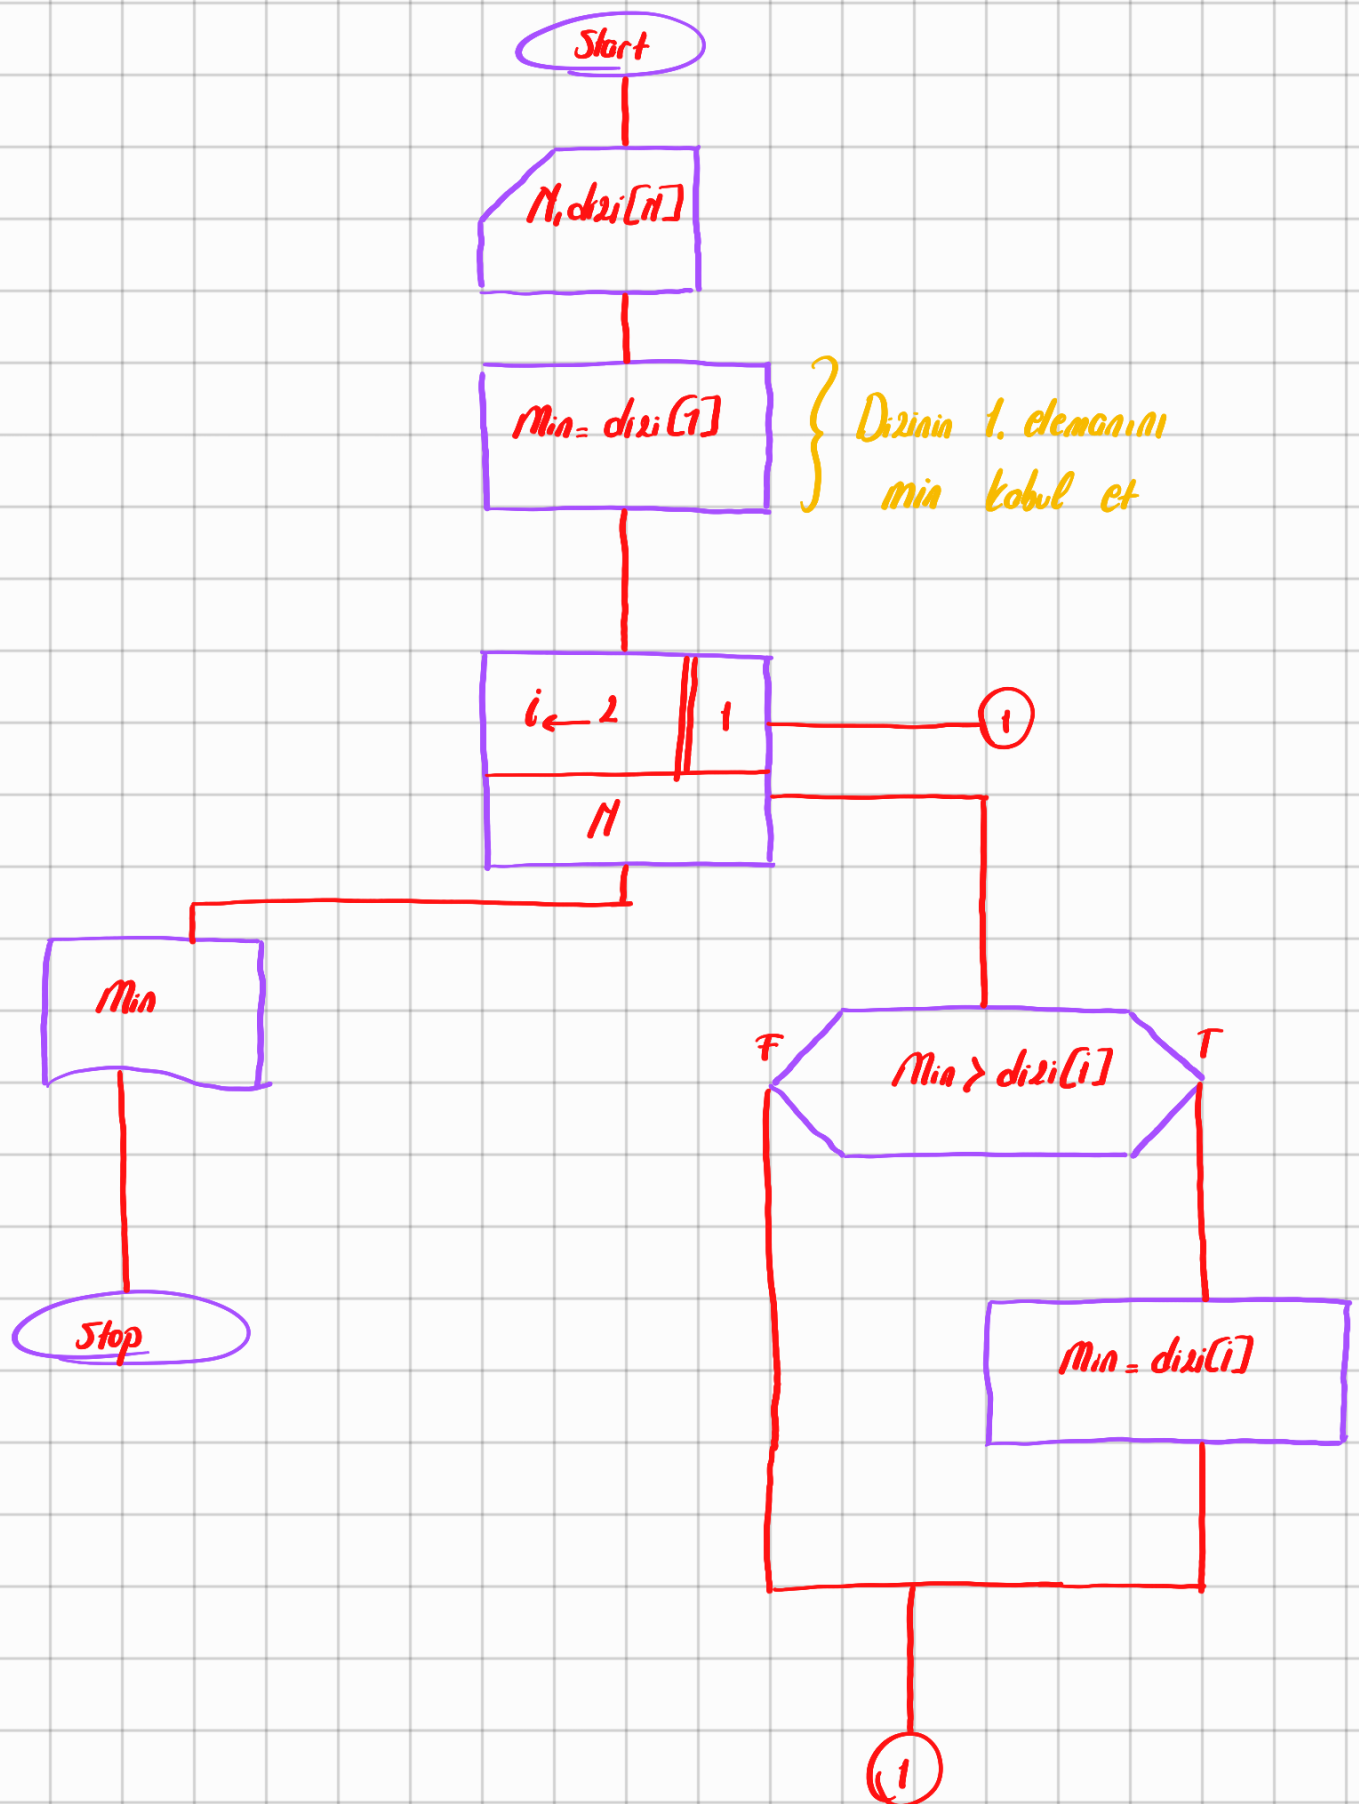

?

0

Start

N

$i \leftarrow 1$ || 1
10

$digit[i] = 0$

$isUnique = 1$

$N > 0$ And $isUnique = 1$


1

F $isUnique = 1$ T

$i = N \bmod 10$

$digit[i] = 0$

:-

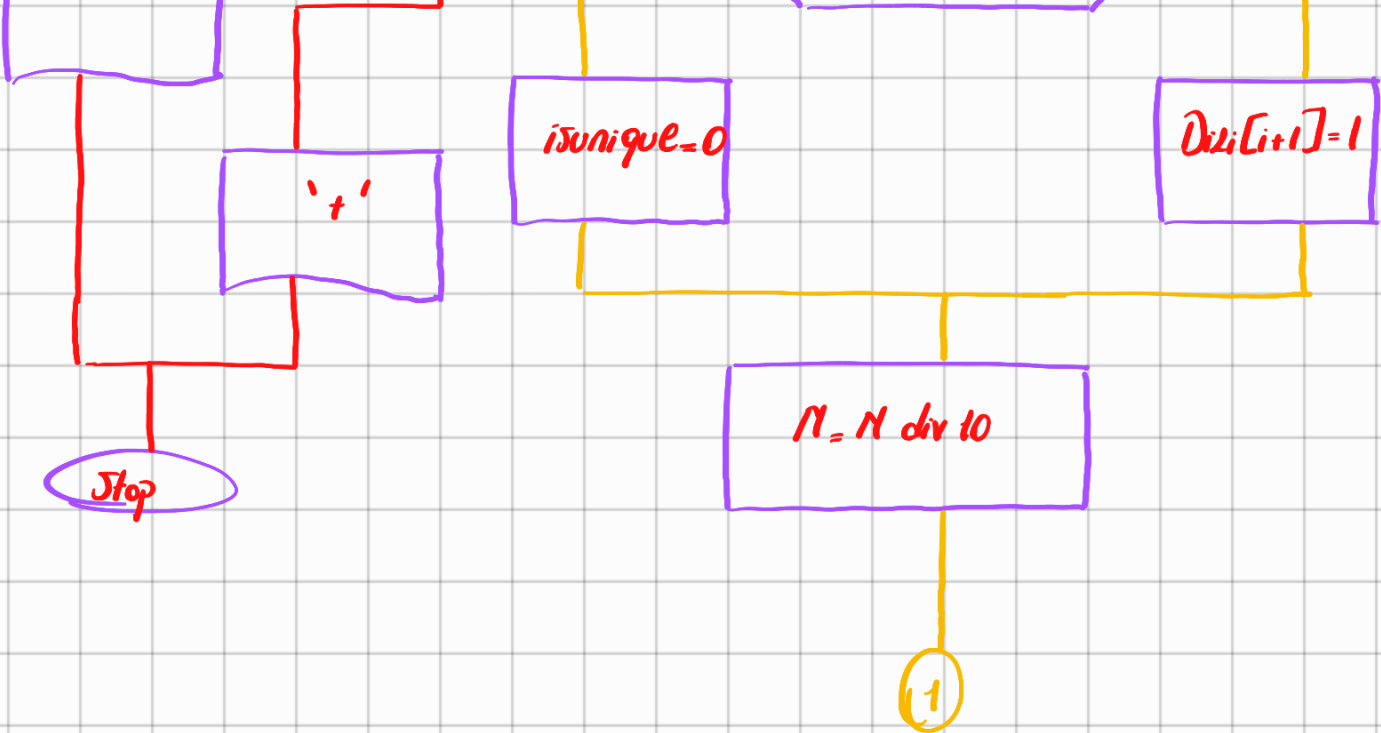

```
#include <stdio.h>
```

```
int main() {
```

```
    int i, number, dizi[20], isunique = 1;
```

```
    printf("Saygi giriniz \n");
```


```
    scanf("%d", &number);
```

```
    for(i=0; i<10; i++)
```

```
        dizi[i] = 0;
```

?

0



$i = 1$

$M > 9$

$digit[i] = M \bmod 10$

$M = M \div 10$

$i = i + 1$

$Digit[i] = M$

$J = 1$

$isunique = 1$

$J < 1$ And $isunique = 1$

②

$K = J + 1$


F

$isunique$


T


$K < 1$ And $isUnique = 1$

①

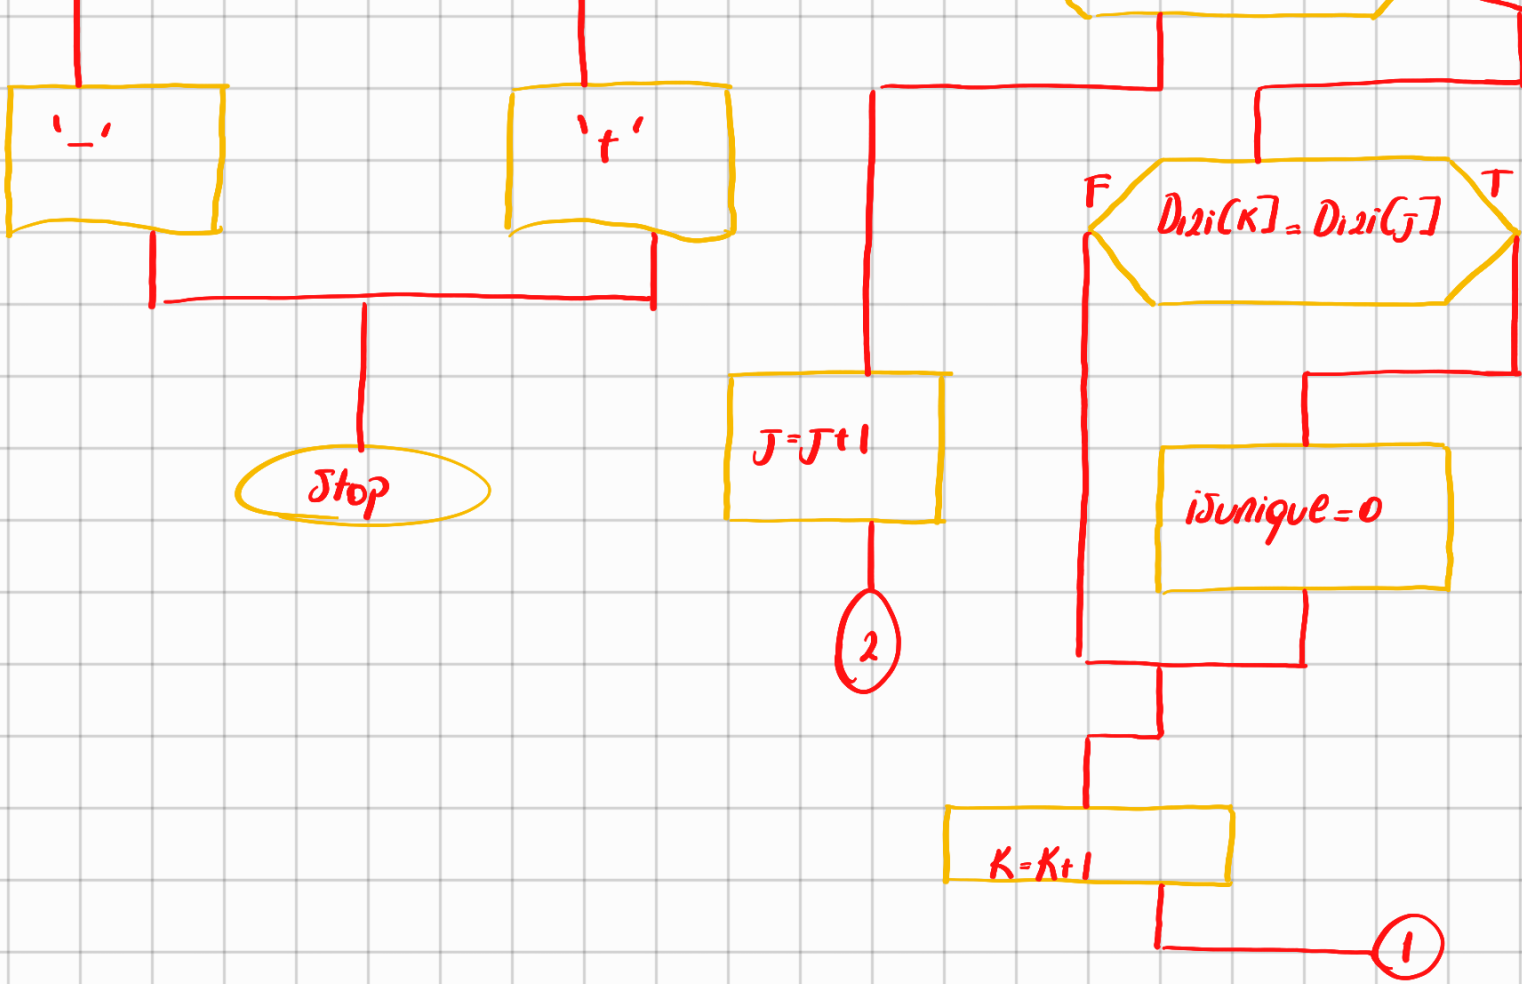


Asal sayı bulan
algoritma

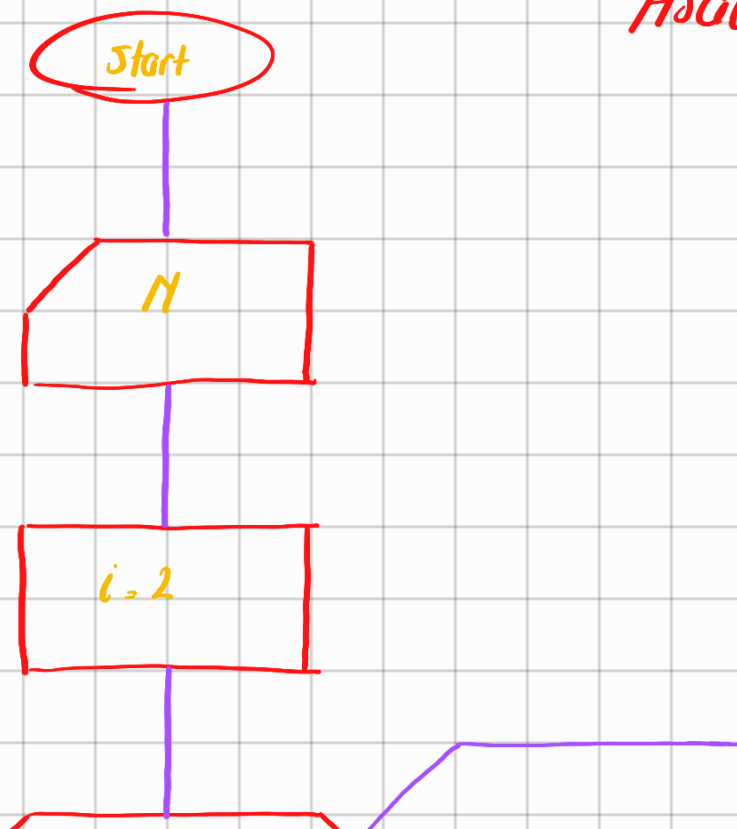

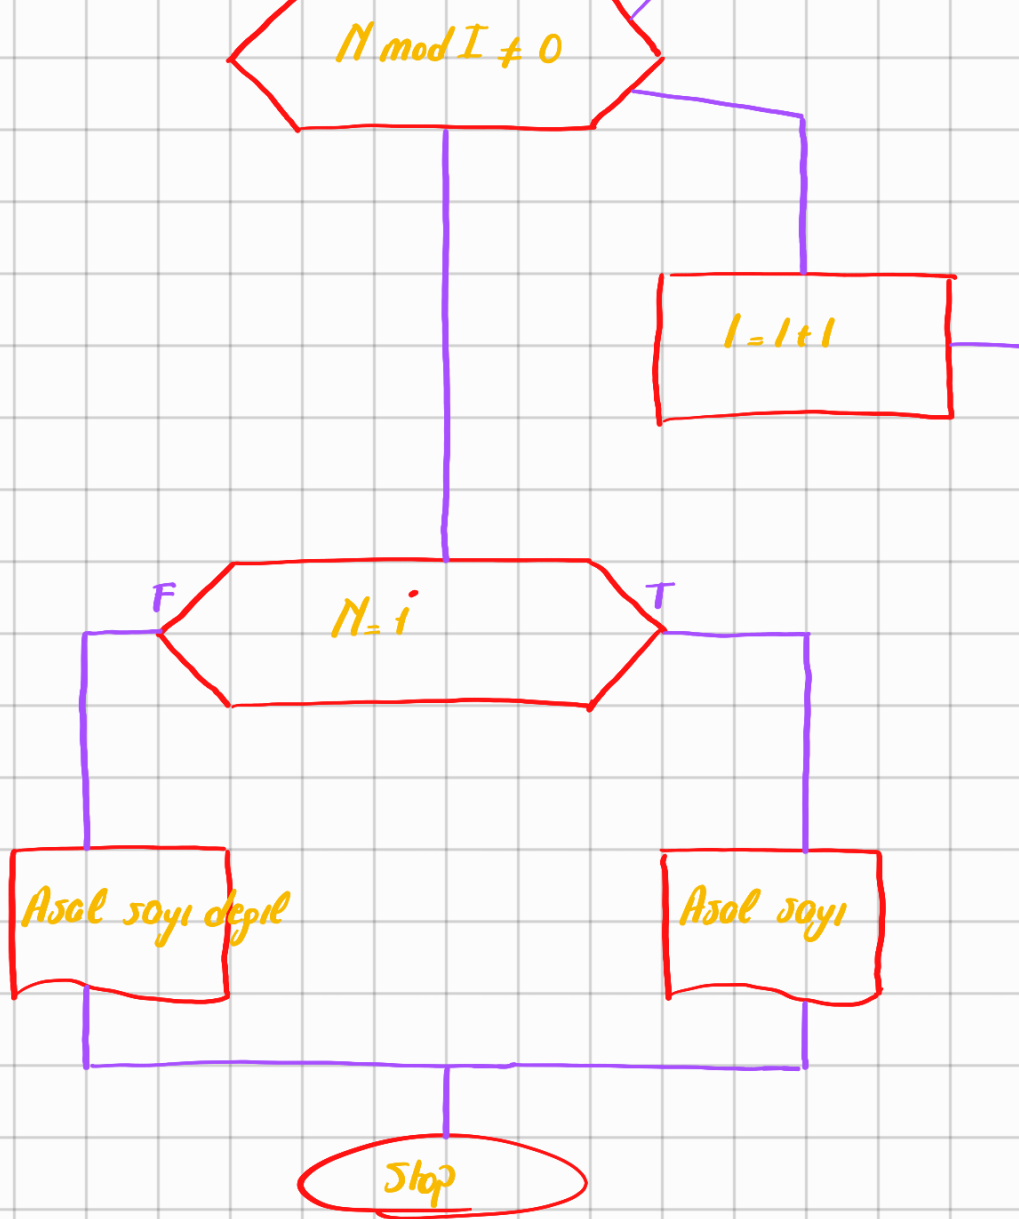

Asal sayı bulan
algoritma

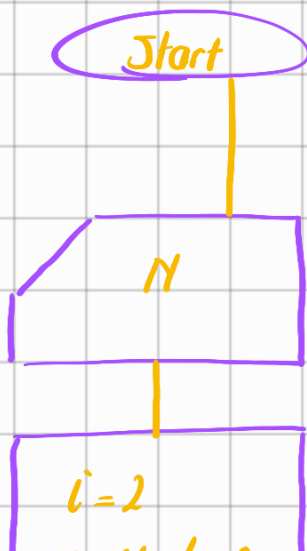

$m = N \text{ div } 2$

$isprime = 1$

$l \leq m \text{ And } isprime = 1$

$isprime = 1$

Asal sayı değil

Asal sayı

Stop

$N \bmod I = 0$

$isprime = 0$

$l = l + 1$

