


App\Controllers\Api
\BaseApi\initController

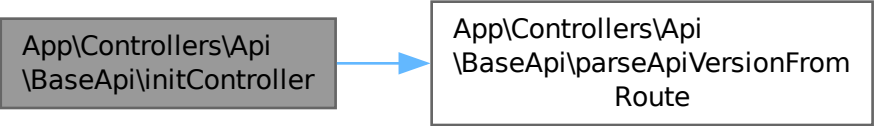

```
graph LR; A["App\Controllers\Api<br>\BaseApi\initController"] --> B["App\Controllers\Api<br>\BaseApi\parseApiVersionFrom<br>Route"]
```

A diagram showing a call from the `initController` method to the `parseApiVersionFromRoute` method. The `initController` method is represented by a grey box on the left, and the `parseApiVersionFromRoute` method is represented by a white box on the right. A blue arrow points from the `initController` box to the `parseApiVersionFromRoute` box.

App\Controllers\Api
\BaseApi\parseApiVersionFrom
Route