
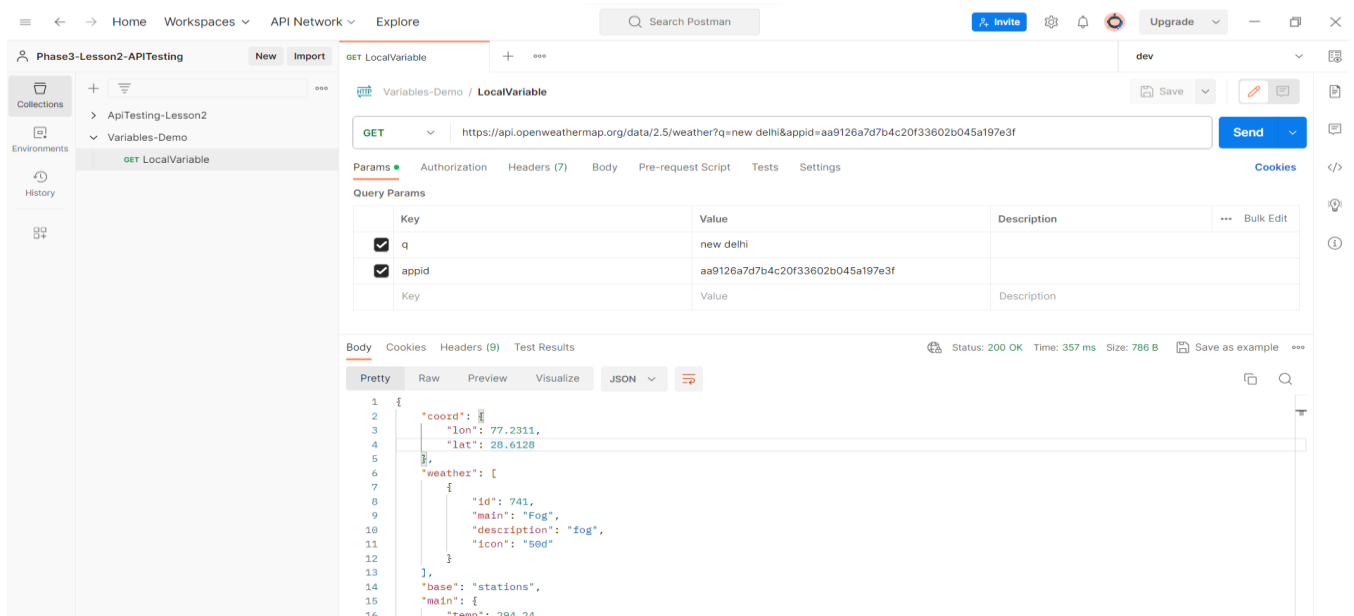


Variables and there scope in Postman

Create a collection → create a new request → get methods → openweather API:

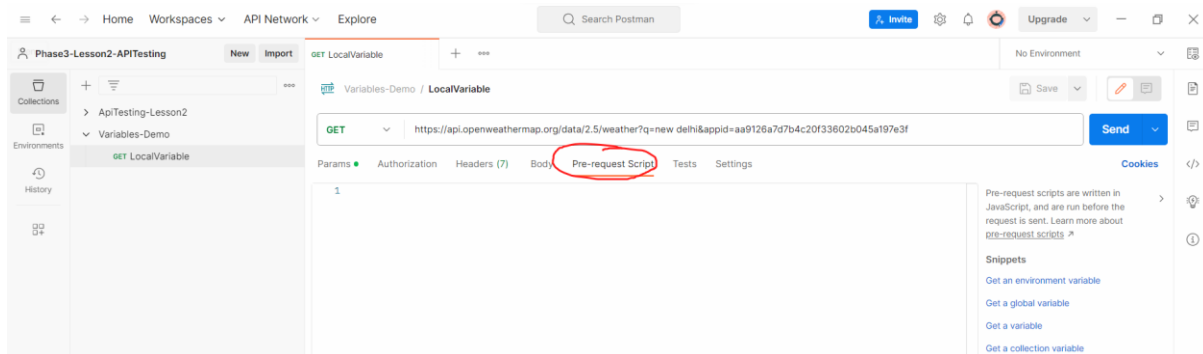

Phase3-Lesson2-APITesting New Import GET LocalVariable + ... Search Postman Invite Upgrade

Variables-Demo / LocalVariable

GET https://api.openweathermap.org/data/2.5/weather?q=({City})&appid=aa9126a7d7b4c20f33602b045a197e3f

Params Authorization Headers (7) Body Pre-request Script Tests Settings

```
1 pm.environment.set("City", "New York");
```

No Environment

No Environment

dev

Cookies

Pre-request scripts are written in JavaScript, and are run before the request is sent. Learn more about [pre-request scripts](#).

Snippets

- Get an environment variable
- Get a global variable
- Get a variable
- Get a collection variable
- Set an environment variable
- Set a global variable
- Set a collection variable

Phase3-Lesson2-APITesting New Import GET LocalVariable + ... Search Postman Invite Upgrade

Variables-Demo / LocalVariable

GET https://api.openweathermap.org/data/2.5/weather?q=({City})&appid=aa9126a7d7b4c20f33602b045a197e3f

Params Authorization Headers (7) Body Pre-request Script Tests Settings

```
1 pm.environment.set("City", "New York");
```

City

INITIAL

CURRENT New York

SCOPE Environment

Send

Cookies

Pre-request scripts are written in JavaScript, and are run before the request is sent. Learn more about [pre-request scripts](#).

Snippets

- Get an environment variable
- Get a global variable
- Get a variable
- Get a collection variable
- Set an environment variable
- Set a global variable
- Set a collection variable
- Clear an environment variable

Body Cookies Headers (9) Test Results

Status: 200 OK Time: 357 ms Size: 786 B Save as example