How to work with POST requests.

Post is used to send data to a server to create/update a resource.

Below are the steps to work on POST requests

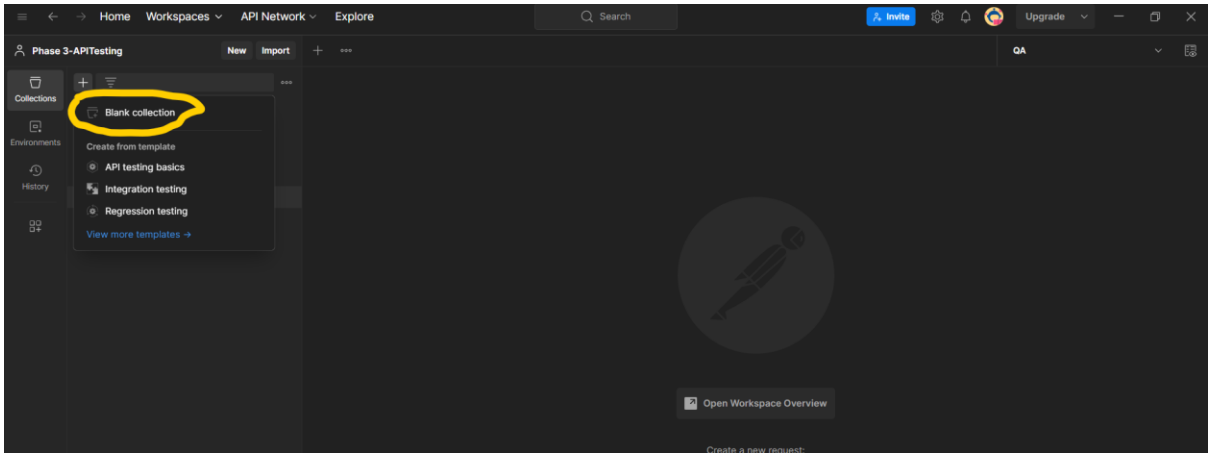

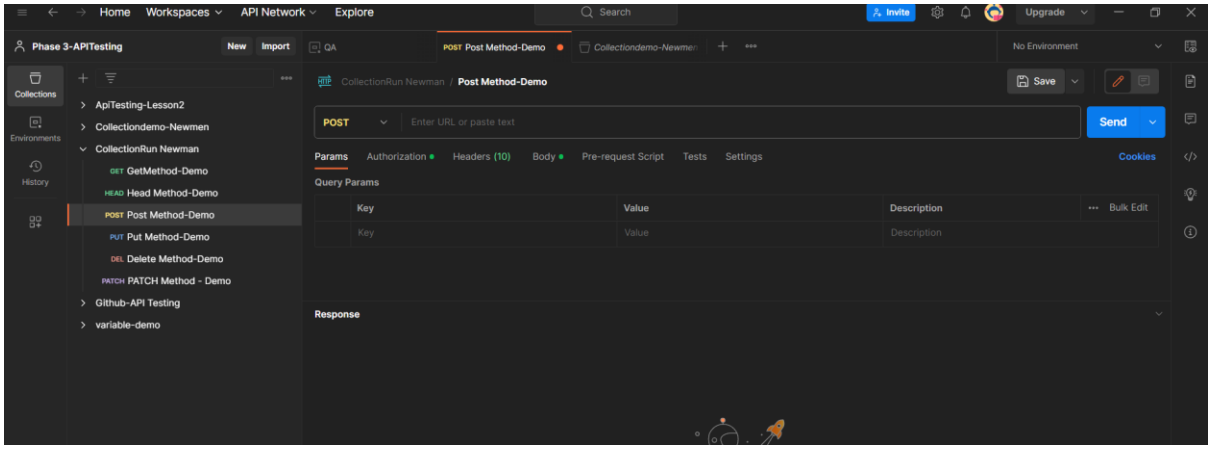

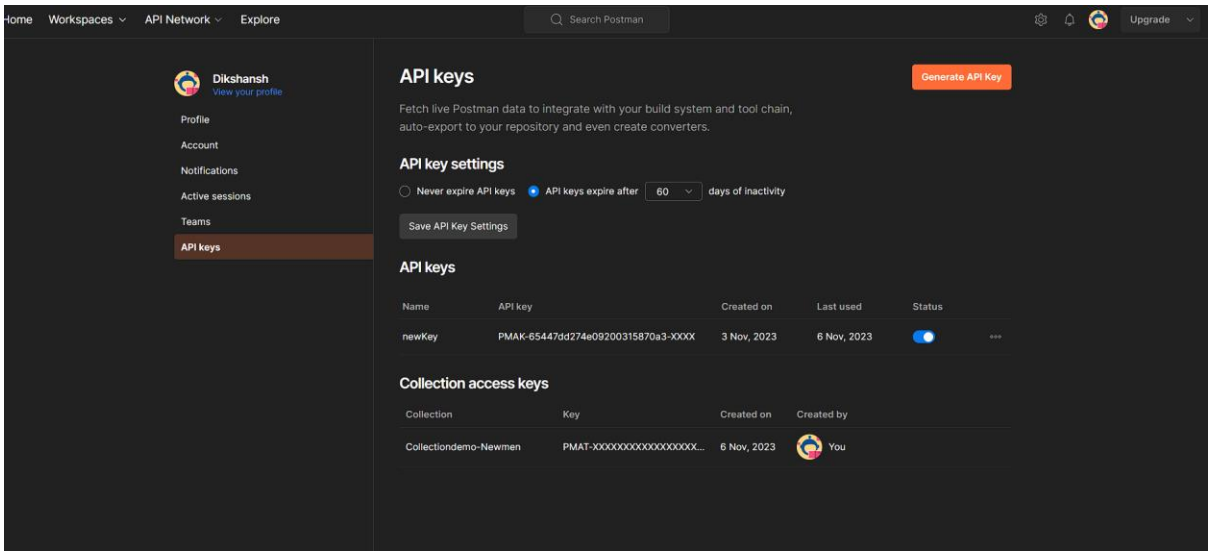

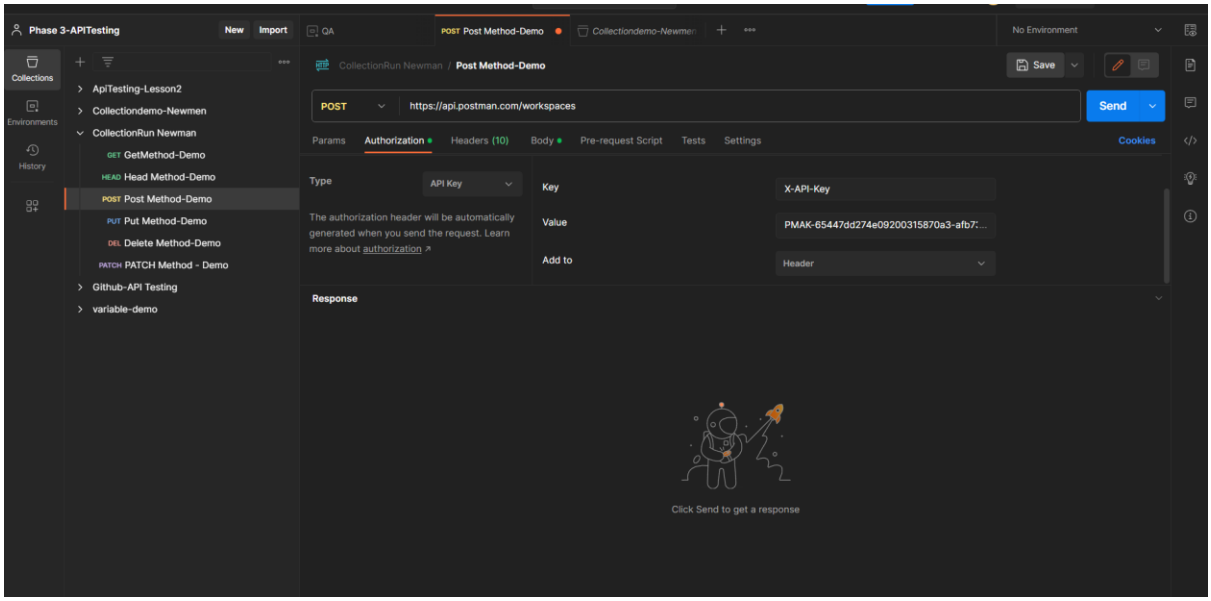
Phase 3-APITesting
New
Import
Collections
Environments
History
ApiTesting-Lesson2
Collectiondemo-Newmen
CollectionRun Newman
GET GetMethod-Demo
HEAD Head Method-Demo
POST Post Method-Demo
PUT Put Method-Demo
DEL Delete Method-Demo
PATCH PATCH Method - Demo
Github-API Testing
variable-demo
QA
POST Post Method-Demo
Collectiondemo-Newmen
No Environment
CollectionRun Newman / Post Method-Demo
Save
POST
https://api.postman.com/workspaces
Send
Params
Authorization
Headers (10)
Body
Pre-request Script
Tests
Settings
Cookies
Type
API Key
Key
X-API-Key
The authorization header will be automatically generated when you send the request. Learn more about authorization
Value
PMAK-65447dd274e09200315870a3-afb7:...
Add to
Header
Response
Click Send to get a response

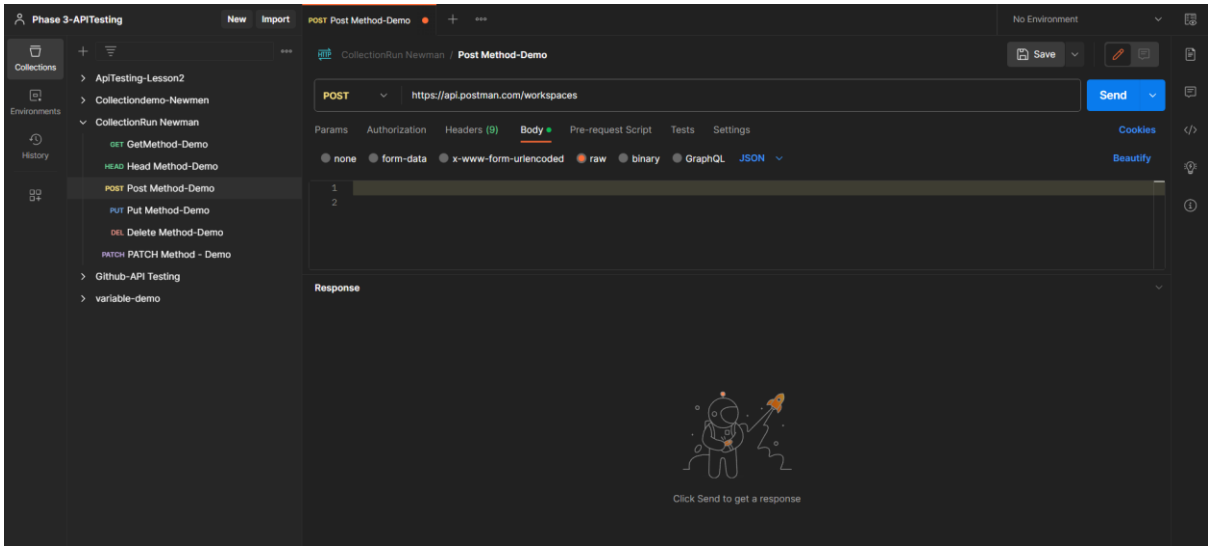
Phase 3-APITesting
New
Import
Collections
Environments
History
ApiTesting-Lesson2
Collectiondemo-Newmen
CollectionRun Newman
GET GetMethod-Demo
HEAD Head Method-Demo
POST Post Method-Demo
PUT Put Method-Demo
DEL Delete Method-Demo
PATCH PATCH Method - Demo
Github-API Testing
variable-demo
POST Post Method-Demo
No Environment
CollectionRun Newman / Post Method-Demo
Save
POST
https://api.postman.com/workspaces
Send
Params
Authorization
Headers (9)
Body
Pre-request Script
Tests
Settings
Cookies
none
form-data
x-www-form-urlencoded
raw
binary
GraphQL
JSON
Beautify
Response
Click Send to get a response

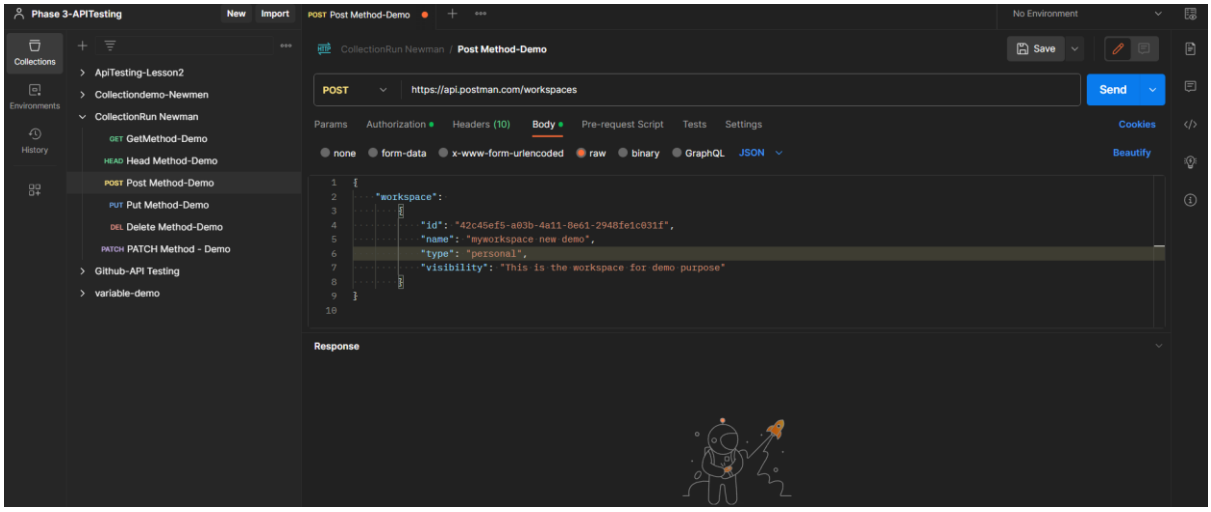
Phase 3-APITesting
New
Import
Collections
Environments
History
ApiTesting-Lesson2
Collectiondemo-Newmen
CollectionRun Newman
GET GetMethod-Demo
HEAD Head Method-Demo
POST Post Method-Demo
PUT Put Method-Demo
DEL Delete Method-Demo
PATCH PATCH Method - Demo
Github-API Testing
variable-demo
POST Post Method-Demo
No Environment
CollectionRun Newman / Post Method-Demo
Save
POST
https://api.postman.com/workspaces
Send
Params
Authorization
Headers (10)
Body
Pre-request Script
Tests
Settings
Cookies
none
form-data
x-www-form-urlencoded
raw
binary
GraphQL
JSON
Beautify
{
"workspace": {
"id": "42c45ef5-a03b-4a11-8e61-2948fe1c031f",
"name": "myworkspace new demo",
"type": "personal",
"visibility": "This is the workspace for demo purpose"
}
}
Response

Response

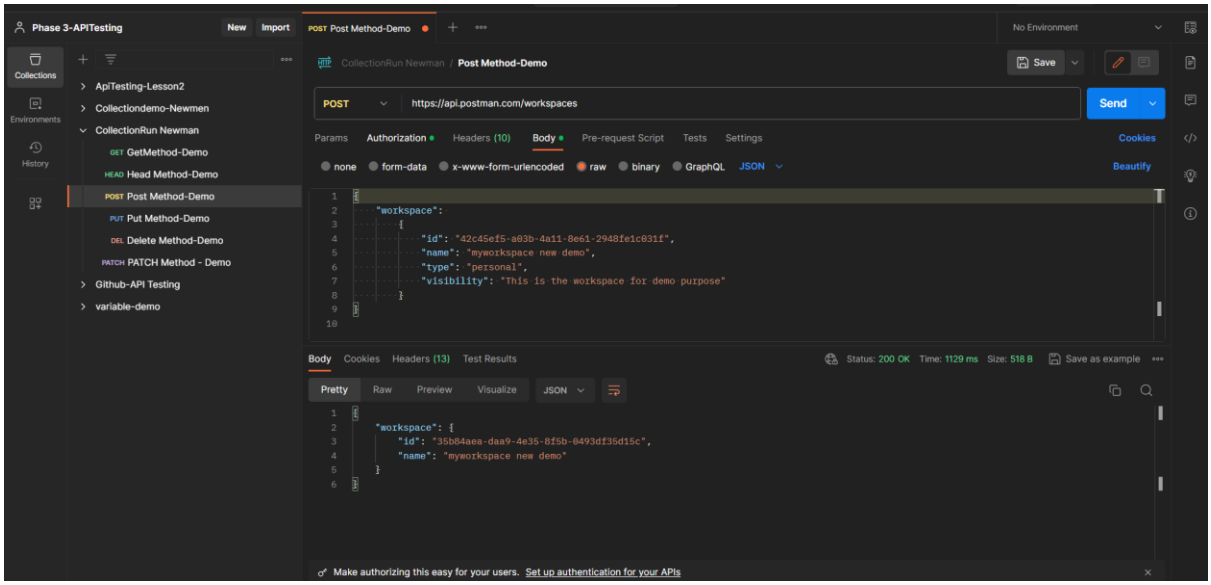
Phase 3-APITesting
New
Import
Collections
Environments
History
ApiTesting-Lesson2
Collectiondemo-Newmen
CollectionRun Newman
GET GetMethod-Demo
HEAD Head Method-Demo
POST Post Method-Demo
PUT Put Method-Demo
DEL Delete Method-Demo
PATCH PATCH Method - Demo
Github-API Testing
variable-demo
POST Post Method-Demo
No Environment
CollectionRun Newman / Post Method-Demo
Save
POST
https://api.postman.com/workspaces
Send
Params
Authorization
Headers (10)
Body
Pre-request Script
Tests
Settings
Cookies
none
form-data
x-www-form-urlencoded
raw
binary
GraphQL
JSON
Beautify
{
"workspace":
[
"id": "42c45ef5-a03b-4a11-8e61-2948fe1c031f",
"name": "myworkspace new demo",
"type": "personal",
"visibility": "This is the workspace for demo purpose"
]
}
Body
Cookies
Headers (13)
Test Results
Status: 200 OK
Time: 1129 ms
Size: 518 B
Save as example
Pretty
Raw
Preview
Visualize
JSON
{
"workspace": {
"id": "35b84aea-daa9-4e35-8f5b-0493df35d15c",
"name": "myworkspace new demo"
}
}
Make authorizing this easy for your users. Set up authentication for your APIs