


Files

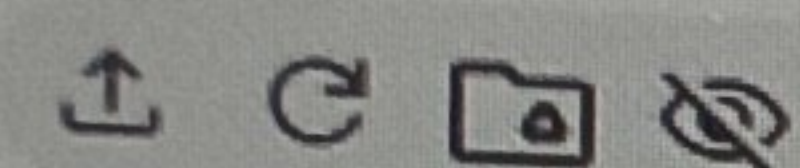

..

sample_data

WA_Fn-UseC_-Telco-Customer-...

[4]
✓ 5s

```
# Target Encoding
df['Churn'] = df['Churn'].map({
    'No':0,
    'Yes':1
})

# =====
# FEATURES & TARGET
# =====

X = df.drop('Churn', axis=1)
y = df['Churn']

# =====
# COLUMN TYPES
# =====

numeric_features = [
    'tenure',
    'MonthlyCharges',
    'TotalCharges'
]

categorical_features = [
    col for col in X.columns
    if col not in numeric_features
]

# =====
# PREPROCESSING
# =====

numeric_transformer = Pipeline([
    ('imputer', SimpleImputer(strategy='median')),
    ('scaler', StandardScaler())
])

categorical_transformer = Pipeline([
    ('imputer', SimpleImputer(strategy='most_frequent')),
    ('onehot', OneHotEncoder(drop='first',
                             handle_unknown='ignore'))
])
```

Disk

65.52 GB available

Variables Terminal

27°C
Mostly sunny

Search



DELL