


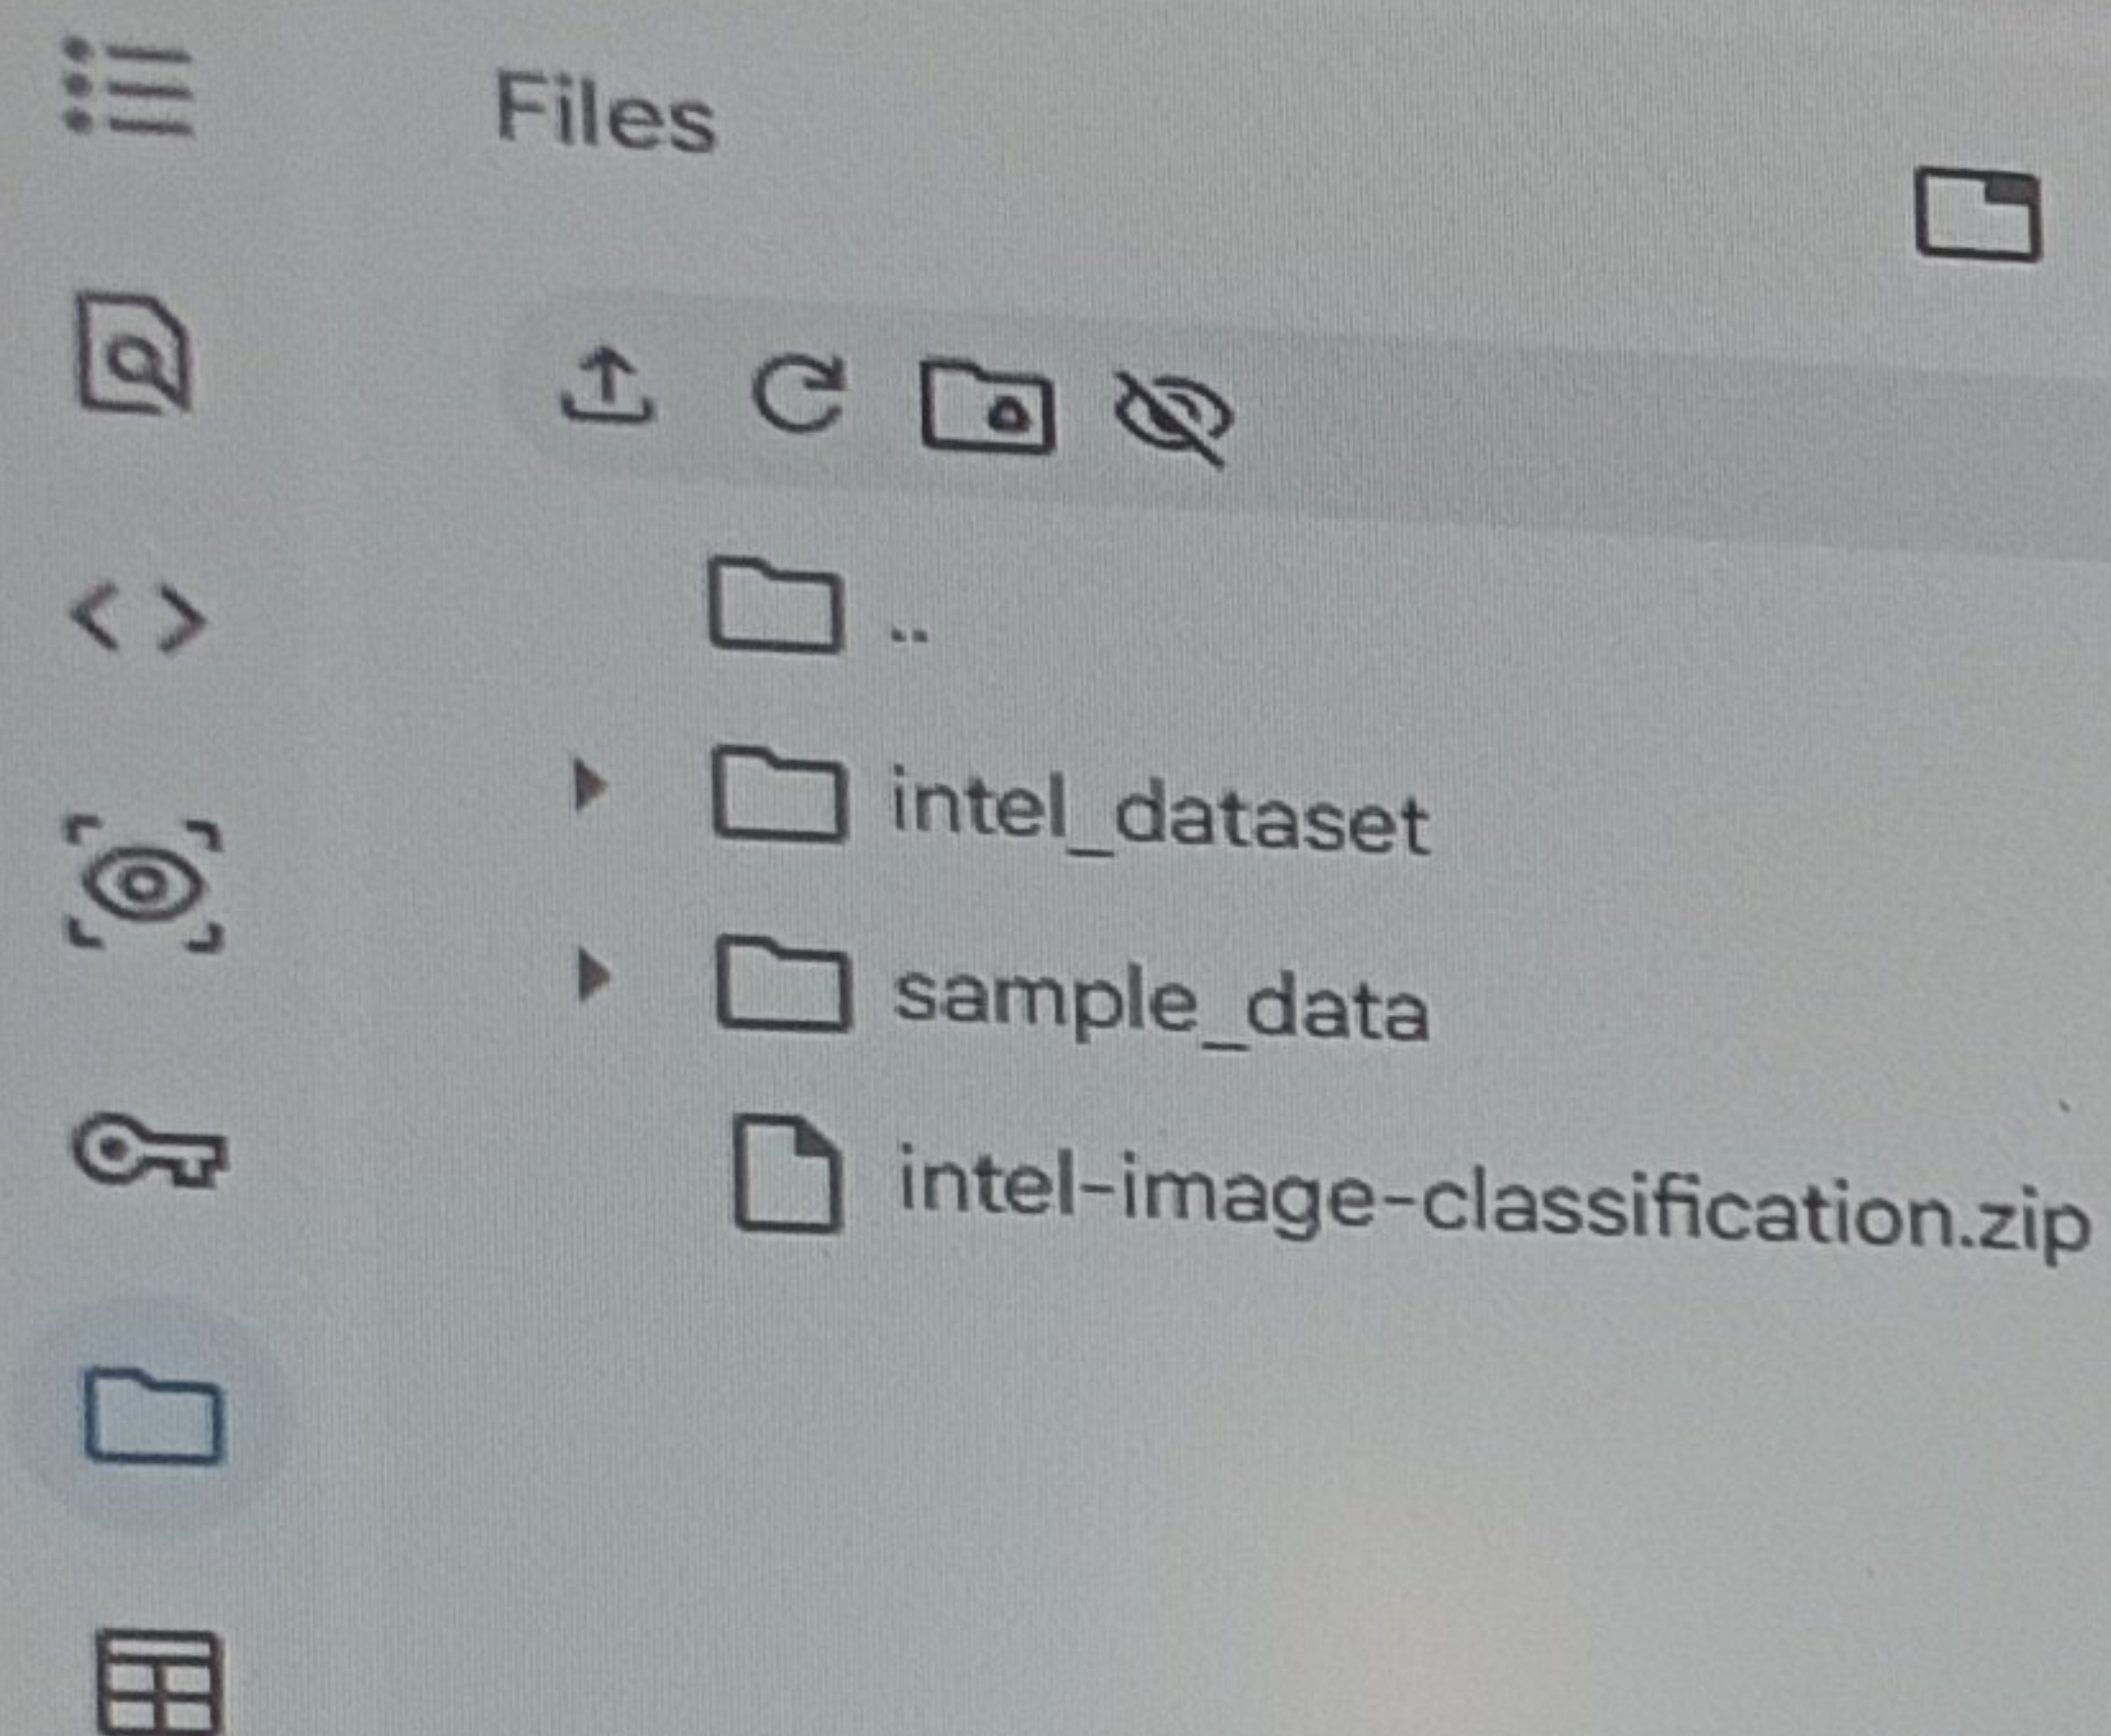

```
[4] ✓ 4m ▶ def train_pretrained(base_model_fn, model_name):  
    print(f"\nTraining {model_name}...")  
  
    base_model = base_model_fn(  
        weights='imagenet',  
        include_top=False,  
        input_shape=(96,96,3)  
    )  
  
    base_model.trainable = False  
  
    model = models.Sequential([  
        base_model,  
        layers.GlobalAveragePooling2D(),  
        layers.Dense(128, activation='relu'),  
        layers.Dropout(0.3),  
        layers.Dense(10, activation='softmax')  
    ])  
  
    model.compile(  
        optimizer='adam',  
        loss='sparse_categorical_crossentropy',  
        metrics=['accuracy']  
    )  
  
    model.fit(  
        train_ds,  
        epochs=3,  
        validation_data=test_ds,  
        verbose=1  
    )  
  
    loss, acc = model.evaluate(test_ds, verbose=0)  
    results[model_name] = acc  
  
    tf.keras.backend.clear_session()  
    gc.collect()
```

How can I install Python libraries?

Load data from Google Drive

Show an example of training

What can I help you build?

Gemini 2.5 Flash ▶

Disk

64.35 GB available

Variables Terminal

3 27°C Sunny

Search

DELL

11:31 AM T4 (Python)

ENG IN 04-06