


AWS-Solution-Architect-Associate Dumps

Amazon AWS Certified Solutions Architect - Associate

<https://www.certleader.com/AWS-Solution-Architect-Associate-dumps.html>

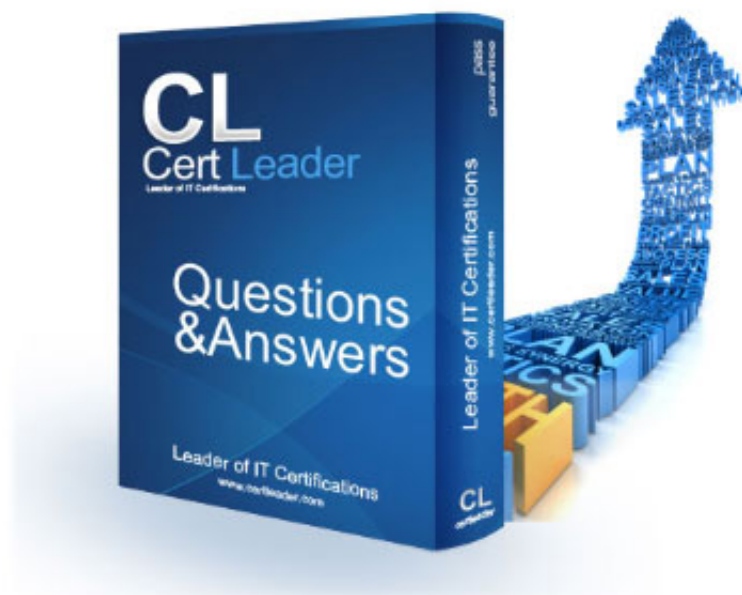

NEW QUESTION 1

In Amazon EC2 Container Service components, what is the name of a logical grouping of container instances on which you can place tasks?

- A. A cluster
- B. A container instance
- C. A container
- D. A task definition

Answer: A

Explanation:

Amazon ECS contains the following components:

A Cluster is a logical grouping of container instances that you can place tasks on.

A Container instance is an Amazon EC2 instance that is running the Amazon ECS agent and has been registered into a cluster.

A Task definition is a description of an application that contains one or more container definitions. A Scheduler is the method used for placing tasks on container instances.

A Service is an Amazon ECS service that allows you to run and maintain a specified number of instances of a task definition simultaneously.

A Task is an instantiation of a task definition that is running on a container instance. A Container is a Linux container that was created as part of a task.

Reference: <http://docs.aws.amazon.com/AmazonECS/latest/developerguide/Welcome.html>

NEW QUESTION 2

To specify a resource in a policy statement, in Amazon EC2, can you use its Amazon Resource Name (ARN)?

- A. Yes, you can.
- B. No, you can't because EC2 is not related to ARN.
- C. No, you can't because you can't specify a particular Amazon EC2 resource in an IAM policy.
- D. Yes, you can but only for the resources that are not affected by the action

Answer: A

Explanation:

Some Amazon EC2 API actions allow you to include specific resources in your policy that can be created or modified by the action. To specify a resource in the statement, you need to use its Amazon Resource Name (ARN).

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ec2-ug.pdf>

NEW QUESTION 3

A user is launching an EC2 instance in the US East region. Which of the below mentioned options is recommended by AWS with respect to the selection of the availability zone?

- A. Always select the AZ while launching an instance
- B. Always select the US-East-1-a zone for HA
- C. Do not select the AZ; instead let AWS select the AZ
- D. The user can never select the availability zone while launching an instance

Answer: C

Explanation:

When launching an instance with EC2, AWS recommends not to select the availability zone (AZ). AWS specifies that the default Availability Zone should be accepted. This is because it enables AWS to select the best Availability Zone based on the system health and available capacity. If the user launches additional instances, only then an Availability Zone should be specified. This is to specify the same or different AZ from the running instances.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-regions-availability-zones.html>

NEW QUESTION 4

What is a placement group in Amazon EC2?

- A. It is a group of EC2 instances within a single Availability Zone.
- B. It the edge location of your web content.
- C. It is the AWS region where you run the EC2 instance of your web content.
- D. It is a group used to span multiple Availability Zone

Answer: A

Explanation:

A placement group is a logical grouping of instances within a single Availability Zone. Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/placement-groups.html>

NEW QUESTION 5

An edge location refers to which Amazon Web Service?

- A. An edge location is referred to the network configured within a Zone or Region
- B. An edge location is an AWS Region
- C. An edge location is the location of the data center used for Amazon CloudFront.
- D. An edge location is a Zone within an AWS Region

Answer: C

Explanation:

Amazon CloudFront is a content distribution network. A content delivery network or content distribution network (CDN) is a large distributed system of servers deployed in multiple data centers across the world. The location of the data center used for CDN is called edge location.

Amazon CloudFront can cache static content at each edge location. This means that your popular static content (e.g., your site's logo, navigational images, cascading style sheets, JavaScript code, etc.) will be available at a nearby edge location for the browsers to download with low latency and improved performance for viewers. Caching popular static content with Amazon CloudFront also helps you offload requests for such files from your origin server — CloudFront serves the cached copy when available and only makes a request to your origin server if the edge location receiving the browser's request does not have a copy of the file.

Reference: <http://aws.amazon.com/cloudfront/>

NEW QUESTION 6

You need to import several hundred megabytes of data from a local Oracle database to an Amazon RDS DB instance. What does AWS recommend you use to accomplish this?

- A. Oracle export/import utilities
- B. Oracle SQL Developer
- C. Oracle Data Pump
- D. DBMS_FILE_TRANSFER

Answer: C

Explanation:

How you import data into an Amazon RDS DB instance depends on the amount of data you have and the number and variety of database objects in your database.

For example, you can use Oracle SQL Developer to import a simple, 20 MB database; you want to use Oracle Data Pump to import complex databases or databases that are several hundred megabytes or several terabytes in size.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Oracle.Procedural.Importing.html>

NEW QUESTION 7

A user has created an EBS volume with 1000 IOPS. What is the average IOPS that the user will get for most of the year as per EC2 SLA if the instance is attached to the EBS optimized instance?

- A. 950
- B. 990
- C. 1000
- D. 900

Answer: D

Explanation:

As per AWS SLA if the instance is attached to an EBS-Optimized instance, then the Provisioned IOPS volumes are designed to deliver within 10% of the provisioned IOPS performance 99.9% of the time in a given year. Thus, if the user has created a volume of 1000 IOPS, the user will get a minimum 900 IOPS 99.9% time of the year.

Reference: <http://aws.amazon.com/ec2/faqs/>

NEW QUESTION 8

Which of the following is true of Amazon EC2 security group?

- A. You can modify the outbound rules for EC2-Classic.
- B. You can modify the rules for a security group only if the security group controls the traffic for just one instance.
- C. You can modify the rules for a security group only when a new instance is created.
- D. You can modify the rules for a security group at any time.

Answer: D

Explanation:

A security group acts as a virtual firewall that controls the traffic for one or more instances. When you launch an instance, you associate one or more security groups with the instance. You add rules to each security group that allow traffic to or from its associated instances. You can modify the rules for a security group at any time; the new rules are automatically applied to all instances that are associated with the security group.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-network-security.html>

NEW QUESTION 9

An Elastic IP address (EIP) is a static IP address designed for dynamic cloud computing. With an EIP, you can mask the failure of an instance or software by rapidly remapping the address to another instance in your account. Your EIP is associated with your AWS account, not a particular EC2 instance, and it remains associated with your account until you choose to explicitly release it. By default how many EIPs is each AWS account limited to on a per region basis?

- A. 1
- B. 5
- C. Unlimited
- D. 10

Answer: B

Explanation:

By default, all AWS accounts are limited to 5 Elastic IP addresses per region for each AWS account, because public (IPv4) Internet addresses are a scarce public resource. AWS strongly encourages you to use an EIP primarily for load balancing use cases, and use DNS hostnames for all other inter-node communication.

If you feel your architecture warrants additional EIPs, you would need to complete the Amazon EC2 Elastic IP Address Request Form and give reasons as to your need for additional addresses. Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/elastic-ip-addresses-eip.html#using-instance-addressing-limit>

NEW QUESTION 10

While using the EC2 GET requests as URLs, the is the URL that serves as the entry point for the web service.

- A. token
- B. endpoint
- C. action
- D. None of these

Answer: B

Explanation:

The endpoint is the URL that serves as the entry point for the web service.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-query-api.html>

NEW QUESTION 10

Much of your company's data does not need to be accessed often, and can take several hours for retrieval time, so it's stored on Amazon Glacier. However someone within your organization has expressed concerns that his data is more sensitive than the other data, and is wondering whether the high level of encryption that he knows is on S3 is also used on the much cheaper Glacier service. Which of the following statements would be most applicable in regards to this concern?

- A. There is no encryption on Amazon Glacier, that's why it is cheaper.
- B. Amazon Glacier automatically encrypts the data using AES-128 a lesser encryption method than Amazon S3 but you can change it to AES-256 if you are willing to pay more.
- C. Amazon Glacier automatically encrypts the data using AES-256, the same as Amazon S3.
- D. Amazon Glacier automatically encrypts the data using AES-128 a lesser encryption method than Amazon S3.

Answer: C

Explanation:

Like Amazon S3, the Amazon Glacier service provides low-cost, secure, and durable storage. But where S3 is designed for rapid retrieval, Glacier is meant to be used as an archival service for data that is not accessed often, and for which retrieval times of several hours are suitable.

Amazon Glacier automatically encrypts the data using AES-256 and stores it durably in an immutable form. Amazon Glacier is designed to provide average annual durability of 99.999999999% for an archive. It stores each archive in multiple facilities and multiple devices. Unlike traditional systems which can require laborious data verification and manual repair, Glacier performs regular, systematic data integrity checks, and is built to be automatically self-healing.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

NEW QUESTION 13

You've created your first load balancer and have registered your EC2 instances with the load balancer. Elastic Load Balancing routinely performs health checks on all the registered EC2 instances and automatically distributes all incoming requests to the DNS name of your load balancer across your registered, healthy EC2 instances. By default, the load balancer uses the _ protocol for checking the health of your instances.

- A. HTTPS
- B. HTTP
- C. ICMP
- D. IPv6

Answer: B

Explanation:

In Elastic Load Balancing a health configuration uses information such as protocol, ping port, ping path (URL), response timeout period, and health check interval to determine the health state of the instances registered with the load balancer.

Currently, HTTP on port 80 is the default health check. Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/TerminologyandKeyConcepts.html>

NEW QUESTION 18

You need to set up a complex network infrastructure for your organization that will be reasonably easy to deploy, replicate, control, and track changes on. Which AWS service would be best to use to help you accomplish this?

- A. AWS Import/Export
- B. AWS CloudFormation
- C. Amazon Route 53
- D. Amazon CloudWatch

Answer: B

Explanation:

AWS CloudFormation is a service that helps you model and set up your Amazon Web Services resources so that you can spend less time managing those resources and more time focusing on your applications that run in AWS. You create a template that describes all the AWS resources that you want (like Amazon EC2 instances or Amazon RDS DB instances), and AWS CloudFormation takes care of provisioning and configuring those resources for you. You don't need to manually create and configure AWS resources

and figure out what's dependent on what. AWS CloudFormation handles all of that.

Reference: <http://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/Welcome.html>

NEW QUESTION 22

In an experiment, if the minimum size for an Auto Scaling group is 1 instance, which of the following statements holds true when you terminate the running instance?

- A. Auto Scaling must launch a new instance to replace it.
- B. Auto Scaling will raise an alarm and send a notification to the user for action.

- C. Auto Scaling must configure the schedule actMty that terminates the instance after 5 days.
D. Auto Scaling will terminate the experimen

Answer: A

Explanation:

If the minimum size for an Auto Scaling group is 1 instance, when you terminate the running instance, Auto Scaling must launch a new instance to replace it.
Reference: http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/AS_Concepts.html

NEW QUESTION 24

An online gaming site asked you if you can deploy a database that is a fast, highly scalable NoSQL database service in AWS for a new site that he wants to build. Which database should you recommend?

- A. Amazon DynamoDB
B. Amazon RDS
C. Amazon Redshift
D. Amazon SimpleDB

Answer: A

Explanation:

Amazon DynamoDB is ideal for database applications that require very low latency and predictable performance at any scale but don't need complex querying capabilities like joins or transactions. Amazon DynamoDB is a fully-managed NoSQL database service that offers high performance, predictable throughput and low cost. It is easy to set up, operate, and scale.

With Amazon DynamoDB, you can start small, specify the throughput and storage you need, and easily scale your capacity requirements on the fly. Amazon DynamoDB automatically partitions data over a number of servers to meet your request capacity. In addition, DynamoDB automatically replicates your data synchronously across multiple Availability Zones within an AWS Region to ensure high-availability and data durability.

Reference: https://aws.amazon.com/running_databases/#dynamodb_anchor

NEW QUESTION 28

You have been doing a lot of testing of your VPC Network by deliberately failing EC2 instances to test whether instances are failing over properly. Your customer who will be paying the AWS bill for all this asks you if he being charged for all these instances. You try to explain to him how the billing works on EC2 instances to the best of your knowledge. What would be an appropriate response to give to the customer in regards to this?

- A. Billing commences when Amazon EC2 AM instance is completely up and billing ends as soon as the instance starts to shutdown.
B. Billing only commences only after 1 hour of uptime and billing ends when the instance terminates.
C. Billing commences when Amazon EC2 initiates the boot sequence of an AM instance and billing ends when the instance shuts down.
D. Billing commences when Amazon EC2 initiates the boot sequence of an AM instance and billing ends as soon as the instance starts to shutdown.

Answer: C

Explanation:

Billing commences when Amazon EC2 initiates the boot sequence of an AM instance. Billing ends when the instance shuts down, which could occur through a web services command, by running "shutdown -h", or through instance failure.

Reference: <http://aws.amazon.com/ec2/faqs/#Billing>

NEW QUESTION 31

You log in to IAM on your AWS console and notice the following message. "Delete your root access keys." Why do you think IAM is requesting this?

- A. Because the root access keys will expire as soon as you log out.
B. Because the root access keys expire after 1 week.
C. Because the root access keys are the same for all users.
D. Because they provide unrestricted access to your AWS resource

Answer: D

Explanation:

In AWS an access key is required in order to sign requests that you make using the command-line interface (CLI), using the AWS SDKs, or using direct API calls. Anyone who has the access key for your root account has unrestricted access to all the resources in your account, including billing information. One of the best ways to protect your account is to not have an access key for your root account. We recommend that unless you must have a root access key (this is very rare), that you do not generate one. Instead, AWS best practice is to create one or more AWS Identity and Access Management (IAM) users, give them the necessary permissions, and use IAM users for everyday interaction with AWS.

Reference:

<http://docs.aws.amazon.com/general/latest/gr/aws-access-keys-best-practices.html#root-password>

NEW QUESTION 34

Once again your customers are concerned about the security of their sensitive data and with their latest enquiry ask about what happens to old storage devices on AWS. What would be the best answer to this QUESTION ?

- A. AWS reformats the disks and uses them again.
B. AWS uses the techniques detailed in DoD 5220.22-M to destroy data as part of the decommissioning process.
C. AWS uses their own proprietary software to destroy data as part of the decommissioning process.
D. AWS uses a 3rd party security organization to destroy data as part of the decommissioning proces

Answer: B

Explanation:

When a storage device has reached the end of its useful life, AWS procedures include a decommissioning process that is designed to prevent customer data from being exposed to unauthorized individuals.

AWS uses the techniques detailed in DoD 5220.22-M ("National Industrial Security Program Operating Manual ") or NIST 800-88 ("Guidelines for Media Sanitization") to destroy data as part of the decommissioning process.

All decommissioned magnetic storage devices are degaussed and physically destroyed in accordance with industry-standard practices.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

NEW QUESTION 35

You need to change some settings on Amazon Relational Database Service but you do not want the database to reboot immediately which you know might happen depending on the setting that you change. Which of the following will cause an immediate DB instance reboot to occur?

- A. You change storage type from standard to PIOPS, and Apply Immediately is set to true.
- B. You change the DB instance class, and Apply Immediately is set to false.
- C. You change a static parameter in a DB parameter group.
- D. You change the backup retention period for a DB instance from 0 to a nonzero value or from a nonzero value to 0, and Apply Immediately is set to false.

Answer: A

Explanation:

A DB instance outage can occur when a DB instance is rebooted, when the DB instance is put into a state that prevents access to it, and when the database is restarted. A reboot can occur when you manually reboot your DB instance or when you change a DB instance setting that requires a reboot before it can take effect.

A DB instance reboot occurs immediately when one of the following occurs:

You change the backup retention period for a DB instance from 0 to a nonzero value or from a nonzero value to 0 and set Apply Immediately to true.

You change the DB instance class, and Apply Immediately is set to true.

You change storage type from standard to PIOPS, and Apply Immediately is set to true.

A DB instance reboot occurs during the maintenance window when one of the following occurs:

You change the backup retention period for a DB instance from 0 to a nonzero value or from a nonzero value to 0, and Apply Immediately is set to false.

You change the DB instance class, and Apply Immediately is set to false. Reference:

http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/CHAP_Troubleshooting.html#CHAP_Troubleshooting.Security

NEW QUESTION 40

You are setting up a very complex financial services grid and so far it has 5 Elastic IP (EIP) addresses.

You go to assign another EIP address, but all accounts are limited to 5 Elastic IP addresses per region by default, so you aren't able to. What is the reason for this?

- A. For security reasons.
- B. Hardware restrictions.
- C. Public (IPv4) internet addresses are a scarce resource.
- D. There are only 5 network interfaces per instance

Answer: C

Explanation:

Public (IPv4) internet addresses are a scarce resource. There is only a limited amount of public IP space available, and Amazon EC2 is committed to helping use that space efficiently.

By default, all accounts are limited to 5 Elastic IP addresses per region. If you need more than 5 Elastic IP addresses, AWS asks that you apply for your limit to be raised. They will ask you to think through your use case and help them understand your need for additional addresses.

Reference: http://aws.amazon.com/ec2/faqs/#How_many_instances_can_I_run_in_Amazon_EC2

NEW QUESTION 41

Amazon RDS provides high availability and failover support for DB instances using .

- A. customized deployments
- B. Appstream customizations
- C. log events
- D. Multi-AZ deployments

Answer: D

Explanation:

Amazon RDS provides high availability and failover support for DB instances using Multi-AZ deployments. Multi-AZ deployments for Oracle, PostgreSQL, MySQL, and MariaDB DB instances use Amazon technology, while SQL Server DB instances use SQL Server Mirroring.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Concepts.MultiAZ.html>

NEW QUESTION 42

What does Amazon DynamoDB provide?

- A. A predictable and scalable MySQL database
- B. A fast and reliable PL/SQL database cluster
- C. A standalone Cassandra database, managed by Amazon Web Services
- D. A fast, highly scalable managed NoSQL database service

Answer: D

Explanation:

Amazon DynamoDB is a managed NoSQL database service offered by Amazon. It automatically manages tasks like scalability for you while it provides high availability and durability for your data, allowing you to concentrate in other aspects of your application.

Reference: check link - https://aws.amazon.com/running_databases/

NEW QUESTION 46

A user needs to run a batch process which runs for 10 minutes. This will only be run once, or at maximum twice, in the next month, so the processes will be temporary only. The process needs 15 X-Large instances. The process downloads the code from S3 on each instance when it is launched, and then generates a temporary log file. Once the instance is terminated, all the data will be lost. Which of the below mentioned pricing models should the user choose in this case?

- A. Spot instance.
- B. Reserved instance.
- C. On-demand instance.
- D. EBS optimized instanc

Answer: A

Explanation:

In Amazon Web Services, the spot instance is useful when the user wants to run a process temporarily. The spot instance can terminate the instance if the other user outbids the existing bid. In this case all storage is temporary and the data is not required to be persistent. Thus, the spot instance is a good option to save money.

Reference: <http://aws.amazon.com/ec2/purchasing-options/spot-instances/>

NEW QUESTION 50

A user has configured ELB with two EBS backed EC2 instances. The user is trying to understand the DNS access and IP support for ELB. Which of the below mentioned statements may not help the user understand the IP mechanism supported by ELB?

- A. The client can connect over IPV4 or IPV6 using Dualstack
- B. Communication between the load balancer and back-end instances is always through IPV4
- C. ELB DNS supports both IPV4 and IPV6
- D. The ELB supports either IPV4 or IPV6 but not both

Answer: D

Explanation:

Elastic Load Balancing supports both Internet Protocol version 6 (IPv6) and Internet Protocol version 4 (IPv4). Clients can connect to the user's load balancer using either IPv4 or IPv6 (in EC2-Classic) DNS. However, communication between the load balancer and its back-end instances uses only IPv4. The user can use the Dualstack-prefixed DNS name to enable IPv6 support for communications between the client and the load balancers. Thus, the clients are able to access the load balancer using either IPv4 or IPv6 as their indM dual connectMty needs dictate.

Reference: <http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/UserScenariosForEC2.html>

NEW QUESTION 55

A user is accessing an EC2 instance on the SSH port for IP 10.20.30.40. Which one is a secure way to configure that the instance can be accessed only from this IP?

- A. In the security group, open port 22 for IP 10.20.30.40
- B. In the security group, open port 22 for IP 10.20.30.40/32
- C. In the security group, open port 22 for IP 10.20.30.40/24
- D. In the security group, open port 22 for IP 10.20.30.40/0

Answer: B

Explanation:

In AWS EC2, while configuring a security group, the user needs to specify the IP address in CIDR notation. The CIDR IP range 10.20.30.40/32 says it is for a single IP 10.20.30.40. If the user specifies the IP as 10.20.30.40 only, the security group will not accept and ask it in a CIRD format.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-network-security.html>

NEW QUESTION 60

You are building a system to distribute confidential documents to employees. Using CloudFront, what method could be used to serve content that is stored in S3, but not publically accessible from S3 directly?

- A. Add the CloudFront account security group "amazon-cf/amazon-cf-sg" to the appropriate S3 bucket policy.
- B. Create a S3 bucket policy that lists the C|oudFront distribution ID as the Principal and the target bucket as the Amazon Resource Name (ARN).
- C. Create an Identity and Access Management (IAM) User for CloudFront and grant access to the objects in your S3 bucket to that IAM User.
- D. Create an Origin Access Identity (OAI) for CloudFront and grant access to the objects in your S3 bucket to that OAI.

Answer: D

Explanation:

You restrict access to Amazon S3 content by creating an origin access identity, which is a special CloudFront user. You change Amazon S3 permissions to give the origin access identity permission to access your objects, and to remove permissions from everyone else. When your users access your Amazon S3 objects using CloudFront URLs, the CloudFront origin access identity gets the objects on your users' behalf. If your users try to access objects using Amazon S3 URLs, they're denied access. The origin access identity has permission to access objects in your Amazon S3 bucket, but users don't. Reference:

<http://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/private-content-restricting-access-to-s3.html>

NEW QUESTION 64

A user has created a subnet in VPC and launched an EC2 instance within it. The user has not selected the option to assign the IP address while launching the instance. The user has 3 elastic IPs and is trying to assign one of the Elastic IPs to the VPC instance from the console. The console does not show any instance in the IP assignment screen. What is a possible reason that the instance is unavailable in the assigned IP console?

- A. The IP address may be attached to one of the instances

- B. The IP address belongs to a different zone than the subnet zone
- C. The user has not created an internet gateway
- D. The IP addresses belong to EC2 Classic; so they cannot be assigned to VPC

Answer: D

Explanation:

A Virtual Private Cloud (VPC) is a virtual network dedicated to the user's AWS account. A user can create a subnet with VPC and launch instances inside that subnet. When the user is launching an instance he needs to select an option which attaches a public IP to the instance. If the user has not selected the option to attach the public IP then it will only have a private IP when launched. If the user wants to connect to an instance from the internet he should create an elastic IP with VPC. If the elastic IP is a part of EC2 Classic it cannot be assigned to a VPC instance.

Reference: <http://docs.aws.amazon.com/AmazonVPC/latest/GettingStartedGuide/LaunchInstance.html>

NEW QUESTION 65

A user has created photo editing software and hosted it on EC2. The software accepts requests from the user about the photo format and resolution and sends a message to S3 to enhance the picture accordingly. Which of the below mentioned AWS services will help make a scalable software with the AWS infrastructure in this scenario?

- A. AWS Simple Notification Service
- B. AWS Simple Queue Service
- C. AWS Elastic Transcoder
- D. AWS Glacier

Answer: B

Explanation:

Amazon Simple Queue Service (SQS) is a fast, reliable, scalable, and fully managed message queuing service. SQS provides a simple and cost-effective way to decouple the components of an application. The user can configure SQS, which will decouple the call between the EC2 application and S3. Thus, the application does not keep waiting for S3 to provide the data.

Reference: <http://aws.amazon.com/sqs/faqs/>

NEW QUESTION 69

Which of the following strategies can be used to control access to your Amazon EC2 instances?

- A. DB security groups
- B. IAM policies
- C. None of these
- D. EC2 security groups

Answer: D

Explanation:

IAM policies allow you to specify what actions your IAM users are allowed to perform against your EC2 Instances. However, when it comes to access control, security groups are what you need in order to define and control the way you want your instances to be accessed, and whether or not certain kind of communications are allowed or not.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

NEW QUESTION 73

An organization has a statutory requirement to protect the data at rest for data stored in EBS volumes. Which of the below mentioned options can the organization use to achieve data protection?

- A. Data replication.
- B. Data encryption.
- C. Data snapshot.
- D. All the options listed her

Answer: D

Explanation:

For protecting the Amazon EBS data at REST, the user can use options, such as Data Encryption (Windows / Linux / third party based), Data Replication (AWS internally replicates data for redundancy), and Data Snapshot (for point in time backup).

Reference: http://media.amazonwebservices.com/AWS_Security_Best_Practices.pdf

NEW QUESTION 77

A client of yours has a huge amount of data stored on Amazon S3, but is concerned about someone stealing it while it is in transit. You know that all data is encrypted in transit on AWS, but which of the following is wrong when describing server-side encryption on AWS?

- A. Amazon S3 server-side encryption employs strong multi-factor encryption.
- B. Amazon S3 server-side encryption uses one of the strongest block ciphers available, 256-bit Advanced Encryption Standard (AES-256), to encrypt your data.
- C. In server-side encryption, you manage encryption/decryption of your data, the encryption keys, and related tools.
- D. Server-side encryption is about data encryption at rest—that is, Amazon S3 encrypts your data as it writes it to disks.

Answer: C

Explanation:

Amazon S3 encrypts your object before saving it on disks in its data centers and decrypts it when you download the objects. You have two options depending on

how you choose to manage the encryption keys: Server-side encryption and client-side encryption.

Server-side encryption is about data encryption at rest—that is, Amazon S3 encrypts your data as it writes it to disks in its data centers and decrypts it for you when you access it. As long as you authenticate your request and you have access permissions, there is no difference in the way you access encrypted or unencrypted objects. Amazon S3 manages encryption and decryption for you. For example, if you share your objects using a pre-signed URL, that URL works the same way for both encrypted and unencrypted objects.

In client-side encryption, you manage encryption/decryption of your data, the encryption keys, and related tools. Server-side encryption is an alternative to client-side encryption in which Amazon S3 manages the encryption of your data, freeing you from the tasks of managing encryption and encryption keys.

Amazon S3 server-side encryption employs strong multi-factor encryption. Amazon S3 encrypts each object with a unique key. As an additional safeguard, it encrypts the key itself with a master key that it regularly rotates. Amazon S3 server-side encryption uses one of the strongest block ciphers available, 256-bit Advanced Encryption Standard (AES-256), to encrypt your data.

Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/UsingServerSideEncryption.html>

NEW QUESTION 82

You have just set up a large site for a client which involved a huge database which you set up with Amazon RDS to run as a Multi-AZ deployment. You now start to worry about what will happen if the database instance fails. Which statement best describes how this database will function if there is a database failure?

- A. Updates to your DB Instance are synchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.
- B. Your database will not resume operation without manual administrative intervention.
- C. Updates to your DB Instance are asynchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.
- D. Updates to your DB Instance are synchronously replicated across S3 to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.

Answer: A

Explanation:

Amazon Relational Database Service (Amazon RDS) is a managed service that makes it easy to set up, operate, and scale a relational database in the cloud. It provides cost-efficient and resizable capacity, while managing time-consuming database administration tasks, freeing you up to focus on your applications and business.

When you create or modify your DB Instance to run as a Multi-AZ deployment, Amazon RDS automatically provisions and maintains a synchronous "standby" replica in a different Availability Zone. Updates to your DB Instance are synchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.

During certain types of planned maintenance, or in the unlikely event of DB Instance failure or Availability Zone failure, Amazon RDS will automatically failover to the standby so that you can resume database writes and reads as soon as the standby is promoted. Since the name record for your DB Instance remains the same, your application can resume database operation without the need for manual administrative intervention. With Multi-AZ deployments, replication is transparent: you do not interact directly with the standby, and it cannot be used to serve read traffic. If you are using Amazon RDS for MySQL and are looking to scale read traffic beyond the capacity constraints of a single DB Instance, you can deploy one or more Read Replicas.

Reference: <http://aws.amazon.com/rds/faqs/>

NEW QUESTION 83

Name the disk storage supported by Amazon Elastic Compute Cloud (EC2).

- A. None of these
- B. Amazon AppStream store
- C. Amazon SNS store
- D. Amazon Instance Store

Answer: D

Explanation:

Amazon EC2 supports the following storage options: Amazon Elastic Block Store (Amazon EBS) Amazon EC2 Instance Store Amazon Simple Storage Service (Amazon S3)

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/Storage.html>

NEW QUESTION 84

You are signed in as root user on your account but there is an Amazon S3 bucket under your account that you cannot access. What is a possible reason for this?

- A. An IAM user assigned a bucket policy to an Amazon S3 bucket and didn't specify the root user as a principal
- B. The S3 bucket is full.
- C. The S3 bucket has reached the maximum number of objects allowed.
- D. You are in the wrong availability zone

Answer: A

Explanation:

With IAM, you can centrally manage users, security credentials such as access keys, and permissions that control which AWS resources users can access.

In some cases, you might have an IAM user with full access to IAM and Amazon S3. If the IAM user assigns a bucket policy to an Amazon S3 bucket and doesn't specify the root user as a principal, the root user is denied access to that bucket. However, as the root user, you can still access the bucket by modifying the bucket policy to allow root user access.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/iam-troubleshooting.html#testing2>

NEW QUESTION 85

A user is observing the EC2 CPU utilization metric on CloudWatch. The user has observed some interesting patterns while filtering over the 1 week period for a particular hour. The user wants to zoom that data point to a more granular period. How can the user do that easily with CloudWatch?

- A. The user can zoom a particular period by selecting that period with the mouse and then releasing the mouse
- B. The user can zoom a particular period by specifying the aggregation data for that period
- C. The user can zoom a particular period by double clicking on that period with the mouse

D. The user can zoom a particular period by specifying the period in the Time Range

Answer: A

Explanation:

Amazon CloudWatch provides the functionality to graph the metric data generated either by the AWS services or the custom metric to make it easier for the user to analyse. The AWS CloudWatch console provides the option to change the granularity of a graph and zoom in to see data over a shorter time period. To zoom, the user has to click in the graph details pane, drag on the graph area for selection, and then release the mouse button.

Reference: http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/zoom_in_on_graph.html

NEW QUESTION 86

Select the correct statement: Within Amazon EC2, when using Linux instances, the device name /dev/sda1 is .

- A. reserved for EBS volumes
- B. recommended for EBS volumes
- C. recommended for instance store volumes
- D. reserved for the root device

Answer: D

Explanation:

Within Amazon EC2, when using a Linux instance, the device name /dev/sda1 is reserved for the root device.

Reference: http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/device_naming.html

NEW QUESTION 88

A user is planning to make a mobile game which can be played online or offline and will be hosted on EC2.

The user wants to ensure that if someone breaks the highest score or they achieve some milestone they can inform all their colleagues through email. Which of the below mentioned AWS services helps achieve this goal?

- A. AWS Simple Workflow Service.
- B. AWS Simple Email Service.
- C. Amazon Cognito
- D. AWS Simple Queue Servic

Answer: B

Explanation:

Amazon Simple Email Service (Amazon SES) is a highly scalable and cost-effective email-sending service for businesses and developers. It integrates with other AWS services, making it easy to send emails from applications that are hosted on AWS.

Reference: <http://aws.amazon.com/ses/faqs/>

NEW QUESTION 93

You need to create an Amazon Machine Image (AM) for a customer for an application which does not appear to be part of the standard AWS AM template that you can see in the AWS console. What are the alternative possibilities for creating an AM on AWS?

- A. You can purchase an AMs from a third party but cannot create your own AM.
- B. You can purchase an AMIs from a third party or can create your own AMI.
- C. Only AWS can create AMIs and you need to wait till it becomes available.
- D. Only AWS can create AMIs and you need to request them to create one for yo

Answer: B

Explanation:

You can purchase an AMIs from a third party, including AMIs that come with service contracts from organizations such as Red Hat. You can also create an AMI and sell it to other Amazon EC2 users. After you create an AMI, you can keep it private so that only you can use it, or you can share it with a specified list of AWS accounts. You can also make your custom AMI public so that the community can

use it. Building a safe, secure, usable AMI for public consumption is a fairly straightforward process, if you follow a few simple guidelines.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/AMIs.html>

NEW QUESTION 96

While creating an Amazon RDS DB, your first task is to set up a DB that controls which IP address or EC2 instance can access your DB Instance.

- A. security token pool
- B. security token
- C. security pool
- D. security group

Answer: D

Explanation:

While creating an Amazon RDS DB, your first task is to set up a DB Security Group that controls what IP addresses or EC2 instances have access to your DB Instance.

Reference: http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/USER_WorkingWithSecurityGroups.html

NEW QUESTION 99

You are very concerned about security on your network because you have multiple programmers testing APIs and SDKs and you have no idea what is happening.

You think C|oudTrail| may help but are not sure what it does. Which of the following statements best describes the AWS service CloudTrail?

- A. With AWS CloudTrail you can get a history of AWS API calls and related events for your account.
- B. With AWS CloudTrail you can get a history of IAM users for your account.
- C. With AWS CloudTrail you can get a history of S3 logfiles for your account.
- D. With AWS CloudTrail you can get a history of CloudFormation JSON scripts used for your account.

Answer: A

Explanation:

With AWS CloudTrail, you can get a history of AWS API calls for your account, including API calls made via the AWS Management Console, the AWS SDKs, the command line tools, and higher-level AWS services. You can also identify which users and accounts called AWS APIs for services that support CloudTrail, the source IP address the calls were made from, and when the calls occurred.

You can identify which users and accounts called AWS for services that support CloudTrail, the source IP address the calls were made from, and when the calls occurred. You can integrate CloudTrail into applications using the API, automate trail creation for your organization, check the status of your trails, and control how administrators turn CloudTrail logging on and off.

Reference: http://docs.aws.amazon.com/awscloudtrail/latest/userguide/what_is_cloud_trail_top_level.html

NEW QUESTION 101

What is the default maximum number of Access Keys per user?

- A. 10
- B. 15
- C. 2
- D. 20

Answer: C

Explanation:

The default maximum number of Access Keys per user is 2.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/LimitationsOnEntities.html>

NEW QUESTION 103

What is the network performance offered by the c4.8xlarge instance in Amazon EC2?

- A. 20 Gigabit
- B. 10 Gigabit
- C. Very High but variable
- D. 5 Gigabit

Answer: B

Explanation:

Networking performance offered by the c4.8xlarge instance is 10 Gigabit. Reference: <http://aws.amazon.com/ec2/instance-types/>

NEW QUESTION 108

You have been asked to tighten up the password policies in your organization after a serious security breach, so you need to consider every possible security measure. Which of the following is not an account password policy for IAM Users that can be set?

- A. Force IAM users to contact an account administrator when the user has allowed his or her password to expire.
- B. A minimum password length.
- C. Force IAM users to contact an account administrator when the user has entered his password incorrectly.
- D. Prevent IAM users from reusing previous password

Answer: C

Explanation:

IAM users need passwords in order to access the AWS Management Console. (They do not need passwords if they will access AWS resources programmatically by using the CLI, AWS SDKs, or the APIs.)

You can use a password policy to do these things: Set a minimum password length.

Require specific character types, including uppercase letters, lowercase letters, numbers, and non-alphanumeric characters. Be sure to remind your users that passwords are case sensitive. Allow all IAM users to change their own passwords.

Require IAM users to change their password after a specified period of time (enable password expiration). Prevent IAM users from reusing previous passwords.

Force IAM users to contact an account administrator when the user has allowed his or her password to expire.

Reference: http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_ManagingPasswordPolicies.html

NEW QUESTION 109

A user has created a CloudFormation stack. The stack creates AWS services, such as EC2 instances, ELB, AutoScaling, and RDS. While creating the stack it created EC2, ELB and AutoScaling but failed to create RDS. What will CloudFormation do in this scenario?

- A. Rollback all the changes and terminate all the created services
- B. It will wait for the user's input about the error and correct the mistake after the input
- C. CloudFormation can never throw an error after launching a few services since it verifies all the steps before launching
- D. It will warn the user about the error and ask the user to manually create RDS

Answer: A

Explanation:

AWS CloudFormation is an application management tool which provides application modeling, deployment, configuration, management and related activities. The AWS CloudFormation stack is a collection of AWS resources which are created and managed as a single unit when AWS CloudFormation instantiates a template. If any of the services fails to launch, CloudFormation will rollback all the changes and terminate or delete all the created services.

Reference: <http://aws.amazon.com/cloudformation/faqs/>

NEW QUESTION 114

You have just finished setting up an advertisement server in which one of the obvious choices for a service was Amazon Elastic Map Reduce (EMR) and are now troubleshooting some weird cluster states that you are seeing. Which of the below is not an Amazon EMR cluster state?

- A. STARTING
- B. STOPPED
- C. RUNNING
- D. WAITING

Answer: B

Explanation:

Amazon Elastic Map Reduce (EMR) is a web service that enables businesses, researchers, data analysts, and developers to easily and cost-effectively process vast amounts of data.

Amazon EMR historically referred to an Amazon EMR cluster (and all processing steps assigned to it) as a "cluster". Every cluster has a unique identifier that starts with "j-".

The different cluster states of an Amazon EMR cluster are listed below. STARTING — The cluster provisions, starts, and configures EC2 instances.

BOOTSTRAPPING — Bootstrap actions are being executed on the cluster. RUNNING — A step for the cluster is currently being run.

WAITING — The cluster is currently active, but has no steps to run. TERMINATING - The cluster is in the process of shutting down. TERMINATED - The cluster was shut down without error. TERMINATED_WITH_ERRORS - The cluster was shut down with errors.

Reference: <https://aws.amazon.com/elasticmapreduce/faqs/>

NEW QUESTION 115

The AWS CloudHSM service defines a resource known as a high-availability (HA) , which is a virtual partition that represents a group of partitions, typically distributed between several physical HSMs for high-availability.

- A. proxy group
- B. partition group
- C. functional group
- D. relational group

Answer: B

Explanation:

The AWS CloudHSM service defines a resource known as a high-availability (HA) partition group, which is a virtual partition that represents a group of partitions, typically distributed between several physical HSMs for high-availability.

Reference: <http://docs.aws.amazon.com/cloudhsm/latest/userguide/configuring-ha.html>

NEW QUESTION 119

After setting up some EC2 instances you now need to set up a monitoring solution to keep track of these instances and to send you an email when the CPU hits a certain threshold. Which statement below best describes what thresholds you can set to trigger a CloudWatch Alarm?

- A. Set a target value and choose whether the alarm will trigger when the value is greater than (>), greater than or equal to (>=), less than (<), or less than or equal to (<=) that value.
- B. Thresholds need to be set in IAM not CloudWatch
- C. Only default thresholds can be set you can't choose your own thresholds.
- D. Set a target value and choose whether the alarm will trigger when the value hits this threshold

Answer: A

Explanation:

Amazon CloudWatch is a monitoring service for AWS cloud resources and the applications you run on AWS. You can use Amazon CloudWatch to collect and track metrics, collect and monitor log files, and set alarms.

When you create an alarm, you first choose the Amazon CloudWatch metric you want it to monitor. Next, you choose the evaluation period (e.g., five minutes or one hour) and a statistical value to measure (e.g., Average or Maximum).

To set a threshold, set a target value and choose whether the alarm will trigger when the value is greater than (>), greater than or equal to (>=), less than (<), or less than or equal to (<=) that value.

Reference: <http://aws.amazon.com/cloudwatch/faqs/>

NEW QUESTION 122

When does the billing of an Amazon EC2 system begin?

- A. It starts when the Status column for your distribution changes from Creating to Deployed.
- B. It starts as soon as you click the create instance option on the main EC2 console.
- C. It starts when your instance reaches 720 instance hours.
- D. It starts when Amazon EC2 initiates the boot sequence of an AM instance

Answer: D

Explanation:

Billing commences when Amazon EC2 initiates the boot sequence of an AM instance. Billing ends when the instance terminates, which could occur through a web services command, by running "shutdown -h", or through instance failure. When you stop an instance, Amazon shuts it down but doesn't charge hourly usage for a stopped instance, or data transfer fees, but charges for the storage for any Amazon EBS volumes.

Reference: <http://aws.amazon.com/ec2/faqs/>

NEW QUESTION 126

You have just discovered that you can upload your objects to Amazon S3 using Multipart Upload API. You start to test it out but are unsure of the benefits that it would provide. Which of the following is not a benefit of using multipart uploads?

- A. You can begin an upload before you know the final object size.
- B. Quick recovery from any network issues.
- C. Pause and resume object uploads.
- D. It's more secure than normal upload

Answer: D

Explanation:

Multipart upload in Amazon S3 allows you to upload a single object as a set of parts. Each part is a contiguous portion of the object's data. You can upload these object parts independently and in any order.

If transmission of any part fails, you can re-transmit that part without affecting other parts. After all parts of your object are uploaded, Amazon S3 assembles these parts and creates the object. In general, when

your object size reaches 100 MB, you should consider using multipart uploads instead of uploading the object in a single operation.

Using multipart upload provides the following advantages:

Improved throughput—You can upload parts in parallel to improve throughput.

Quick recovery from any network issues—Smaller part size minimizes the impact of restarting a failed upload due to a network error.

Pause and resume object uploads—You can upload object parts over time. Once you initiate a multipart upload there is no expiry; you must explicitly complete or abort the multipart upload.

Begin an upload before you know the final object size—You can upload an object as you are creating it. Reference:

<http://docs.aws.amazon.com/AmazonS3/latest/dev/uploadobjusingmpu.html>

NEW QUESTION 131

You're trying to delete an SSL certificate from the IAM certificate store, and you're getting the message "Certificate: <certificate-id> is being used by CloudFront." Which of the following statements is probably the reason why you are getting this error?

- A. Before you can delete an SSL certificate, you need to either rotate SSL certificates or revert from using a custom SSL certificate to using the default CloudFront certificate.
- B. You can't delete SSL certificates. You need to request it from AWS.
- C. Before you can delete an SSL certificate, you need to set up the appropriate access level in IAM
- D. Before you can delete an SSL certificate you need to set up https on your server

Answer: A

Explanation:

CloudFront is a web service that speeds up distribution of your static and dynamic web content, for example, .html, .css, .php, and image files, to end users.

Every CloudFront web distribution must be associated either with the default CloudFront certificate or with a custom SSL certificate. Before you can delete an SSL certificate, you need to either rotate SSL certificates (replace the current custom SSL certificate with another custom SSL certificate) or revert from using a custom SSL certificate to using the default CloudFront certificate.

Reference: <http://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/Troubleshooting.html>

NEW QUESTION 134

How many types of block devices does Amazon EC2 support?

- A. 4
- B. 5
- C. 2
- D. 1

Answer: C

Explanation:

Amazon EC2 supports 2 types of block devices. Reference:

<http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/block-device-mapping-concepts.html>

NEW QUESTION 136

In relation to AWS CloudHSM, High-availability (HA) recovery is hands-off resumption by failed HA group members.

Prior to the introduction of this function, the HA feature provided redundancy and performance, but required that a failed/lost group member be reinstated.

- A. automatically
- B. periodically
- C. manually
- D. continuously

Answer: C

Explanation:

In relation to AWS CloudHSM, High-availability (HA) recovery is hands-off resumption by failed HA group members.

Prior to the introduction of this function, the HA feature provided redundancy and performance, but required that a failed/lost group member be manually reinstated.

Reference: <http://docs.aws.amazon.com/cloudhsm/latest/userguide/ha-best-practices.html>

NEW QUESTION 138

You are using Amazon SES as an email solution but are unsure of what its limitations are. Which statement below is correct in regards to that?

- A. New Amazon SES users who have received production access can send up to 1,000 emails per 24-hour period, at a maximum rate of 10 emails per second.
- B. Every Amazon SES sender has a the same set of sending limits
- C. Sending limits are based on messages rather than on recipients
- D. Every Amazon SES sender has a unique set of sending limits

Answer: D

Explanation:

Amazon Simple Email Service (Amazon SES) is a highly scalable and cost-effective email-sending service for businesses and developers. Amazon SES eliminates the complexity and expense of building an in-house email solution or licensing, installing, and operating a third-party email service for this type of email communication.

Every Amazon SES sender has a unique set of sending limits, which are calculated by Amazon SES on an ongoing basis:

Sending quota — the maximum number of emails you can send in a 24-hour period. Maximum send rate — the maximum number of emails you can send per second.

New Amazon SES users who have received production access can send up to 10,000 emails per 24-hour period, at a maximum rate of 5 emails per second.

Amazon SES automatically adjusts these limits upward, as long as you send high-quality email. If your existing quota is not adequate for your needs and the system has not automatically increased your quota, you can submit an SES Sending Quota Increase case at any time.

Sending limits are based on recipients rather than on messages. You can check your sending limits at any time by using the Amazon SES console.

Note that if your email is detected to be of poor or QUESTION able quality (e.g., high complaint rates, high bounce rates, spam, or abusive content), Amazon SES might temporarily or permanently reduce your permitted send volume, or take other action as AWS deems appropriate.

Reference: <https://aws.amazon.com/ses/faqs/>

NEW QUESTION 142

A for a VPC is a collection of subnets (typically private) that you may want to designate for your backend RDS DB Instances.

- A. DB Subnet Set
- B. RDS Subnet Group
- C. DB Subnet Group
- D. DB Subnet Collection

Answer: C

Explanation:

DB Subnet Groups are a set of subnets (one per Availability Zone of a particular region) designed for your DB instances that reside in a VPC. They make easy to manage Multi-AZ deployments as well as the conversion from a Single-AZ to a Multi-AZ one.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Overview.RDSVPC.html>

NEW QUESTION 144

You have set up an S3 bucket with a number of images in it and you have decided that you want anybody to be able to access these images, even anonymous users. To accomplish this you create a bucket policy. You will need to use an Amazon S3 bucket policy that specifies a in the principal element, which means anyone can access the bucket.

- A. hash tag (#)
- B. anonymous user
- C. wildcard (*)
- D. S3 user

Answer: C

Explanation:

You can use the AWS Policy Generator to create a bucket policy for your Amazon S3 bucket. You can then use the generated document to set your bucket policy by using the Amazon S3 console, by a number of third-party tools, or via your application.

You use an Amazon S3 bucket policy that specifies a wildcard (*) in the principal element, which means anyone can access the bucket. With anonymous access, anyone (including users without an AWS account) will be able to access the bucket.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/iam-troubleshooting.html#d0e20565>

NEW QUESTION 146

You have been asked to build AWS infrastructure for disaster recovery for your local applications and within that you should use an AWS Storage Gateway as part of the solution. Which of the following best describes the function of an AWS Storage Gateway?

- A. Accelerates transferring large amounts of data between the AWS cloud and portable storage devices .
- B. A web service that speeds up distribution of your static and dynamic web content.
- C. Connects an on-premises software appliance with cloud-based storage to provide seamless and secure integration between your on-premises IT environment and AWS's storage infrastructure.
- D. Is a storage service optimized for infrequently used data, or "cold data."

Answer: C

Explanation:

AWS Storage Gateway connects an on-premises software appliance with cloud-based storage to provide seamless integration with data security features between your on-premises IT environment and the Amazon Web Services (AWS) storage infrastructure. You can use the service to store data in the AWS cloud for scalable and cost-effective storage that helps maintain data security. AWS Storage Gateway offers both volume-based and tape-based storage solutions:

Volume gateways Gateway-cached volumes Gateway-stored volumes

Gateway-virtual tape library (VTL)

Reference:

http://media.amazonwebservices.com/architecturecenter/AWS_ac_ra_disasterrecovery_07.pdf

NEW QUESTION 148

An organization has a statutory requirement to protect the data at rest for the S3 objects. Which of the below mentioned options need not be enabled by the organization to achieve data security?

- A. MFA delete for S3 objects
- B. Client side encryption
- C. Bucket versioning
- D. Data replication

Answer: D

Explanation:

AWS S3 provides multiple options to achieve the protection of data at REST. The options include Permission (Policy), Encryption (Client and Server Side), Bucket Versioning and MFA based delete. The user can enable any of these options to achieve data protection. Data replication is an internal facility by AWS where S3 replicates each object across all the Availability Zones and the organization need not enable it in this case.

Reference: http://media.amazonwebservices.com/AWS_Security_Best_Practices.pdf

NEW QUESTION 151

Are penetration tests allowed as long as they are limited to the customer's instances?

- A. Yes, they are allowed but only for selected regions.
- B. No, they are never allowed.
- C. Yes, they are allowed without any permission.
- D. Yes, they are allowed but only with approval.

Answer: D

Explanation:

Penetration tests are allowed after obtaining permission from AWS to perform them. Reference: <http://aws.amazon.com/security/penetration-testing/>

NEW QUESTION 154

In AWS CloudHSM, in addition to the AWS recommendation that you use two or more HSM appliances in a high-availability configuration to prevent the loss of keys and data, you can also perform a remote backup/restore of a Luna SA partition if you have purchased a:

- A. Luna Restore HSNL
- B. Luna Backup HSM.
- C. Luna HSNL.
- D. Luna SA HSM.

Answer: B

Explanation:

In AWS CloudHSM, you can perform a remote backup/restore of a Luna SA partition if you have purchased a Luna Backup HSM.

Reference: <http://docs.aws.amazon.com/cloudhsm/latest/userguide/cloud-hsm-backup-restore.html>

NEW QUESTION 156

A user has launched a large EBS backed EC2 instance in the US-East-1a region. The user wants to achieve Disaster Recovery (DR) for that instance by creating another small instance in Europe. How can the user achieve DR?

- A. Copy the instance from the US East region to the EU region
- B. Use the "Launch more like this" option to copy the instance from one region to another
- C. Copy the running instance using the "Instance Copy" command to the EU region
- D. Create an AMI of the instance and copy the AMI to the EU region
- E. Then launch the instance from the EU AMI

Answer: D

Explanation:

To launch an EC2 instance it is required to have an AMI in that region. If the AMI is not available in that region, then create a new AMI or use the copy command to copy the AMI from one region to the other region.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/CopyingAMIs.html>

NEW QUESTION 160

A friend wants you to set up a small BitTorrent storage area for him on Amazon S3. You tell him it is highly unlikely that AWS would allow such a thing in their infrastructure. However you decide to investigate. Which of the following statements best describes using BitTorrent with Amazon S3?

- A. Amazon S3 does not support the BitTorrent protocol because it is used for pirated software.
- B. You can use the BitTorrent protocol but only for objects that are less than 100 GB in size.
- C. You can use the BitTorrent protocol but you need to ask AWS for specific permissions first.
- D. You can use the BitTorrent protocol but only for objects that are less than 5 GB in size

Answer: D

Explanation:

BitTorrent is an open, peer-to-peer protocol for distributing files. You can use the BitTorrent protocol to retrieve any publicly-accessible object in Amazon S3. Amazon S3 supports the BitTorrent protocol so that developers can save costs when distributing content at high scale. Amazon S3 is useful for simple, reliable storage of any data. The default distribution mechanism for Amazon S3 data is via client/server download. In client/server distribution, the entire object is

transferred point-to-point from Amazon S3 to every authorized user who requests that object. While client/server delivery is appropriate for a wide variety of use cases, it is not optimal for everybody. Specifically, the costs of client/server distribution increase linearly as the number of users downloading objects increases. This can make it expensive to distribute popular objects.

BitTorrent addresses this problem by recruiting the very clients that are downloading the object as distributors themselves: Each client downloads some pieces of the object from Amazon S3 and some from other clients, while simultaneously uploading pieces of the same object to other interested "peers." The benefit for publishers is that for large, popular files the amount of data actually supplied by Amazon S3 can be substantially lower than what it would have been sewing the same clients via client/server download. Less data transferred means lower costs for the publisher of the object.

Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/S3Torrent.html>

NEW QUESTION 163

While creating a network in the VPC, which of the following is true of a NAT device?

- A. You have to administer the NAT Gateway Service provided by AWS.
- B. You can choose to use any of the three kinds of NAT devices offered by AWS for special purposes.
- C. You can use a NAT device to enable instances in a private subnet to connect to the Internet.
- D. You are recommended to use AWS NAT instances over NAT gateways, as the instances provide better availability and bandwidth.

Answer: C

Explanation:

You can use a NAT device to enable instances in a private subnet to connect to the Internet (for example, for software updates) or other AWS services, but prevent the Internet from initiating connections with the instances. AWS offers two kinds of NAT devices u a NAT gateway or a NAT instance. We recommend NAT gateways, as they provide better availability and bandwidth over NAT instances. The NAT Gateway service is also a managed service that does not require your administration efforts. A NAT instance is launched from a NAT AM. You can choose to use a NAT instance for special purposes.

Reference: <http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/vpc-nat.html>

NEW QUESTION 166

You want to establish a dedicated network connection from your premises to AWS in order to save money by transferring data directly to AWS rather than through your internet service provider. You are sure there must be some other benefits beyond cost savings. Which of the following would not be considered a benefit if you were to establish such a connection?

- A. Elasticity
- B. Compatibility with all AWS services.
- C. Private connectMty to your Amazon VPC.
- D. Everything listed is a benefi

Answer: D

Explanation:

AWS Direct Connect makes it easy to establish a dedicated network connection from your premises to AWS.

Using AWS Direct Connect, you can establish private connectMty between AWS and your datacenter, office, or colocation environment, which in many cases can reduce your network costs, increase bandwidth throughput, and provide a more consistent network experience than internet-based connections.

You could expect the following benefits if you use AWS Direct Connect. Reduced bandwidth costs

Consistent network performance Compatibility with all AWS services Private connectMty to your Amazon VPC Elasticity

Simplicity

Reference: <http://aws.amazon.com/directconnect/>

NEW QUESTION 167

George has launched three EC2 instances inside the US-East-1a zone with his AWS account. Ray has launched two EC2 instances in the US-East-1a zone with his AWS account. Which of the below mentioned statements will help George and Ray understand the availability zone (AZ) concept better?

- A. All the instances of George and Ray can communicate over a private IP with a minimal cost
- B. The US-East-1a region of George and Ray can be different availability zones
- C. All the instances of George and Ray can communicate over a private IP without any cost
- D. The instances of George and Ray will be running in the same data centre

Answer: B

Explanation:

Each AWS region has multiple, isolated locations known as Availability Zones. To ensure that the AWS resources are distributed across the Availability Zones for a region, AWS independently maps the Availability Zones to identifiers for each account. In this case the Availability Zone US-East-1a where George's EC2 instances are running might not be the same location as the US-East-1a zone of Ray's EC2 instances. There is no way for the user to coordinate the Availability Zones between accounts.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-regions-availability-zones.html>

NEW QUESTION 168

You are in the process of moving your friend's WordPress site onto AWS to try and save him some money, and you have told him that he should probably also move his domain name. He asks why he can't leave

his domain name where it is and just have his infrastructure on AWS. What would be an incorrect response to his question ?

- A. Route 53 offers low query latency for your end users.
- B. Route 53 is designed to automatically answer queries from the optimal location depending on network conditions.
- C. The globally distributed nature of AWS's DNS servers helps ensure a consistent ability to route your end users to your application.
- D. Route 53 supports Domain Name System Security Extensions (DNSSEC).

Answer: D

Explanation:

Amazon Route 53 provides highly available and scalable Domain Name System (DNS), domain name registration, and health-checking web services. Route 53 is built using AWS's highly available and reliable infrastructure. The globally distributed nature of our DNS servers helps ensure a consistent ability to route your end users to your application by circumventing any internet or network related issues. Route 53 is designed to provide the level of dependability required by important applications. Using a global anycast network of DNS servers around the world, Route 53 is designed to automatically answer queries from the optimal location depending on network conditions. As a result, the service offers low query latency for your end users. Amazon Route 53 does not support Domain Name System Security Extensions (DNSSEC) at this time. Reference: <https://aws.amazon.com/route53/faqs/>

NEW QUESTION 170

While controlling access to Amazon EC2 resources, which of the following acts as a firewall that controls the traffic allowed to reach one or more instances?

- A. A security group
- B. An instance type
- C. A storage cluster
- D. An object

Answer: A

Explanation:

A security group acts as a firewall that controls the traffic allowed to reach one or more instances. When you launch an instance, you assign it one or more security groups.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

NEW QUESTION 171

Which one of the following can't be used as an origin server with Amazon CloudFront?

- A. A web server running in your infrastructure
- B. Amazon S3
- C. Amazon Glacier
- D. A web server running on Amazon EC2 instances

Answer: C

Explanation:

Amazon CloudFront is designed to work with Amazon S3 as your origin server, customers can also use Amazon CloudFront with origin servers running on Amazon EC2 instances or with any other custom origin.

Reference: <http://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/distribution-web.html>

NEW QUESTION 176

You have been asked to set up monitoring of your network and you have decided that Cloudwatch would be the best service to use. Amazon CloudWatch monitors your Amazon Web Services (AWS) resources and the applications you run on AWS in real-time. You can use CloudWatch to collect and track metrics, which are the variables you want to measure for your resources and applications. Which of the following items listed can AWS Cloudwatch monitor?

- A. Log files your applications generate.
- B. All of the items listed on this page.
- C. System-wide visibility into resource utilization, application performance, and operational health.
- D. Custom metrics generated by your applications and services .

Answer: B

Explanation:

Amazon CloudWatch can monitor AWS resources such as Amazon EC2 instances, Amazon DynamoDB tables, and Amazon RDS DB instances, as well as custom metrics generated by your applications and services, and any log files your applications generate. You can use Amazon CloudWatch to gain system-wide visibility into resource utilization, application performance, and operational health. You can use these insights to react and keep your application running smoothly.

Reference: <http://aws.amazon.com/cloudwatch/>

NEW QUESTION 181

You have a Business support plan with AWS. One of your EC2 instances is running Microsoft Windows Server 2008 R2 and you are having problems with the software. Can you receive support from AWS for this software?

- A. Yes
- B. No, AWS does not support any third-party software.
- C. No, Microsoft Windows Server 2008 R2 is not supported.
- D. No, you need to be on the enterprise support plan

Answer: A

Explanation:

Third-party software support is available only to AWS Support customers enrolled for Business or Enterprise Support. Third-party support applies only to software running on Amazon EC2 and does not extend to assisting with on-premises software. An exception to this is a VPN tunnel configuration running supported devices for Amazon VPC.

Reference: <https://aws.amazon.com/premiumsupport/features/>

NEW QUESTION 184

After deciding that EMR will be useful in analysing vast amounts of data for a gaming website that you are architecting you have just deployed an Amazon EMR Cluster and wish to monitor the cluster performance. Which of the following tools cannot be used to monitor the cluster performance?

- A. Kinesis

- B. Ganglia
- C. CloudWatch Metrics
- D. Hadoop Web Interfaces

Answer: A

Explanation:

Amazon EMR provides several tools to monitor the performance of your cluster. Hadoop Web Interfaces

Every cluster publishes a set of web interfaces on the master node that contain information about the cluster. You can access these web pages by using an SSH tunnel to connect them on the master node. For more information, see [View Web Interfaces Hosted on Amazon EMR Clusters](#).

CloudWatch Metrics

Every cluster reports metrics to CloudWatch. CloudWatch is a web service that tracks metrics, and which you can use to set alarms on those metrics. For more information, see [Monitor Metrics with CloudWatch](#). Ganglia

Ganglia is a cluster monitoring tool. To have this available, you have to install Ganglia on the cluster when you launch it. After you've done so, you can monitor the cluster as it runs by using an SSH tunnel to connect to the Ganglia UI running on the master node. For more information, see [Monitor Performance with Ganglia](#).

Reference:

<http://docs.aws.amazon.com/ElasticMapReduce/latest/DeveloperGuide/emr-troubleshoot-tools.html>

NEW QUESTION 189

Can you move a Reserved Instance from one Availability Zone to another?

- A. Yes, but each Reserved Instance is associated with a specific Region that cannot be changed.
- B. Yes, only in US-West-2.
- C. Yes, only in US-East-1.
- D. No

Answer: A

Explanation:

Each Reserved Instance is associated with a specific Region, which is fixed for the lifetime of the reservation and cannot be changed. Each reservation can, however, be used in any of the available AZs within the associated Region.

Reference: <https://aws.amazon.com/rds/faqs/>

NEW QUESTION 190

An application hosted at the EC2 instance receives an HTTP request from ELB. The same request has an X-Forwarded-For header, which has three IP addresses. Which system's IP will be a part of this header?

- A. Previous Request IP address.
- B. Client IP address.
- C. All of the answers listed here.
- D. Load Balancer IP address

Answer: C

Explanation:

When a user sends a request to ELB over HTTP/HTTPS, the request header log at the instance will only receive the IP of ELB. This is because ELB is the interceptor between the EC2 instance and the client request. To get the client IP, use the header X-Forwarded-For in header. The client IP address in the X-Forwarded-For request header is followed by the IP addresses of each successive proxy that passes along the request. The last IP address is the IP address that connects to the back-end application instance. e.g. if the HTTP request already has a header when it reaches the Load Balancer, the IP address from which the request came is appended at the end of the header followed by the IP address of the Load Balancer. In such cases, the X-Forwarded-For request header takes the following form:

X-Forwarded-For: clientIPAddress, previousRequestIPAddress, LoadBalancerIPAddress. Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/TerminologyandKeyConcepts.html>

NEW QUESTION 191

You need to set up a security certificate for a client's e-commerce website as it will use the HTTPS protocol. Which of the below AWS services do you need to access to manage your SSL server certificate?

- A. AWS Directory Service
- B. AWS Identity & Access Management
- C. AWS CloudFormation
- D. Amazon Route 53

Answer: B

Explanation:

AWS Identity and Access Management (IAM) is a web service that enables Amazon Web Services (AWS) customers to manage users and user permissions in AWS.

All your SSL server certificates are managed by AWS Identity and Access management (IAM). Reference:

<http://docs.aws.amazon.com/IAM/latest/UserGuide/ManagingServerCerts.html>

NEW QUESTION 196

Your company has HQ in Tokyo and branch offices all over the world and is using a logistics software with a multi-regional deployment on AWS in Japan, Europe and USA. The logistic software has a 3-tier architecture and currently uses MySQL 5.6 for data persistence. Each region has deployed its own database

In the HQ region you run an hourly batch process reading data from every region to compute cross regional reports that are sent by email to all offices this batch process must be completed as fast as possible to quickly optimize logistics how do you build the database architecture in order to meet the requirements?

- A. For each regional deployment, use RDS MySQL with a master in the region and a read replica in the HQ region
- B. For each regional deployment, use MySQL on EC2 with a master in the region and send hourly EBS snapshots to the HQ region

- C. For each regional deployment, use RDS MySQL with a master in the region and send hourly RDS snapshots to the HQ region
- D. For each regional deployment, use MySQL on EC2 with a master in the region and use S3 to copy data files hourly to the HQ region
- E. Use Direct Connect to connect all regional MySQL deployments to the HQ region and reduce network latency for the batch process

Answer: A

NEW QUESTION 200

You have recently joined a startup company building sensors to measure street noise and air quality in urban areas. The company has been running a pilot deployment of around 100 sensors for 3 months each sensor uploads 1KB of sensor data every minute to a backend hosted on AWS. During the pilot, you measured a peak of 10 IOPS on the database, and you stored an average of 3GB of sensor data per month in the database. The current deployment consists of a load-balanced auto scaled Ingestion layer using EC2 instances and a PostgreSQL RDS database with 500GB standard storage. The pilot is considered a success and your CEO has managed to get the attention of some potential investors. The business plan requires a deployment of at least 100K sensors which needs to be supported by the backend. You also need to store sensor data for at least two years to be able to compare year over year improvements. To secure funding, you have to make sure that the platform meets these requirements and leaves room for further scaling. Which setup will meet the requirements?

- A. Add an SQS queue to the ingestion layer to buffer writes to the RDS instance
- B. Ingest data into a DynamoDB table and move old data to a Redshift cluster
- C. Replace the RDS instance with a 6 node Redshift cluster with 96TB of storage
- D. Keep the current architecture but upgrade RDS storage to 3TB and IOPS provisioned IOPS

Answer: C

NEW QUESTION 204

You have been asked to design the storage layer for an application. The application requires disk performance of at least 100,000 IOPS in addition, the storage layer must be able to survive the loss of an individual disk. EC2 instance, or Availability Zone without any data loss. The volume you provide must have a capacity of at least 3 TB. Which of the following designs will meet these objectives'?

- A. Instantiate a c3.8xlarge instance in us-east-1. Provision 4x1TB EBS volumes, attach them to the instance, and configure them as a single RAID 5 volume
- B. Ensure that EBS snapshots are performed every 15 minutes.
- C. Instantiate a c3.8xlarge instance in us-east-1. Provision 3x1TB EBS volumes, attach them to the instance, and configure them as a single RAID 0 volume
- D. Ensure that EBS snapshots are performed every 15 minutes.
- E. Instantiate an i2.8xlarge instance in us-east-1
- F. Create a RAID 0 volume using the four 800GB SSD ephemeral disks provided with the instance
- G. Provision 3x1TB EBS volumes, attach them to the instance, and configure them as a second RAID 0 volume
- H. Configure synchronous, block-level replication from the ephemeral-backed volume to the EBS-backed volume.
- I. Instantiate a c3.8xlarge instance in us-east-1. Provision an AWS Storage Gateway and configure it for 3 TB of storage and 100,000 IOPS
- J. Attach the volume to the instance
- K. Instantiate an i2.8xlarge instance in us-east-1
- L. Create a RAID 0 volume using the four 800GB SSD ephemeral disks provided with the instance
- M. Configure synchronous, block-level replication to an identically configured instance in us-east-1

Answer: C

NEW QUESTION 207

You are responsible for a legacy web application whose server environment is approaching end of life. You would like to migrate this application to AWS as quickly as possible, since the application environment currently has the following limitations:
The VM's single 10GB VMDK is almost full. The virtual network interface still uses the 10Mbps driver, which leaves your 100Mbps WAN connection completely underutilized.
It is currently running on a highly customized Windows VM within a VMware environment. You do not have the installation media.
This is a mission critical application with an RTO (Recovery Time Objective) of 8 hours. RPO (Recovery Point Objective) of 1 hour. How could you best migrate this application to AWS while meeting your business continuity requirements?

- A. Use the EC2 VM Import Connector for vCenter to import the VM into EC2.
- B. Use Import/Export to import the VM as an EBS snapshot and attach to EC2.
- C. Use S3 to create a backup of the VM and restore the data into EC2.
- D. Use the ec2-bundle-instance API to import an image of the VM into EC2

Answer: A

NEW QUESTION 208

An International company has deployed a multi-tier web application that relies on DynamoDB in a single region. For regulatory reasons, they need disaster recovery capability in a separate region with a Recovery Time Objective of 2 hours and a Recovery Point Objective of 24 hours. They should synchronize their data on a regular basis and be able to provision the web application rapidly using CloudFormation. The objective is to minimize changes to the existing web application, control the throughput of DynamoDB used for the synchronization of data and synchronize only the modified elements. Which design would you choose to meet these requirements?

- A. Use AWS Data Pipeline to schedule a DynamoDB cross-region copy once a day
- B. Create a 'Last updated' attribute in your DynamoDB table that would represent the timestamp of the last update and use it as a filter.
- C. Use EMR and write a custom script to retrieve data from DynamoDB in the current region using a SCAN operation and push it to DynamoDB in the second region.
- D. Use AWS Data Pipeline to schedule an export of the DynamoDB table to S3 in the current region once a day, then schedule another task immediately after it that will import data from S3 to DynamoDB in the other region.
- E. Send all data into an SQS queue in the second region; use an auto-scaling group behind the SQS queue to replay the write in the second region.

Answer: A

NEW QUESTION 211

Your company currently has a 2-tier web application running in an on-premises data center. You have experienced several infrastructure failures in the past two months resulting in significant financial losses. Your CIO is strongly agreeing to move the application to AWS. While working on achieving buy-in from the other company executives, he asks you to develop a disaster recovery plan to help improve Business continuity in the short term. He specifies a target Recovery Time Objective (RTO) of 4 hours and a Recovery Point Objective (RPO) of 1 hour or less. He also asks you to implement the solution within 2 weeks. Your database is 200GB in size and you have a 20Mbps Internet connection.

How would you do this while minimizing costs?

- A. Create an EBS backed private AMI which includes a fresh install of your application
- B. Develop a CloudFormation template which includes your AMI and the required EC2, AutoScaling, and ELB resources to support deploying the application across Multiple- Availability-Zone
- C. Asynchronously replicate transactions from your on-premises database to a database instance in AWS across a secure VPN connection.
- D. Deploy your application on EC2 instances within an Auto Scaling group across multiple availability zone
- E. Asynchronously replicate transactions from your on-premises database to a database instance in AWS across a secure VPN connection.
- F. Create an EBS backed private AMI which includes a fresh install of your application
- G. Setup a script in your data center to backup the local database every 1 hour and to encrypt and copy the resulting file to an S3 bucket using multi-part upload.
- H. Install your application on a compute-optimized EC2 instance capable of supporting the application's average load
- I. Synchronously replicate transactions from your on-premises database to a database instance in AWS across a secure Direct Connect connection.

Answer: A

Explanation:

Overview of Creating Amazon EBS-Backed AMIs

First, launch an instance from an AMI that's similar to the AMI that you'd like to create. You can connect to your instance and customize it. When the instance is configured correctly, ensure data integrity by

stopping the instance before you create an AMI, then create the image. When you create an Amazon EBS-backed AMI, we automatically register it for you.

Amazon EC2 powers down the instance before creating the AMI to ensure that everything on the instance is stopped and in a consistent state during the creation process. If you're confident that your instance is in a consistent state appropriate for AMI creation, you can tell Amazon EC2 not to power down and reboot the instance. Some file systems, such as XFS, can freeze and unfreeze activity, making it safe to create the image without rebooting the instance.

During the AMI-creation process, Amazon EC2 creates snapshots of your instance's root volume and any other EBS volumes attached to your instance. If any volumes attached to the instance are encrypted, the new AMI only launches successfully on instances that support Amazon EBS encryption. For more information, see Amazon EBS Encryption.

Depending on the size of the volumes, it can take several minutes for the AMI-creation process to complete (sometimes up to 24 hours). You may find it more efficient to create snapshots of your volumes prior to creating your AMI. This way, only small, incremental snapshots need to be created when the AMI is created, and the process completes more quickly (the total time for snapshot creation remains the same). For more information, see Creating an Amazon EBS Snapshot. After the process completes, you have a new AMI and snapshot created from the root volume of the instance. When you launch an instance using the new AMI, we create a new EBS volume for its root volume using the snapshot. Both the AMI and the snapshot incur charges to your account until you delete them. For more information, see Deregistering Your AMI.

If you add instance-store volumes or EBS volumes to your instance in addition to the root device volume, the block device mapping for the new AMI contains information for these volumes, and the block device mappings for instances that you launch from the new AMI automatically contain information for these volumes. The instance-store volumes specified in the block device mapping for the new instance are new and don't contain any data from the instance store volumes of the instance you used to create the AMI. The data on EBS volumes persists. For more information, see Block Device Mapping.

NEW QUESTION 212

Your company previously configured a heavily used, dynamically routed VPN connection between your on-premises data center and AWS. You recently provisioned a DirectConnect connection and would like to start using the new connection. After configuring DirectConnect settings in the AWS Console, which of the following options will provide the most seamless transition for your users?

- A. Delete your existing VPN connection to avoid routing loops configure your DirectConnect router with the appropriate settings and verify network traffic is leveraging DirectConnect.
- B. Configure your DirectConnect router with a higher BGP priority than your VPN router, verify network traffic is leveraging DirectConnect and then delete your existing VPN connection.
- C. Update your VPC route tables to point to the DirectConnect connection configure your DirectConnect router with the appropriate settings verify network traffic is leveraging DirectConnect and then delete the VPN connection.
- D. Configure your DirectConnect router, update your VPC route tables to point to the DirectConnect connection, configure your VPN connection with a higher BGP priority and then delete the VPN connection.
- E. And verify network traffic is leveraging the DirectConnect connection.

Answer: D

NEW QUESTION 216

A web company is looking to implement an external payment service into their highly available application deployed in a VPC. Their application EC2 instances are behind a public-facing ELB. Auto scaling is used to add additional instances as traffic increases. Under normal load the application runs 2 instances in the Auto Scaling group but at peak it can scale 3x in size. The application instances need to communicate with the payment service over the Internet which requires whitelisting of all public IP addresses used to communicate with it. A maximum of 4 whitelisting IP addresses are allowed at a time and can be added through an API.

How should they architect their solution?

- A. Route payment requests through two NAT instances setup for High Availability and whitelist the Elastic IP addresses attached to the NAT instances.
- B. Whitelist the VPC Internet Gateway Public IP and route payment requests through the Internet Gateway.
- C. Whitelist the ELB IP addresses and route payment requests from the Application servers through the ELB.
- D. Automatically assign public IP addresses to the application instances in the Auto Scaling group and run a script on boot that adds each instance's public IP address to the payment validation whitelist API.

Answer: D

NEW QUESTION 218

You've been brought in as solutions architect to assist an enterprise customer with their migration of an e-commerce platform to Amazon Virtual Private Cloud (VPC). The previous architect has already deployed a 3-tier VPC. The configuration is as follows:

VPC: vpc-2f8bc447 IGW: igw-2d8bc445 NACL: ad-208bc448

Subnets and Route Tables: Web servers: subnet-258bc44d

Application servers: subnet-248bc44c Database servers: subnet-9189c6f9 Route Tables:

rtb-218bc449 rtb-238bc44b Associations:

subnet-258bc44d : rtb-218bc449 subnet-248bc44c : rtb-238bc44b subnet-9189c6f9 : rtb-238bc44b

You are now ready to begin deploying EC2 instances into the VPC Web servers must have direct access to the internet Application and database servers cannot have direct access to the internet.

Which configuration below will allow you the ability to remotely administer your application and database servers, as well as allow these servers to retrieve updates from the Internet?

- A. Create a bastion and NAT instance in subnet-258bc44d, and add a route from rtb- 238bc44b to the NAT instance.
- B. Add a route from rtb-238bc44b to igw-2d8bc445 and add a bastion and NAT instance within subnet-248bc44c.
- C. Create a bastion and NAT instance in subnet-248bc44c, and add a route from rtb- 238bc44b to subnet-258bc44d.
- D. Create a bastion and NAT instance in subnet-258bc44d, add a route from rtb-238bc44b to igw- 2d8bc445, and a new NACL that allows access between subnet-258bc44d and subnet -248bc44c.

Answer: A

NEW QUESTION 223

You are designing Internet connectivity for your VPC. The Web servers must be available on the Internet. The application must have a highly available architecture. Which alternatives should you consider? (Choose 2 answers)

- A. Configure a NAT instance in your VPC Create a default route via the NAT instance and associate it with all subnets Configure a DNS A record that points to the NAT instance public IP address.
- B. Configure a CloudFront distribution and configure the origin to point to the private IP addresses of your Web servers Configure a Route53 CNAME record to your Cloud Front distribution.
- C. Place all your web servers behind ELB Configure a Route53 CNAME to point to the ELB DNS name.
- D. Assign EIPs to all web server
- E. Configure a Route53 record set with all EIP
- F. With health checks and DNS failover.
- G. Configure ELB with an EIP Place all your Web servers behind ELB Configure a Route53 A record that points to the EIP.

Answer: CD

NEW QUESTION 224

You are tasked with moving a legacy application from a virtual machine running inside your datacenter to an Amazon VPC Unfortunately this app requires access to a number of on-premises services and no one who configured the app still works for your company. Even worse there's no documentation for it. What will allow the application running inside the VPC to reach back and access its internal dependencies without being reconfigured? (Choose 3 answers)

- A. An AWS Direct Connect link between the VPC and the network housing the internal services.
- B. An Internet Gateway to allow a VPN connection.
- C. An Elastic IP address on the VPC instance
- D. An IP address space that does not conflict with the one on-premises
- E. Entries in Amazon Route 53 that allow the Instance to resolve its dependencies' IP addresses
- F. A VM Import of the current virtual machine

Answer: ADF

Explanation:

AWS Direct Connect

AWS Direct Connect makes it easy to establish a dedicated network connection from your premises to AWS. Using AWS Direct Connect, you can establish private connectivity between AWS your datacenter, office, or colocation environment, which in many cases can reduce your network costs, increase bandwidth throughput, and provide a more consistent network experience than Internet based connections.

AWS Direct Connect lets you establish a dedicated network connection between your network and one of the AWS Direct Connect locations. Using industry standard 802.1q VLANs, this dedicated connection can be partitioned into multiple virtual interfaces. This allows you to use the same connection to access public resources such as objects stored in Amazon S3 using public IP address space, and private resources

such as Amazon EC2 instances running within an Amazon Virtual Private Cloud (VPC) using private IP space, while maintaining network separation between the public and private environments. Virtual interfaces can be reconfigured at any time to meet your changing needs.

What is AWS Direct Connect?

AWS Direct Connect links your internal network to an AWS Direct Connect location over a standard 1 gigabit or 10 gigabit Ethernet fiber-optic cable. One end of the cable is connected to your router, the other to an AWS Direct Connect router. With this connection in place, you can create virtual interfaces directly to the AWS cloud (for example, to Amazon Elastic Compute Cloud (Amazon EC2) and Amazon Simple Storage Service (Amazon S3)) and to Amazon Virtual Private Cloud (Amazon VPC), bypassing Internet service providers in your network path. An AWS Direct Connect location provides access to Amazon Web Services in the region it is associated with, as well as access to other US regions. For example, you can provision a single connection to any AWS Direct Connect location in the US and use it to access public AWS services in all US Regions and AWS GovCloud (US).

The following diagram shows how AWS Direct Connect interfaces with your network.

Requirements

To use AWS Direct Connect, your network must meet one of the following conditions:

Your network is colocated with an existing AWS Direct Connect location. For more information on available AWS Direct Connect locations, go to <http://aws.amazon.com/directconnect/>.

You are working with an AWS Direct Connect partner who is a member of the AWS Partner Network (APN). For a list of AWS Direct Connect partners who can help you connect, go to <http://aws.amazon.com/directconnect>

You are working with an independent service provider to connect to AWS Direct Connect. In addition, your network must meet the following conditions:

Connections to AWS Direct Connect require single mode fiber, 1000BASE-LX (1310nm) for 1 gigabit Ethernet, or 10GBASE-LR (1310nm) for 10 gigabit Ethernet.

Auto Negotiation for the port must be disabled. You must support 802.1Q VLANs across these connections.

Your network must support Border Gateway Protocol (BGP) and BGP MD5 authentication. Optionally, you may configure Bidirectional Forwarding Detection (BFD).

To connect to Amazon Virtual Private Cloud (Amazon VPC), you must first do the following: Provide a private Autonomous System Number (ASN). Amazon allocates a private IP address in the 169.x.x.x range to you.

Create a virtual private gateway and attach it to your VPC. For more information about creating a virtual private gateway, see Adding a Hardware Virtual Private

Gateway to Your VPC in the Amazon VPC User Guide.

To connect to public AWS products such as Amazon EC2 and Amazon S3, you need to provide the following:

A public ASN that you own (preferred) or a private ASN.

Public IP addresses (/31) (that is, one for each end of the BGP session) for each BGP session. If you do not have public IP addresses to assign to this connection, log on to AWS and then open a ticket with AWS Support.

The public routes that you will advertise over BGP.

NEW QUESTION 225

A corporate web application is deployed within an Amazon Virtual Private Cloud (VPC) and is connected to the corporate data center via an IPsec VPN. The application must authenticate against the on-premises LDAP server. After authentication, each logged-in user can only access an Amazon Simple Storage Space (S3) keyspace specific to that user.

Which two approaches can satisfy these objectives? (Choose 2 answers)

- A. Develop an identity broker that authenticates against IAM security Token service to assume a Lambda role in order to get temporary AWS security credentials. The application calls the identity broker to get AWS temporary security credentials with access to the appropriate S3 bucket.
- B. The application authenticates against LDAP and retrieves the name of an IAM role associated with the user.
- C. The application then calls the IAM Security Token Service to assume that IAM role. The application can use the temporary credentials to access the appropriate S3 bucket.
- D. Develop an identity broker that authenticates against LDAP and then calls IAM Security Token Service to get IAM federated user credentials. The application calls the identity broker to get IAM federated user credentials with access to the appropriate S3 bucket.
- E. The application authenticates against LDAP. The application then calls the AWS identity and Access Management (IAM) Security service to log in to IAM using the LDAP credentials. The application can use the IAM temporary credentials to access the appropriate S3 bucket.
- F. The application authenticates against IAM Security Token Service using the LDAP credentials. The application uses those temporary AWS security credentials to access the appropriate S3 bucket.

Answer: BC

NEW QUESTION 229

Your company produces customer commissioned one-of-a-kind skiing helmets combining high fashion with custom technical enhancements. Customers can show off their individuality on the ski slopes and have access to head-up-displays, GPS rear-view cams and any other technical innovation they wish to embed in the helmet.

The current manufacturing process is data rich and complex including assessments to ensure that the custom electronics and materials used to assemble the helmets are to the highest standards. Assessments are a mixture of human and automated assessments you need to add a new set of assessment to model the failure modes of the custom electronics using GPUs with CUDA, across a cluster of servers with low latency networking.

What architecture would allow you to automate the existing process using a hybrid approach and ensure that the architecture can support the evolution of processes over time?

- A. Use AWS Data Pipeline to manage movement of data & meta-data and assessments. Use an autoscaling group of G2 instances in a placement group.
- B. Use Amazon Simple Workflow (SWF) to manage assessments, movement of data & meta-data. Use an auto-scaling group of G2 instances in a placement group.
- C. Use Amazon Simple Workflow (SWF) to manage assessments. Movement of data & meta-data. Use an auto-scaling group of C3 instances with SR-IOV (Single Root I/O Virtualization).
- D. Use AWS data Pipeline to manage movement of data & meta-data and assessments. Use an autoscaling group of C3 with SR-IOV (Single Root I/O virtualization).

Answer: B

NEW QUESTION 231

You require the ability to analyze a large amount of data, which is stored on Amazon S3 using Amazon Elastic Map Reduce. You are using the cc2.8xlarge instance type, whose CPUs are mostly idle during processing. Which of the below would be the most cost efficient way to reduce the runtime of the job?

- A. Create more smaller files on Amazon S3.
- B. Add additional cc2.8xlarge instances by introducing a task group.
- C. Use smaller instances that have higher aggregate I/O performance.
- D. Create fewer, larger files on Amazon S3.

Answer: C

NEW QUESTION 236

Your website is serving on-demand training videos to your workforce. Videos are uploaded monthly in high resolution MP4 format. Your workforce is distributed globally, often on the move and using company-provided tablets that require the HTTP Live Streaming (HLS) protocol to watch a video. Your company has no video transcoding expertise and it required you may need to pay for a consultant.

How do you implement the most cost-efficient architecture without compromising high availability and quality of video delivery?

- A. A video transcoding pipeline running on EC2 using SQS to distribute tasks and Auto Scaling to adjust the number of nodes depending on the length of the queue.
- B. EBS volumes to host videos and EBS snapshots to incrementally backup original files after a few days.
- C. CloudFront to serve HLS transcoded videos from EC2.
- D. Elastic Transcoder to transcode original high-resolution MP4 videos to HLS.
- E. EBS volumes to host videos and EBS snapshots to incrementally backup original files after a few days.
- F. CloudFront to serve HLS transcoded videos from EC2.
- G. Elastic Transcoder to transcode original high-resolution MP4 videos to HLS.
- H. S3 to host videos with Lifecycle Management to archive original files to Glacier after a few days.
- I. CloudFront to serve HLS transcoded videos from S3.
- J. A video transcoding pipeline running on EC2 using SQS to distribute tasks and Auto Scaling to adjust the number of nodes depending on the length of the queue.
- K. S3 to host videos with Lifecycle Management to archive all files to Glacier after a few days.
- L. CloudFront to serve HLS transcoded videos from Glacier.

Answer: C

NEW QUESTION 241

You've been hired to enhance the overall security posture for a very large e-commerce site. They have a well architected multi-tier application running in a VPC that uses ELBs in front of both the web and the app tier with static assets served directly from S3. They are using a combination of RDS and DynamoDB for their dynamic data and then archive nightly into S3 for further processing with EMR. They are concerned because they found suspicious log entries and suspect someone is attempting to gain unauthorized access. Which approach provides a cost effective scalable mitigation to this kind of attack?

- A. Recommend that they lease space at a DirectConnect partner location and establish a DirectConnect connection to their VPC. They would then establish Internet connectivity into their space, filter the traffic in hardware Web Application Firewall (WAF). And then pass the traffic through the DirectConnect connection into their application running in their VPC.
- B. Add previously identified hostile source IPs as an explicit INBOUND DENY NACL to the web tier sub net.
- C. Add a WAF tier by creating a new ELB and an AutoScaling group of EC2 Instances running a host based WAF. They would redirect Route 53 to resolve to the new WAF tier ELB. The WAF tier would then pass the traffic to the current web tier. The web tier Security Groups would be updated to only allow traffic from the WAF tier Security Group.
- D. Remove all but TLS 1.2 from the web tier ELB and enable Advanced Protocol Filtering. This will enable the ELB itself to perform WAF functionality.

Answer: C

NEW QUESTION 246

You are designing a data leak prevention solution for your VPC environment. You want your VPC Instances to be able to access software depots and distributions on the Internet for product updates. The depots and distributions are accessible via third party CDNs by their URLs. You want to explicitly deny any other outbound connections from your VPC instances to hosts on the internet. Which of the following options would you consider?

- A. Configure a web proxy server in your VPC and enforce URL-based rules for outbound access. Remove default routes.
- B. Implement security groups and configure outbound rules to only permit traffic to software depots.
- C. Move all your instances into private VPC subnets, remove default routes from all routing tables and add specific routes to the software depots and distributions only.
- D. Implement network access control lists to all specific destinations, with an implicit deny as a rule.

Answer: A

NEW QUESTION 251

An AWS customer is deploying an application that is composed of an AutoScaling group of EC2 Instances. The customer's security policy requires that every outbound connection from these instances to any other service within the customer's Virtual Private Cloud must be authenticated using a unique X.509 certificate that contains the specific instance-id. In addition, X.509 certificates must be designed by the customer's Key management service in order to be trusted for authentication. Which of the following configurations will support these requirements?

- A. Configure an IAM Role that grants access to an Amazon S3 object containing a signed certificate and configure the Auto Scaling group to launch instances with this role. Have the instances bootstrap to get the certificate from Amazon S3 upon first boot.
- B. Embed a certificate into the Amazon Machine Image that is used by the Auto Scaling group. Have the launched instances generate a certificate signature request with the instance's assigned instance-id to the Key management service for signature.
- C. Configure the Auto Scaling group to send an SNS notification of the launch of a new instance to the trusted key management service.
- D. Have the Key management service generate a signed certificate and send it directly to the newly launched instance.
- E. Configure the launched instances to generate a new certificate upon first boot. Have the Key management service poll the AutoScaling group for associated instances and send new instances a certificate signature (that contains the specific instance-id).

Answer: A

NEW QUESTION 255

You are designing an SSL/TLS solution that requires HTTPS clients to be authenticated by the Web server using client certificate authentication. The solution must be resilient. Which of the following options would you consider for configuring the web server infrastructure? (Choose 2 answers)

- A. Configure ELB with TCP listeners on TCP/443. And place the Web servers behind it.
- B. Configure your Web servers with HTTPS. Place the Web servers in a Route53 Record Set and configure health checks against all Web servers.
- C. Configure ELB with HTTPS listeners, and place the Web servers behind it.
- D. Configure your web servers as the origins for a CloudFront distribution.
- E. Use custom SSL certificates on your CloudFront distribution.

Answer: AB

NEW QUESTION 259

You are designing an intrusion detection prevention (IDS/IPS) solution for a customer web application in a single VPC. You are considering the options for implementing IDS/IPS protection for traffic coming from the Internet. Which of the following options would you consider? (Choose 2 answers)

- A. Implement IDS/IPS agents on each Instance running in VPC.
- B. Configure an instance in each subnet to switch its network interface card to promiscuous mode and analyze network traffic.
- C. Implement Elastic Load Balancing with SSL listeners in front of the web applications.
- D. Implement a reverse proxy layer in front of web servers and configure IDS/IPS agents on each reverse proxy server.

Answer: BD

NEW QUESTION 262

A benefits enrollment company is hosting a 3-tier web application running in a VPC on AWS which includes a NAT (Network Address Translation) instance in the

public Web tier. There is enough provisioned capacity for the expected workload for the new fiscal year benefit enrollment period plus some extra overhead. Enrollment proceeds nicely for two days and then the web tier becomes unresponsive, upon investigation using CloudWatch and other monitoring tools it is discovered that there is an extremely large and unanticipated amount of inbound traffic coming from a set of 15 specific IP addresses over port 80 from a country where the benefits company has no customers. The web tier instances are so overloaded that benefit enrollment administrators cannot even SSH into them. Which actMty would be useful in defending against this attack?

- A. Create a custom route table associated with the web tier and block the attacking IP addresses from the IGW (Internet Gateway)
- B. Change the EIP (Elastic IP Address) of the NAT instance in the web tier subnet and update the Main Route Table with the new EIP
- C. Create 15 Security Group rules to block the attacking IP addresses over port 80
- D. Create an inbound NACL (Network Access control list) associated with the web tier subnet with deny rules to block the attacking IP addresses

Answer: D

Explanation:

Use AWS Identity and Access Management (IAM) to control who in your organization has permission to create and manage security groups and network ACLs (NACL). Isolate the responsibilities and roles for better defense. For example, you can give only your network administrators or security ad min the permission to manage the security groups and restrict other roles.

NEW QUESTION 264

You require the ability to analyze a customer's clickstream data on a website so they can do behavioral analysis. Your customer needs to know what sequence of pages and ads their customer clicked on. This data will be used in real time to modify the page layouts as customers click through the site to increase stickiness and advertising click-through. Which option meets the requirements for captioning and analyzing this data?

- A. Log clicks in weblogs by URL store to Amazon S3, and then analyze with Elastic MapReduce
- B. Push web clicks by session to Amazon Kinesis and analyze behavior using Kinesis workers
- C. Write click events directly to Amazon Redshift and then analyze with SQL
- D. Publish web clicks by session to an Amazon SQS queue then periodically drain these events to Amazon RDS and analyze with SQL

Answer: B

Explanation:

Reference: <http://www.slideshare.net/AmazonWebServices/aws-webcast-introduction-to-amazon-kinesis>

NEW QUESTION 268

An AWS customer runs a public blogging website. The site users upload two million blog entries a month. The average blog entry size is 200 KB. The access rate to blog entries drops to negligible 6 months after publication and users rarely access a blog entry 1 year after publication. Additionally, blog entries have a high update rate during the first 3 months following publication, this drops to no updates after 6 months. The customer wants to use CloudFront to improve his user's load times.

Which of the following recommendations would you make to the customer?

- A. Duplicate entries into two different buckets and create two separate CloudFront distributions where S3 access is restricted only to Cloud Front identity
- B. Create a CloudFront distribution with "US" Europe price class for US/ Europe users and a different CloudFront distribution with All Edge Locations' for the remaining users.
- C. Create a CloudFront distribution with S3 access restricted only to the CloudFront identity and partition the blog entry's location in S3 according to the month it was uploaded to be used with CloudFront behaviors.
- D. Create a CloudFront distribution with Restrict Viewer Access Forward Query string set to true and minimum TTL of 0.

Answer: C

NEW QUESTION 270

Your company is getting ready to do a major public announcement of a social media site on AWS. The website is running on EC2 instances deployed across multiple Availability Zones with a Multi-AZ RDS MySQL Extra Large DB Instance. The site performs a high number of small reads and writes per second and relies on an eventual consistency model. After comprehensive tests you discover that there is read contention on RDS MySQL. Which are the best approaches to meet these requirements? (Choose 2 answers)

- A. Deploy ElastiCache in-memory cache running in each availability zone
- B. Implement sharding to distribute load to multiple RDS MySQL instances
- C. Increase the RDS MySQL Instance size and Implement provisioned IOPS
- D. Add an RDS MySQL read replica in each availability zone

Answer: AC

NEW QUESTION 272

A company is running a batch analysis every hour on their main transactional DB. running on an RDS MySQL instance to populate their central Data Warehouse running on Redshift. During the execution of the batch their transactional applications are very slow. When the batch completes they need to update the top management dashboard with the new data. The dashboard is produced by another system running on-premises that is currently started when a manually-sent email notifies that an update is required. The on-premises system cannot be modified because it is managed by another team. How would you optimize this scenario to solve performance issues and automate the process as much as possible?

- A. Replace RDS with Redshift for the batch analysis and SNS to notify the on-premises system to update the dashboard
- B. Replace RDS with Redshift for the batch analysis and SQS to send a message to the on-premises system to update the dashboard
- C. Create an RDS Read Replica for the batch analysis and SNS to notify the on-premises system to update the dashboard
- D. Create an RDS Read Replica for the batch analysis and SQS to send a message to the on-premises system to update the dashboard.

Answer: A

NEW QUESTION 273

To serve Web traffic for a popular product your chief financial officer and IT director have purchased 10 ml large heavy utilization Reserved Instances (RIs) evenly spread across two availability zones:

Route 53 is used to deliver the traffic to an Elastic Load Balancer (ELB). After several months, the product grows even more popular and you need additional capacity. As a result, your company purchases two C3.2xlarge medium utilization RIs. You register the two c3 2xlarge instances with your ELB and quickly find that the ml large instances are at 100% of capacity and the c3 2xlarge instances have significant capacity that's unused. Which option is the most cost effective and uses EC2 capacity most effectively?

- A. Use a separate ELB for each instance type and distribute load to ELBs with Route 53 weighted round robin
- B. Configure Autoscaling group and Launch Configuration with ELB to add up to 10 more on-demand ml large instances when triggered by Cloudwatch shut off c3 2xlarge instances
- C. Route traffic to EC2 ml large and c3 2xlarge instances directly using Route 53 latency based routing and health checks shut off ELB
- D. Configure ELB with two c3 2xlarge Instances and use on-demand Autoscaling group for up to two additional c3.2xlarge instances Shut on ml .large instances.

Answer: D

NEW QUESTION 274

You are looking to migrate your Development (Dev) and Test environments to AWS. You have decided to use separate AWS accounts to host each environment. You plan to link each accounts bill to a Master AWS account using Consolidated Billing. To make sure you Keep within budget you would like to implement a way for administrators in the Master account to have access to stop, delete and/or terminate resources in both the Dev and Test accounts. Identify which option will allow you to achieve this goal.

- A. Create IAM users in the Master account with full Admin permission
- B. Create cross-account roles in the Dev and Test accounts that grant the Master account access to the resources in the account by inheriting permissions from the Master account.
- C. Create IAM users and a cross-account role in the Master account that grants full Admin permissions to the Dev and Test accounts.
- D. Create IAM users in the Master account Create cross-account roles in the Dev and Test accounts that have full Admin permissions and grant the Master account access.
- E. Link the accounts using Consolidated Billin
- F. This will give IAM users in the Master account access to resources in the Dev and Test accounts

Answer: C

Explanation:

Bucket Owner Granting Cross-account Permission to objects It Does Not Own

In this example scenario, you own a bucket and you have enabled other AWS accounts to upload objects. That is, your bucket can have objects that other AWS accounts own.

Now, suppose as a bucket owner, you need to grant cross-account permission on objects, regardless of who the owner is, to a user in another account. For example, that user could be a billing application that needs to access object metadata. There are two core issues:

The bucket owner has no permissions on those objects created by other AWS accounts. So for the bucket owner to grant permissions on objects it does not own, the object owner, the AWS account that created the objects, must first grant permission to the bucket owner. The bucket owner can then delegate those permissions.

Bucket owner account can delegate permissions to users in its own account but it cannot delegate permissions to other AWS accounts, because cross-account delegation is not supported.

In this scenario, the bucket owner can create an AWS Identity and Access Management (IAM) role with permission to access objects, and grant another AWS account permission to assume the role temporarily enabling it to access objects in the bucket.

Background: Cross-Account Permissions and Using IAM Roles

IAM roles enable several scenarios to delegate access to your resources, and cross-account access is

one of the key scenarios. In this example, the bucket owner, Account A, uses an IAM role to temporarily delegate object access cross-account to users in another AWS account, Account C. Each IAM role you create has two policies attached to it:

A trust policy identifying another AWS account that can assume the role.

An access policy defining what permissions-for example, s3:GetObject-are allowed when someone assumes the role. For a list of permissions you can specify in a policy, see Specifying Permissions in a Policy.

The AWS account identified in the trust policy then grants its user permission to assume the role. The user can then do the following to access objects:

Assume the role and, in response, get temporary security credentials. Using the temporary security credentials, access the objects in the bucket.

For more information about IAM roles, go to Roles (Delegation and Federation) in IAM User Guide. The following is a summary of the walkthrough steps:

Account A administrator user attaches a bucket policy granting Account B conditional permission to upload objects.

Account A administrator creates an IAM role, establishing trust with Account C, so users in that account can access Account A. The access policy attached to the role limits what user in Account C can do when the user accesses Account A.

Account B administrator uploads an object to the bucket owned by Account A, granting full-control permission to the bucket owner.

Account C administrator creates a user and attaches a user policy that allows the user to assume the role.

User in Account C first assumes the role, which returns the user temporary security credentials. Using those temporary credentials, the user then accesses objects in the bucket.

For this example, you need three accounts. The following table shows how we refer to these accounts and the administrator users in these accounts. Per IAM guidelines (see About Using an

Administrator User to Create Resources and Grant Permissions) we do not use the account root

credentials in this walkthrough. Instead, you create an administrator user in each account and use those credentials in creating resources and granting them permissions

NEW QUESTION 276

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your AWS-Solution-Architect-Associate Exam with Our Prep Materials Via below:

<https://www.certleader.com/AWS-Solution-Architect-Associate-dumps.html>