### POIR 613: Computational Social Science

#### Pablo Barberá


School of International Relations University of Southern California pablobarbera.com

Course website: pablobarbera.com/POIR613/

### **Today**

- Project
  - Next milestone: 5-page summary that includes some data analysis by November 4th
- 2. Word embeddings
  - Overview
  - Applications
  - Bias
  - Demo
- 3. Event detection; ideological scaling
- 4. Solutions to challenge 7
- 5. Additional methods to compare documents

#### Overview of text as data methods

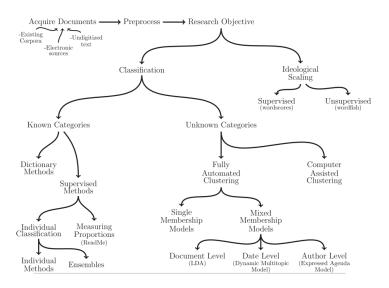

Word embeddings

# Beyond bag-of-words

Most applications of text analysis rely on a bag-of-words representation of documents


- Only relevant feature: frequency of features
- Ignores context, grammar, word order...
- Wrong but often irrelevant

One alternative: word embeddings

- Represent words as real-valued vector in a multidimensional space (often 100–500 dimensions), common to all words
- Distance in space captures syntactic and semantic regularities, i.e. words that are close in space have similar meaning
  - How? Vectors are learned based on context similarity
  - Distributional hypothesis: words that appear in the same context share semantic meaning
- Operations with vectors are also meaningful


# Word embeddings example

word	$D_1$	$D_2$	$D_3$	 $D_N$
man	0.46	0.67	0.05	 •••
woman	0.46	-0.89	-0.08	 
king	0.79	0.96	0.02	 
queen	0.80	-0.58	-0.14	 

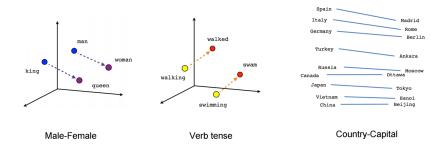

# word2vec (Mikolov 2013)

- Statistical method to efficiently learn word embeddings from a corpus, developed by Google engineer
- Most popular, in part because pre-trained vectors are available
- Two models to learn word embeddings:



#### Word embeddings

- Overview
- ► Applications
- ▶ Bias
- Demo

#### The Geometry of Culture: Analyzing the Meanings of Class through Word Embeddings

American Sociological Review
1-45
© American Sociological
Association 2019
DOI: 10.1177/0003122419877135
journals.sagepub.com/home/asr

Austin C. Kozlowski,<sup>a</sup> Matt Taddy,<sup>b</sup> and James A. Evans<sup>a,c</sup>

#### Abstract

We argue word embedding models are a useful tool for the study of culture using a historical analysis of shared understandings of social class as an empirical case. Word embeddings represent semantic relations between words as relationships between vectors in a high-dimensional space, specifying a relational model of meaning consistent with contemporary theories of culture. Dimensions induced by word differences (rich – poor) in these spaces correspond to dimensions of cultural meaning, and the projection of words onto these dimensions reflects widely shared associations, which we validate with surveys. Analyzing text from millions of books published over 100 years, we show that the markers of class continuously shifted amidst the economic transformations of the twentieth century, yet the basic cultural dimensions of class remained remarkably stable. The notable exception is education, which became tightly linked to affluence independent of its association with cultivated taste.

#### Keywords

word embeddings, word2vec, culture, computational sociology, methodology, text analysis, content analysis

Source: Kozlowski et al, ASR 2019

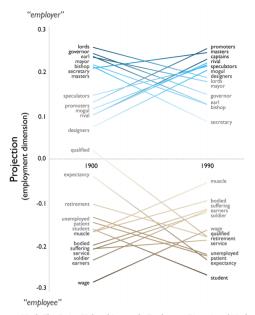


Figure 10. Words That Project High and Low on the Employment Dimension of Word Embedding Models Trained on Texts Published at the Beginning and End of the Twentieth Century; 1900–1919 and 1980–1999 Google Ngrams Corpus

# Cooperation in the international system





Figure 4: Distances by core countries. Plot of Euclidian distances between US and Russia (gray), and US and China (maroon).

Source: Pomeroy et al 2018

#### Semantic shifts


Using word embeddings to visualize changes in word meaning:



Source: Hamilton et al, 2016 ACL. https://nlp.stanford.edu/projects/histwords/

# Application: semantic shifts

Using word embeddings to visualize changes in word meaning:

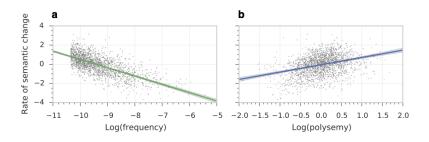

Source: Hamilton et al, 2016 ACL. https://nlp.stanford.edu/projects/histwords/

#### Dictionary expansion

Using word embeddings to expand dictionaries (e.g. incivility)

```
> distance(file_name = "FBvec.bin",
> distance(file_name = "FBvec.bin",
                                                         search_word = "idiot",
          search_word = "libtard".
                                                         num = 10)
          num = 10)
Entered word or sentence: libtard
                                             Entered word or sentence: idiot
Word: libtard Position in vocabulary: 5753
                                             Word: idiot Position in vocabulary: 646
         word
                           dist
                                                                         dist
                                                      word
          lib 0.798957586288452
                                                 imbecile 0.867565214633942
        lefty 0.771853387355804
                                                  asshole 0.848560094833374
       libturd 0.762575328350067
                                                    moron 0.781079053878784
    teabagger 0.744283258914948
                                                   asshat 0.772150039672852
     teabilly 0.715277075767517
                                                   a-hole 0.765781462192535
      liberal 0.709996342658997
                                                    ahole 0.760824918746948
       retard 0.690707504749298
                                                  asswipe 0.742586553096771
      dumbass 0.690422177314758
                                                ianoramus 0.735219776630402
         rwni 0.684058785438538
                                                 arsehole 0.732272684574127
10 republitard 0.678197801113129
                                             10
                                                    idoit 0.720151424407959
```

Source: Timm and Barberá, 2019

#### Word embeddings

- Overview
- Applications
- ► Bias
- Demo

# Bias in word embeddings

Semantic relationships in embeddings space capture stereotypes:

- ▶ Neutral example: man woman  $\approx$  king queen
- ▶ Biased example: man woman ≈ computer programmer homemaker

#### Gender stereotype she-he analogies.

register-nurse-physician	housewife-shopkeeper
nterior designer-architect	softball-baseball
eminism-conservatism	cosmetics-pharmac euticals
vocalist-guitarist	petite-lanky
diva-superstar	charming-affable
cupcakes-pizzas	hairdresser-barber
	nterior designer-architect eminism-conservatism vocalist-guitarist liva-superstar

#### Gender appropriate she-he analogies.

		U
queen-king	sister-brother	mother-father
waitress-waiter	ovarian cancer-prostate cancer	convent-monastery

Source: Bolukbasi et al, 2016. arXiv:1607.06520 See also Garg et al, 2018 PNAS and Caliskan et al, 2017 Science.

#### Word embeddings

- Overview
- Applications
- ▶ Bias
- ► Demo

# Event detection in textual datasets

### Event detection (Beieler et al, 2016)

Goal: identify who did what to whom based on newspaper or historical records.

#### Methods:

- Manual annotation: higher accuracy, but more labor and time intensive
- Machine-based methods: 70-80% accuracy, but scalable and zero marginal costs
  - Actor and verb dictionaries; e.g. TABARI and CAMEO.
  - Named entity recognition, e.g Stanford's NER

#### Issues:

- ► False positives, duplication, geolocation
- Focus on nation-states
- Reporting biases: focus on wealthy areas, media fatigue, negativity bias
- Mostly English-language methods

# Ideological scaling using text as

data

# Wordscores (Laver, Benoit, Garry, 2003, APSR)

- Goal: estimate positions on a latent ideological scale
- Data = document-term matrix W<sub>R</sub> for set of "reference" texts, each with known A<sub>rd</sub>, a policy position on dimension d.
- Compute F, where F<sub>rm</sub> is relative frequency of word m over the total number of words in document r.
- Scores for individual words:
  - $P_{rm} = \frac{F_{rm}}{\sum F_{rm}} \rightarrow (Prob. \text{ we are reading } r \text{ if we observe } m)$
  - Wordscore  $S_{md} = \sum_r (P_{rm} \times A_{rd})$
- Scores for "virgin" texts:
  - ▶  $S_{vd} = \sum_{w} (F_{vm} \times S_{md}) \rightarrow \text{(weighted average of scored words)}$
  - ▶  $S_{vd}^* = (S_{vd} \overline{S_{vd}}) \left( \frac{SD_{rd}}{SD_{vd}} \right) + \overline{S_{vd}} \rightarrow \text{Rescaled scores.}$

# Wordfish (Slapin and Proksch, 2008, AJPS)

- Goal: unsupervised scaling of ideological positions
- ldeology of politician i,  $\theta_i$  is a position in a latent scale.
- Word usage is drawn from a Poisson-IRT model:

$$W_{im} \sim \text{Poisson}(\lambda_{im})$$
  
 $\lambda_{im} = exp(\alpha_i + \psi_m + \beta_m \times \theta_i)$ 

where:

 $\alpha_i$  is "loquaciousness" of politician i  $\psi_m$  is frequency of word m  $\beta_m$  is discrimination parameter of word m

- Estimation using EM algorithm.
- Identification:
  - ▶ Unit variance restriction for  $\theta_i$
  - ▶ Choose *a* and *b* such that  $\theta_a > \theta_b$