
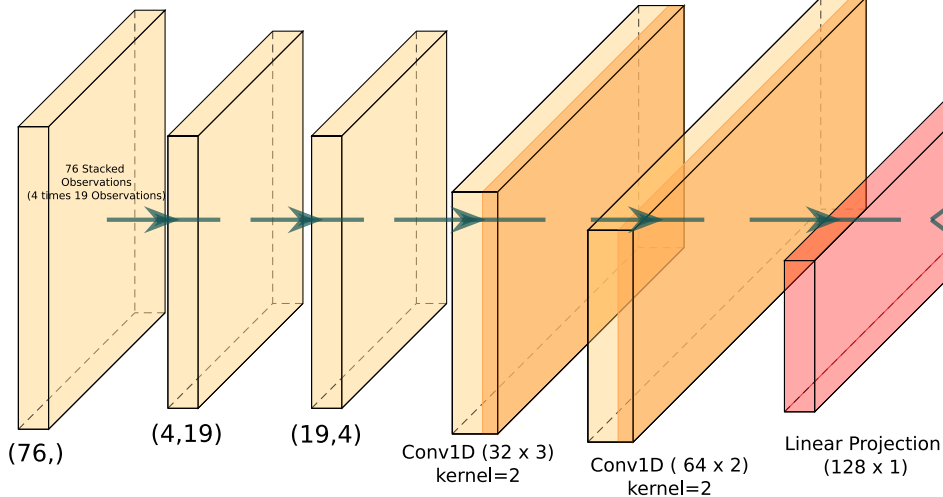


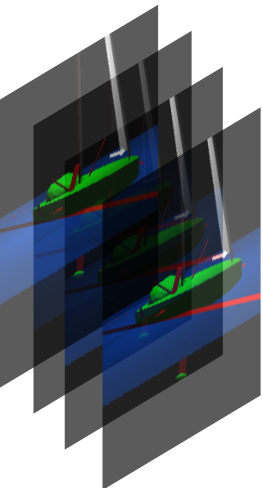

Transform the flat (76,) vector
back into a (history, observation)

Swap dimensions so that 1D- CNN sees
features as channels and time as the
sequence (19 channels, 4 time steps)

Input = 19 (features)
Output channels = 32 (learned
feature maps)
Kernel size = 2
looks at two consecutive time steps
Activation: ReLU → adds nonlinearity

Input = 32 (from conv 1D)
Output channels = 64
Kernel size = 2
compresses temporal
info into a smaller sequence
Activation: ReLU

Takes the flattened CNN output
and projects it to a fixed size
latent vector (64 features) acts
as shared representation for
both actor and critic network.

