

---

# ET-12 01 21 CAE-PA Project Report: HAZOP2RDF

A robust program to handle HAZOP  
studies

Dmytro Kostiuk  
Marcus Rothhaupt  
Artan Kabashi  
Vincenz Forkel



21.07.2021

# Contents

<b>Introduction</b>	<b>3</b>
<b>Problem Analysis</b>	<b>4</b>
<b>Concept</b>	<b>5</b>
Design program components . . . . .	5
User interaction scenario . . . . .	6
Design Command Line Interface . . . . .	6
<b>Implementation</b>	<b>7</b>
Importer interface . . . . .	9
Exporter interface . . . . .	10
Remarks . . . . .	11
<b>Verification</b>	<b>12</b>
<b>Summary</b>	<b>13</b>
<b>Appendix</b>	<b>14</b>
<b>References</b>	<b>18</b>

## List of Tables

## List of Figures

1	Program components . . . . .	5
2	User interaction . . . . .	6
3	Design of Command Line Interface . . . . .	7
4	Structure of Command Line Interface . . . . .	8
5	Sequence diagram of Importer interface . . . . .	10
6	Sequence diagram of Exporter interface . . . . .	11
7	Graph ontology in Excel . . . . .	16
8	HTML coverage report example . . . . .	17

## Introduction

This research paper describes a program that handles HAZOP data from an excel spreadsheet. With the described program an easy to handle back-and-forth conversion from HAZOP data in excel Format to RDF format is possible. Furthermore a verification of the HAZOP data takes place and can also be configured.

By analysing the needs of the faculty and working together with process control engineers we developed this application.

Our solution features a command line interface to give users an easy access to our software.

Using our Importer interface the user can import and validate incoming HAZOP data in Excel format and generate RDF graphs from it. They can be locally stored or uploaded to a Fuseki server.

Using our Exporter interface the user can export RDF graphs containing HAZOP data to Excel format. The source for the Exporter interface can either be a locally stored RDF file or an RDF file stored on a Fuseki server.

As a result of our research we conclude that handling HAZOP data in RDF Format is much more convenient than working with excel data because the descriptive for-

mat largely increases compatibility between different modular plants. With RDF we can build graphs, examine dependencies between single HAZOP cases and store the RDF files in less disk space.

## Problem Analysis

Modular plants are getting more and more important in today's industry. They enable flexible production in small quantities and over variable time periods. A modular plant can be built very quickly, because all interfaces are compatible, but a HAZOP analysis of the entire plant is still necessary, which strongly limits the advantages of modularity.

In order to meet high safety standards a hazard and operability study, short HAZOP has to be conducted on all parts of the modular plant.

The HAZOP risk analysis is an important part of every safety concept of industrial plants. This analysis is done manually and individually in Excel. Since it is done in large packed tables it can not be automated or reused. This inefficiency can be remedied by converting the large HAZOP excel tables into an easier and better to handle format.

The Resource Description Framework, short RDF can be such a format. Because of its easy to handle language, reusability and automatability we choose this widely spread format.

Thanks to RDF, a HAZOP study can be easily exchanged, edited and combined with other HAZOP studies. Through the usage of a DB Server like Fuseki, the transformed file can be shared and stored very conveniently.

One of the biggest problem we faced was to verify and define a well-formed excel spreadsheet so that our importer was able to generate a correct RDF file. Now the verification process uses a user defined configuration to analyse the excel spreadsheet and import it. The importer had to be able to distinguish between meaningful and useless Hazop-Cases inside the spreadsheet.

## Concept

- How did we solve the problem(framework)
- How did we get to the concept?
- Why did we choose this method of implementing

## Design program components

We decided to structure our solution into three separate programs, all of which can stand alone, and operate independent of each other; and a Command Line User Interface for easier operability.

- The Importer: Takes an Excel HAZOP-analysis file, validates it, converts the table structure into RDF-Triples, and finally stores the created RDF-Triples with all metadata either locally or in the TripleStore.
- The Exporter: Takes a HAZOP-analysis in RDF-Triples, extracts information and metadata, and stores them in the industry standard formatting in an Excel file.
- The TripleStore: Fuseki server that stores HAZOP data in RDF-Triples. Acting as a central database for machine readable completed HAZOP-Analysis with easy accessibility.

Great care was taken to design the programs separate and allow for alternative and independent use cases with a focus on reusability. Thus, both the Importer and Exporter are capable of reading and storing data locally or through the TripleStore database. Likewise, the TripleStore is useable for multiple purposes and not limited to just the storing of HAZOP-triples.

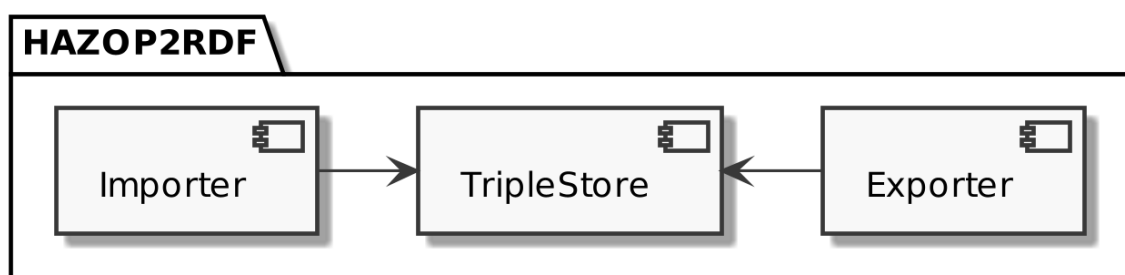


Figure 1: Program components

## User interaction scenario


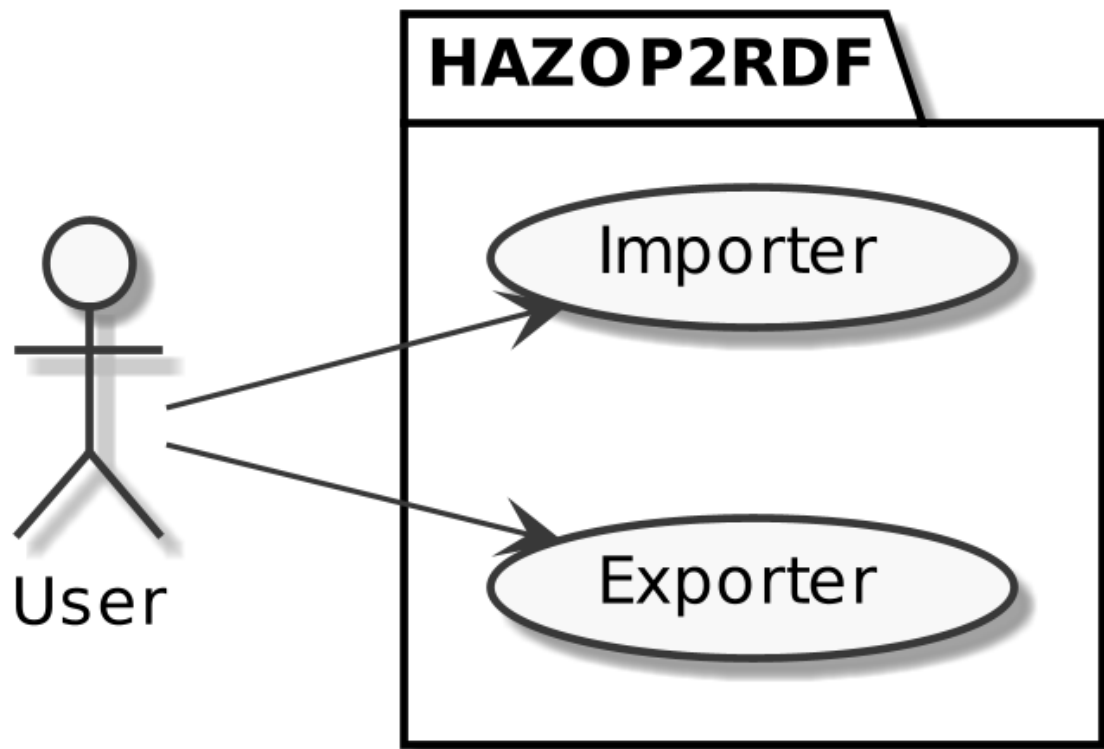


Figure 2: User interaction

## Design Command Line Interface

To take full advantage of the modularity of our solution, a Command Line User Interface was chosen. This allows specific access to all functionalities of only the Importer and Exporter programs and eliminates convolution of the separate functions inside each program through precise commands. For security reasons, the user is only able to communicate with the Triplestore indirectly through Importer and Exporter functions. This furthermore ensures that data on the Triplestore will not be corrupted through operator errors.

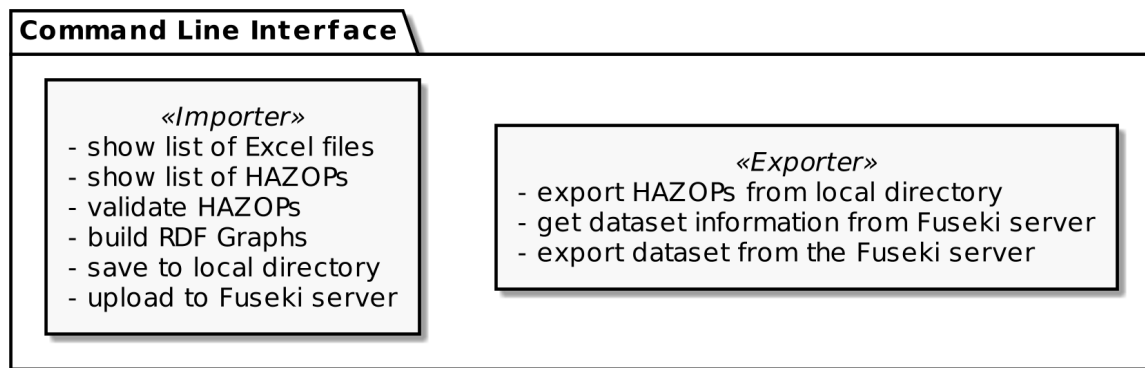


**Figure 3:** Design of Command Line Interface

## Implementation

We implemented the Command Line Interface using [Click](#) package. It is highly configurable and can build very complex applications. The ComplexCLI utility, we used in our project, combines multiple interfaces in a single Command Line Interface.

The following diagram shows the structure of the Command Line Interface. It contains Importer and Exporter interface, which use services. The services contain utilities needed for the interfaces to perform lower level actions.

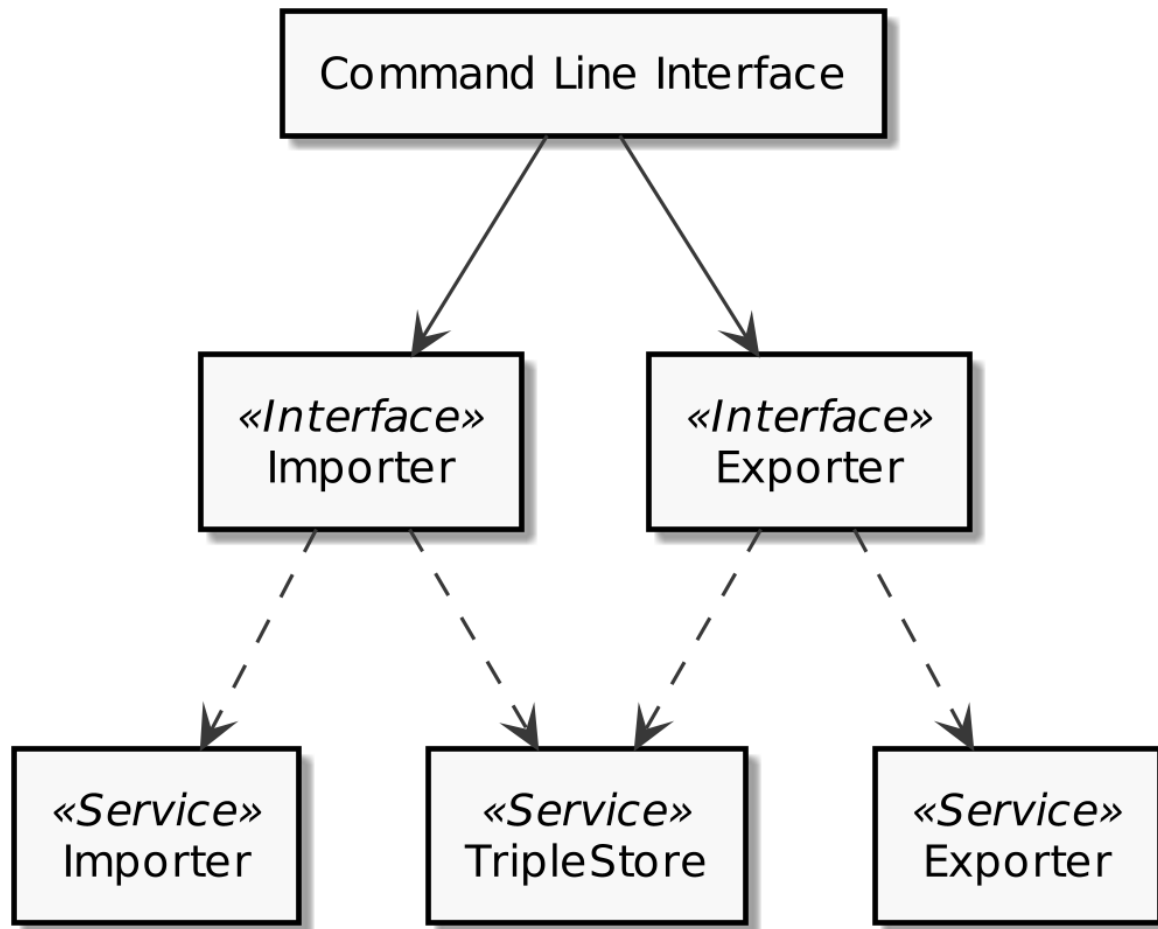

**Figure 4:** Structure of Command Line Interface

Using the Command Line Interface users can interact with our software.

Using our Importer interface the user can import and validate incoming HAZOP data in Excel format and generate RDF graphs from it. They can be locally stored or uploaded to a Fuseki server.

Using our Exporter interface the user can export RDF graphs containing HAZOP data to Excel format. The source for the Exporter interface can either be a locally stored RDF file or an RDF file stored on a Fuseki server.



## Importer interface

The main purpose of the Importer interface is to build an RDF graph from incoming Excel data. To build an RDF graph, we carefully read the incoming HAZOP Data and validate it. To validate the data correctly we implemented a config file, which stores all the metadata needed to describe the importing and validating process.

The main command of the Importer interface is `cmd-build-hazop-graphs`, which reads the HAZOP data stored in a local directory and transforms it to an RDF graph. The graph can be consequentially stored locally or uploaded to a Fuseki server. The two other commands `cmd-read-excel-data` and `cmd-read-hazop-data` make it possible for the user to perform steps of the main importer command individually.

The installation of a Fuseki server is optional. If the server is offline, the files cannot be uploaded to the server resulting in an error message which is displayed to the user.

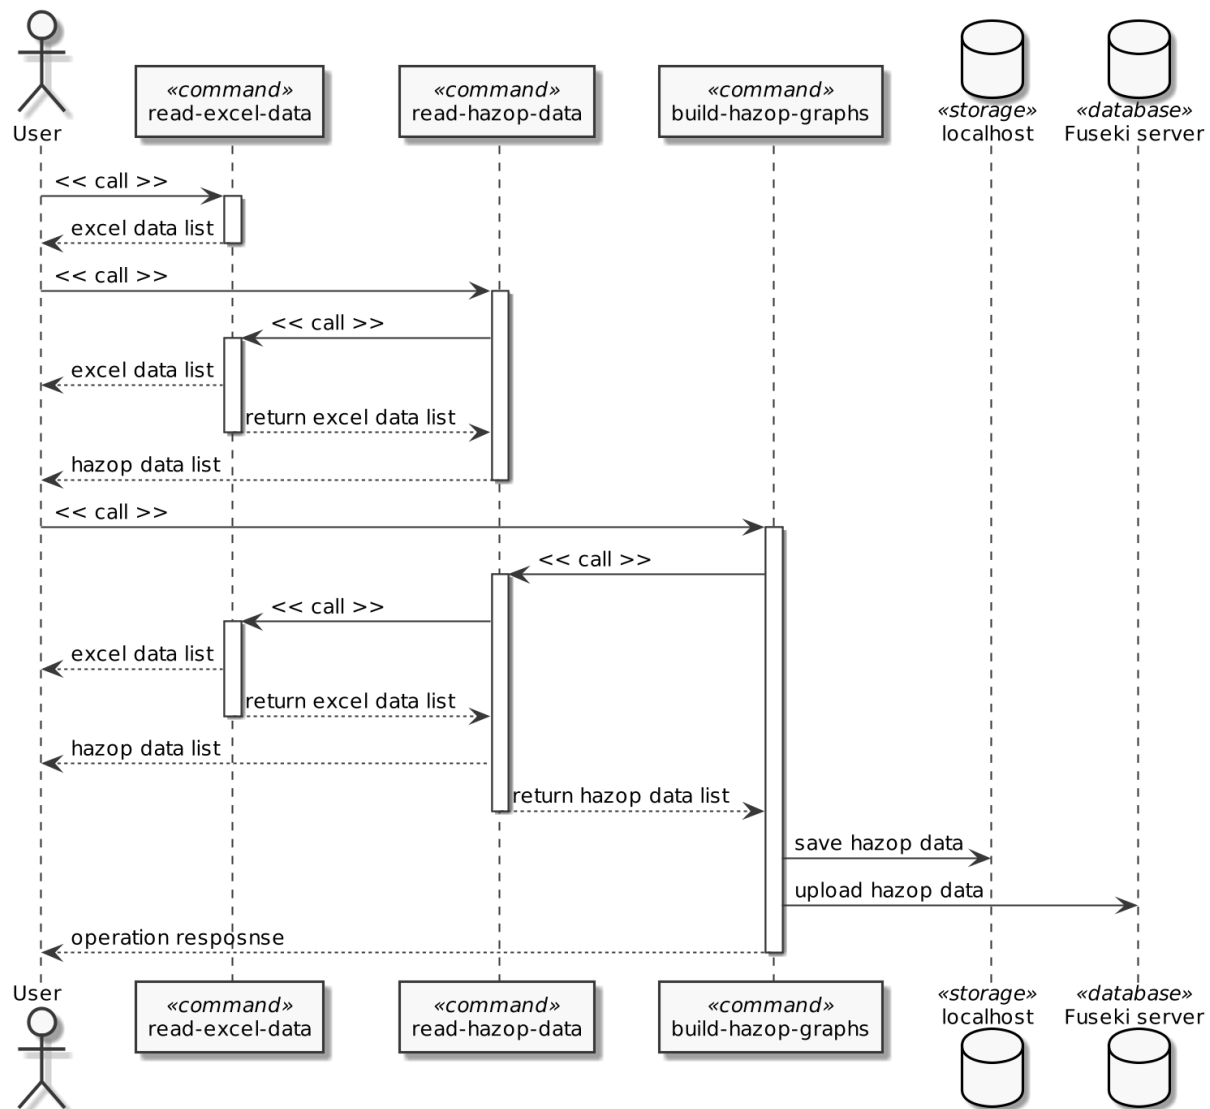


Figure 5: Sequence diagram of Importer interface


## Exporter interface

After the HAZOP data was successfully imported and stored, the user can convert the RDF graph to Excel format again.

There are two main commands in the Exporter interface for the users to interact with. The user can either export data from an RDF file located in a local directory or from a file located online on a Fuseki server. For the successful export from the

Fuseki Server the server needs to be running.

As a result, the RDF graphs will be stored locally in Excel format again.

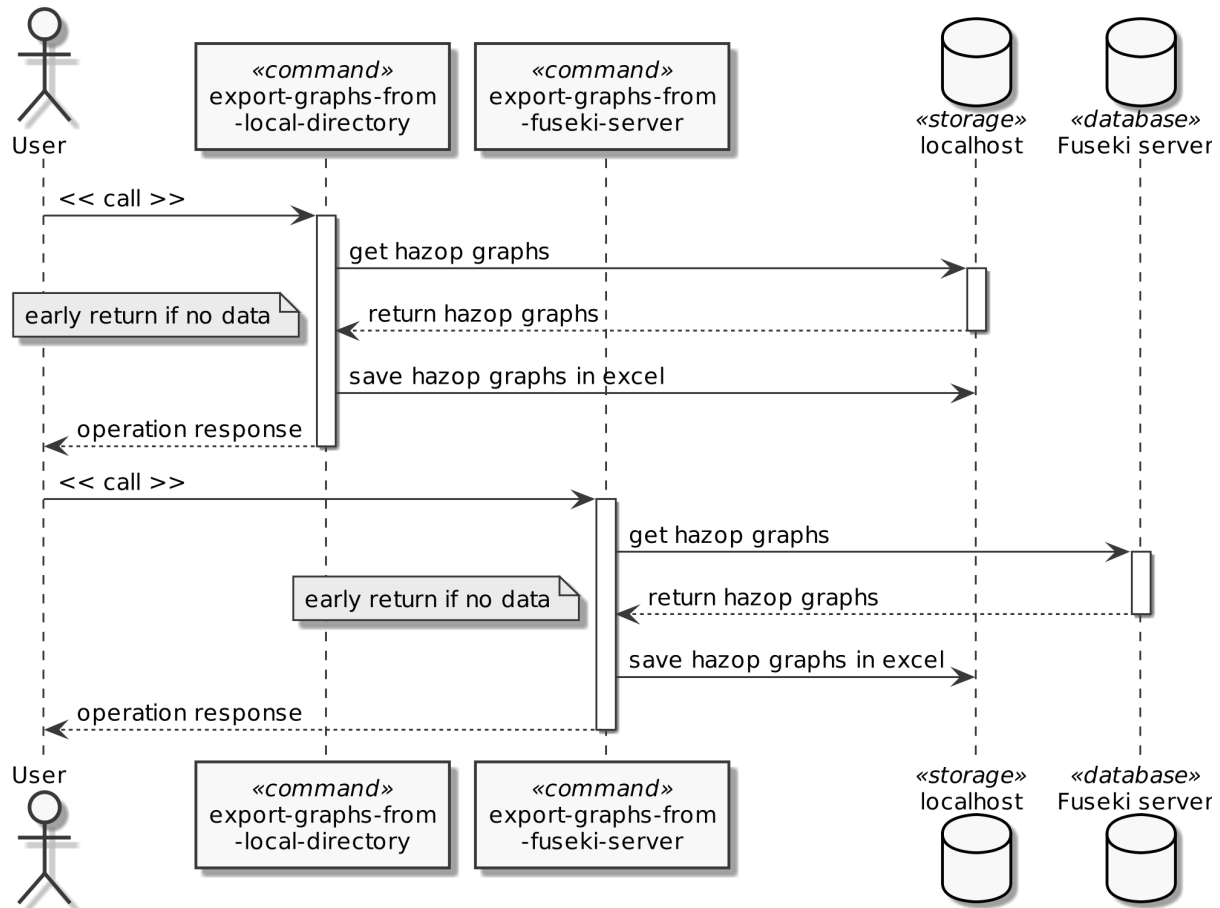

**Figure 6:** Sequence diagram of Exporter interface

## Remarks

We developed the HAZOP2RDF Project with version control on GitHub. The program is available for Windows and macOS. We also included a detailed installation guide in the documentation.

## Verification

The important part of the project is verification. We designed a test pattern to verify the results of the program execution. This pattern is simple and extendable and covers the main parts of the program.

In the tests' directory you can find a list of the following files:

- `test_cli.py` - test command line interface initialisation
- `test_cmd_importer.py` - test importer interface
- `test_cmd_exporter.py` - test exporter interface

The prime objective of the pattern is consistency. It allows us to apply this pattern to every test we want to implement.

The pattern covers the following test cases:

- execution errors
- execution exceptions
- output verification

The code coverage value varies around 94%. The value depends on the state of the Fuseki server. It increases if the Fuseki server is running and there is pre-uploaded data on the server.

The coverage report below shows the detailed information about the tests results.

### Listing 1: Coverage report

1	----- coverage: platform darwin, python 3.8.2-final-0				
2	Name	Stmts	Miss	Cover	Missing
3	-----				-----
4	<code>src/__init__.py</code>	0	0	100%	
5	<code>src/cli.py</code>	20	3	85%	34-35, 43
6	<code>src/commands/__init__.py</code>	0	0	100%	
7	<code>src/commands/cmd_exporter.py</code>	50	6	88%	37, 43, 48-50, 65
8	<code>src/commands/cmd_importer.py</code>	66	2	97%	38, 80
9	<code>src/config/__init__.py</code>	0	0	100%	

10	<code>src/config/config.py</code>	3	0	100%	
11	<code>src/services/__init__.py</code>	0	0	100%	
12	<code>src/services/svc_exporter.py</code>	28	0	100%	
13	<code>src/services/svc_importer.py</code>	66	0	100%	
14	<code>src/services/svc_triplestore.py</code>	16	3	81%	37-40
15	-----				
16	<b>TOTAL</b>	249	14	94%	

The user can although generate a coverage report in HTML format and easily discover the missing statements. See Appendix section for HTML coverage report example.

## Summary

- Discussion

With increasing complexity of systems, the amount of generated data increases proportionally and easily exceeds the human capabilities for interpretation.

Therefore, we propose an approach for data compression and models for correlations of causes, deviations and consequences.

The result are enriched HAZOP studies that are designed to be conducive for human interpretation and also support machine-readability. The HAZOP-data was stored as Resource Description Framework (RDF). An import and export was implemented to support the original documentation of the used HAZOPs.

- Future Work

The vision would be to support humans in the decision-making in such a way that, based on HAZOPs from experts, even novices could also decide whether a plant is safe or not. Since safety scenarios are always critical, this aspect needs to be analysed in more detail and is focus of future research.

- Future Projects

- Problems to be solved

**PROBLEM:** We use a fixed schema to validate the input data, by pattern mismatch the data will be skipped.

TODO: Dynamic schema for accepting dynamic changes.

NEED: Dynamic changes constrains.

PROBLEM: We don't validate the logic of the HAZOP data.

TODO: Validation schema.

NEED: Rules, what are acceptable in HAZOP and what are not.

IMPROVEMENT: TripleStore SOH API (SPARQL over HTML) to an API using Requests or SPARQLWrapper packages.

ADVANTAGES: better control over request/response operations, customization.

## Appendix

- turtle data, output ontology in excel, documentation

### Listing 2: HAZOP ontology in Turtle format

```
1 @prefix blanknode: <http://www.hazop2rdf.de/hazop/blanknode/> .
2 @prefix hazopcase: <http://www.hazop2rdf.de/hazop/hazopcase/> .
3 @prefix predicate: <http://www.hazop2rdf.de/hazop/predicate/> .
4 @prefix xsd: <http://www.w3.org/2001/XMLSchema#> .
5
6 hazopcase:1 blanknode:cause [ predicate:description "Zugeführtes
   Prozessmedium zu heiß (>200°C)" ;
7     predicate:guideword "Mehr" ;
8     predicate:hazopnode "In 1 - Feed-Eingang" ;
9     predicate:parameter "Temperatur" ] ;
10 blanknode:consequence [ predicate:description "
   Materialversagen der Dichtungen, Leckage" ;
11     predicate:guideword "NaN"^^xsd:double ;
12     predicate:hazopnode "Speicherbehälter" ;
13     predicate:parameter "NaN"^^xsd:double ] ;
14 blanknode:deviation [ predicate:description "Überschreitung
   der zulässigen Temperatur im Behälter" ;
15     predicate:guideword "Mehr" ;
16     predicate:hazopnode "Speicherbehälter" ;
17     predicate:parameter "Temperatur" ] ;
18 blanknode:restrisiko [ predicate:avoiding "G2 - fast unmö
   glich" ;
19     predicate:presence "A2 - häufig bis andauernd" ;
20     predicate:probability "W2 - gering" ;
```

```

21         predicate:severity "S1 - minimale " ] ;
22     blanknode:riskgraph [ predicate:avoiding "G2 - fast unmö
    glich" ;
23         predicate:presence "A2 - häufig bis andauernd" ;
24         predicate:probability "W2 - gering" ;
25         predicate:severity "S2 - geringe" ] ;
26     blanknode:safeguard [ predicate:hazopnode "Speicherbehälter"
    ;
27         predicate:otherinfo "NaN"^^xsd:double ;
28         predicate:parameter "Hochwertige Dichtungen für Temp
    . über 200°C (bei 25bar)" ;
29         predicate:recommendation "NaN"^^xsd:double ] .
30
31     hazopcase:10 blanknode:cause [ predicate:description "reines Lö
    sungsmittel wird zugeführt" ;
32         predicate:guideword "Kein" ;
33         predicate:hazopnode "In 1 - Feed-Eingang" ;
34         predicate:parameter "Konzentration" ] ;
35     blanknode:consequence [ predicate:description "kein" ;
36         predicate:guideword "NaN"^^xsd:double ;
37         predicate:hazopnode "Speicherbehälter" ;
38         predicate:parameter "NaN"^^xsd:double ] ;
39     blanknode:deviation [ predicate:description "nur reines Lö
    sungsmittel in Behälter" ;
40         predicate:guideword "Kein" ;
41         predicate:hazopnode "Speicherbehälter" ;
42         predicate:parameter "Konzentration" ] ;
43     blanknode:restrisiko [ predicate:avoiding "NaN"^^xsd:double
    ;
44         predicate:presence "NaN"^^xsd:double ;
45         predicate:probability "NaN"^^xsd:double ;
46         predicate:severity "NaN"^^xsd:double ] ;
47     blanknode:riskgraph [ predicate:avoiding "G1 - möglich" ;
48         predicate:presence "A2 - häufig bis andauernd" ;
49         predicate:probability "W3 - relativ hoch" ;
50         predicate:severity "S1 - minimale " ] ;
51     blanknode:safeguard [ predicate:hazopnode "In 1 - Feed-
    Eingang" ;
52         predicate:otherinfo "NaN"^^xsd:double ;
53         predicate:parameter "keine Aktion erforderlich" ;
54         predicate:recommendation "Normalzustand" ] .

```

PEA-HAZOP-Dosiernodul\_V02.xlsx

Open with Numbers

Index	HAZOP/No	Parameter	Deviation	HAZOP/No	Parameter	Cause	HAZOP/No	Parameter	Consequence	HAZOP/No	Parameter	Severity	Risk Graph	HAZOP/No	Parameter	Safeguard	HAZOP/No	Parameter	Severity	Risk Graph
0	1	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Temperatur	Mehr	Zugelassene Speichertemperatur			Materialverlust			geringe A2 - häufig G2 - fast un W2 - gering							geringe A2 - häufig G2 - fast un W2 - gering	
1	2	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Temperatur	Mehr	Hohe Temp. Speichertemperatur			Schlagartig S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
2	3	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Temperatur	Mehr	Brand im Aspektbehälter			Leckage d/S2 - geringe A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
3	4	Speichertemperatur	Mehr	Überschreithin 2 - N2 El-Medium	Anderer/Au Stoffverwech	Speichertemperatur			Schlagartig S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
4	5	Speichertemperatur	Mehr	Überschreithin 2 - N2 El-Medium	Anderer/Au Stoffverwech	Speichertemperatur			Bildet ein S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
5	6	Speichertemperatur	Weniger	Überschreithin 1 - Feed-Druck	Mehr	Externe niedrige Speichertemperatur			Bildet ein S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
6	7	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Druck	Mehr	Druck des Speichertanks			Druckverlust S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
7	8	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Druck	Mehr	Druck des Speichertanks			Druckverlust S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
8	9	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Druck	Mehr	Druck des Speichertanks			Druckverlust S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
9	10	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Druck	Mehr	Druck des Speichertanks			Druckverlust S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
10	11	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Druck	Mehr	Druck des Speichertanks			Druckverlust S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
11	12	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Druck	Mehr	Druck des Speichertanks			Druckverlust S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
12	13	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Druck	Mehr	Druck des Speichertanks			Druckverlust S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
13	14	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Druck	Mehr	Druck des Speichertanks			Druckverlust S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
14	15	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Druck	Mehr	Druck des Speichertanks			Druckverlust S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
15	16	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Druck	Mehr	Druck des Speichertanks			Druckverlust S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
16	17	Speichertemperatur	Mehr	Überschreithin 1 - Feed-Druck	Mehr	Druck des Speichertanks			Druckverlust S3 - schwere A2 - häufig G1 - mögliche W1 - sehr gering			geringe A2 - häufig G1 - mögliche W1 - sehr gering						geringe A2 - häufig G1 - mögliche W1 - sehr gering		
17																				

Figure 7: Graph ontology in Excel



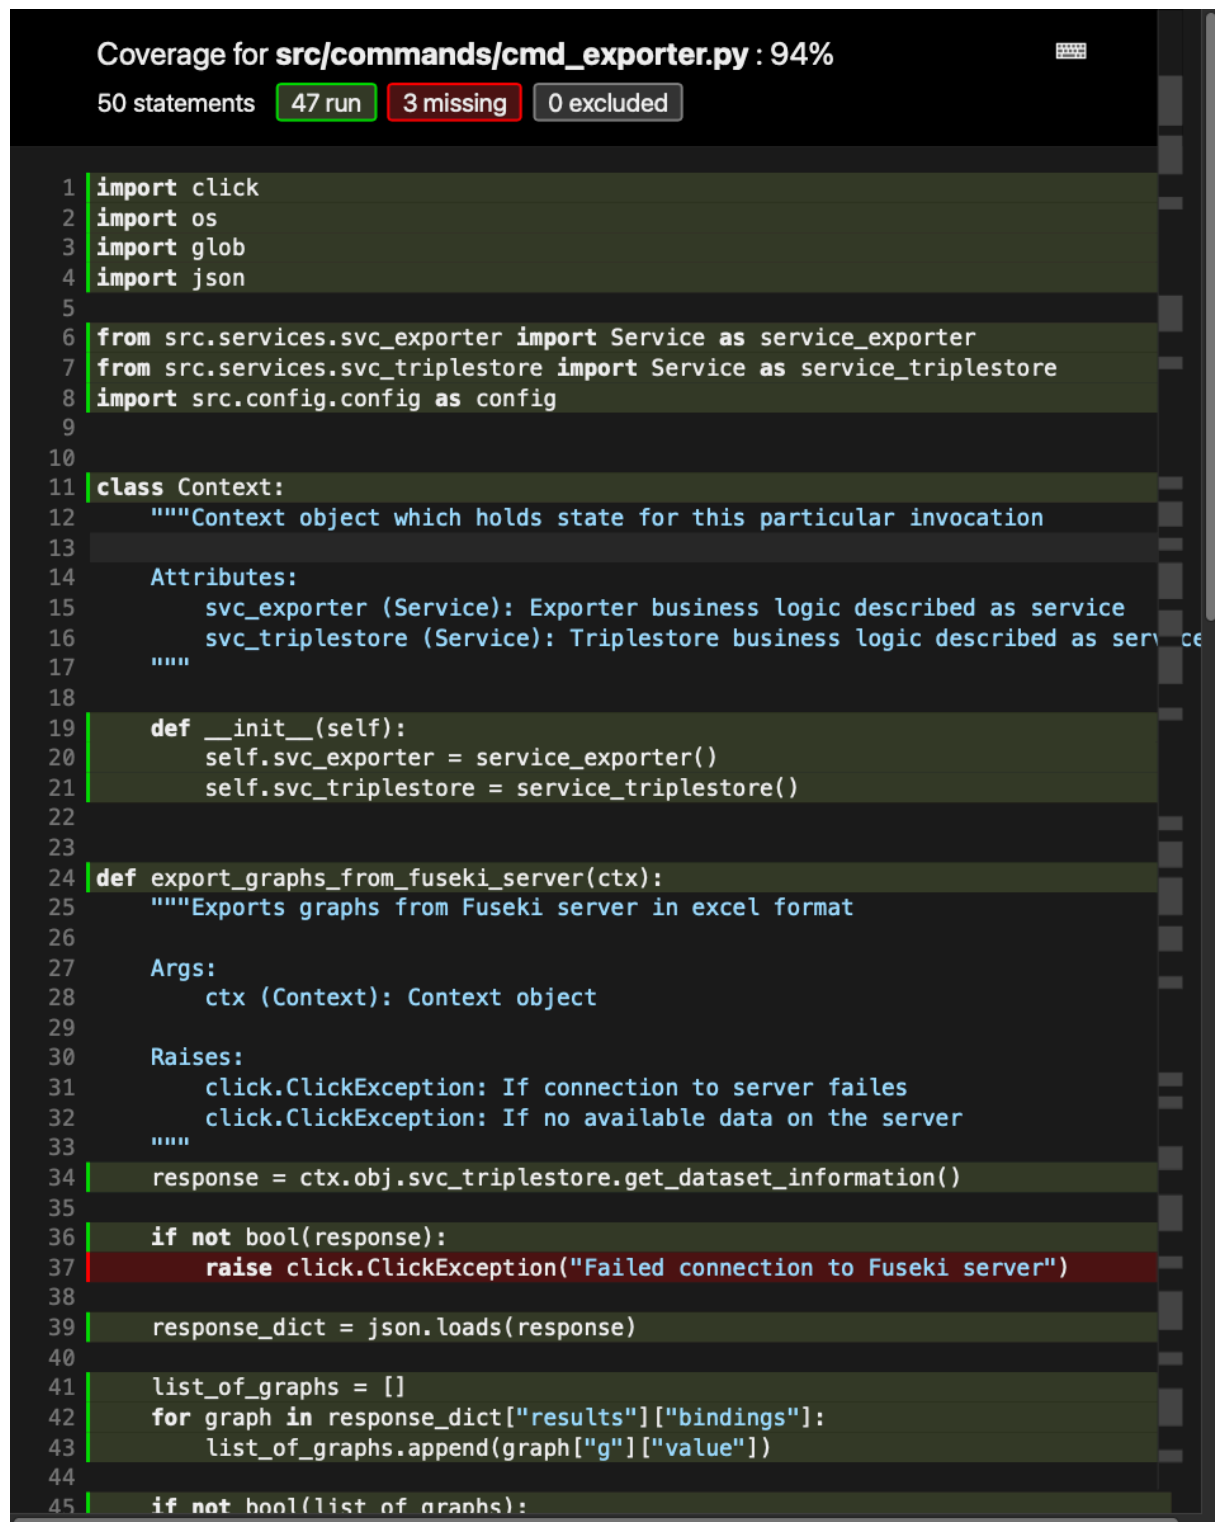


Figure 8: HTML coverage report example

## References