


TUBES LAB 6 DASPRO

Nama:Dimas Dafa Fahreza


Nim:251401129

No.1

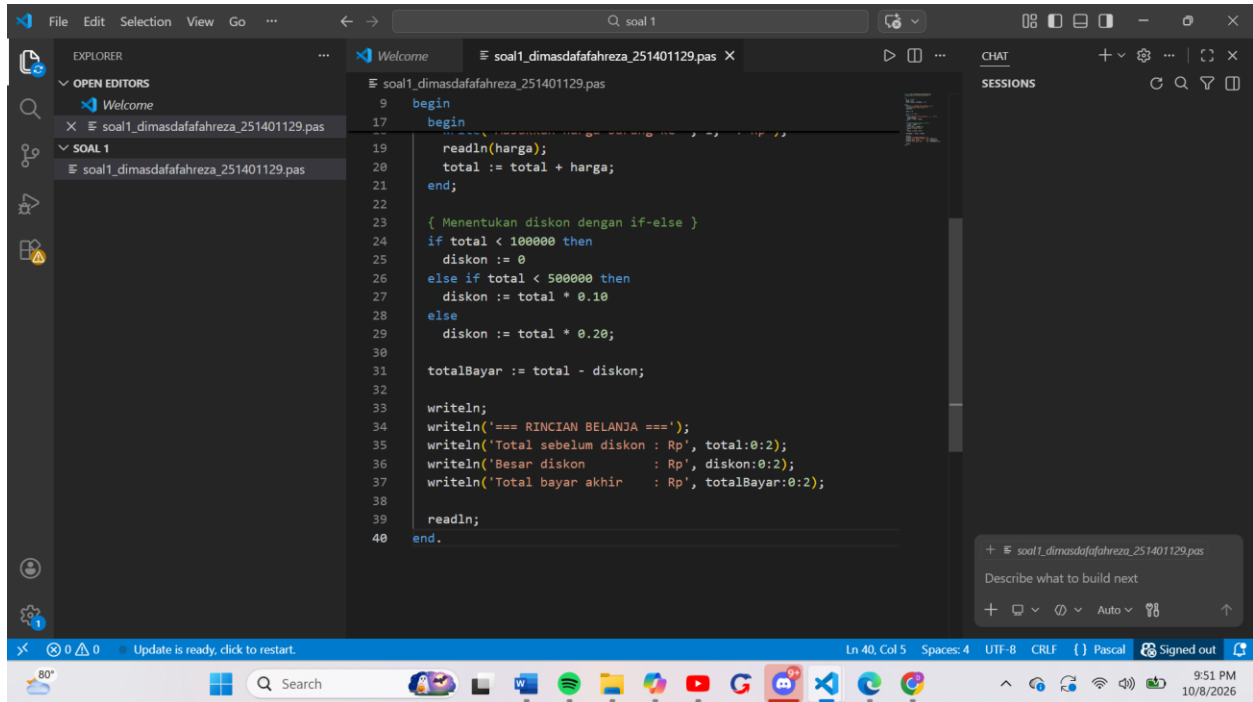



```
9  begin
17  begin
19      readln(harga);
20      total := total + harga;
21  end;
22
23  { Menentukan diskon dengan if-else }
24  if total < 100000 then
25      diskon := 0
26  else if total < 500000 then
27      diskon := total * 0.10
28  else
29      diskon := total * 0.20;
30
31  totalBayar := total - diskon;
32
33  writeln;
34  writeln('=== RINCIAN BELANJA ===');
35  writeln('Total sebelum diskon : Rp', total:0:2);
36  writeln('Besar diskon      : Rp', diskon:0:2);
37  writeln('Total bayar akhir   : Rp', totalBayar:0:2);
38
39  readln;
40  end.
```

The image shows a screenshot of a Visual Studio Code editor with a Pascal program open. The program calculates a total price and applies a discount based on the total amount. The discount logic is as follows: if the total is less than 100,000, the discount is 0; if the total is between 100,000 and 500,000, the discount is 10% of the total; if the total is 500,000 or more, the discount is 20% of the total. The final output shows the total before discount, the discount amount, and the total amount to be paid. The status bar at the bottom indicates the file is in UTF-8 encoding, CRLF line endings, and is a Pascal file. The system tray shows the date and time as 10/8/2026 at 9:51 PM.

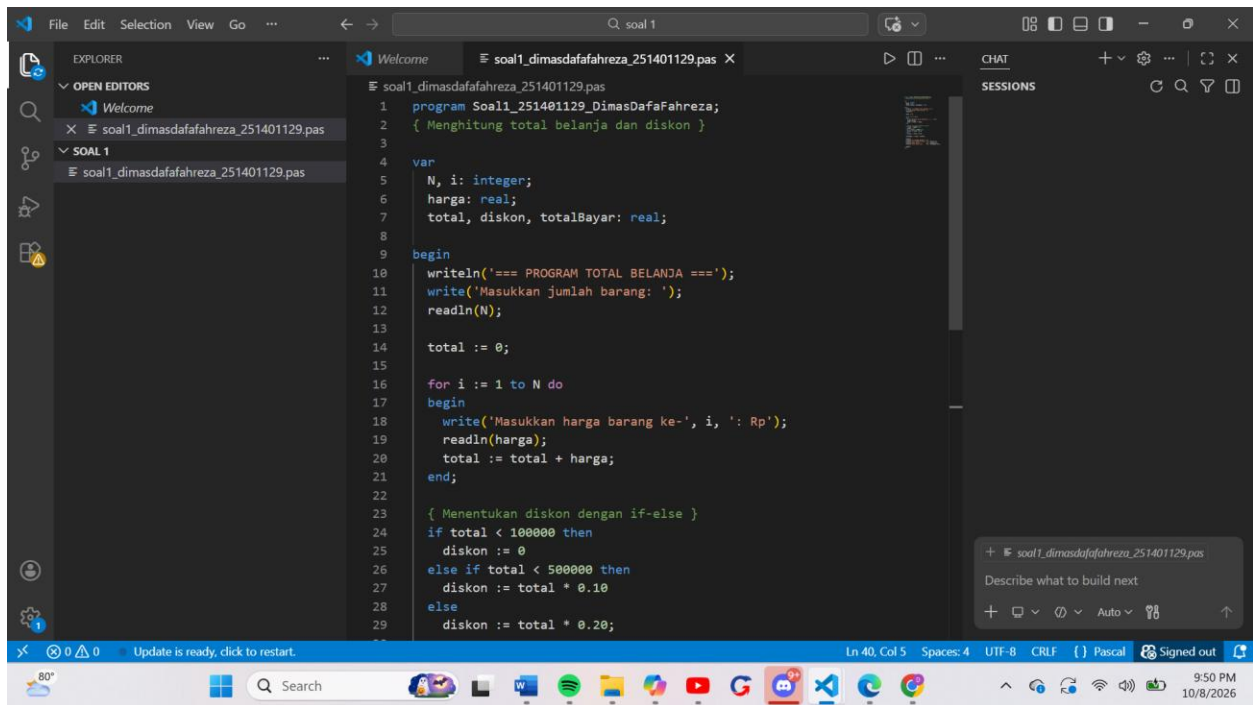



No.2

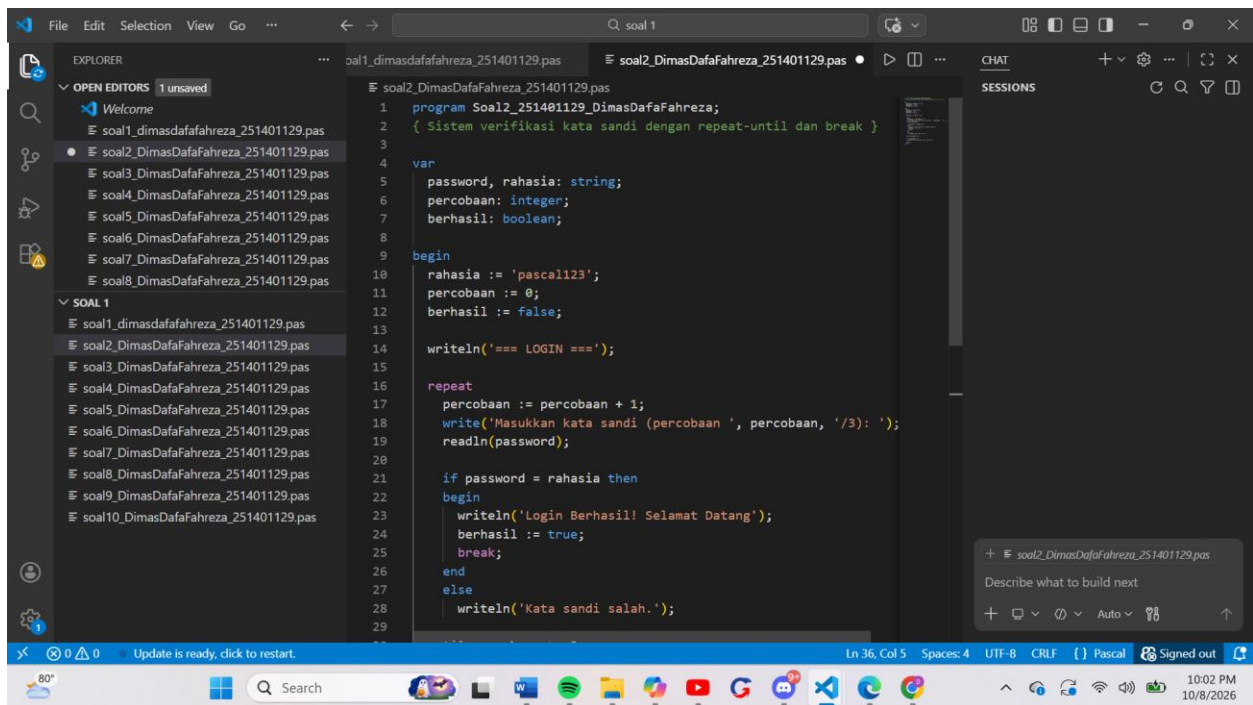

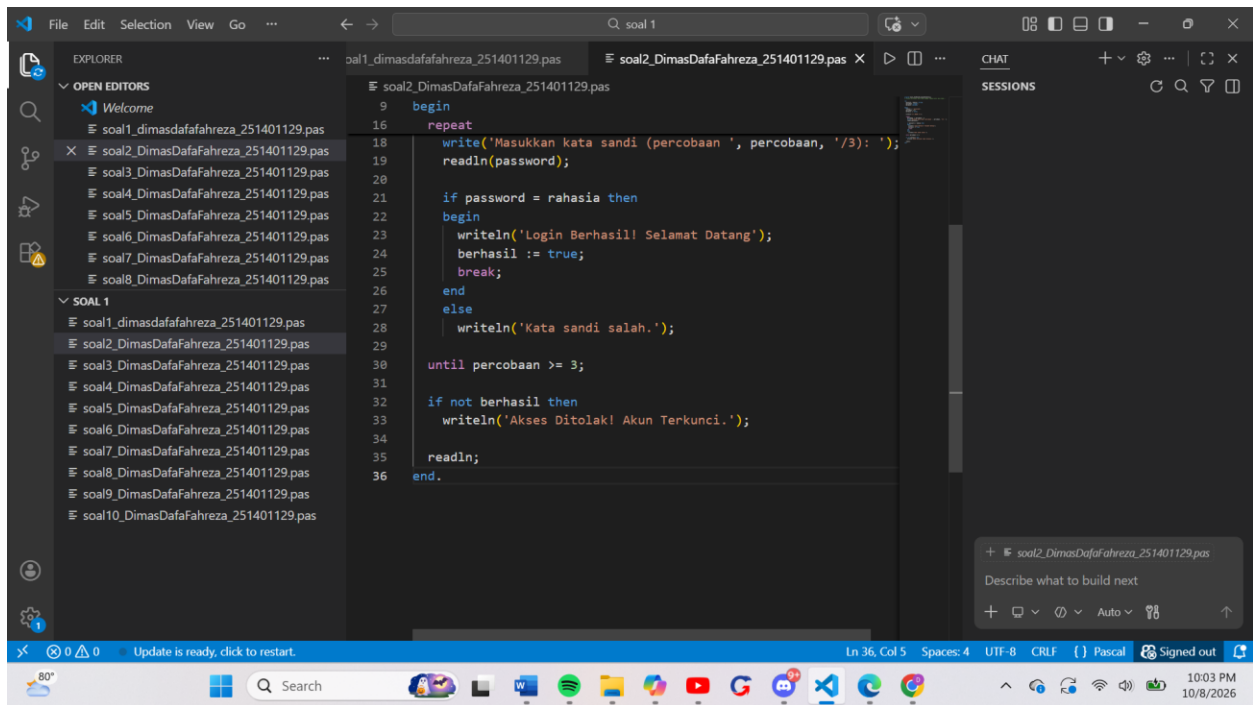



No.3

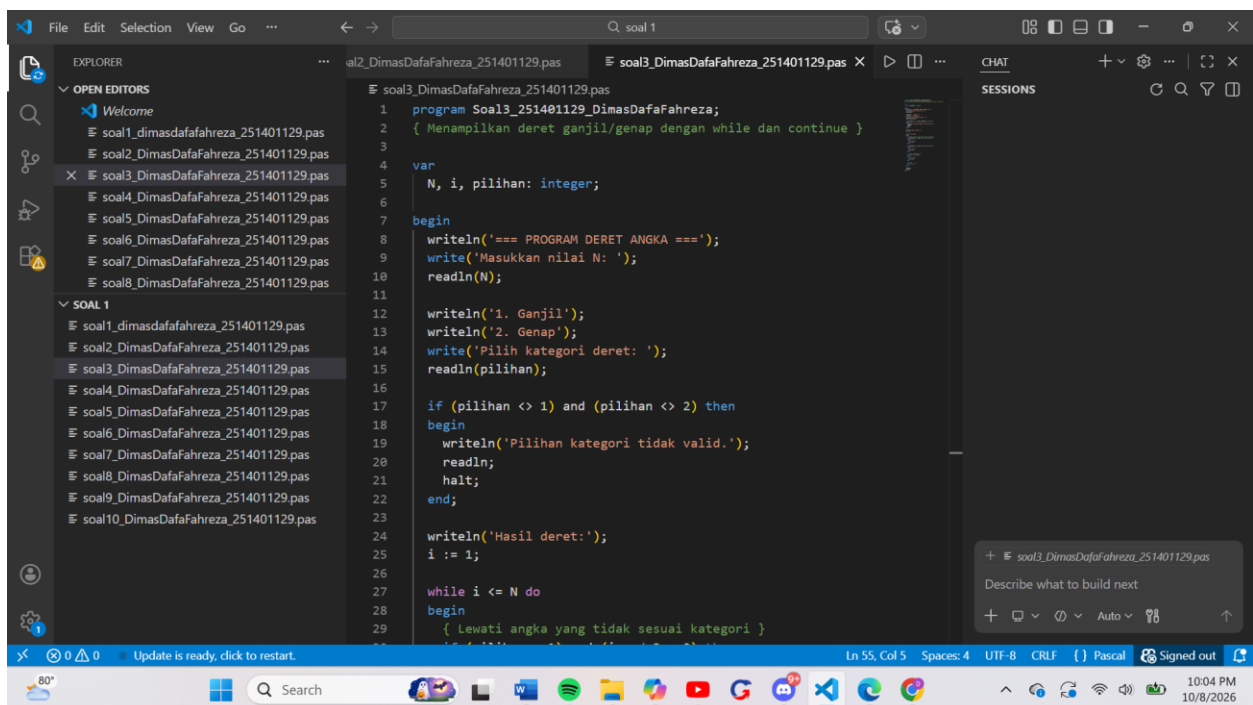

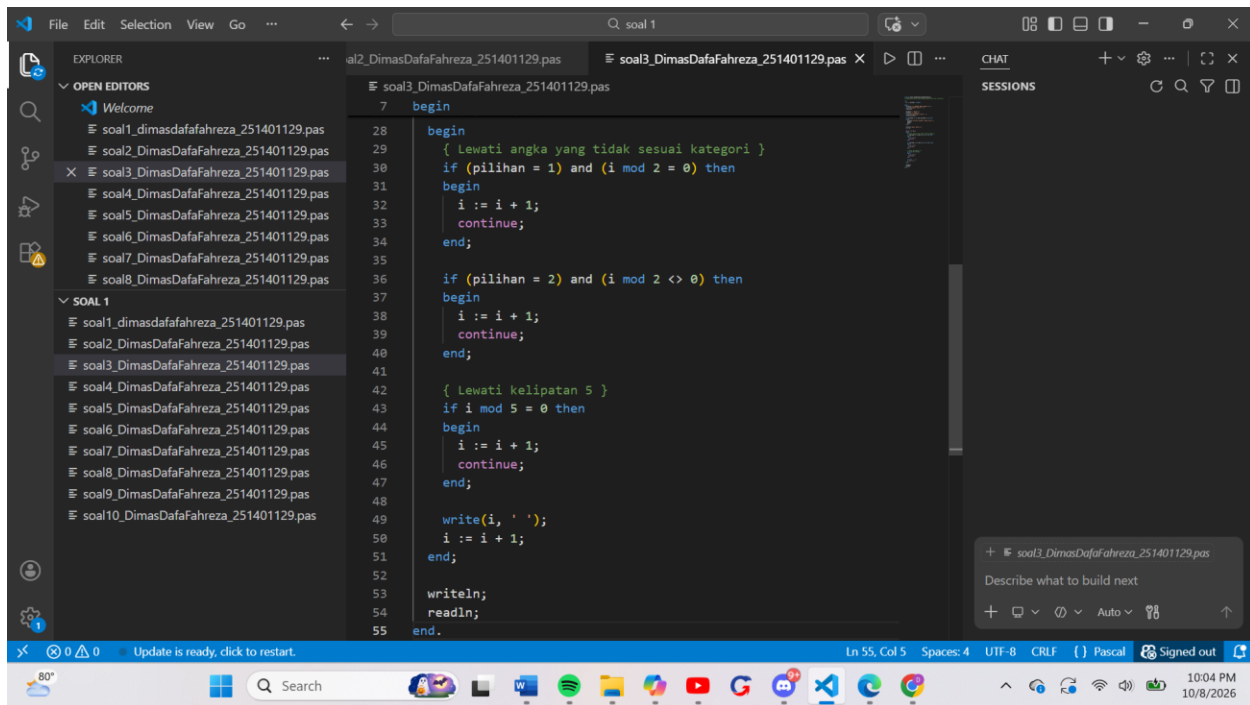


No.4

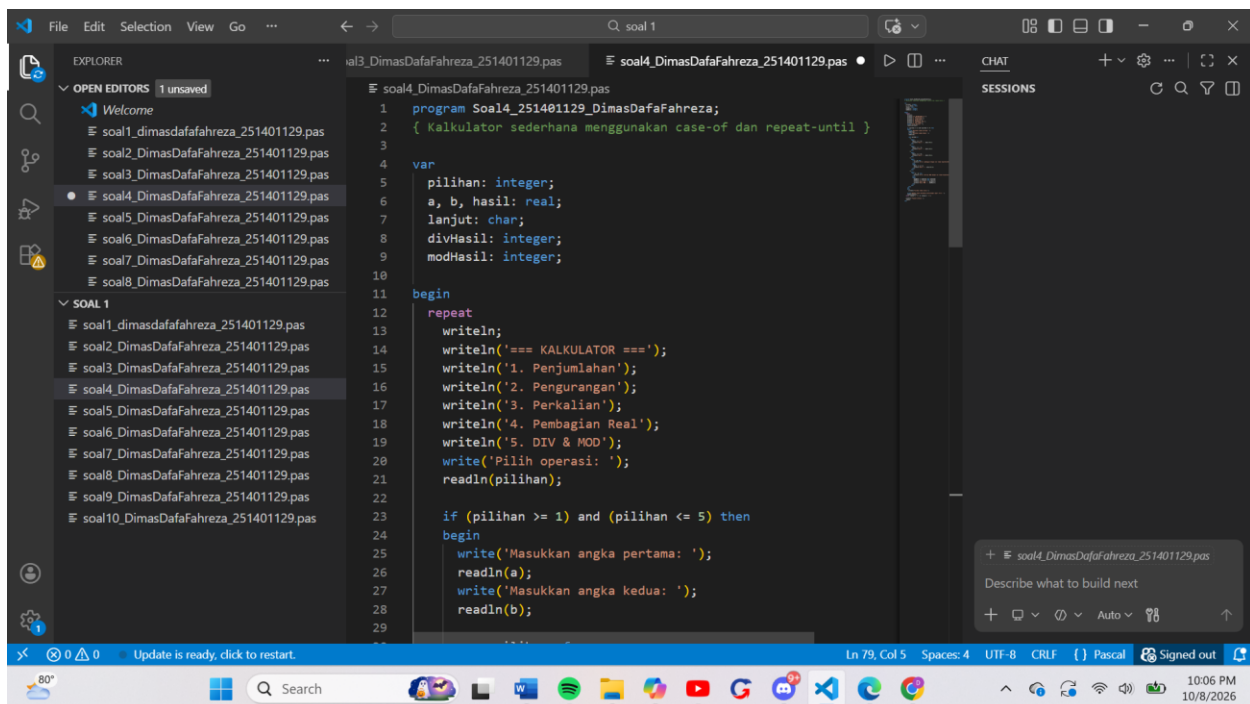

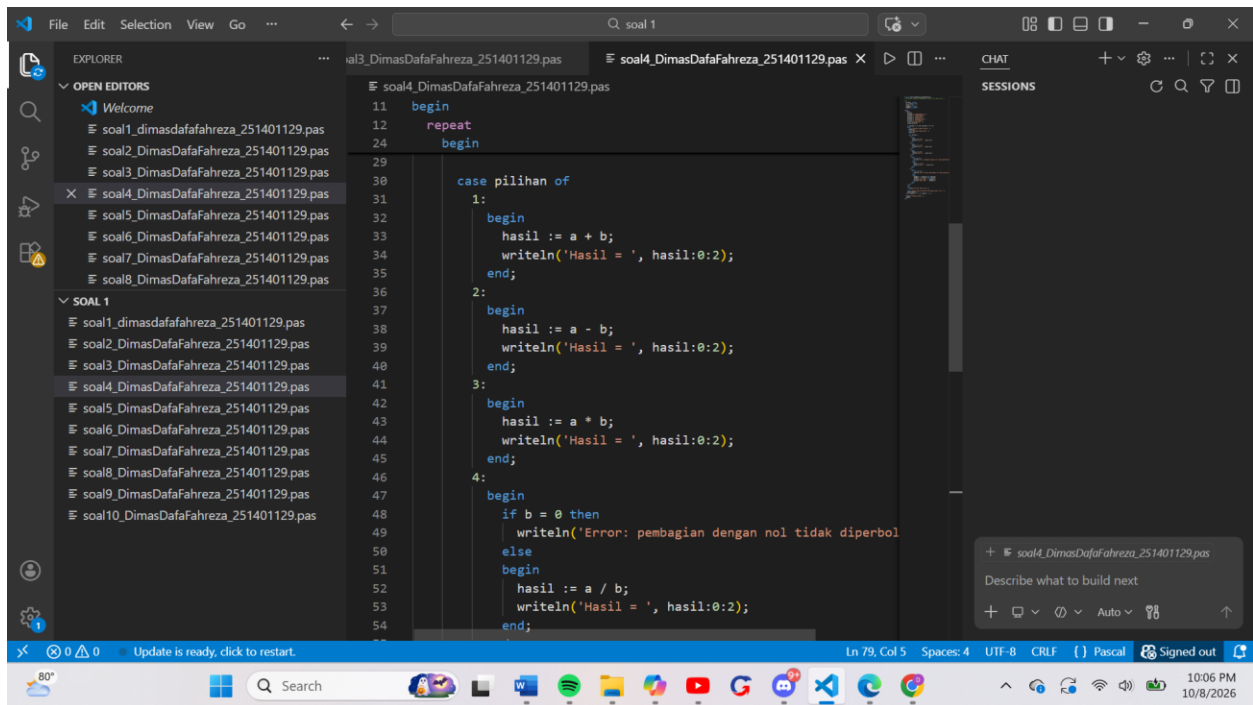

```
11 begin
12   repeat
24     begin
29
30       case pilihan of
31         1:
32           begin
33             hasil := a + b;
34             writeln('Hasil = ', hasil:0:2);
35           end;
36         2:
37           begin
38             hasil := a - b;
39             writeln('Hasil = ', hasil:0:2);
40           end;
41         3:
42           begin
43             hasil := a * b;
44             writeln('Hasil = ', hasil:0:2);
45           end;
46         4:
47           begin
48             if b = 0 then
49               writeln('Error: pembagian dengan nol tidak diperbol
50             else
51               begin
52                 hasil := a / b;
53                 writeln('Hasil = ', hasil:0:2);
54               end;
```

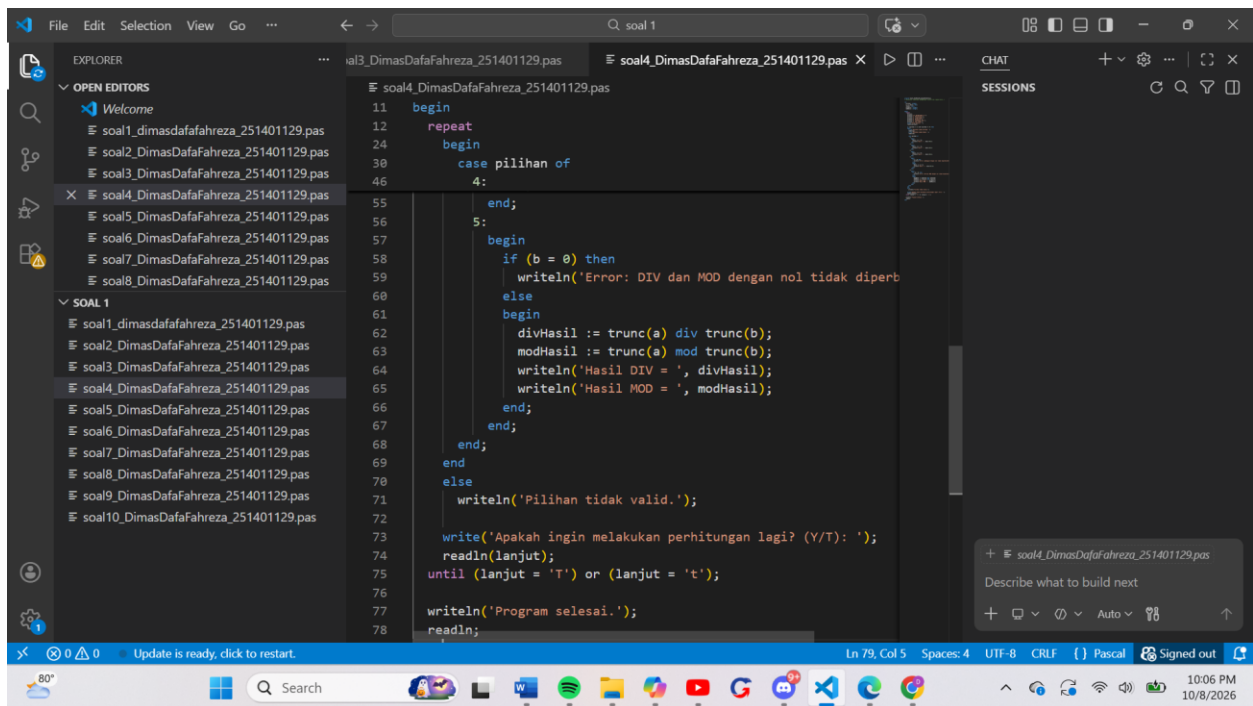

```
55   end;
56   5:
57   begin
58     if (b = 0) then
59       writeln('Error: DIV dan MOD dengan nol tidak dipert
60     else
61       begin
62         divHasil := trunc(a) div trunc(b);
63         modHasil := trunc(a) mod trunc(b);
64         writeln('Hasil DIV = ', divHasil);
65         writeln('Hasil MOD = ', modHasil);
66       end;
67   end;
68 end;
69 end
70 else
71   writeln('Pilihan tidak valid.');
```

```
72
73   write('Apakah ingin melakukan perhitungan lagi? (Y/T): ');
74   readln(lanjut);
75   until (lanjut = 'T') or (lanjut = 't');
76
77   writeln('Program selesai.');
```

```
78   readln;
```

No.5

The screenshot shows the Visual Studio Code editor with a file explorer on the left containing several Pascal files named 'soal1_dimasdafaahreza_251401129.pas' through 'soal10...'. The main editor window displays the code for 'soal5_DimasDafaFahreza_251401129.pas'. The code is a Pascal program for a student grade recapitulation. It starts with a program declaration, followed by variable declarations for M, N, i, j, nilai, total, rata, lulus, and tidakLulus. The program begins with a writeln statement for the title 'REKAPITULASI NILAI MAHASISMA', followed by prompts for the number of students (M) and tasks (N). It then enters a nested loop structure to process each student's grades and determine their status (lulus or tidakLulus).

```
1 program Soal5_251401129_DimasDafaFahreza;
2 { Rekapitulasi nilai mahasiswa dengan nested for-do }
3
4 var
5     M, N, i, j: integer;
6     nilai, total, rata: real;
7     lulus, tidakLulus: integer;
8
9 begin
10    writeln('=== REKAPITULASI NILAI MAHASISMA ===');
11    write('Masukkan jumlah mahasiswa: ');
12    readln(M);
13    write('Masukkan jumlah tugas: ');
14    readln(N);
15
16    lulus := 0;
17    tidakLulus := 0;
18
19    for i := 1 to M do
20    begin
21        total := 0;
22
23        writeln;
24        writeln('Mahasiswa ke-', i);
25
26        for j := 1 to N do
27        begin
28            write(' Nilai tugas ke-', j, ': ');
29            readln(nilai);
```

The screenshot shows the continuation of the Pascal program. It continues the nested loop from the previous screenshot, calculating the total score for each student and then determining their status based on the average score (rata). If the average score is greater than or equal to 65, the student is marked as 'LULUS'; otherwise, they are marked as 'TIDAK LULUS'. The program also updates the total count of students who passed (lulus) or failed (tidakLulus). The code ends with a writeln statement for the title 'HASIL REKAP', followed by writeln statements for the total number of students who passed and failed.

```
30        total := total + nilai;
31    end;
32
33    if N > 0 then
34        rata := total / N
35    else
36        rata := 0;
37
38    writeln(' Rata-rata: ', rata:0:2);
39
40    if rata >= 65 then
41    begin
42        writeln(' Status: LULUS');
43        lulus := lulus + 1;
44    end
45    else
46    begin
47        writeln(' Status: TIDAK LULUS');
48        tidakLulus := tidakLulus + 1;
49    end;
50 end;
51
52 writeln;
53 writeln('=== HASIL REKAP ===');
54 writeln('Total mahasiswa LULUS      : ', lulus);
55 writeln('Total mahasiswa TIDAK LULUS: ', tidakLulus);
```

No.6

This screenshot shows the VS Code editor with a Pascal file named 'soal6_DimasDafaFahreza_251401129.pas' open. The Explorer sidebar on the left lists several files, including 'Welcome', 'soal1', 'soal2', 'soal3', 'soal4', 'soal5', 'soal6', 'soal7', 'soal8', 'soal9', and 'soal10'. The main editor area displays the following code:

```
1 program Soal6_251401129_DimasDafaFahreza;
2 { Menentukan nilai akhir, status kelulusan, dan indeks huruf }
3
4 var
5     tugas, uts, uas, kehadiran, nilaiAkhir: real;
6     indeks: char;
7     status: string;
8
9 begin
10     writeln('=== PENENTUAN NILAI AKHIR ===');
11     write('Nilai Tugas (30%): ');
12     readln(tugas);
13     write('Nilai UTS (30%): ');
14     readln(uts);
15     write('Nilai UAS (40%): ');
16     readln(uas);
17     write('Kehadiran (%): ');
18     readln(kehadiran);
19
20     nilaiAkhir := (tugas * 0.30) + (uts * 0.30) + (uas * 0.40);
21
22     { Menentukan indeks huruf }
23     if nilaiAkhir >= 85 then
24         indeks := 'A'
25     else if nilaiAkhir >= 75 then
26         indeks := 'B'
27     else if nilaiAkhir >= 60 then
28         indeks := 'C'
29     else if nilaiAkhir >= 50 then
```


The status bar at the bottom indicates 'Ln 47, Col 5', 'Spaces: 4', 'UTF-8', 'CRLF', and 'Pascal'. The system tray at the bottom right shows the time as 10:08 PM on 10/8/2026.

This screenshot shows the VS Code editor with the same Pascal file open. The main editor area displays the following code:


```
9 begin
29     else if nilaiAkhir >= 50 then
30         indeks := 'D'
31     else
32         indeks := 'E';
33
34     { Menentukan status kelulusan }
35     if (nilaiAkhir >= 60) and (kehadiran >= 80) then
36         status := 'LULUS'
37     else
38         status := 'TIDAK LULUS';
39
40     writeln;
41     writeln('Nilai Akhir : ', nilaiAkhir:0:2);
42     writeln('Indeks Huruf : ', indeks);
43     writeln('Kehadiran : ', kehadiran:0:2, '%');
44     writeln('Status : ', status);
45
46     readln;
47 end.
```

The status bar at the bottom indicates 'Ln 47, Col 5', 'Spaces: 4', 'UTF-8', 'CRLF', and 'Pascal'. The system tray at the bottom right shows the time as 10:09 PM on 10/8/2026.


No.7

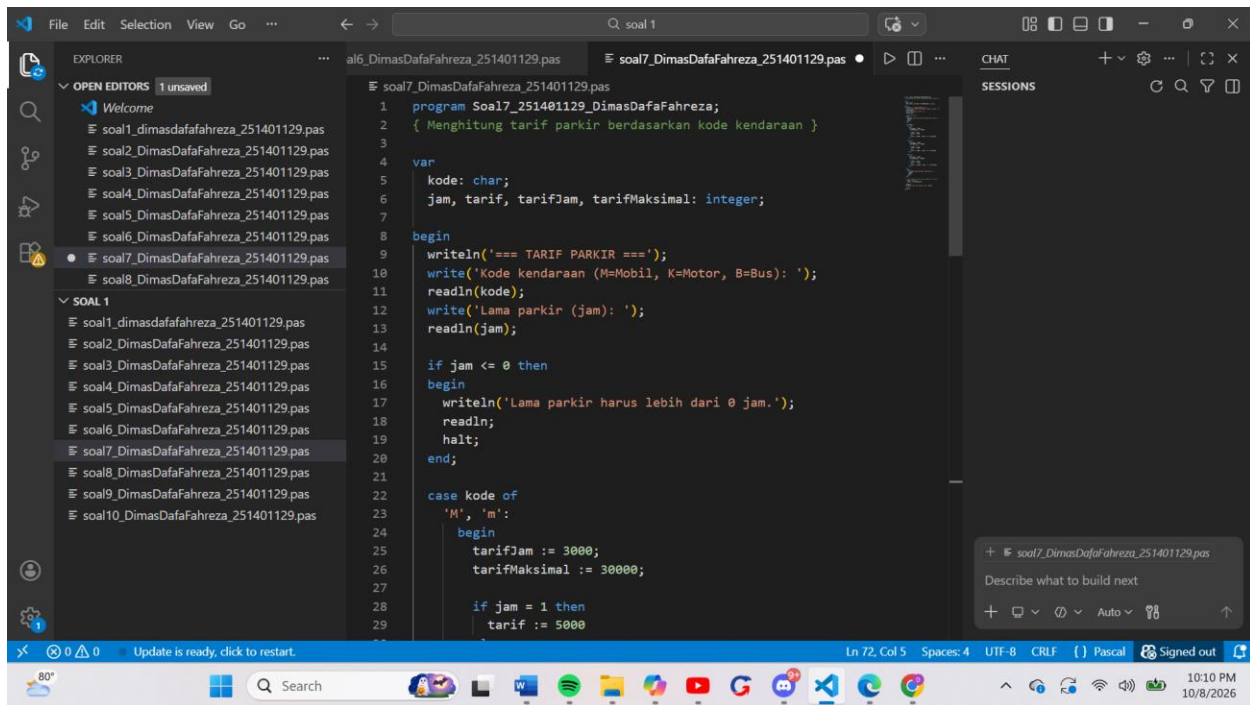


```
1 program Soal7_251401129_DimasDafaFahreza;
2 { Menghitung tarif parkir berdasarkan kode kendaraan }
3
4 var
5     kode: char;
6     jam, tarif, tarifJam, tarifMaksimal: integer;
7
8 begin
9     writeln('=== TARIF PARKIR ===');
10    write('Kode kendaraan (M=Mobil, K=Motor, B=Bus): ');
11    readln(kode);
12    write('Lama parkir (jam): ');
13    readln(jam);
14
15    if jam <= 0 then
16    begin
17        writeln('Lama parkir harus lebih dari 0 jam.');
```

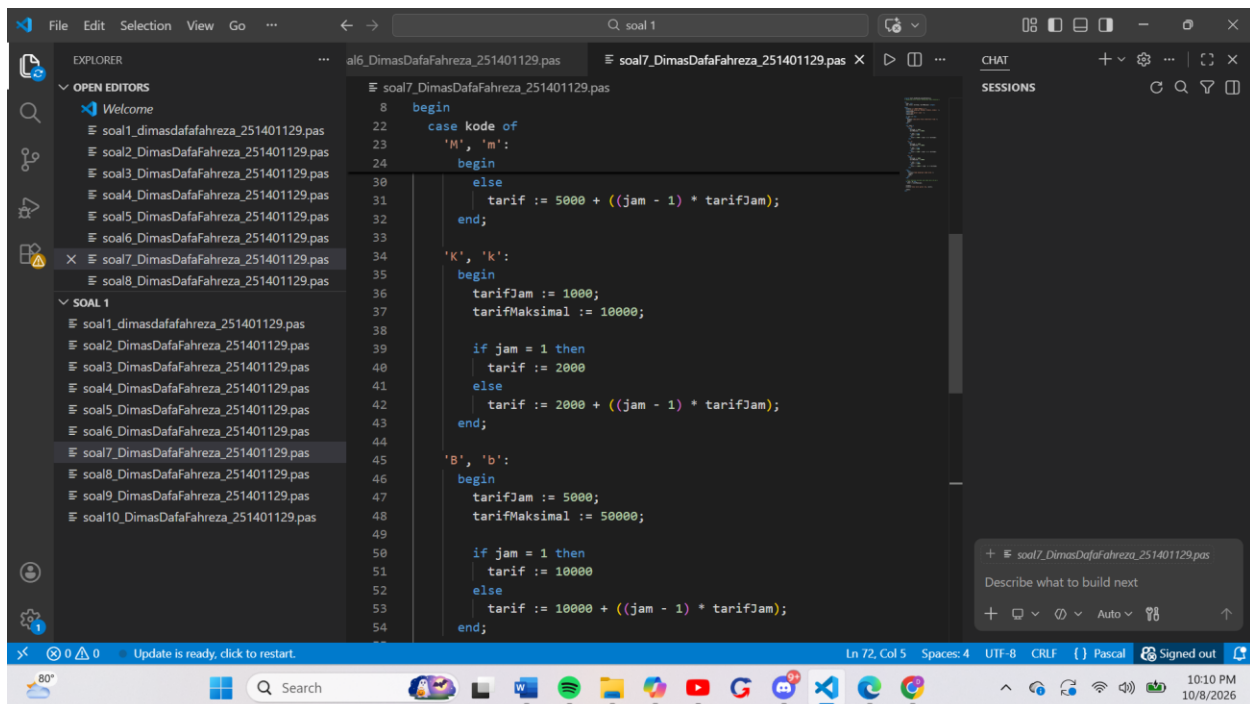


```
22     case kode of
23         'M', 'm':
24             begin
25                 tarifJam := 3000;
26                 tarifMaksimal := 30000;
27
28                 if jam = 1 then
29                     tarif := 5000
30
31             end;
32         'K', 'k':
33             begin
34                 tarifJam := 1000;
35                 tarifMaksimal := 10000;
36
37                 if jam = 1 then
38                     tarif := 2000
39                 else
40                     tarif := 2000 + ((jam - 1) * tarifJam);
41             end;
42         'B', 'b':
43             begin
44                 tarifJam := 5000;
45                 tarifMaksimal := 50000;
46
47                 if jam = 1 then
48                     tarif := 10000
49                 else
50                     tarif := 10000 + ((jam - 1) * tarifJam);
51             end;
52     end;
```

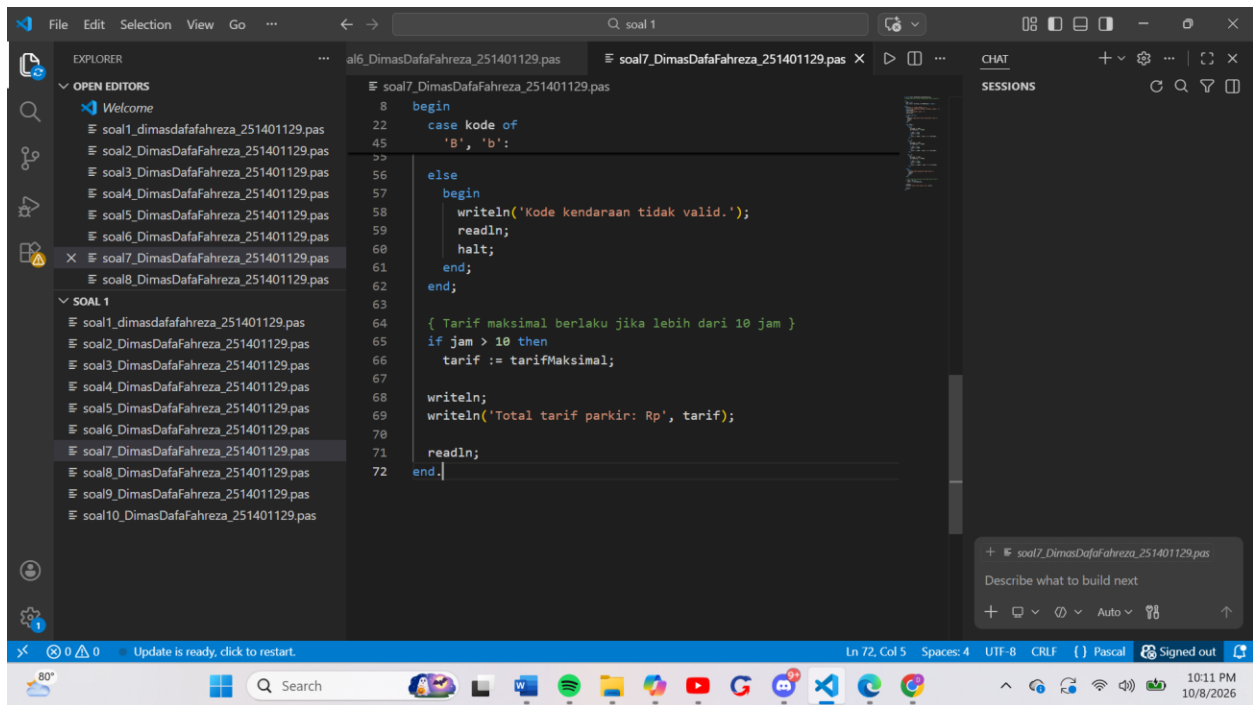



No.8

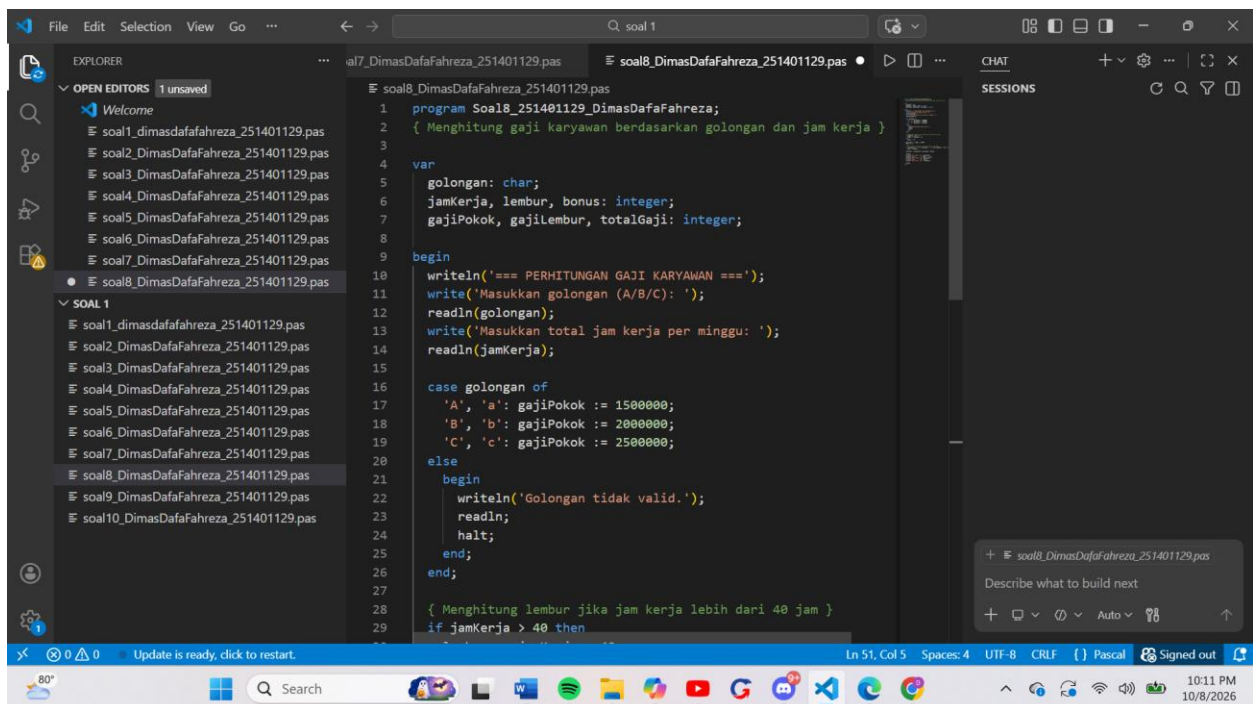

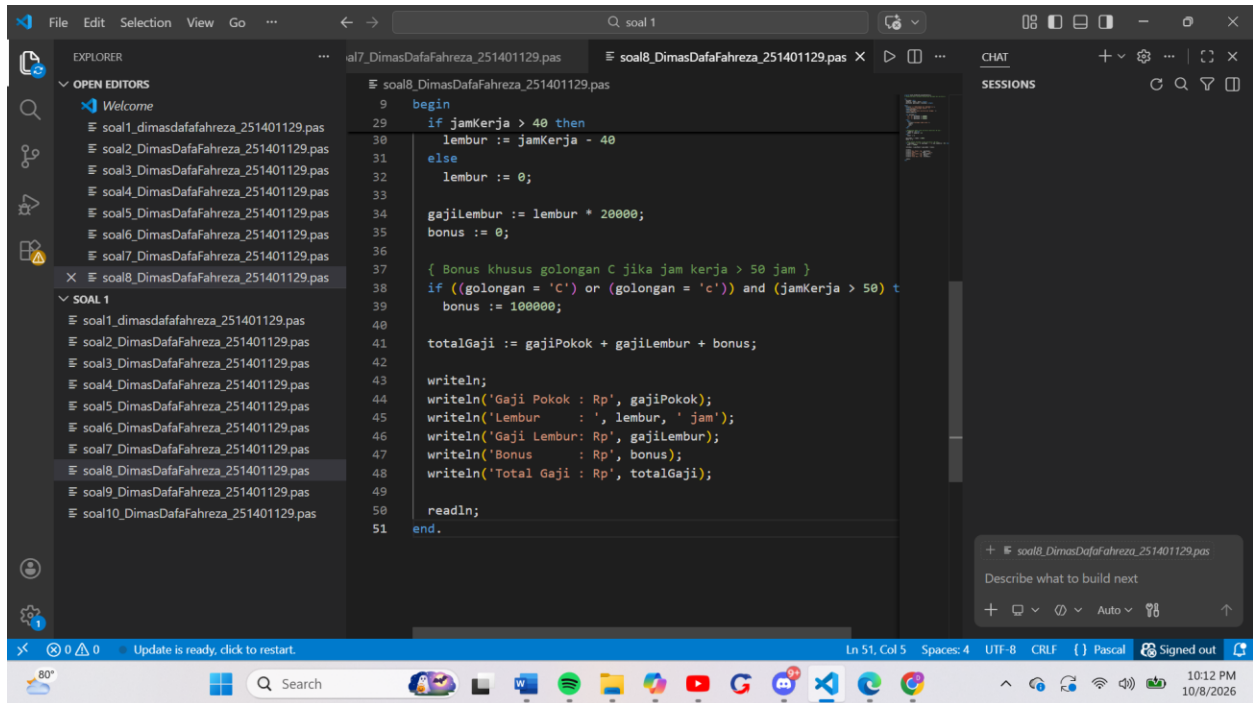

No.9

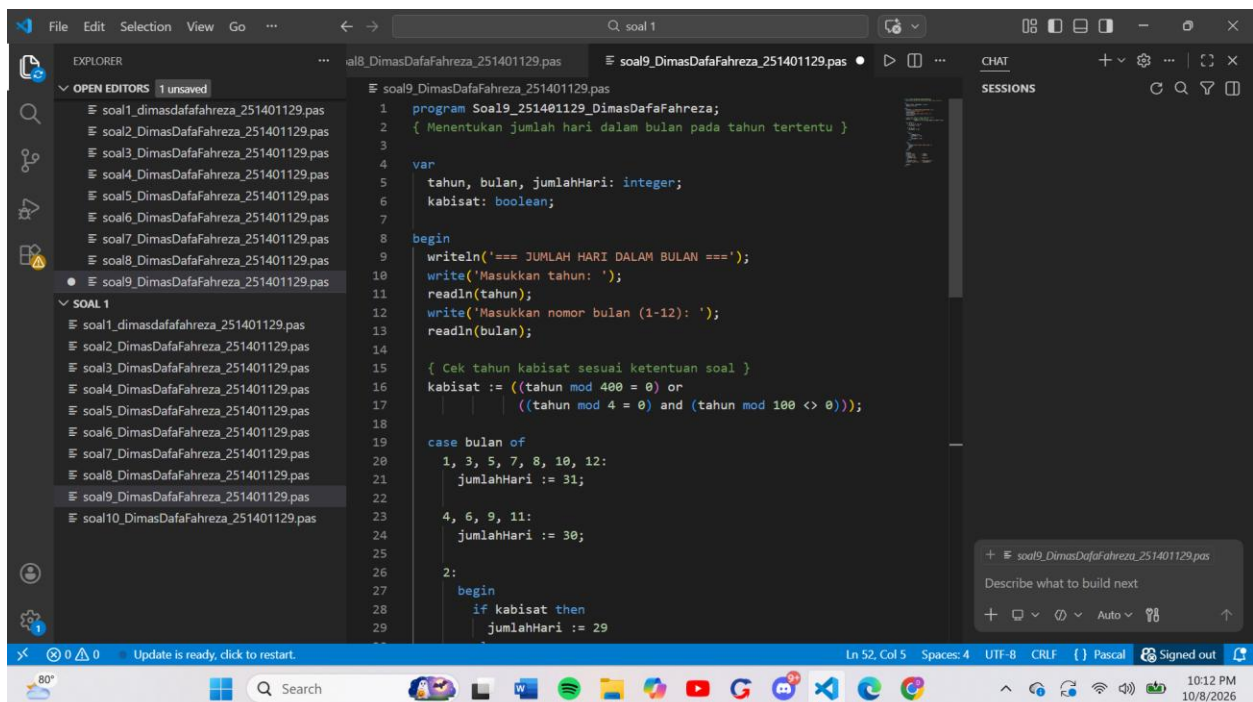

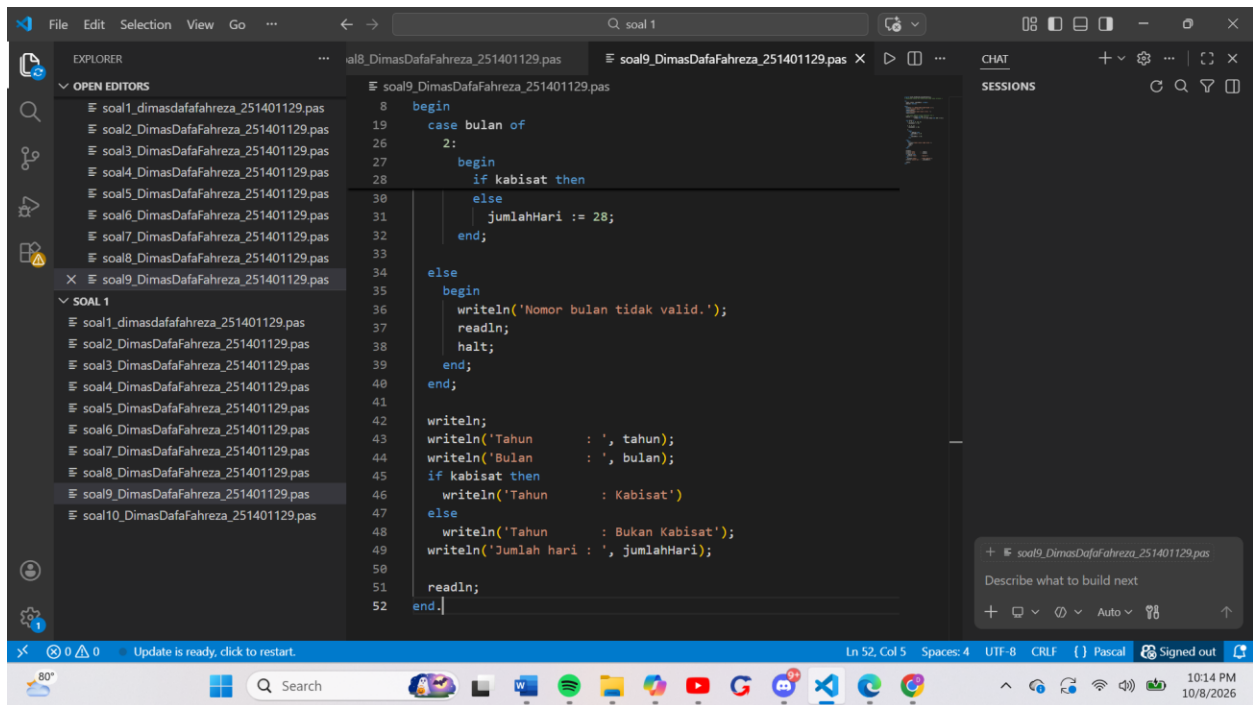

No.10

