DATA COLLECTION

In [1]:
```
# import libraries
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
```

In [2]:
```
# To Import Dataset
sd=pd.read_csv(r"c:\Users\user\Downloads\2015.csv")
sd
```

Out[2]:

	Country	Region	Happiness Rank	Happiness Score	Standard Error	Economy (GDP per Capita)	Family	Health (Life Expectancy)	Free
0	Switzerland	Western Europe	1	7.587	0.03411	1.39651	1.34951	0.94143	0.6
1	Iceland	Western Europe	2	7.561	0.04884	1.30232	1.40223	0.94784	0.6
2	Denmark	Western Europe	3	7.527	0.03328	1.32548	1.36058	0.87464	0.6
3	Norway	Western Europe	4	7.522	0.03880	1.45900	1.33095	0.88521	0.6
4	Canada	North America	5	7.427	0.03553	1.32629	1.32261	0.90563	0.6
...	...	...	...	...	...	...	...	...	
153	Rwanda	Sub-Saharan Africa	154	3.465	0.03464	0.22208	0.77370	0.42864	0.5
154	Benin	Sub-Saharan Africa	155	3.340	0.03656	0.28665	0.35386	0.31910	0.4
155	Syria	Middle East and Northern Africa	156	3.006	0.05015	0.66320	0.47489	0.72193	0.1
156	Burundi	Sub-Saharan Africa	157	2.905	0.08658	0.01530	0.41587	0.22396	0.1
157	Togo	Sub-Saharan Africa	158	2.839	0.06727	0.20868	0.13995	0.28443	0.3

158 rows × 12 columns

In [3]:
```
# to display top 10 rows
sd.head(10)
```

Out[3]:

	Country	Region	Happiness Rank	Happiness Score	Standard Error	Economy (GDP per Capita)	Family	Health (Life Expectancy)	Freed
0	Switzerland	Western Europe	1	7.587	0.03411	1.39651	1.34951	0.94143	0.66
1	Iceland	Western Europe	2	7.561	0.04884	1.30232	1.40223	0.94784	0.62
2	Denmark	Western Europe	3	7.527	0.03328	1.32548	1.36058	0.87464	0.64
3	Norway	Western Europe	4	7.522	0.03880	1.45900	1.33095	0.88521	0.66
4	Canada	North America	5	7.427	0.03553	1.32629	1.32261	0.90563	0.63
5	Finland	Western Europe	6	7.406	0.03140	1.29025	1.31826	0.88911	0.64
6	Netherlands	Western Europe	7	7.378	0.02799	1.32944	1.28017	0.89284	0.61
7	Sweden	Western Europe	8	7.364	0.03157	1.33171	1.28907	0.91087	0.65
8	New Zealand	Australia and New Zealand	9	7.286	0.03371	1.25018	1.31967	0.90837	0.63
9	Australia	Australia and New Zealand	10	7.284	0.04083	1.33358	1.30923	0.93156	0.65

DATA CLEANING AND PRE_PROCESSING

In [4]:
```
sd.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 158 entries, 0 to 157
Data columns (total 12 columns):
 #   Column                         Non-Null Count  Dtype  
---  ------                         --------------  -----  
 0   Country                        158 non-null    object 
 1   Region                         158 non-null    object 
 2   Happiness Rank                 158 non-null    int64  
 3   Happiness Score                158 non-null    float64
 4   Standard Error                 158 non-null    float64
 5   Economy (GDP per Capita)       158 non-null    float64
 6   Family                         158 non-null    float64
 7   Health (Life Expectancy)       158 non-null    float64
 8   Freedom                        158 non-null    float64
 9   Trust (Government Corruption)  158 non-null    float64
 10  Generosity                     158 non-null    float64
 11  Dystopia Residual              158 non-null    float64
dtypes: float64(9), int64(1), object(2)
memory usage: 14.9+ KB
```

In [5]:
```
# to display summary of statistics
sd.describe()
```

Out[5]:

	Happiness Rank	Happiness Score	Standard Error	Economy (GDP per Capita)	Family	Health (Life Expectancy)	Freedom	(Go C
count	158.000000	158.000000	158.000000	158.000000	158.000000	158.000000	158.000000	1
mean	79.493671	5.375734	0.047885	0.846137	0.991046	0.630259	0.428615	
std	45.754363	1.145010	0.017146	0.403121	0.272369	0.247078	0.150693	
min	1.000000	2.839000	0.018480	0.000000	0.000000	0.000000	0.000000	
25%	40.250000	4.526000	0.037268	0.545808	0.856823	0.439185	0.328330	
50%	79.500000	5.232500	0.043940	0.910245	1.029510	0.696705	0.435515	
75%	118.750000	6.243750	0.052300	1.158448	1.214405	0.811013	0.549092	
max	158.000000	7.587000	0.136930	1.690420	1.402230	1.025250	0.669730	

In [6]:
```
#to display colums heading
sd.columns
```

Out[6]:
```
Index(['Country', 'Region', 'Happiness Rank', 'Happiness Score',
       'Standard Error', 'Economy (GDP per Capita)', 'Family',
       'Health (Life Expectancy)', 'Freedom', 'Trust (Government Corruptio
n)',
       'Generosity', 'Dystopia Residual'],
      dtype='object')
```

EDA and visualization

In [7]:
```
sns.pairplot(sd)
```

Out[7]:
```
<seaborn.axisgrid.PairGrid at 0x278e67d4520>
```

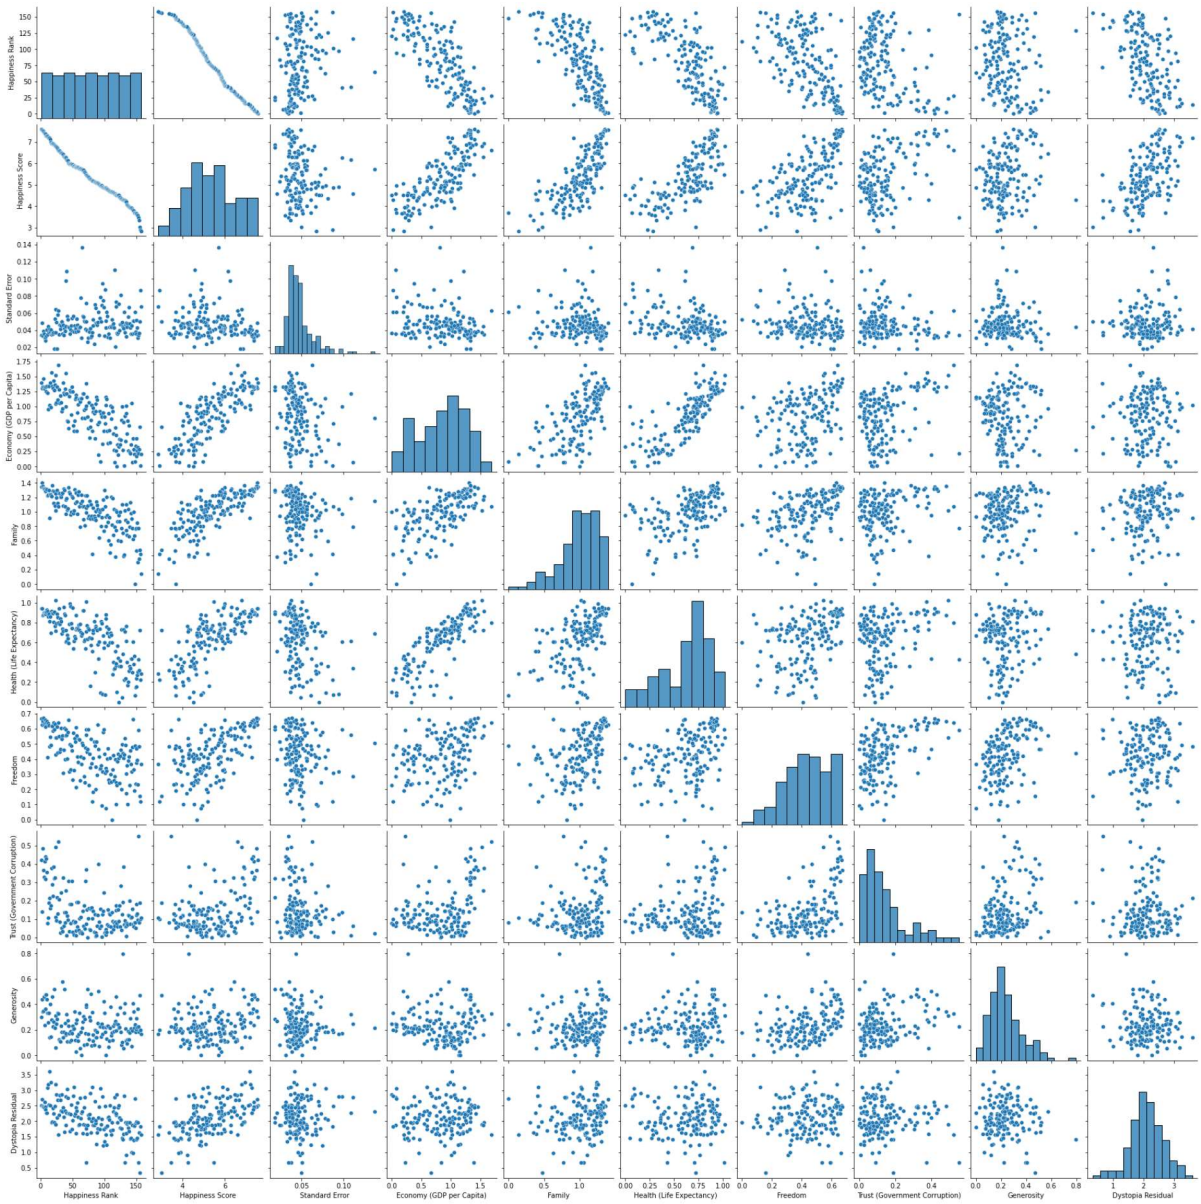

In [8]:
```
sns.distplot(sd['Economy (GDP per Capita)'])
```

```
C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: Fut
ureWarning: `distplot` is a deprecated function and will be removed in a futu
re version. Please adapt your code to use either `displot` (a figure-level fu
nction with similar flexibility) or `histplot` (an axes-level function for hi
stograms).
  warnings.warn(msg, FutureWarning)
```

Out[8]:
```
<AxesSubplot:xlabel='Economy (GDP per Capita)', ylabel='Density'>
```

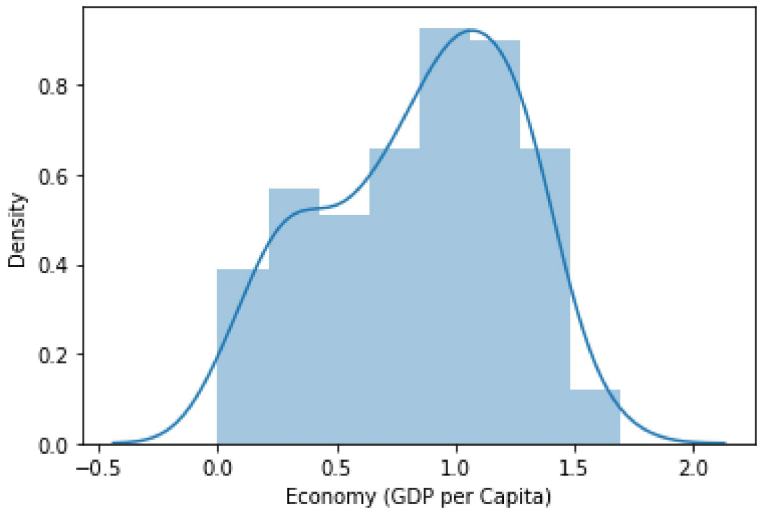

In [9]:
```
sd1=sd[['Happiness Rank', 'Happiness Score',
       'Standard Error', 'Economy (GDP per Capita)', 'Family',
       'Health (Life Expectancy)', 'Freedom', 'Trust (Government Corruption)',
       'Generosity', 'Dystopia Residual']]
```

In [10]:
```
sns.heatmap(sd1.corr())
```

Out[10]: <AxesSubplot:>

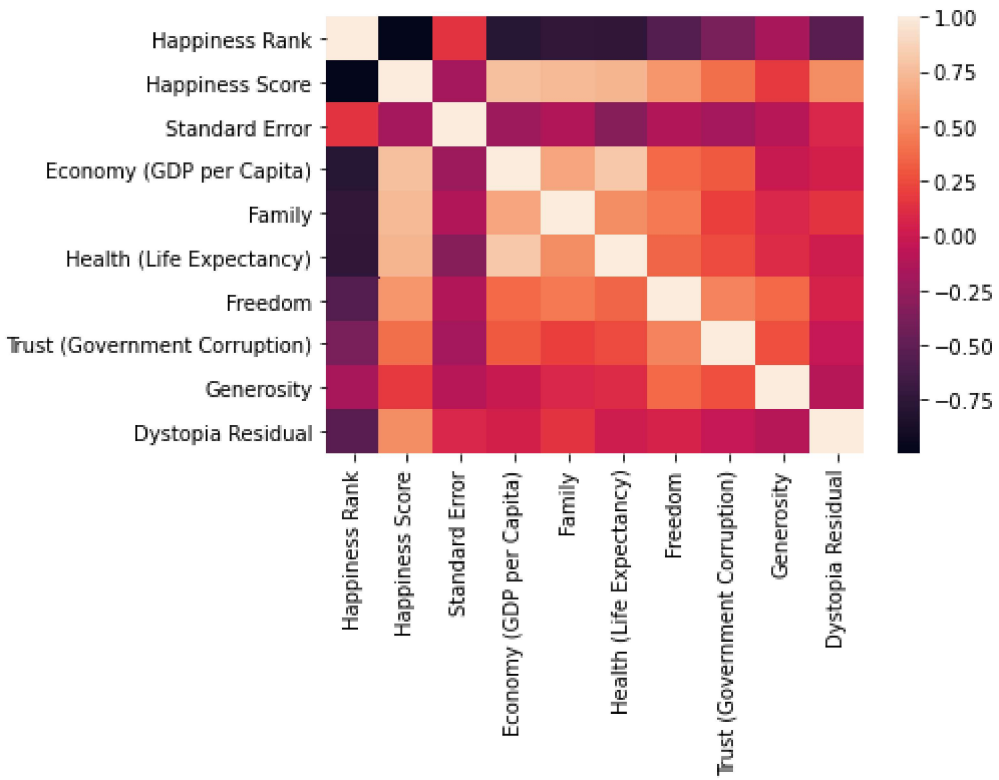

TO TRAIN THE MODEL _MODEL BUILDING

we are goint train Liner Regression model; we need to split out the data into two varibles x and y where x is independent on x (output) and y is dependent on x(output) adress coloumn as it is not required our model

In [11]:
```
x= sd1[['Happiness Rank', 'Happiness Score',
       'Standard Error', 'Economy (GDP per Capita)', 'Family',
       'Health (Life Expectancy)', 'Freedom', 'Trust (Government Corruption)',
       'Generosity']]
y=sd1['Dystopia Residual']
```

In [12]:
```
# To split my dataset  into training data and test data
from sklearn .model_selection import train_test_split
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.4)
```

In [13]:
```
from sklearn.linear_model import LinearRegression

lr=LinearRegression()
lr.fit(x_train,y_train)
```

Out[13]: LinearRegression()

In [14]:
```
from sklearn.linear_model import LinearRegression

lr=LinearRegression()
lr.fit(x_train,y_train)
```

Out[14]:
```
LinearRegression()
```

In [15]:
```
print(lr.intercept_)
```

```
0.0004562324714294519
```

In [16]:
```
coeff= pd.DataFrame(lr.coef_,x.columns,columns=['Co-efficient'])
coeff
```

Out[16]:

	Co-efficient
Happiness Rank	-0.000002
Happiness Score	0.999843
Standard Error	0.000822
Economy (GDP per Capita)	-1.000088
Family	-0.999695
Health (Life Expectancy)	-0.999794
Freedom	-0.999881
Trust (Government Corruption)	-0.999367
Generosity	-1.000028

In [17]:
```
prediction = lr.predict(x_test)
plt.scatter(y_test,prediction)
```

Out[17]:
```
<matplotlib.collections.PathCollection at 0x278ed20f820>
```

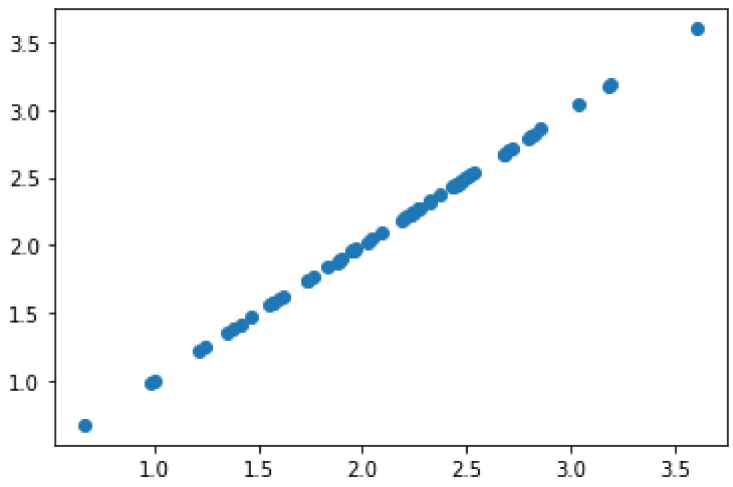

In [18]:
```
print(lr.score(x_test,y_test))
```

```
0.999999719372505
```

In [19]:
```
lr.score(x_train,y_train)
```

Out[19]:
```
0.9999997492013132
```

In [20]:
```
from sklearn.linear_model import Ridge,Lasso
```

In [21]:
```
dr=Ridge(alpha=10)
dr.fit(x_train,y_train)
```

Out[21]:
```
Ridge(alpha=10)
```

In [22]:
```
dr.score(x_test,y_test)
```

Out[22]:
```
0.6426374842919074
```

In [23]:
```
dr.score(x_train,y_train)
```

Out[23]:
```
0.6163541764886483
```

In [24]:
```
la=Lasso(alpha=10)
la.fit(x_train,y_train)
```

Out[24]:
```
Lasso(alpha=10)
```

In [25]:
```
la.score(x_test,y_test)
```

Out[25]:
```
0.039420011867124294
```

In [26]:
```
la.score(x_train,y_train)
```

Out[26]:
```
0.039746035848592265
```

In [ ]:
```

```