


Mockito

Exercise 1: Mocking and Stubbing

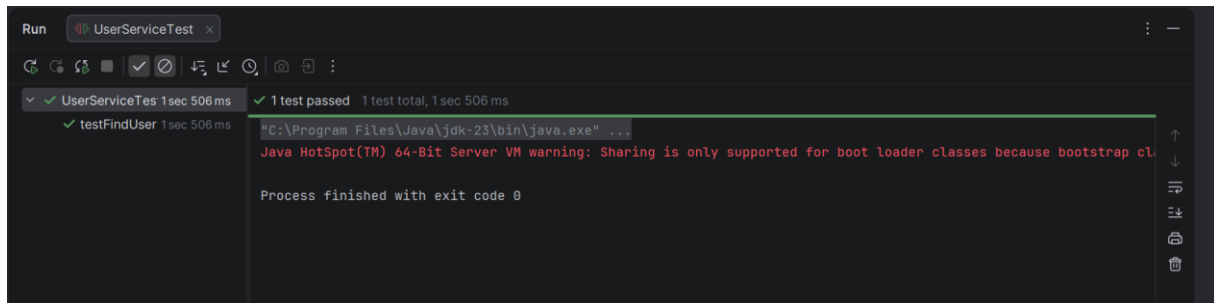


The screenshot shows the 'Run' window of an IDE. The test 'UserServiceTest' has passed successfully. The output console shows the following text:

```
"C:\Program Files\Java\jdk-23\bin\java.exe" ...  
Java HotSpot(TM) 64-Bit Server VM warning: Sharing is only supported for boot loader classes because bootstrap cl  
Process finished with exit code 0
```

Exercise 2: Verifying Interactions


Correct Case:

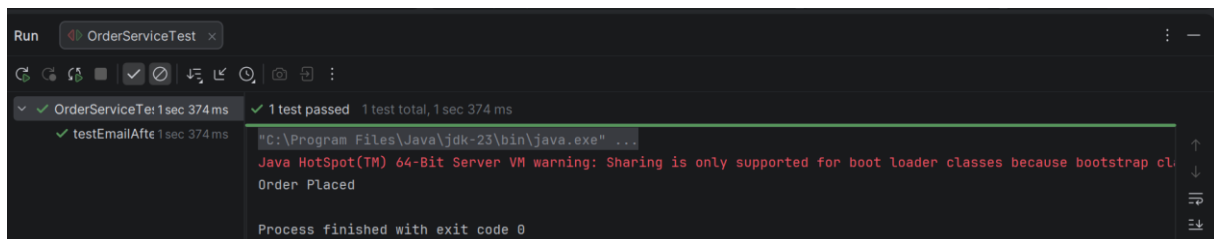

The screenshot shows the 'Run' window of an IDE. The test 'OrderServiceTest' has passed successfully. The output console shows the following text:

```
"C:\Program Files\Java\jdk-23\bin\java.exe" ...  
Java HotSpot(TM) 64-Bit Server VM warning: Sharing is only supported for boot loader classes because bootstrap cl  
Order Placed  
Process finished with exit code 0
```

Wrong Case:

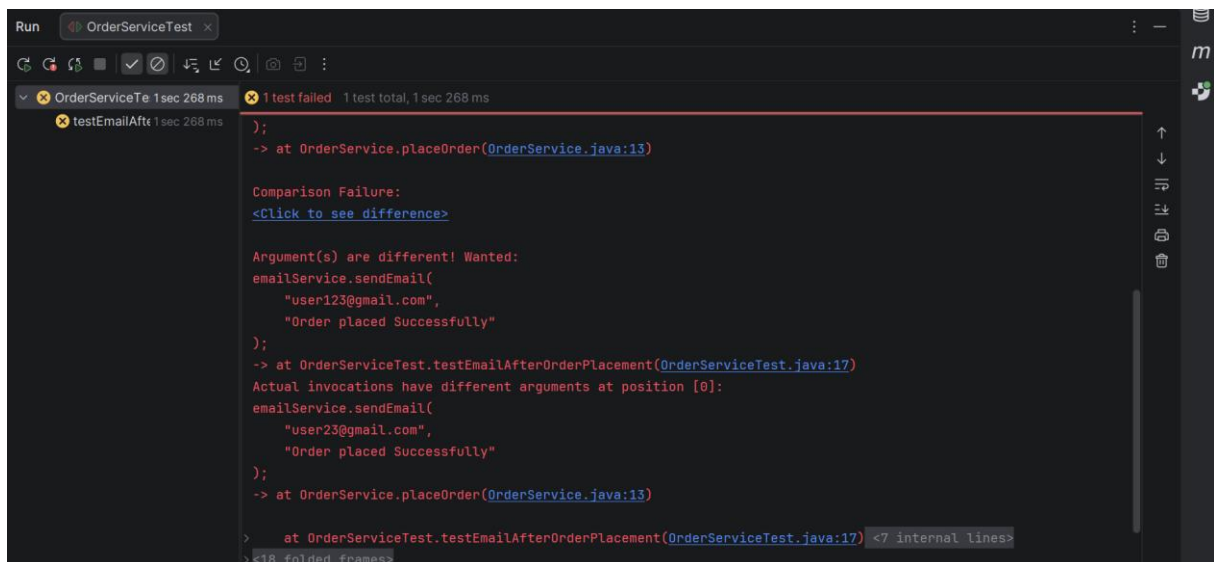

The screenshot shows the 'Run' window of an IDE. The test 'OrderServiceTest' has failed. The output console shows the following text:

```
);  
-> at OrderService.placeOrder(OrderService.java:13)  
  
Comparison Failure:  
<Click to see difference>  
  
Argument(s) are different! Wanted:  
emailService.sendEmail(  
    "user123@gmail.com",  
    "Order placed Successfully"  
);  
-> at OrderServiceTest.testEmailAfterOrderPlacement(OrderServiceTest.java:17)  
Actual invocations have different arguments at position [0]:  
emailService.sendEmail(  
    "user23@gmail.com",  
    "Order placed Successfully"  
);  
-> at OrderService.placeOrder(OrderService.java:13)  
> at OrderServiceTest.testEmailAfterOrderPlacement(OrderServiceTest.java:17) <7 internal lines>  
> <18 folded frames>
```