


# How To ByPass System.setProperty


The following illustrates how to add the driver executable files “i.e., chromedriver.exe” to Environment Variables - System Variables and bypass writing System.setProperty:

1. Copy the path “i.e., "C:\Users\Rex Allen Jones II\Downloads\Drivers" of driver executable files location
2. Access the Advanced system settings via System

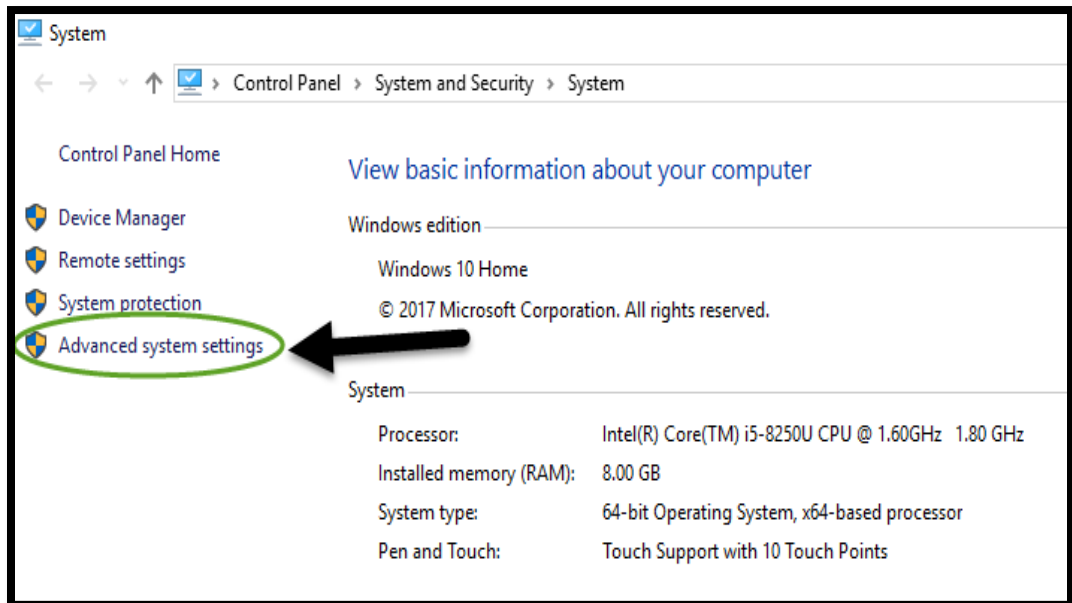


3. Click the Advanced tab
4. Click the Environment Variables button

5. Select Path within System variables section

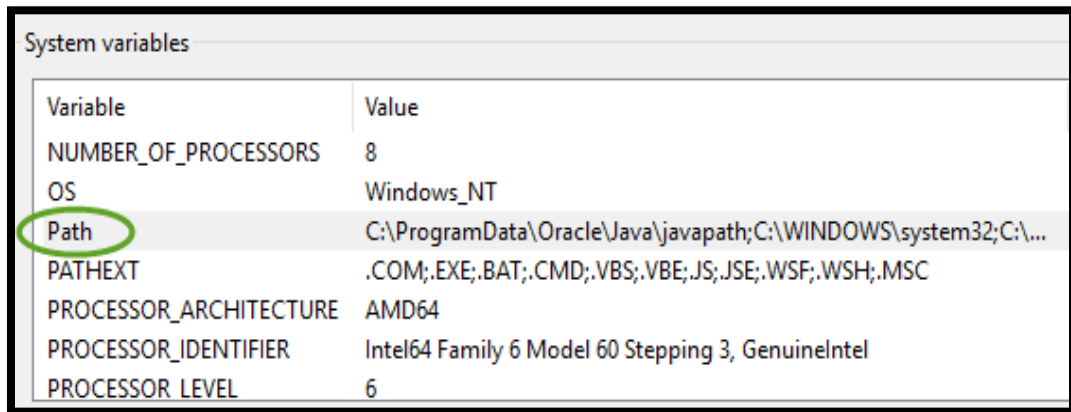

6. Click the Edit button
7. Click the New button
8. Copy the path "i.e., "C:\Users\Rex Allen Jones II\Downloads\Drivers" of driver executable files location

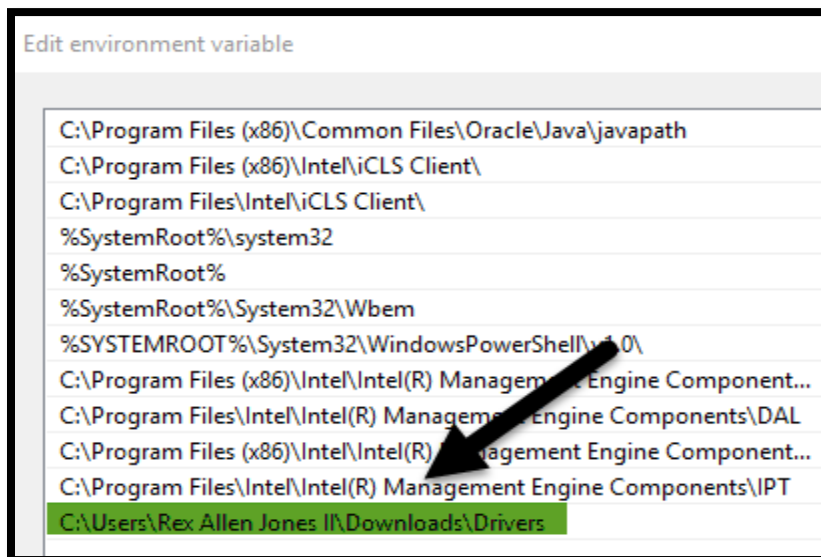

9. Click OK
10. Click Ok
11. Click OK