
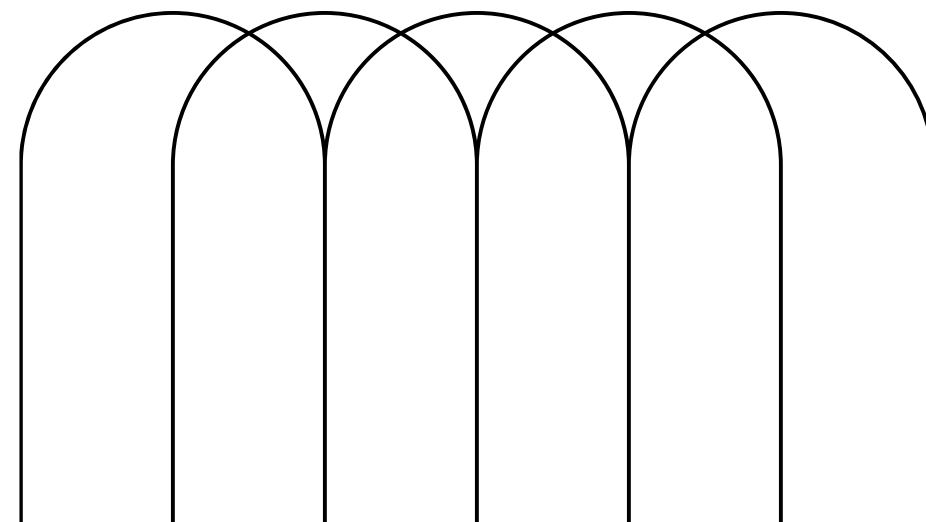


Styling Lists, Position & Overflow

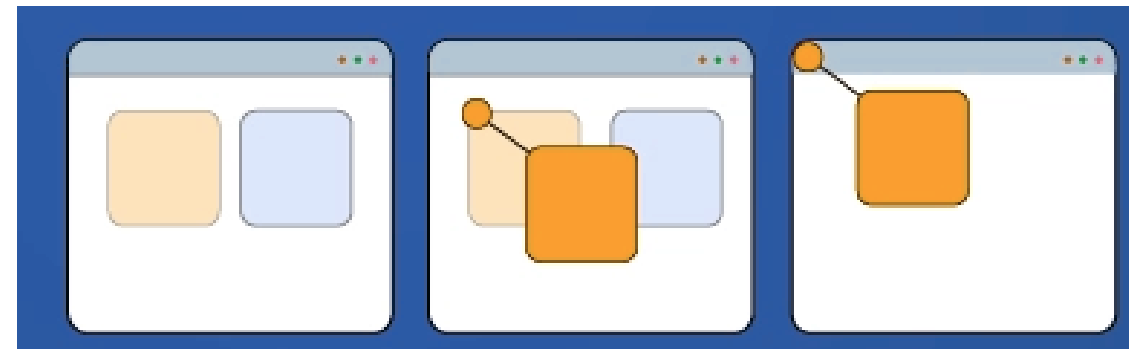

Styling Lists

Lists are fundamental elements in HTML, used for organizing content. CSS allows us to style lists in various ways, enhancing their appearance and usability.

list-style-type

Defines the type of marker for list items.

Example:

```
<style>
ul {
list-style-type: circle;
}
ol {
list-style-type: upper-roman;
}
</style>
```

- **ul options:** disc, circle, square, none
- **ol options:** decimal, lower-alpha, upper-alpha, lower-roman

list-style-image

Uses an image instead of default bullets.

Example:

```
<style>
ul {
list-style-image: url('custom-bullet.png'); }
</style>
```

Unordered list

- ? One
- ✌ Two
- ♥ Three
- ? Four

Ordered list

- ➡ One
- 😄 Two
- 👍 Three
- 4 Four

list-style-position

Defines whether bullets/numbers are inside or outside the list item.

Example:

```
<style>
ul {
list-style-position: inside; }
</style>
```

- **Options:** inside, outside (default)


Styling Lists

Removing Default List Styling

Eliminates default bullets and indentation

```
<style>
ul {
list-style: none;
padding-left: 0;
}
</style>
```

Example

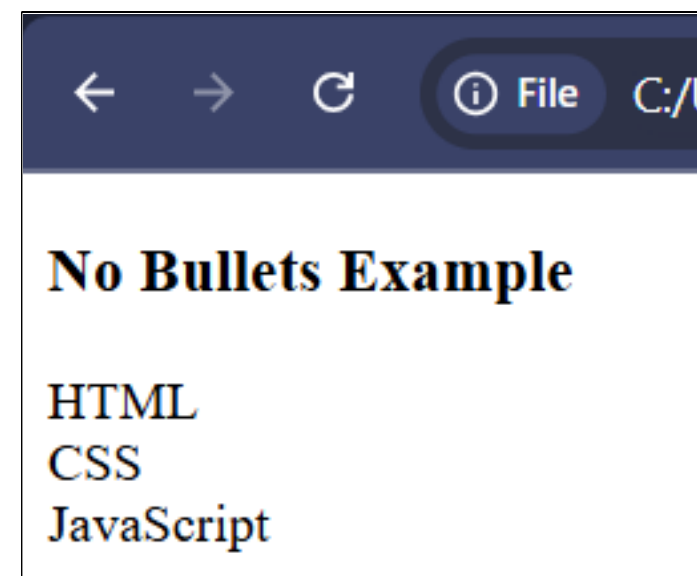


Output

Custom Bullet Points (using ::before)

Add icons, emojis, or symbols manually before each item

```
<style>
ul {
list-style: none;
padding-left: 0;
}
ul li::before {
content: '✓'; /* Custom symbol */
color: red; /* Symbol color */
margin-right: 8px;
}
</style>
```

Example

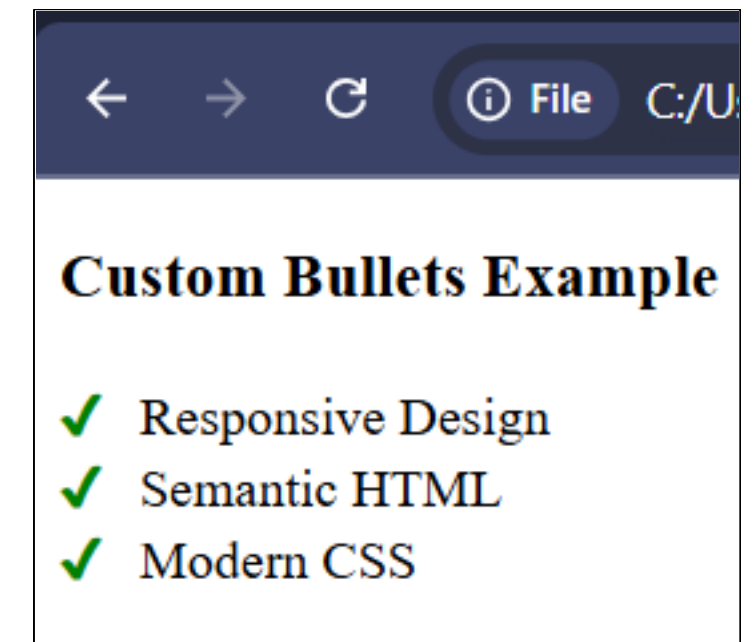

Output

CSS Position


CSS provides a powerful property called position that allows developers to control how elements are positioned within a web page. Understanding how position works is essential for creating flexible and responsive layouts.

1. static (Default)

Static positioned elements are placed according to the normal document flow, without any additional positioning applied.

```
<style>
.box {
  position: static;
  background: lightblue;
  padding: 20px;
}
</style>
```

Example

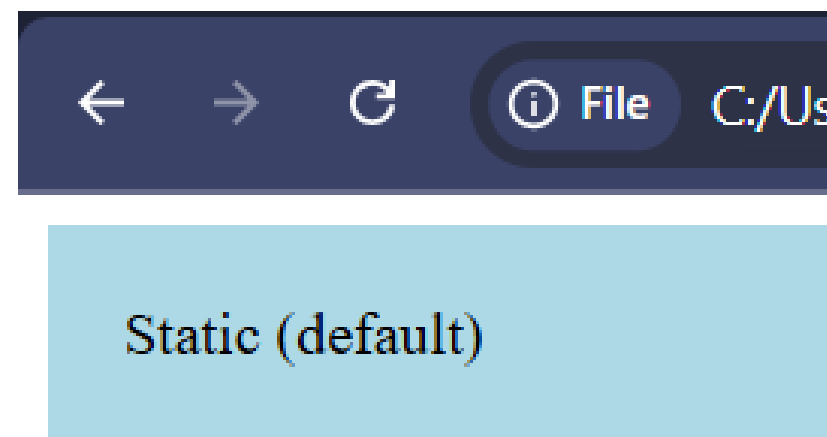


Output

2. relative

When an element is given position: relative;, it remains in the normal document flow but can be adjusted using the top, right, bottom, and left properties relative to its original position.

```
<style>
.box {
  position: relative;
  top: 20px;
  left: 20px;
  background: lightgreen;
  padding: 20px;
}
</style>
```

Example

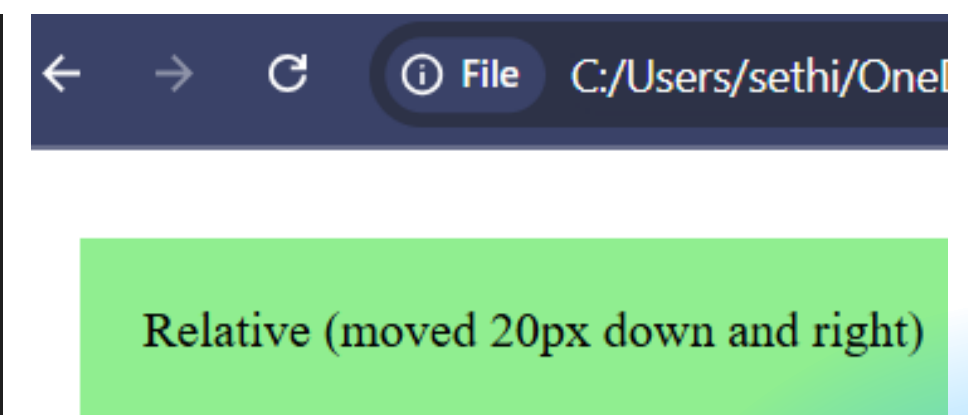

Output

CSS Position

3. Absolute

An element with `position: absolute;` is removed from the normal document flow and positioned relative to its nearest positioned ancestor or `<html>` element.

```
<style>
  .box {
    position: absolute;
    top: 10px;
    right: 20px;
    background: coral;
    padding: 15px;
  }
</style>
```

Example



Absolute (top-right corner)

Output

4. Fixed

An element with `position: fixed;` is completely removed from the document flow and positioned relative to the viewport. It does not move when scrolling the page.

```
<style>
  .box {
    position: fixed;
    top: 10px;
    left: 20px;
    background: gold;
    padding: 15px;
  }
</style>
```




Fixed (stays while scrolling)

CSS Position

5. sticky:

A sticky positioned element behaves like a relative element until it reaches a defined scroll position, after which it sticks to the viewport.

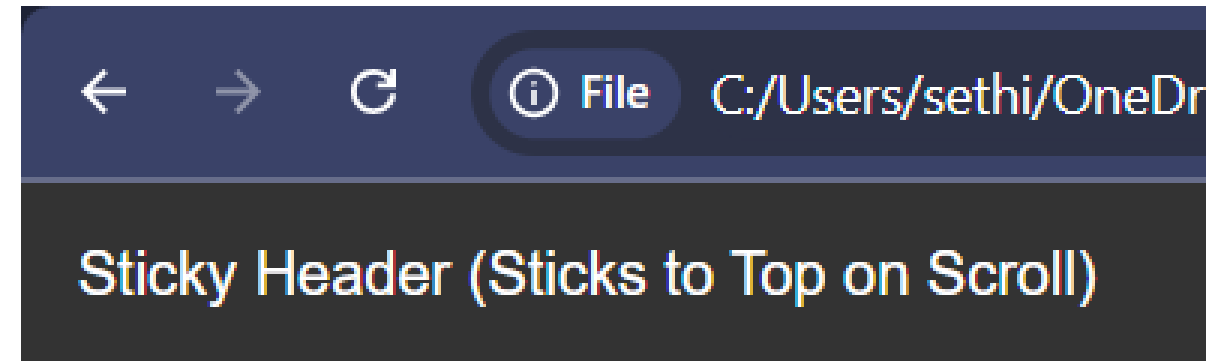

Output

```
<style>
  header {
    position: sticky;
    top: 0;
    background: #333;
    color: white;
    padding: 15px;
    z-index: 10;
  }
```


Example

CSS z-index:

The z-index property in CSS controls the vertical stacking order of elements that overlap. It applies to elements that have a position value of relative, absolute, fixed, or sticky (not static).

```
<style>
.box1 {
  width: 200px;
  height: 200px;
  background-color: orange;
  position: absolute;
  top: 50px;
  left: 50px;
  z-index: 1;
}

.box2 {
  width: 200px;
  height: 200px;
  background-color: blue;
  position: absolute;
  top: 100px;
  left: 100px;
  z-index: 2; /* This appears on top */
}
```

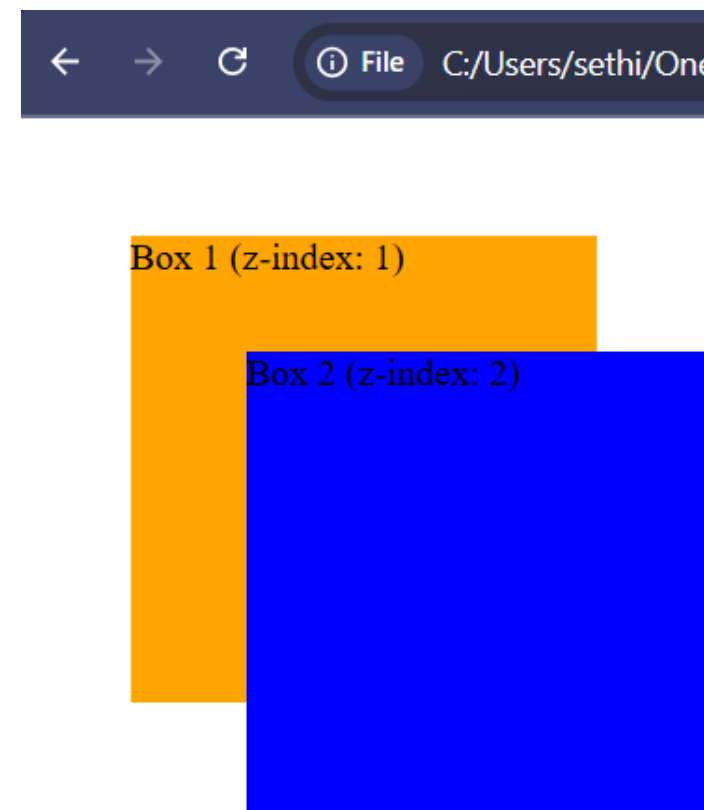


How z-index Works (Summary)

- Higher z-index = element appears on top.
- Default is auto (follows source order).
- Only works on elements with position set (not static).
- Creates a stacking context if z-index is set.
- Negative values can place elements behind their parent.


CSS Overflow

The overflow property in CSS determines how content is displayed when it overflows the boundaries of its container.


1. **visible (default)** – Content spills outside the box without clipping.
2. **hidden** – Extra content is clipped, no scrollbars shown.
3. **scroll** – Scrollbars always visible, even if not needed.
4. **auto** – Scrollbars appear only when content overflows.
5. **overflow** – x, overflow-y – Control horizontal & vertical overflow separately.

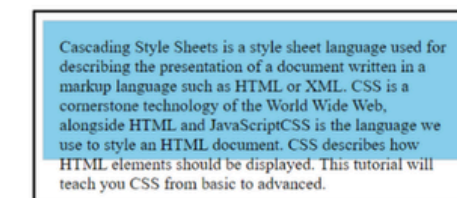


overflow: visible;

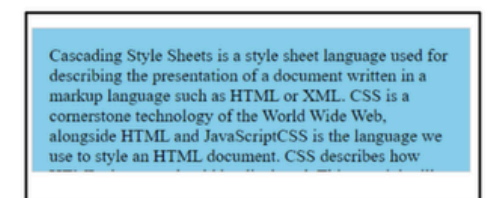


overflow: hidden;

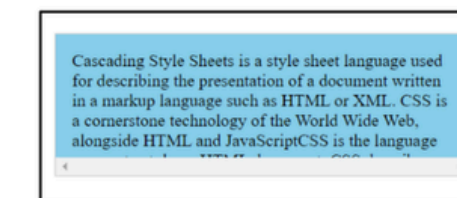

overflow: scroll;

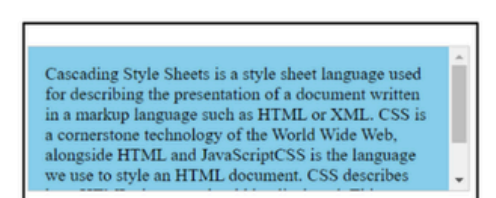

overflow: auto;

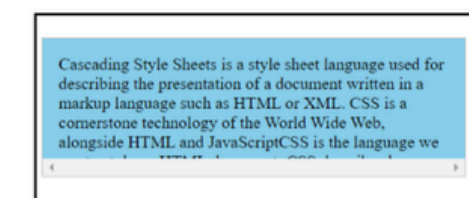

overflow-x: scroll;
overflow-y: hidden;

```
<style>
.box-visible {
  overflow: visible; /* 1. visible (default) - Content overflows freely */
}
.box-hidden {
  overflow: hidden; /* 2. hidden - Overflowing content is clipped */
}
.box-scroll {
  overflow: scroll; /* 3. scroll - Always shows scrollbars */
}
.box-auto {
  overflow: auto; /* 4. auto - Scrollbars only appear when needed */
}
.box-custom {
  overflow-x: hidden; /* 5. overflow-x and overflow-y - Axis-specific overflow control */
  overflow-y: scroll;
}
</style>
```



THANK YOU

PHONE NUMBER

(+91) 778 899 2897

WEBSITE

www.indixpert.com