

```
In [1]: import pandas as pd
import numpy as np
from sklearn import preprocessing
import matplotlib.pyplot as plt
import seaborn as sns
sns.set(style="white")
sns.set(style="whitegrid", color_codes=True)
import warnings
warnings.simplefilter(action='ignore')
```

```
In [3]: train_df=pd.read_csv(r"C:\Users\dinesh reddy\AppData\Local\Microsoft\Windows\I
train_df
```

Out[3]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500
...	...	...	...	...	...	...	...	...	...	...
886	887	0	2	Montvila, Rev. Juozas	male	27.0	0	0	211536	13.0000
887	888	1	1	Graham, Miss. Margaret Edith	female	19.0	0	0	112053	30.0000
888	889	0	3	Johnston, Miss. Catherine Helen "Carrie"	female	NaN	1	2	W./C. 6607	23.4500
889	890	1	1	Behr, Mr. Karl Howell	male	26.0	0	0	111369	30.0000
890	891	0	3	Dooley, Mr. Patrick	male	32.0	0	0	370376	7.7500

891 rows × 12 columns

```
In [4]: train_df.head(10)
```

```
Out[4]:
```

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	C
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500	
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833	
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250	
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000	C
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500	
5	6	0	3	Moran, Mr. James	male	NaN	0	0	330877	8.4583	
6	7	0	1	McCarthy, Mr. Timothy J	male	54.0	0	0	17463	51.8625	
7	8	0	3	Palsson, Master. Gosta Leonard	male	2.0	3	1	349909	21.0750	
8	9	1	3	Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)	female	27.0	0	2	347742	11.1333	
9	10	1	2	Nasser, Mrs. Nicholas (Adele Achem)	female	14.0	1	0	237736	30.0708	



```
In [5]: train_df.shape
```

```
Out[5]: (891, 12)
```

```
In [6]: test_df=pd.read_csv(r"C:\Users\dinesh reddy\AppData\Local\Microsoft\Windows\IN
test_df
```

Out[6]:

	PassengerId	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin
0	892	3	Kelly, Mr. James	male	34.5	0	0	330911	7.8292	NaN
1	893	3	Wilkes, Mrs. James (Ellen Needs)	female	47.0	1	0	363272	7.0000	NaN
2	894	2	Myles, Mr. Thomas Francis	male	62.0	0	0	240276	9.6875	NaN
3	895	3	Wirz, Mr. Albert	male	27.0	0	0	315154	8.6625	NaN
4	896	3	Hirvonen, Mrs. Alexander (Helga E Lindqvist)	female	22.0	1	1	3101298	12.2875	NaN
...	...	...	...	...	...	...	...	...	...	...
413	1305	3	Spector, Mr. Woolf	male	NaN	0	0	A.5. 3236	8.0500	NaN
414	1306	1	Oliva y Ocana, Dona. Fermina	female	39.0	0	0	PC 17758	108.9000	C105
415	1307	3	Saether, Mr. Simon Sivertsen	male	38.5	0	0	SOTON/O.Q. 3101262	7.2500	NaN
416	1308	3	Ware, Mr. Frederick	male	NaN	0	0	359309	8.0500	NaN
417	1309	3	Peter, Master. Michael J	male	NaN	1	1	2668	22.3583	NaN

418 rows × 11 columns

```
In [7]: train_df.describe
```

```
Out[7]: <bound method NDFrame.describe of      PassengerId  Survived  Pclass
0                1         0       3  \
1                2         1       1
2                3         1       3
3                4         1       1
4                5         0       3
..            ...      ...      ...
886            887         0       2
887            888         1       1
888            889         0       3
889            890         1       1
890            891         0       3
```

	Name	Sex	Age	SibSp
0	Braund, Mr. Owen Harris	male	22.0	1
\				
1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1
2	Heikkinen, Miss. Laina	female	26.0	0
3	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1
4	Allen, Mr. William Henry	male	35.0	0
..	...	...	...	...
886	Montvila, Rev. Juozas	male	27.0	0
887	Graham, Miss. Margaret Edith	female	19.0	0
888	Johnston, Miss. Catherine Helen "Carrie"	female	NaN	1
889	Behr, Mr. Karl Howell	male	26.0	0
890	Dooley, Mr. Patrick	male	32.0	0

	Parch	Ticket	Fare	Cabin	Embarked
0	0	A/5 21171	7.2500	NaN	S
1	0	PC 17599	71.2833	C85	C
2	0	STON/O2. 3101282	7.9250	NaN	S
3	0	113803	53.1000	C123	S
4	0	373450	8.0500	NaN	S
..	...	...	...	...	...
886	0	211536	13.0000	NaN	S
887	0	112053	30.0000	B42	S
888	2	W./C. 6607	23.4500	NaN	S
889	0	111369	30.0000	C148	C
890	0	370376	7.7500	NaN	Q

```
[891 rows x 12 columns]>
```

```
In [8]: train_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 12 columns):
#   Column          Non-Null Count  Dtype  
---  -
0   PassengerId      891 non-null    int64  
1   Survived         891 non-null    int64  
2   Pclass           891 non-null    int64  
3   Name             891 non-null    object  
4   Sex              891 non-null    object  
5   Age              714 non-null    float64 
6   SibSp            891 non-null    int64  
7   Parch            891 non-null    int64  
8   Ticket           891 non-null    object  
9   Fare             891 non-null    float64 
10  Cabin            204 non-null    object  
11  Embarked         889 non-null    object  
dtypes: float64(2), int64(5), object(5)
memory usage: 83.7+ KB
```

```
In [10]: test_df.describe()
```

```
Out[10]:
```

	PassengerId	Pclass	Age	SibSp	Parch	Fare
<b>count</b>	418.000000	418.000000	332.000000	418.000000	418.000000	417.000000
<b>mean</b>	1100.500000	2.265550	30.272590	0.447368	0.392344	35.627188
<b>std</b>	120.810458	0.841838	14.181209	0.896760	0.981429	55.907576
<b>min</b>	892.000000	1.000000	0.170000	0.000000	0.000000	0.000000
<b>25%</b>	996.250000	1.000000	21.000000	0.000000	0.000000	7.895800
<b>50%</b>	1100.500000	3.000000	27.000000	0.000000	0.000000	14.454200
<b>75%</b>	1204.750000	3.000000	39.000000	1.000000	0.000000	31.500000
<b>max</b>	1309.000000	3.000000	76.000000	8.000000	9.000000	512.329200

```
In [11]: test_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 418 entries, 0 to 417
Data columns (total 11 columns):
#   Column          Non-Null Count  Dtype
---  -
0   PassengerId     418 non-null   int64
1   Pclass          418 non-null   int64
2   Name            418 non-null   object
3   Sex             418 non-null   object
4   Age             332 non-null   float64
5   SibSp           418 non-null   int64
6   Parch           418 non-null   int64
7   Ticket          418 non-null   object
8   Fare            417 non-null   float64
9   Cabin           91 non-null    object
10  Embarked        418 non-null   object
dtypes: float64(2), int64(4), object(5)
memory usage: 36.0+ KB
```

```
In [12]: test_df.head(10)
```

```
Out[12]:
```

	PassengerId	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embar
0	892	3	Kelly, Mr. James	male	34.5	0	0	330911	7.8292	NaN	
1	893	3	Wilkes, Mrs. James (Ellen Needs)	female	47.0	1	0	363272	7.0000	NaN	
2	894	2	Myles, Mr. Thomas Francis	male	62.0	0	0	240276	9.6875	NaN	
3	895	3	Wirz, Mr. Albert	male	27.0	0	0	315154	8.6625	NaN	
4	896	3	Hirvonen, Mrs. Alexander (Helga E Lindqvist)	female	22.0	1	1	3101298	12.2875	NaN	
5	897	3	Svensson, Mr. Johan Cervin	male	14.0	0	0	7538	9.2250	NaN	
6	898	3	Connolly, Miss. Kate	female	30.0	0	0	330972	7.6292	NaN	
7	899	2	Caldwell, Mr. Albert Francis	male	26.0	1	1	248738	29.0000	NaN	
8	900	3	Abraham, Mrs. Joseph (Sophie Halaut Easu)	female	18.0	0	0	2657	7.2292	NaN	
9	901	3	Davies, Mr. John Samuel	male	21.0	2	0	A/4 48871	24.1500	NaN	






```
In [13]: train_df.isnull().sum()
```

```
Out[13]: PassengerId      0  
Survived      0  
Pclass      0  
Name      0  
Sex      0  
Age      177  
SibSp      0  
Parch      0  
Ticket      0  
Fare      0  
Cabin      687  
Embarked      2  
dtype: int64
```

```
In [14]: test_df.isnull().sum()
```

```
Out[14]: PassengerId      0  
Pclass      0  
Name      0  
Sex      0  
Age      86  
SibSp      0  
Parch      0  
Ticket      0  
Fare      1  
Cabin      327  
Embarked      0  
dtype: int64
```

```
In [15]: ax=train_df["Age"].hist(bins=15,density=True,stacked=True,color='cyan',alpha=0.5)
train_df["Age"].plot(kind='density',color='teal')
ax.set(xlabel='Age')
plt.xlim(-10,88)
plt.show()
```

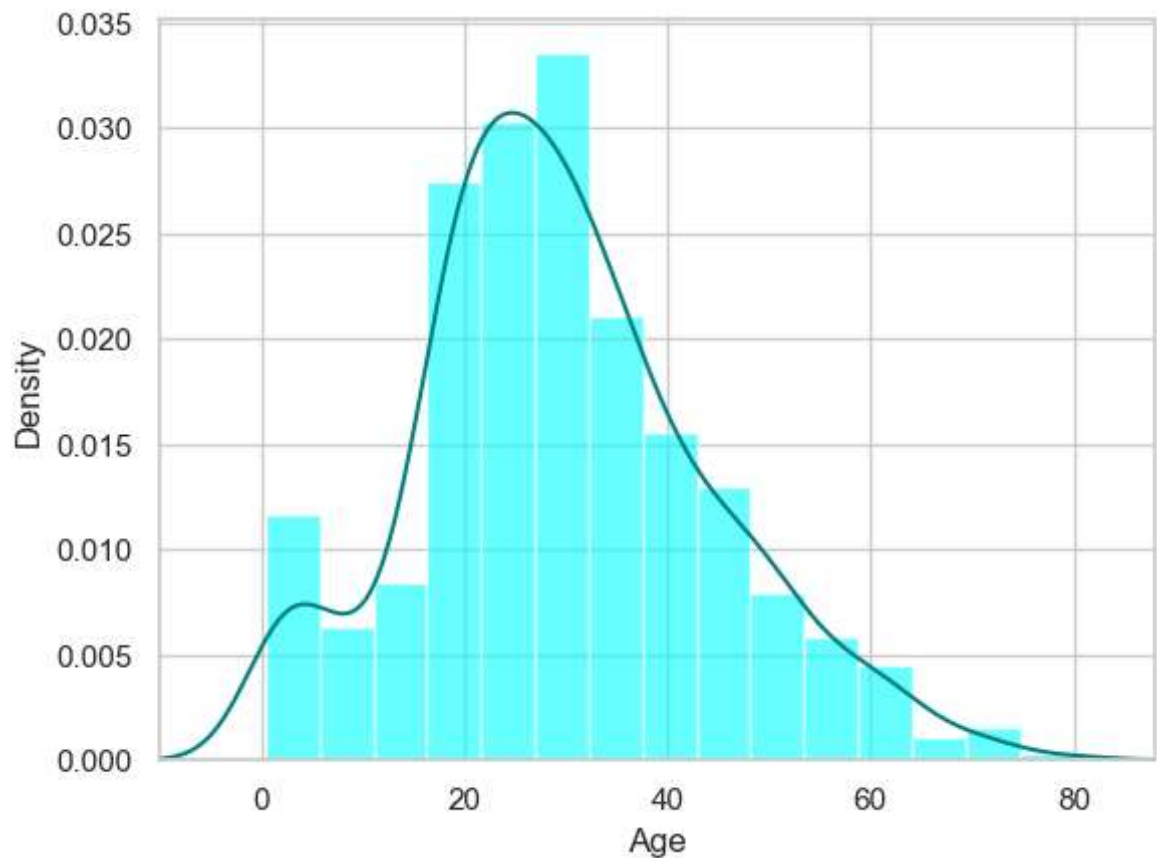

```
In [16]: print(train_df["Age"].mean(skipna=True))
print(train_df["Age"].median(skipna=True))
```

```
29.69911764705882
28.0
```

```
In [17]: print((train_df['Cabin'].isnull().sum()/train_df.shape[0])*100)
```

```
77.10437710437711
```

```
In [18]: print((train_df['Embarked'].isnull().sum()/train_df.shape[0])*100)
```

```
0.22446689113355783
```

```
In [19]: print('Boarded passenger grouped ny port of embarkation(C=Cherbourg,Q=Queensto
print(train_df['Embarked'].value_counts(1))
sns.countplot(x='Embarked',data=train_df)
plt.show()
```

Boarded passenger grouped ny port of embarkation(C=Cherbourg,Q=Queenstown,S=Southampton)


Embarked

S 0.724409

C 0.188976

Q 0.086614

Name: proportion, dtype: float64

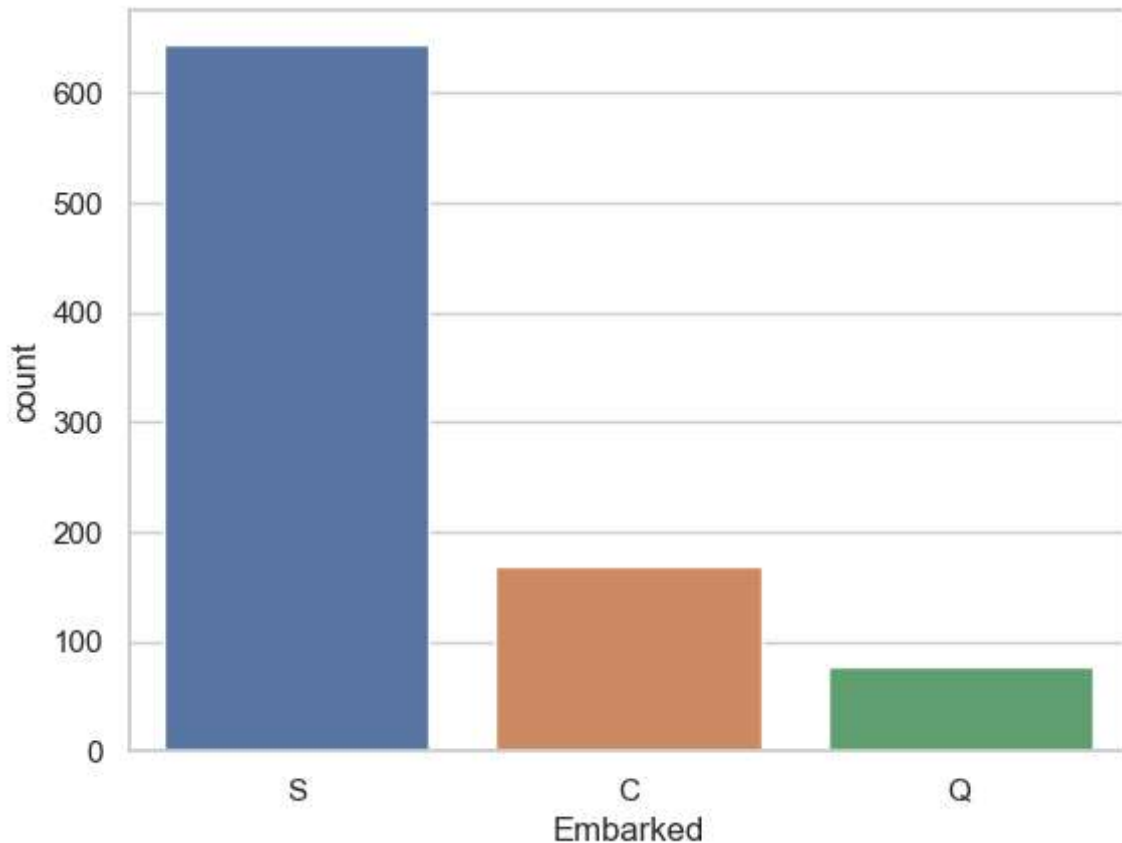

```
In [21]: print(train_df['Embarked'].value_counts().idxmax())
```

S

```
In [22]: train_data=train_df.copy()
train_data['Age'].fillna(train_df["Age"].median(skipna=True),inplace=True)
train_data['Embarked'].fillna(train_df["Embarked"].value_counts().idxmax(),inplace=True)
train_data.drop('Cabin',axis=1,inplace=True)
```

```
In [23]: train_data.isnull().sum()
```


```
Out[23]: PassengerId    0
Survived              0
Pclass               0
Name                 0
Sex                  0
Age                  0
SibSp                0
Parch                0
Ticket              0
Fare                 0
Embarked             0
dtype: int64
```

```
In [24]: train_data.head()
```

```
Out[24]:
```

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Embarked
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500	S
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...)	female	38.0	1	0	PC 17599	71.2833	C
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250	S
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000	C
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500	S

```
In [26]: plt.figure(figsize=(15,8))
ax=train_df["Age"].hist(bins=15,density=True,stacked=True,color='teal',alpha=0.5)
train_df['Age'].plot(kind='density',color='teal')
ax=train_data['Age'].hist(bins=15,density=True,stacked=True,color='orange',alpha=0.5)
train_data['Age'].plot(kind='density',color='orange')
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

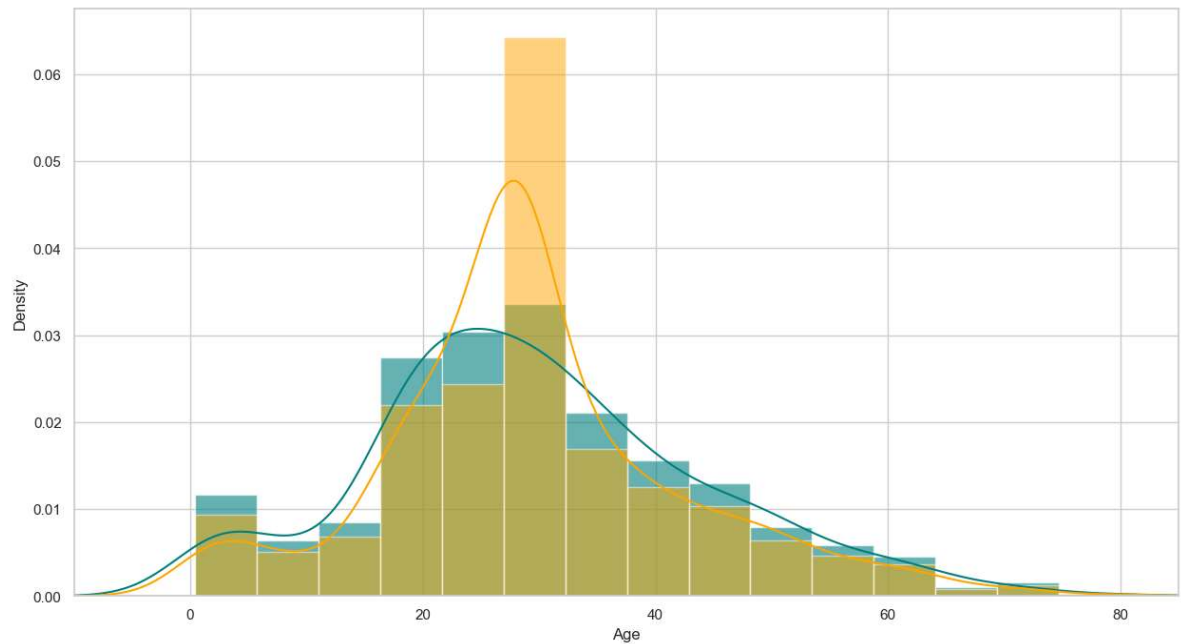

```
In [27]: train_data['TravelAlone']=np.where((train_data["SibSp"]+train_data["Parch"])>0,1,0)
train_data.drop('SibSp',axis=1, inplace=True)
```

```
In [28]: train_data.drop('Parch',axis=1, inplace=True)
```

```
In [29]: training=pd.get_dummies(train_data, columns=["Pclass","Embarked","Sex"])
training.drop('Sex_female', axis=1, inplace=True)
training.drop('PassengerId', axis=1, inplace=True)
training.drop('Name', axis=1, inplace=True)
training.drop('Ticket', axis=1, inplace=True)
final_train = training
final_train.head()
```

Out[29]:

	Survived	Age	Fare	TravelAlone	Pclass_1	Pclass_2	Pclass_3	Embarked_C	Embarked_
0	0	22.0	7.2500	1	False	False	True	False	Fal:
1	1	38.0	71.2833	1	True	False	False	True	Fal:
2	1	26.0	7.9250	1	False	False	True	False	Fal:
3	1	35.0	53.1000	1	True	False	False	False	Fal:
4	0	35.0	8.0500	1	False	False	True	False	Fal:



```
In [30]: test_df.isnull().sum()
```

```
Out[30]: PassengerId      0
Pclass      0
Name        0
Sex         0
Age        86
SibSp       0
Parch       0
Ticket      0
Fare        1
Cabin     327
Embarked    0
dtype: int64
```

```


In [31]: test_data = test_df.copy()
test_data["Age"].fillna(train_df["Age"].median(skipna=True), inplace=True)
test_data["Fare"].fillna(train_df["Fare"].median(skipna=True), inplace=True)
test_data.drop('Cabin', axis=1, inplace=True)
test_data['TravelAlone']=np.where((test_data["SibSp"]+test_data["Parch"])>0,0,0)
test_data.drop('SibSp', axis=1, inplace=True)
test_data.drop('Parch', axis=1, inplace=True)
testing = pd.get_dummies(test_data, columns=["Pclass", "Embarked", "Sex"])
testing.drop('Sex_female', axis=1, inplace=True)
testing.drop('PassengerId', axis=1, inplace=True)
testing.drop('Name', axis=1, inplace=True)
testing.drop('Ticket', axis=1, inplace=True)
final_test = testing
final_test.head()

```


Out[31]:

	Age	Fare	TravelAlone	Pclass_1	Pclass_2	Pclass_3	Embarked_C	Embarked_Q	Embarked_S
0	34.5	7.8292	1	False	False	True	False	True	
1	47.0	7.0000	0	False	False	True	False	False	
2	62.0	9.6875	1	False	True	False	False	True	
3	27.0	8.6625	1	False	False	True	False	False	
4	22.0	12.2875	0	False	False	True	False	False	

```
In [32]: plt.figure(figsize=(15,8))
ax = sns.kdeplot(final_train["Age"][final_train.Survived == 1], color="darkturquoise", fill=True)
sns.kdeplot(final_train["Age"][final_train.Survived == 0], color="lightcoral", fill=True)
plt.legend(['Survived', 'Died'])
plt.title('Density Plot of Age for Surviving Population and Deceased Population')
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

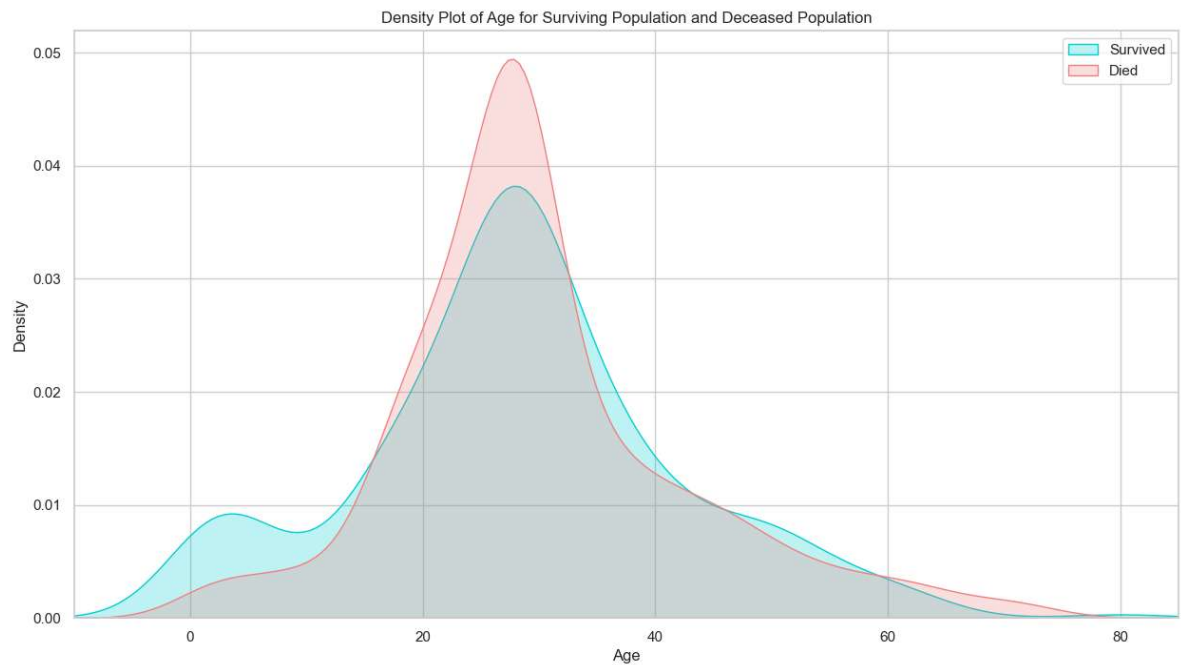

```
In [33]: plt.figure(figsize=(20,8))
avg_survival_byage = final_train[["Age", "Survived"]].groupby(['Age'], as_index=False).mean()
g = sns.barplot(x='Age', y='Survived', data=avg_survival_byage, color="LightSeaGreen")
plt.show()
```

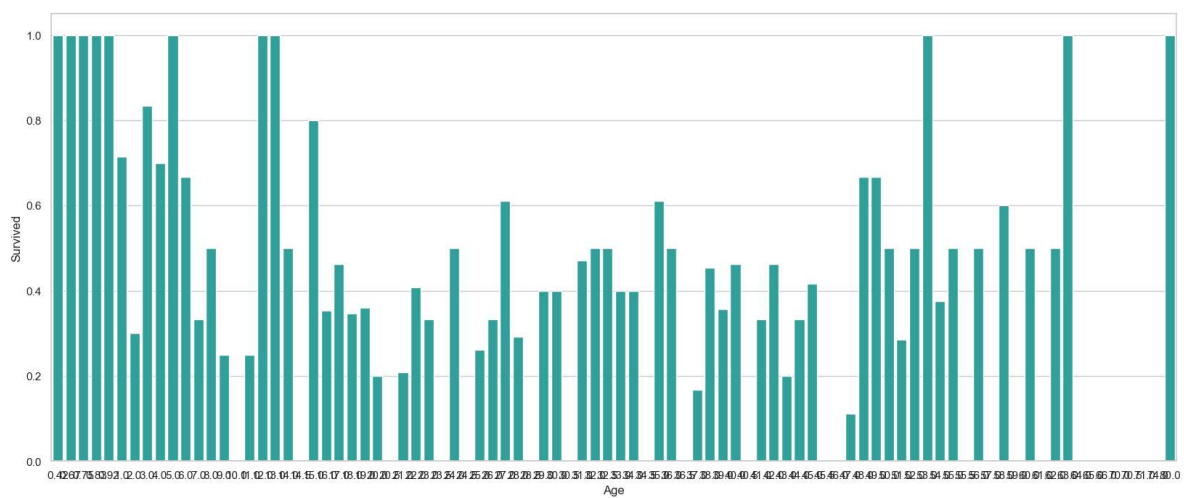




```
In [34]: final_train['IsMinor']=np.where(final_train['Age']<=16, 1, 0)
print(final_train['IsMinor'])
```

```
0      0
1      0
2      0
3      0
4      0
..
886    0
887    0
888    0
889    0
890    0
Name: IsMinor, Length: 891, dtype: int32
```


```
In [35]: final_test['IsMinor']=np.where(final_test['Age']<=16, 1, 0)
print(final_test['IsMinor'])
```

```
0      0
1      0
2      0
3      0
4      0
..
413    0
414    0
415    0
416    0
417    0
Name: IsMinor, Length: 418, dtype: int32
```

```
In [36]: sns.barplot(x='TravelAlone', y='Survived', data=final_train, color="mediumturquoise",  
plt.show())
```

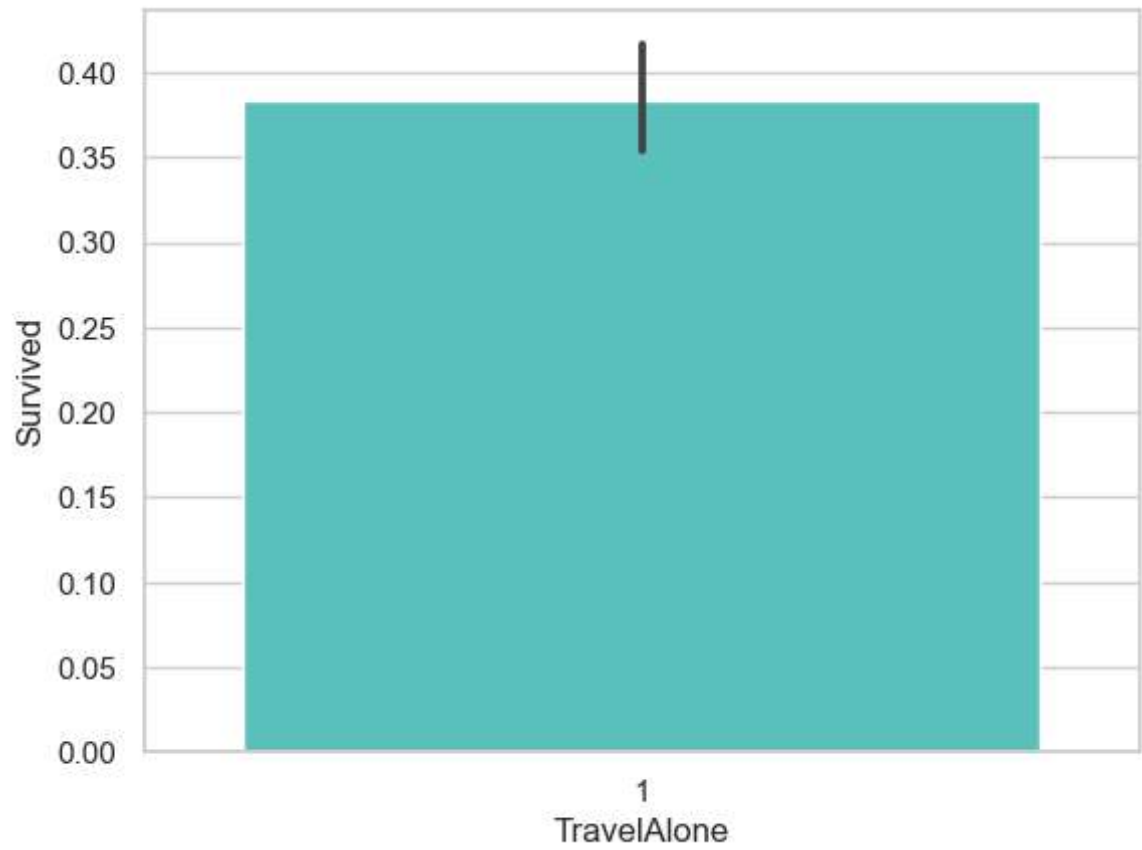

```
In [37]: import seaborn as sns
import matplotlib.pyplot as plt
# Assuming 'train_df' is your DataFrame containing the data
sns.barplot(x='Sex', y='Survived', data=train_df, color='aquamarine')
plt.show()
```

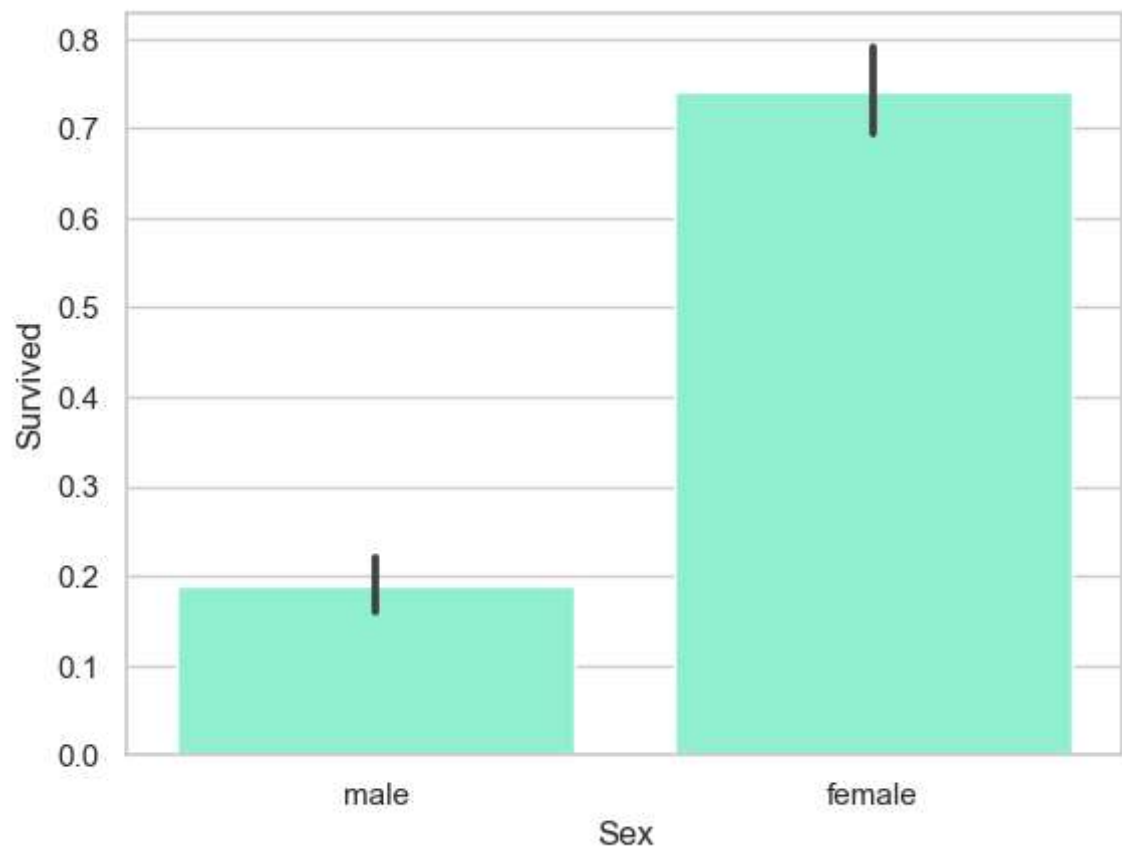

In [ ]: