


ER Diagram of log message service

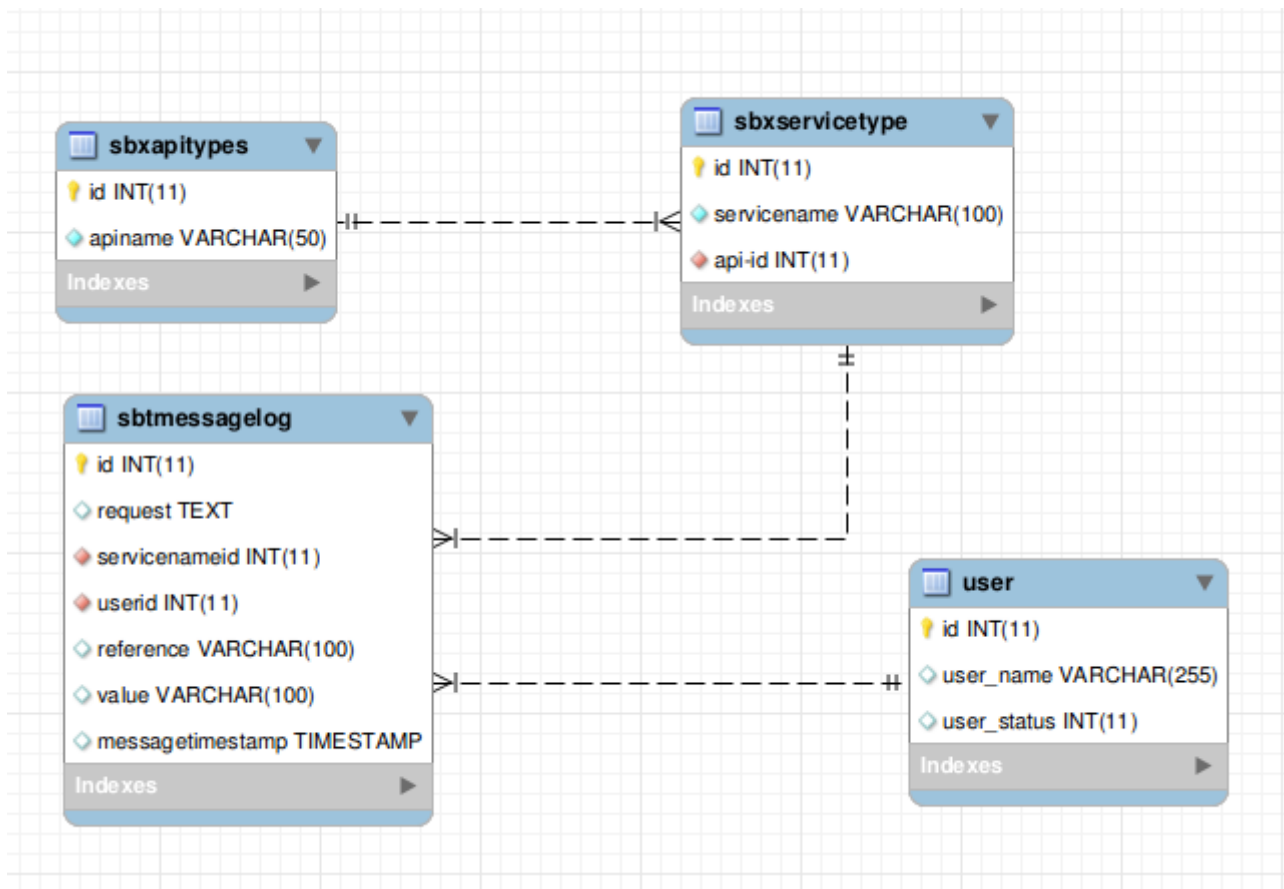

sbxservicetype table

This table contains all the services according to the api types.

Columns

- **id**(integer :PK)
 - auto generated unique number to identify the service
- **servicename**(varchar :100)
 - name of the service
- **api-id**(integer :FK)
 - foreign key from **sbxapitypes**

sbtmessagelog table

This table contains all json messages which comes to call the services.

Columns

- id(integer :PK)
 - auto generated unique number to identify the log
- request(text)
 - json message which comes to the service
- servicenameid(integer :FK)
 - foreign key from sbxservicetype
- userid(integer :FK)
 - foreign key from user
- reference(varchar :100)
 - reference name according to the called service (E.g. msisdn)
- value(varchar :100)
 - value of the reference (E.g. +94771234567)
- message-timestamp(timestamp)
 - timestamp of the logged message