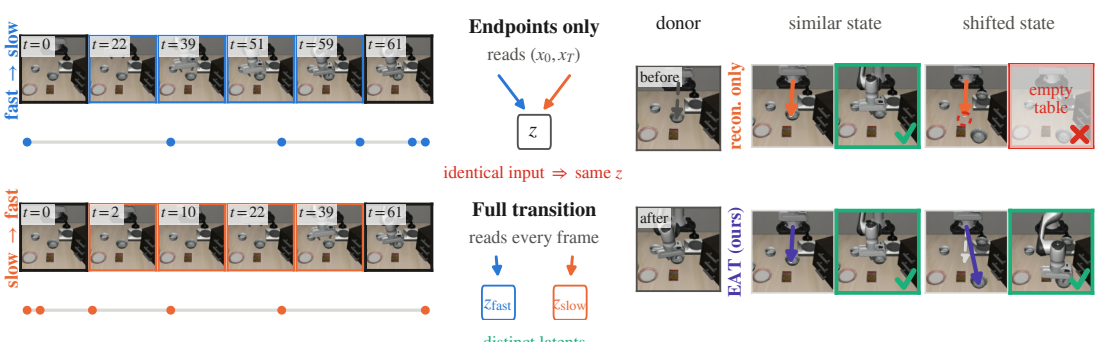

(a) Same endpoints, different dynamics
A latent action should preserve how the transition unfolds.
(b) Same action, different states
Its effect should adapt to the current state.
fast → slow
t=0
t=22
t=39
t=51
t=59
t=61
slow → fast
t=0
t=2
t=10
t=22
t=39
t=61
Endpoints only
reads (x0, xT)
z
identical input ⇒ same z
Full transition
reads every frame
zfast
zslow
distinct latents
donor
similar state
shifted state
before
recon. only
empty table
after
EAT (ours)
Latent actions should capture temporal effects — not merely endpoints — and remain executable across states.