

TP 4 : DOCKER

Proposer un service

1. Récupération de l'image Docker

```
docker pull jenkins/jenkins:lts-jdk17
```

```
c/Users/AlizeePro via 
> docker pull jenkins/jenkins:lts-jdk17
lts-jdk17: Pulling from jenkins/jenkins
0a96bdb82805: Extracting [=====> ] 8.847MB/48.5MB
b5e2db483aae: Downloading [=====> ] 59.63MB/61.61MB
72b137db2cdf: Download complete
d0aac1e9e20c: Download complete
c48e3974586c: Download complete
d281eadf0ae3: Downloading [=====> ] 38.19MB/96.59MB
be47ab5dc59d: Download complete
c09c222384de: Downloading [=====> ] 1.654MB/6.29MB
a91f2a3bb141: Waiting
1a17773e6697: Waiting
b535e1c5efef: Waiting
3cfa79b75794: Waiting
```

```
c/Users/AlizeePro via 
> docker image ls
```


REPOSITORY	TAG	IMAGE ID	CREATED	SIZE
jenkins/jenkins	lts-jdk17	44c1caefd796	8 days ago	468MB
api-project-api	latest	c1821b7bb670	2 months ago	997MB
postgres	latest	813dc60d83aa	2 months ago	435MB
projet6	latest	c62b1681948a	12 months ago	598MB
projet	latest	4dd53df5da35	12 months ago	562MB
web2	latest	4374b5fed7a5	13 months ago	562MB

2. Démarrage du conteneur

```
docker run -it -p 8080:8080 -p 5000:5000 jenkins/jenkins:lts-jdk17
```

```
c/Users/AlizeePro via @ took 57s
) docker run -it -p 8080:8080 -p 50000:50000 --name jenkins-container jenkins/jenkins:lts-jdk17
Running from: /usr/share/jenkins/jenkins.war
webroot: /var/jenkins_home/war
2025-01-17 11:55:35.851+0000 [id=1] INFO winstone.Logger#logInternal: Beginning extraction from war file
2025-01-17 11:55:37.303+0000 [id=1] WARNING o.e.j.ee9.nested.ContextHandler#setContextPath: Empty contextPath
2025-01-17 11:55:37.413+0000 [id=1] INFO org.eclipse.jetty.server.Server#doStart: jetty-12.0.16; built: 2024-12-09T21:02:54.535Z; git: c3f88bafb4e393f23204dc14dc57b042e84debc7; jvm 17.0.13+11
2025-01-17 11:55:38.072+0000 [id=1] INFO o.e.j.e.w.StandardDescriptorProcessor#visitServlet: NO JSP Support for /, did not find org.eclipse.jetty.ee9.jsp.JettyJspServlet
2025-01-17 11:55:38.191+0000 [id=1] INFO o.e.j.s.DefaultSessionIdManager#doStart: Session workerName=node0
2025-01-17 11:55:39.179+0000 [id=1] INFO hudson.WebAppMain#contextInitialized: Jenkins home directory: /var/jenkins_home found at: EnvVars.masterEnvVars.get("JENKINS_HOME")
2025-01-17 11:55:39.408+0000 [id=1] INFO o.e.j.s.handler.ContextHandler#doStart: Started oeje9n.ContextHandler$CoreContextHandler@772861aa{Jenkins v2.479.3,,b=file:///var/jenkins_home/war/,a=AVAILABLE,h=oeje9n.ContextHandler$CoreContextHandler$CoreToNestedHandler@6631cb64{STARTED}}
2025-01-17 11:55:39.440+0000 [id=1] INFO o.e.j.server.AbstractConnector#doStart: Started ServerConnector@c35af2a{HTTP/1.1, (http/1.1)}{0.0.0.0:8080}
2025-01-17 11:55:39.467+0000 [id=1] INFO org.eclipse.jetty.server.Server#doStart: Started oejs.Server@1c7fd41f{STARTING}[12.0.16,sto=0] @4885ms
2025-01-17 11:55:39.470+0000 [id=26] INFO winstone.Logger#logInternal: Winstone Servlet Engine running: controlPort=disabled
2025-01-17 11:55:39.902+0000 [id=34] INFO jenkins.InitReactorRunner$1#onAttained: Started initialization
2025-01-17 11:55:39.946+0000 [id=43] INFO jenkins.InitReactorRunner$1#onAttained: Listed all plugins
2025-01-17 11:55:41.608+0000 [id=37] INFO jenkins.InitReactorRunner$1#onAttained: Prepared all plugins
```

Après avoir mis le mdp et installer les ressources

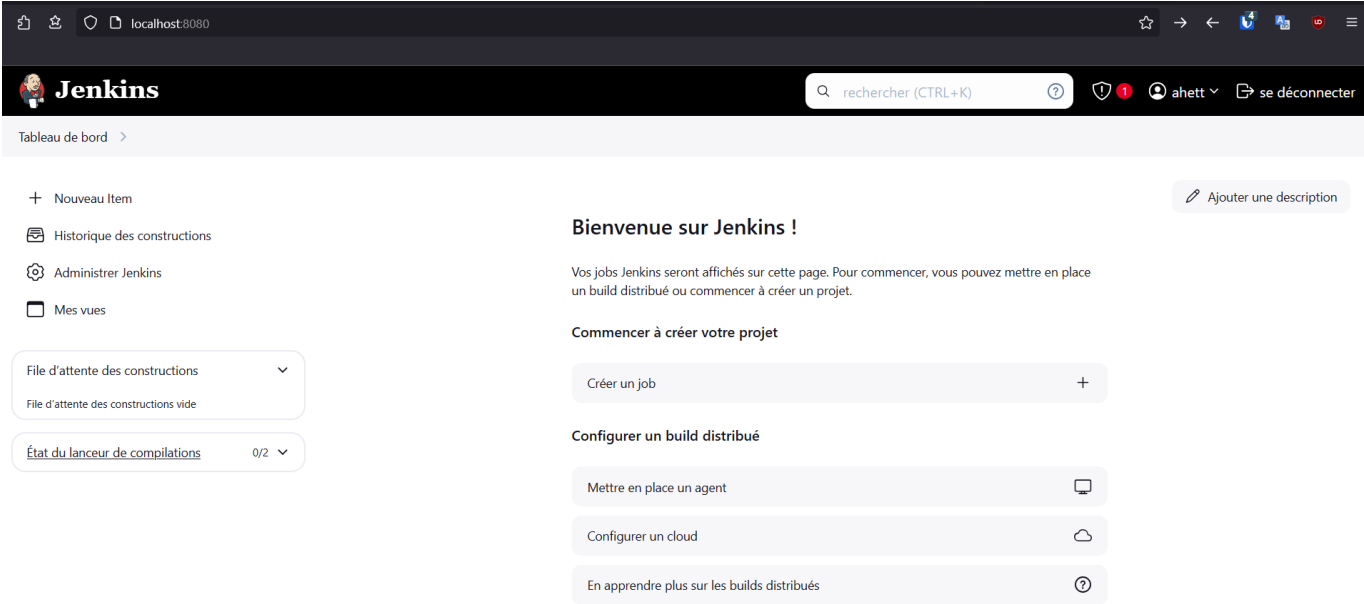

3. La vérification de la disponibilité du service

```
docker ps -a
```

```
c/Users/AlizeePro via @
) docker ps -a
CONTAINER ID   IMAGE                                COMMAND                  CREATED        STATUS        PORTS                               NAMES
5e280ccdb68   jenkins/jenkins:lts-jdk17          "/usr/bin/tini -- /u... 11 minutes ago Up 2 seconds  0.0.0.0:8080->8080/tcp, 0.0.0.0:50000->50000/tcp  jenkins-container
521ef19a0f78   api-project-api                     "npx nodemon /usr/sr... 2 months ago   Exited (255) 45 hours ago  0.0.0.0:3000->3000/tcp  api-project-api-1
613cc85ec0b1   postgres:latest                     "docker-entrypoint.s... 2 months ago   Exited (255) 45 hours ago  0.0.0.0:5432->5432/tcp  api-project-db-1
```

4. L'arrêt du conteneur

```
docker stop jenkins-container
```

```
c/Users/AlizeePro via @
) docker stop jenkins-container
jenkins-container

c/Users/AlizeePro via @
) docker ps -a
CONTAINER ID   IMAGE                                COMMAND                  CREATED        STATUS                    PORTS                               NAMES
5e2800ccdb68   jenkins/jenkins:lts-jdk17          "/usr/bin/tini -- /u..." 17 minutes ago Exited (143) 2 seconds ago                               jenkins-container
521ef19a0f78   api-project-api                     "npx nodemon /usr/sr..." 2 months ago   Exited (255) 45 hours ago   0.0.0.0:3000→3000/tcp             api-project-api-1
613cc85ec0b1   postgres:latest                     "docker-entrypoint.s..." 2 months ago   Exited (255) 45 hours ago   0.0.0.0:5432→5432/tcp             api-project-db-1
```

Service from Scratch

1. Récupération des données

```
docker pull tomcat:jdk17
```

```
c/Users/AlizeePro via @ took 4s
) docker pull tomcat:9.0.98-jdk8-corretto
9.0.98-jdk8-corretto: Pulling from library/tomcat
2ddc0aa2636e: Pull complete
857466e9d40e: Pull complete
32e82f75462b: Pull complete
4f4fb700ef54: Pull complete
6b77abfd1a98: Pull complete
Digest: sha256:a8332e0d7870b76ceed39b2c37e29bafc220a2aad9a7784bc4ca12f5bdad6ff
Status: Downloaded newer image for tomcat:9.0.98-jdk8-corretto
docker.io/library/tomcat:9.0.98-jdk8-corretto
```

2. Création du DockerFile

```
~\dockercat via @ desktop-linux
) cat .\Dockerfile
FROM tomcat:jdk21

COPY jenkins.war /usr/local/tomcat/webapps

WORKDIR /usr/local/tomcat/webapps

EXPOSE 8080

CMD ["java", "-jar", "jenkins.war"]
```

3. Création de l'image et déploiement

```
docker build -t jenkins:1.0 .
```

4. Test du services

```
docker run -it -p 8080:8080 jenkins:1.1
```

Et après télécharger les outils et mis le mdp spécifié

