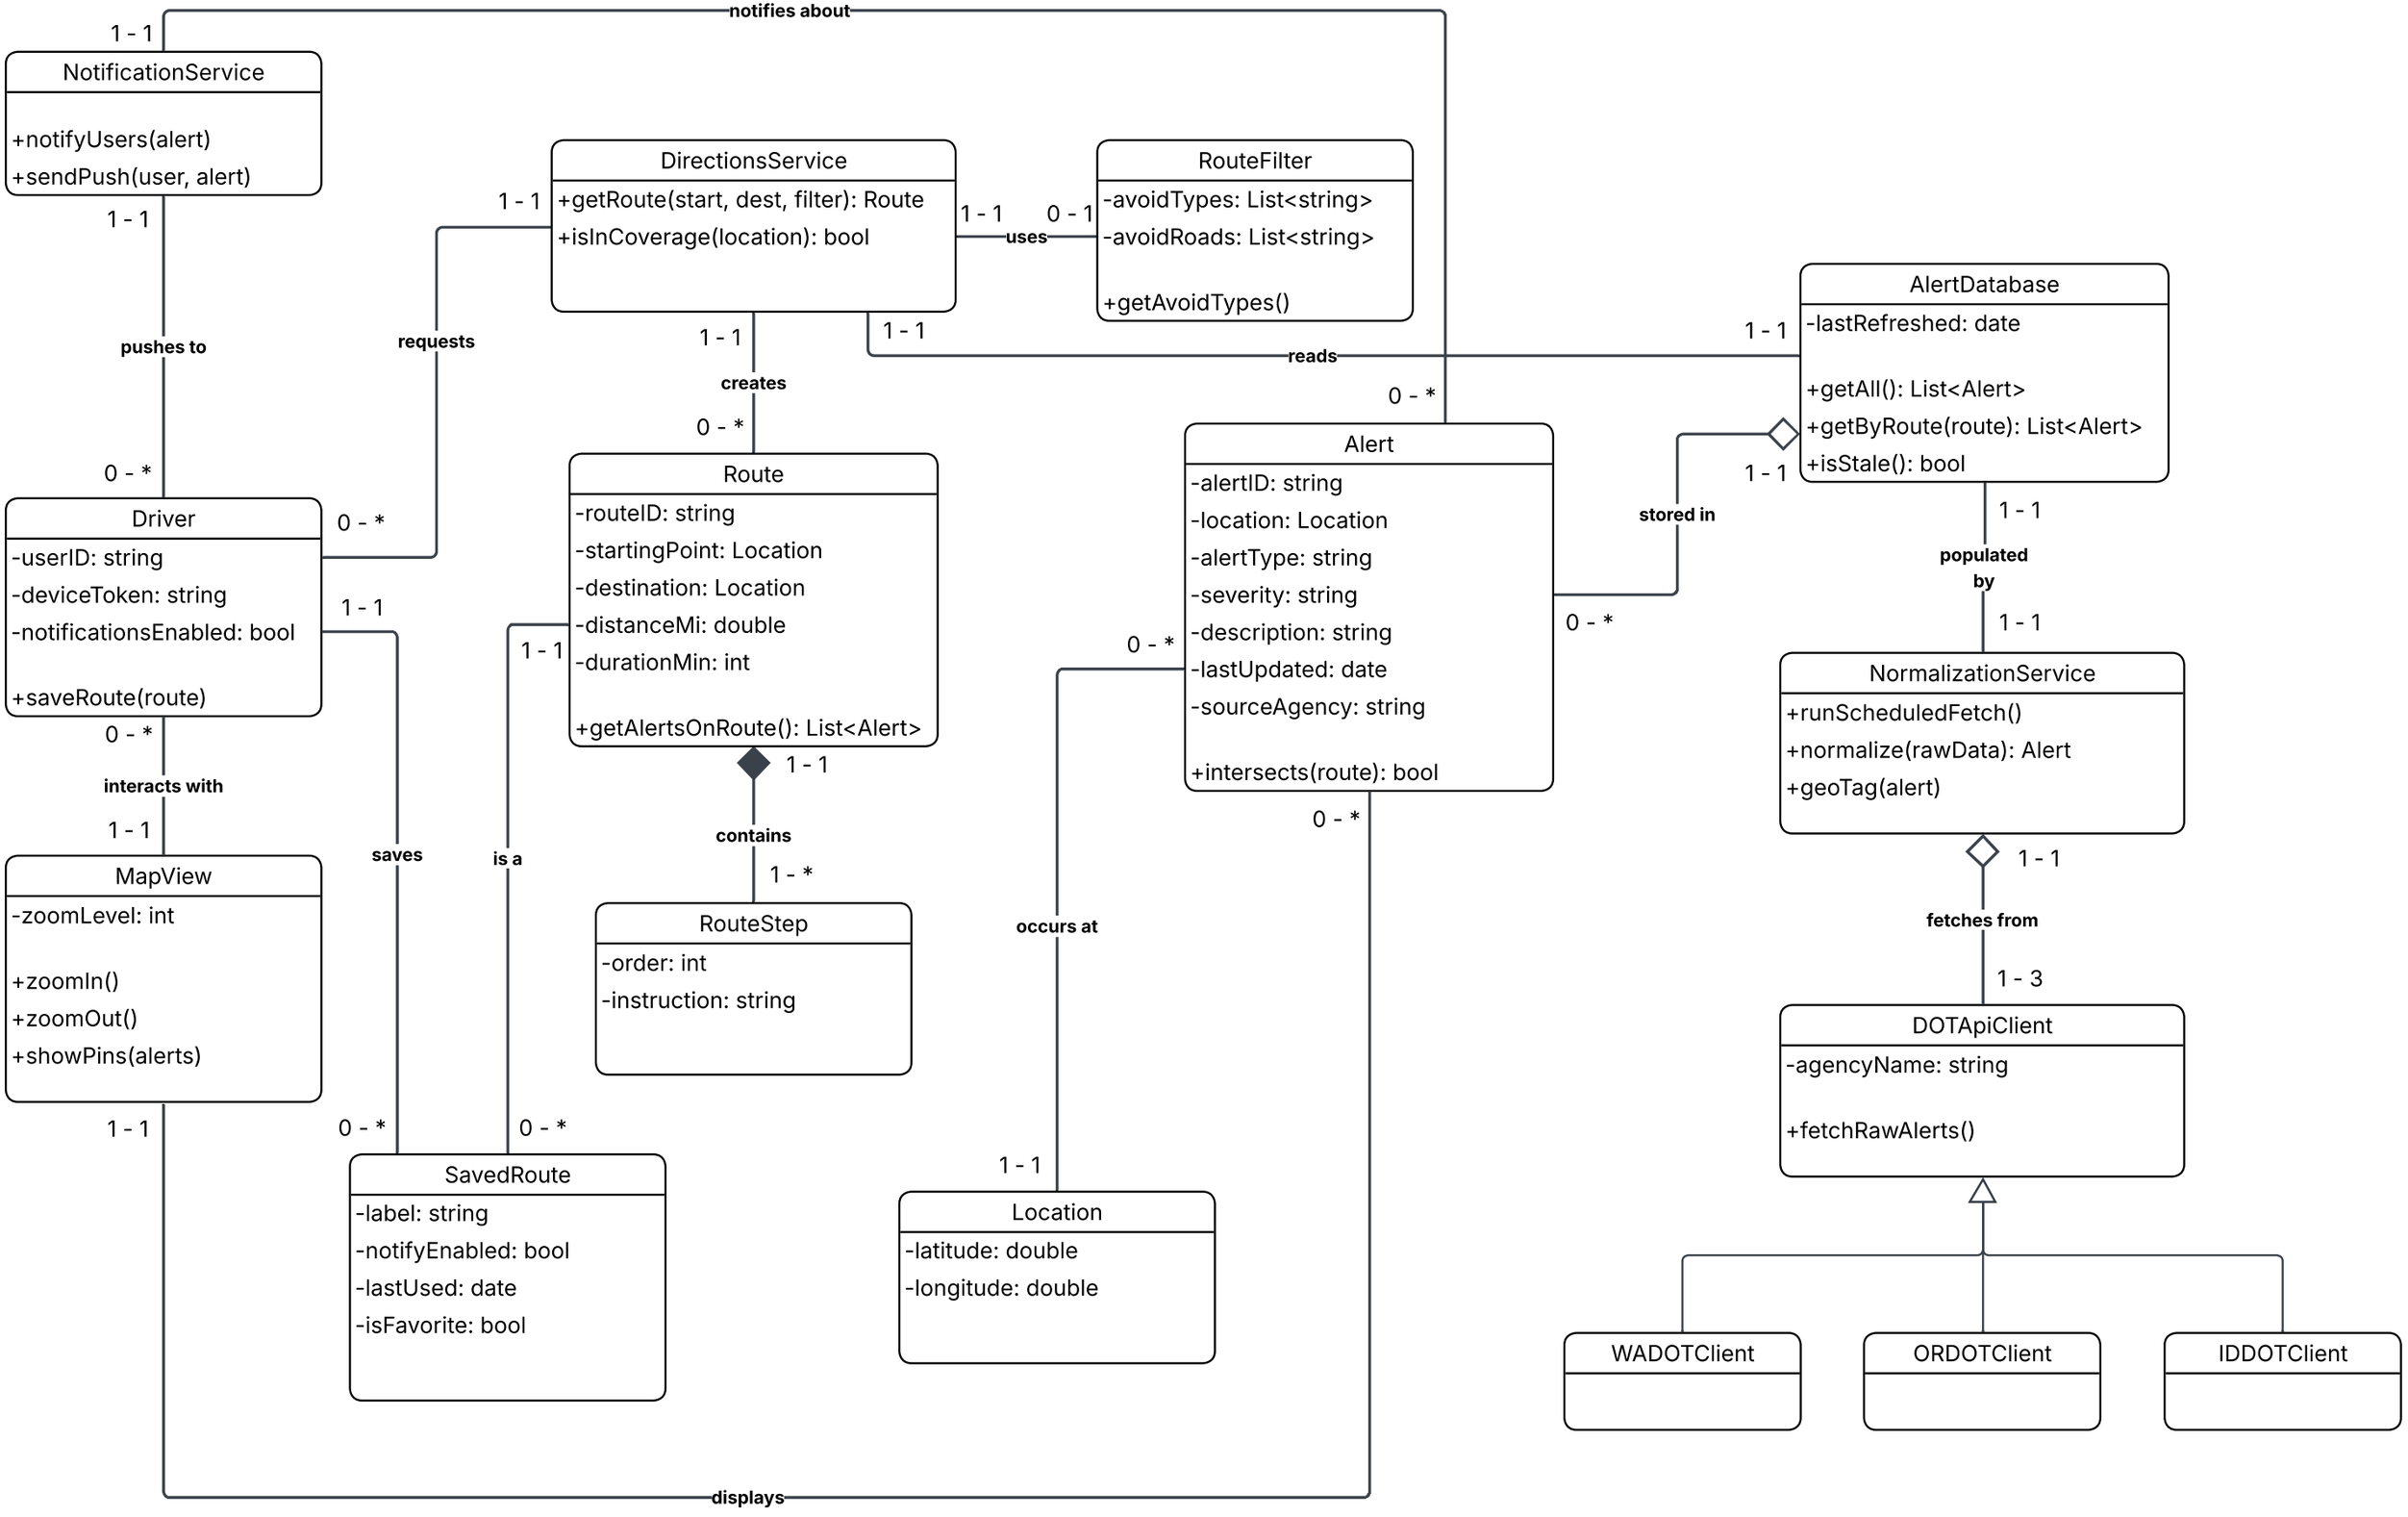

NotificationService
+notifyUsers(alert)
+sendPush(user, alert)
notifies about
1 - 1
1 - 1
pushes to
0 - *
DirectionsService
+getRoute(start, dest, filter): Route
+isInCoverage(location): bool
1 - 1
requests
0 - *
1 - 1
uses
0 - 1
RouteFilter
-avoidTypes: List<string>
-avoidRoads: List<string>
+getAvoidTypes()
1 - 1
creates
0 - *
reads
1 - 1
AlertDatabase
-lastRefreshed: date
+getAll(): List<Alert>
+getByRoute(route): List<Alert>
+isStale(): bool
Driver
-userID: string
-deviceToken: string
-notificationsEnabled: bool
+saveRoute(route)
0 - *
1 - 1
Route
-routeID: string
-startingPoint: Location
-destination: Location
-distanceMi: double
-durationMin: int
+getAlertsOnRoute(): List<Alert>
1 - 1
Alert
-alertID: string
-location: Location
-alertType: string
-severity: string
-description: string
-lastUpdated: date
-sourceAgency: string
+intersects(route): bool
0 - *
0 - *
stored in
1 - 1
1 - 1
populated by
1 - 1
NormalizationService
+runScheduledFetch()
+normalize(rawData): Alert
+geoTag(alert)
interacts with
1 - 1
MapView
-zoomLevel: int
+zoomIn()
+zoomOut()
+showPins(alerts)
1 - 1
saves
0 - *
is a
0 - *
contains
1 - *
RouteStep
-order: int
-instruction: string
occurs at
1 - 1
SavedRoute
-label: string
-notifyEnabled: bool
-lastUsed: date
-isFavorite: bool
Location
-latitude: double
-longitude: double
displays
0 - *
1 - 1
fetches from
1 - 3
DOTApiClient
-agencyName: string
+fetchRawAlerts()
WADOTClient
ORDOTClient
IDDOTClient