
Creación de repositorio:



Comandos:

```
MINGW64:/c/AppServ/www/aureasushi
 _D@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (master)
Reinitialized existing Git repository in C:/AppServ/www/aureasushi/.git/
LD@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (master)
$ git add README.md
fatal: pathspec 'README.md' did not match any files
LD@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (master)
$ git add .
LD@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (master)
$ git commit -m "pagina_estatica"
On branch master
Your branch is up to date with 'origin/main'.
nothing to commit, working tree clean
LD@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (master)
$ ^C
 LD@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (master)
$ git branch -M main
LD@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (main)
$ git remote add origin https://github.com/Diose03/MWtaller2.git
error: remote origin already exists.
LD@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (main)
$ git remote set-u origin https://github.com/Diose03/MWtaller2.git
error: Unknown subcommand: set-u
usage: git remote [-v | --verbose]
   or: git remote add [-t <branch>] [-m <master>] [-f] [--tags | --no-tags] [--m
irror=<fetch|push>] <name> <url>
   or: git remote rename <old> <new>
   or: git remote remove <name>
   or: git remote set-head <name> (-a | --auto | -d | --delete | <br/>branch>)
   or: git remote [-v | --verbose] show [-n] <name>
   or: git remote prune [-n | --dry-run] <name>
   or: git remote [-v | --verbose] update [-p | --prune] [(<group> | <remote>)..
   or: git remote set-branches [--add] <name> <brackstanch>...
or: git remote get-url [--push] [--all] <name>
or: git remote set-url [--push] <name> <newurl> [<oldurl>]
   or: git remote set-url --add <name> <newurl>
   or: git remote set-url --delete <name> <url>
                              be verbose; must be placed before a subcommand
    -v. --verbose
 _D@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (main)
$ git remote set-url origin https://github.com/Diose03/MWtaller2.git
 _D@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (main)
$ git remote --verbose
origin https://github.com/DioseO3/MWtaller2.git (fetch)
origin https://github.com/DioseO3/MWtaller2.git (push)
LD@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (main)
$ git push -u origin main
Enumerating objects: 102, done.
Counting objects: 100% (102/102), done.
Delta compression using up to 8 threads
Compressing objects: 100% (94/94), done.
Writing objects: 100% (102/102), 2.07 MiB | 2.06 MiB/s, done. Total 102 (delta 37), reused 0 (delta 0), pack-reused 0 remote: Resolving deltas: 100% (37/37), done.
To https://github.com/Diose03/MWtaller2.git
   [new branch]
                        main -> main
Branch 'main' set up to track remote branch 'main' from 'origin'.
 D@DESKTOP-60DK4HB MINGW64 /c/AppServ/www/aureasushi (main).
```

Archivos en Github:

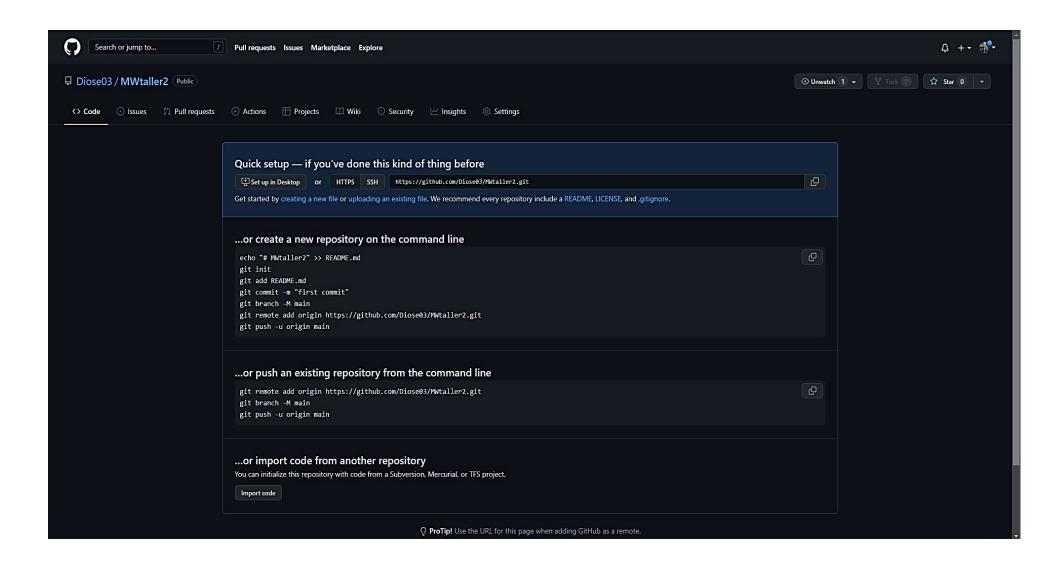