


Chapter 5: CPU Scheduling






Basic Concepts

- ❑ Maximum CPU utilization obtained with multiprogramming
- ❑ CPU–I/O Burst Cycle – Process execution consists of a **cycle** of CPU execution and I/O wait
- ❑ **CPU burst** followed by **I/O burst**
- ❑ CPU burst distribution is of main concern

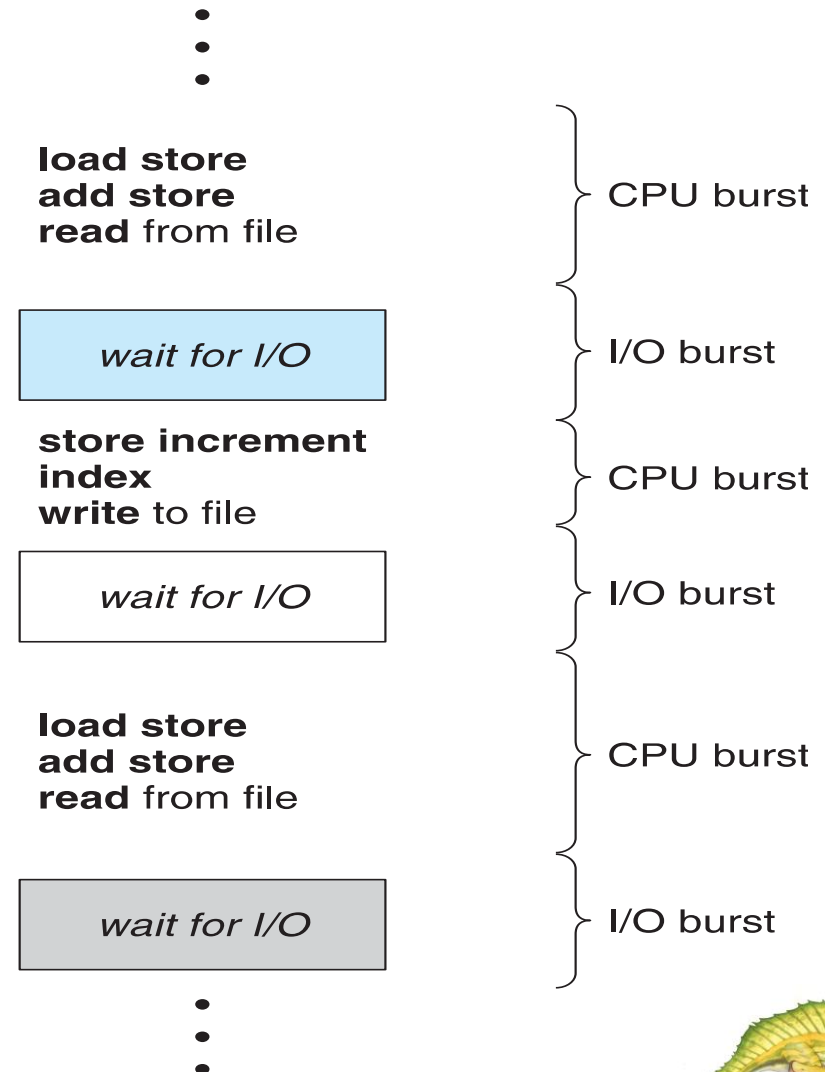




Histogram of CPU-burst Times

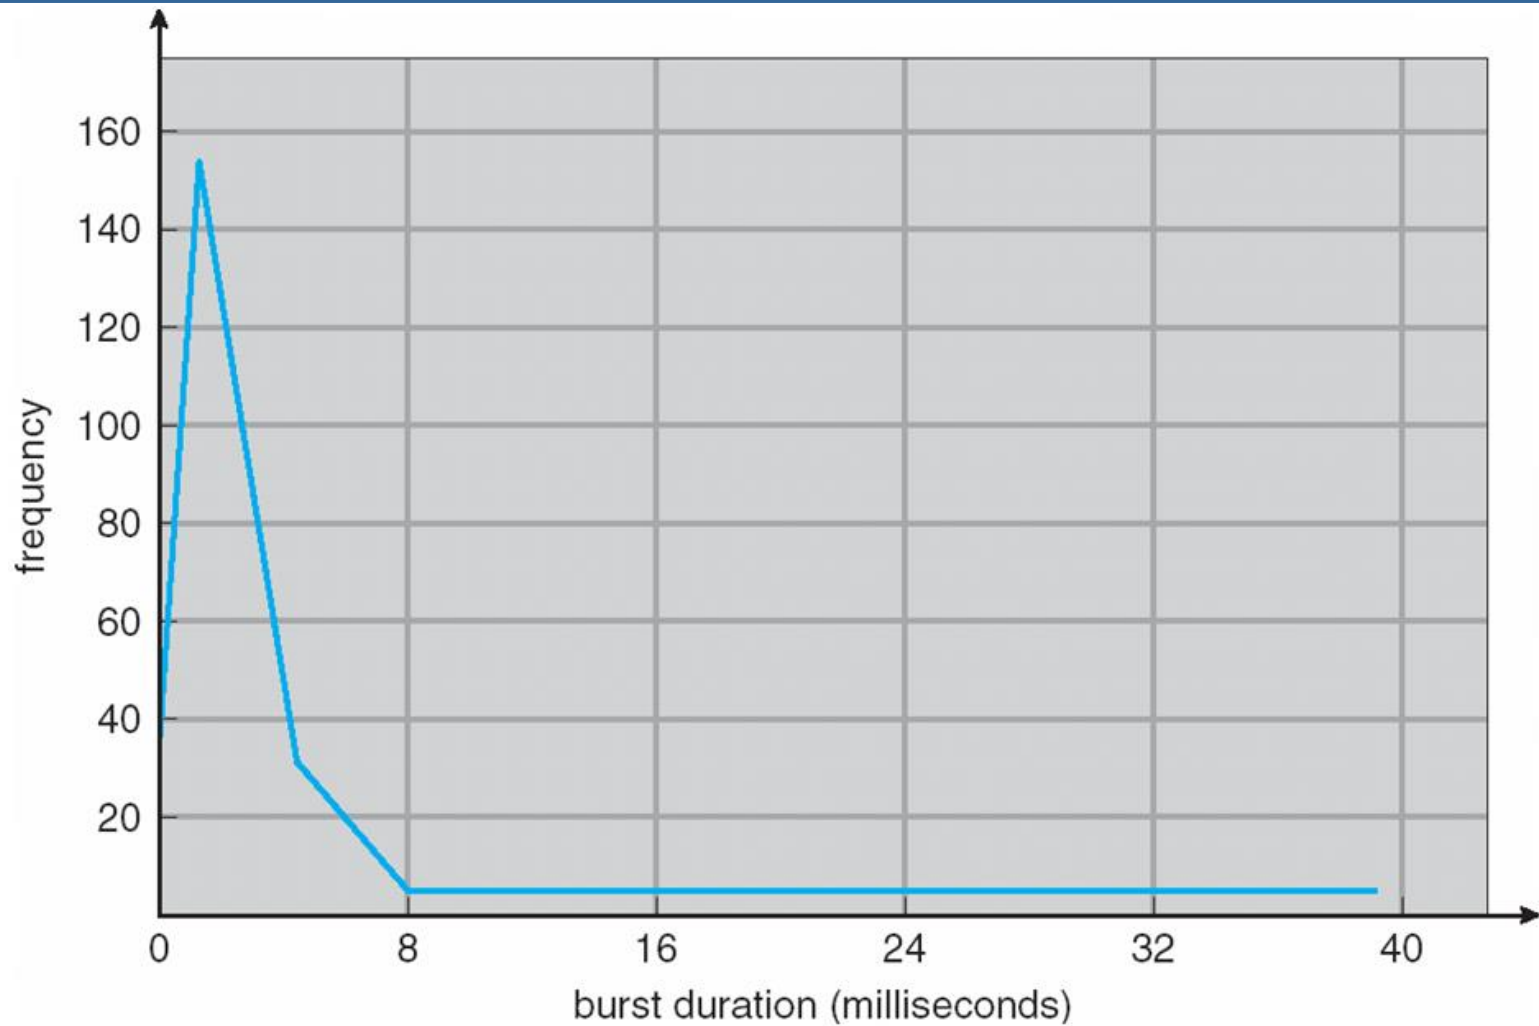



CPU Scheduler

- ❑ **Short-term scheduler** selects from among the processes in ready queue, and allocates the CPU to one of them
 - ❑ Queue may be ordered in various ways
- ❑ CPU scheduling decisions may take place when a process:
 1. Switches from running to waiting state
 2. Switches from running to ready state
 3. Switches from waiting to ready
 4. Terminates
- ❑ Scheduling under 1 and 4 is **nonpreemptive**
- ❑ All other scheduling is **preemptive**
 - ❑ Consider access to shared data
 - ❑ Consider preemption while in kernel mode
 - ❑ Consider interrupts occurring during crucial OS activities

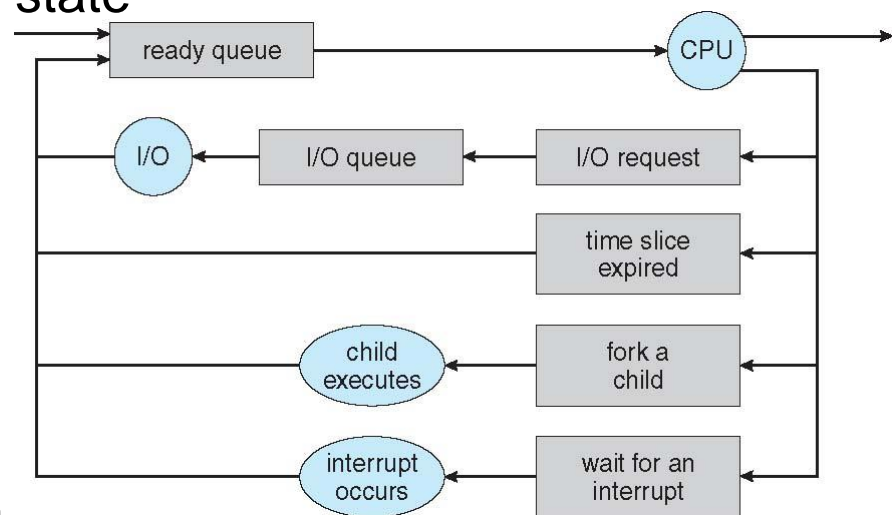



Dispatcher


- Dispatcher module gives control of the CPU to the process selected by the short-term scheduler; this involves:
 - switching context
 - switching to user mode
 - jumping to the proper location in the user program to restart that program
- **Dispatch latency** – time it takes for the dispatcher to stop one process and start another running





Scheduling Criteria

- ❑ **CPU utilization** – keep the CPU as busy as possible
- ❑ **Throughput** – # of processes that complete their execution per time unit
- ❑ **Turnaround time** – amount of time to execute a particular process. It is sum of the periods spent in waiting to get into memory, waiting in ready queue, executing in CPU and doing I/O
- ❑ **Waiting time** – amount of time a process has been waiting in the ready queue. It is sum of periods spent waiting in ready queue.
- ❑ **Response time** – amount of time it takes from when a request was submitted until the first response is produced, not output (for time-sharing environment)





Scheduling Algorithm Optimization Criteria

- ❑ Max CPU utilization
- ❑ Max throughput
- ❑ Min turnaround time
- ❑ Min waiting time
- ❑ Min response time






First- Come, First-Served (FCFS) Scheduling

<u>Process</u>	<u>Burst Time</u>
P_1	24
P_2	3
P_3	3

- Suppose that the processes arrive in the order: P_1 , P_2 , P_3
The **Gantt Chart** for the schedule is:

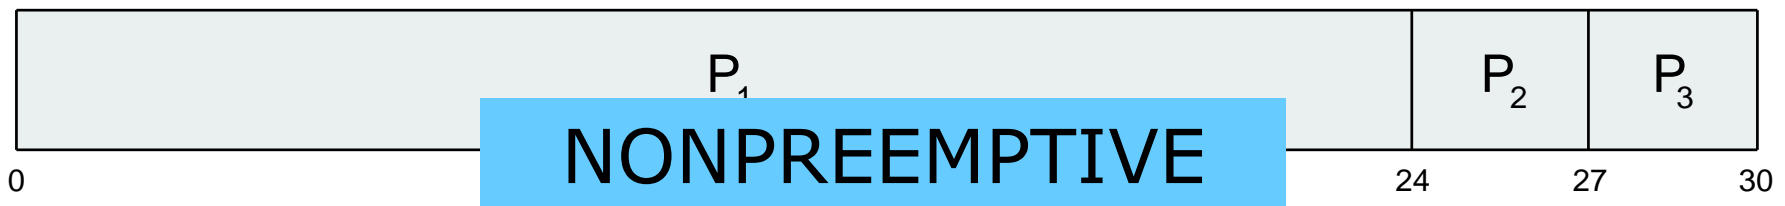

- Waiting time for $P_1 = 0$; $P_2 = 24$; $P_3 = 27$
- Average waiting time: $(0 + 24 + 27)/3 = 17$





FCFS Scheduling (Cont.)

Suppose that the processes arrive in the order:

$$P_2, P_3, P_1$$

□ The Gantt chart for the schedule is:



- Waiting time for $P_1 = 6$; $P_2 = 0$; $P_3 = 3$
- Average waiting time: $(6 + 0 + 3)/3 = 3$
- Much better than previous case
- **Convoy effect** - short process behind long process
 - Consider one CPU-bound and many I/O-bound processes





Shortest-Job-First (SJF) Scheduling

- Associate with each process the length of its next CPU burst
 - Use these lengths to schedule the process with the shortest time
- SJF is optimal – gives minimum average waiting time for a given set of processes
 - The difficulty is knowing the length of the next CPU request
 - Could ask the user






Example of SJF

<u>Process</u>	<u>Burst Time</u>
P_1	6
P_2	8
P_3	7
P_4	3

□ SJF scheduling chart

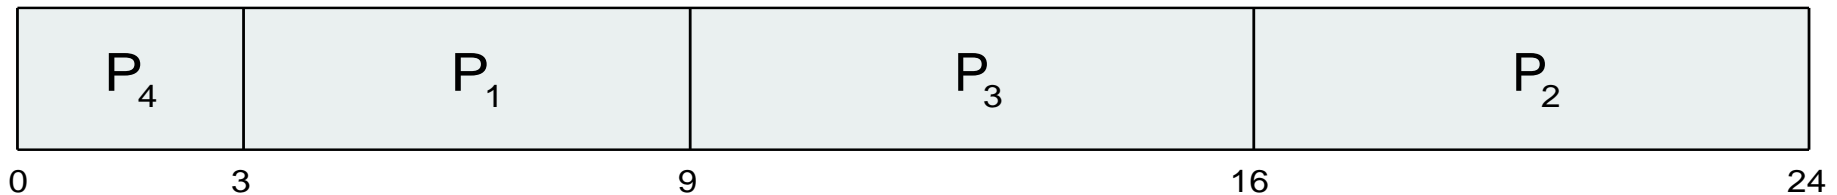

□ Average waiting time = $(3 + 16 + 9 + 0) / 4 = 7$






Determining Length of Next CPU Burst

- Can only estimate the length – should be similar to the previous one
 - Then pick process with shortest predicted next CPU burst
- Can be done by using the length of previous CPU bursts, using exponential averaging
 1. t_n = actual length of n^{th} CPU burst
 2. τ_{n+1} = predicted value for the next CPU burst
 3. $\alpha, 0 \leq \alpha \leq 1$
 4. Define : $\tau_{n+1} = \alpha t_n + (1 - \alpha)\tau_n$.
- Commonly, α set to $\frac{1}{2}$
- Preemptive version called **shortest-remaining-time-first**






Prediction of the Length of the Next CPU Burst

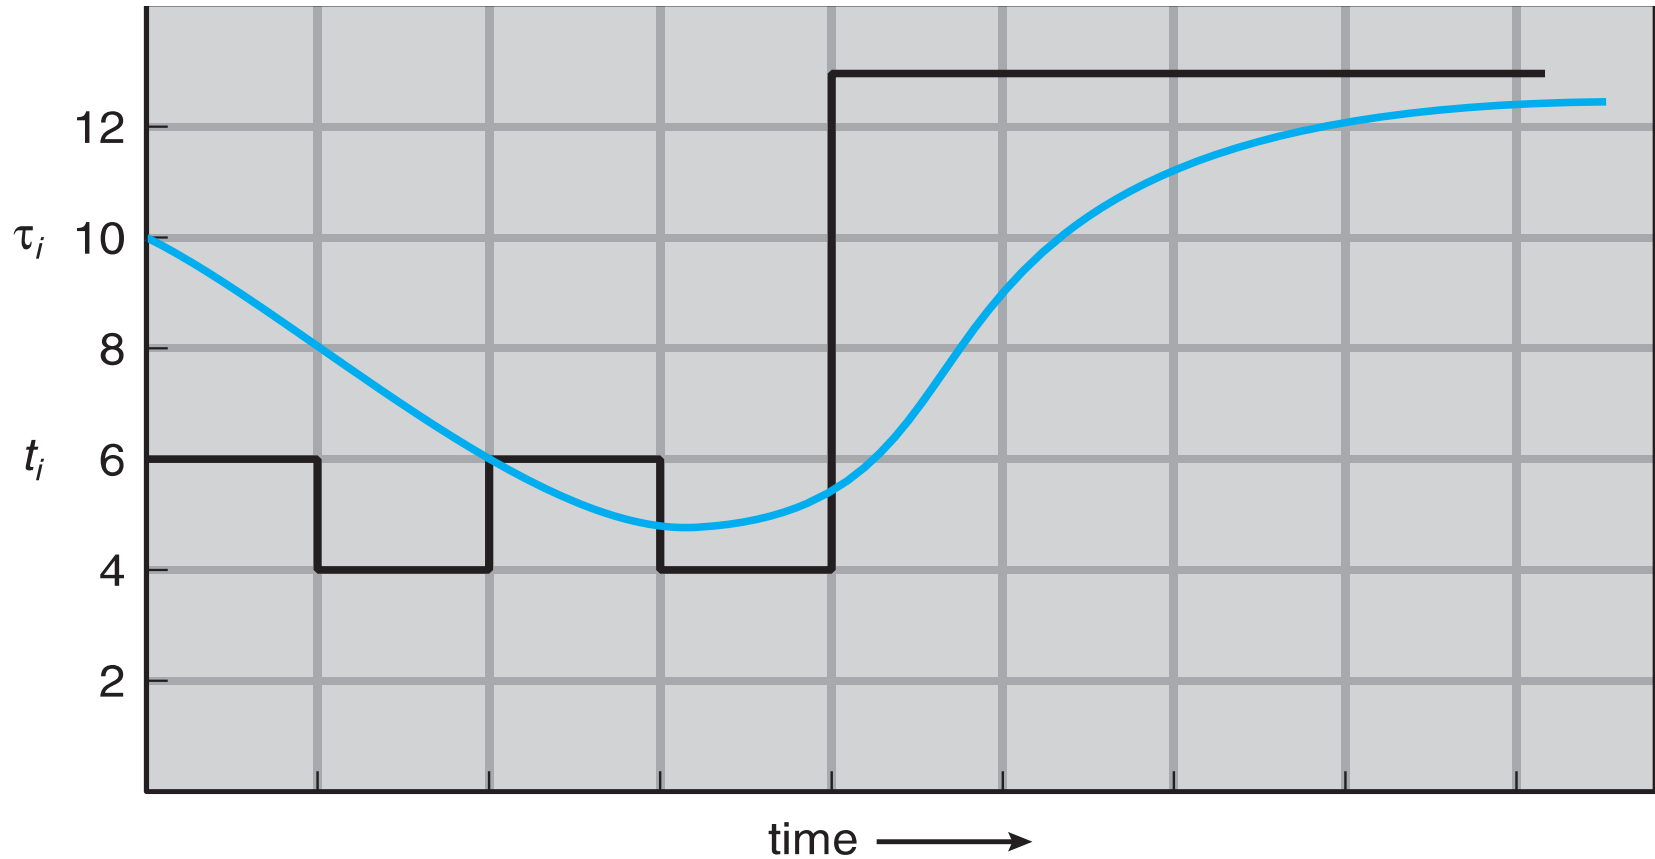

CPU burst (t_i)	6	4	6	4	13	13	13	...
"guess" (τ_i)	10	8	6	6	5	9	11	12





Examples of Exponential Averaging

- $\alpha = 0$

- $\tau_{n+1} = \tau_n$

- Recent history does not count

- $\alpha = 1$

- $\tau_{n+1} = \alpha t_n$

- Only the actual last CPU burst counts

- If we expand the formula, we get:

$$\begin{aligned}\tau_{n+1} = & \alpha t_n + (1 - \alpha)\alpha t_{n-1} + \dots \\ & + (1 - \alpha)^j \alpha t_{n-j} + \dots \\ & + (1 - \alpha)^{n+1} \tau_0\end{aligned}$$

- Since both α and $(1 - \alpha)$ are less than or equal to 1, each successive term has less weight than its predecessor






Example of Shortest-remaining-time-first


- Now we add the concepts of varying arrival times and preemption to the analysis

<u>Process</u>	<u>Arrival Time</u>	<u>Burst Time</u>
P_1	0	8
P_2	1	4
P_3	2	9
P_4	3	5

- Preemptive* SJF Gantt Chart

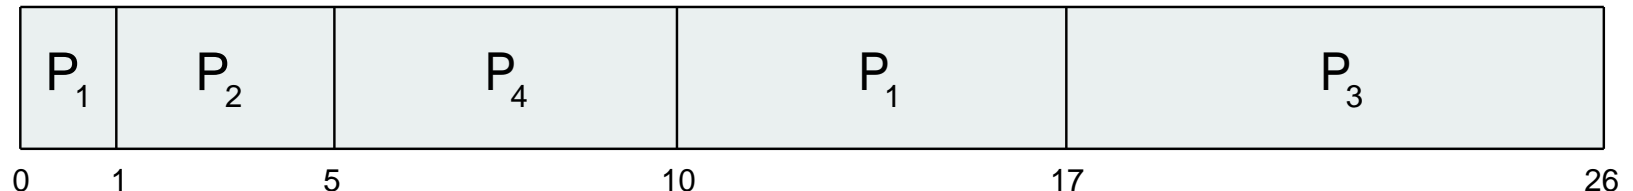

- Average waiting time = $[(10-1)+(1-1)+(17-2)+5-3]/4 = 26/4 = 6.5$ msec (Nonpreemptive = 7.75 ms)





Priority Scheduling

- A priority number (integer) is associated with each process
- The CPU is allocated to the process with the highest priority (smallest integer \equiv highest priority)
 - Preemptive
 - Nonpreemptive
- SJF is priority scheduling where priority is the inverse of predicted next CPU burst time
- Problem \equiv **Starvation** – low priority processes may never execute
- Solution \equiv **Aging** – as time progresses increase the priority of the process





Example of Priority Scheduling

<u>Process</u>	<u>Burst Time</u>	<u>Priority</u>
P_1	10	3
P_2	1	1
P_3	2	4
P_4	1	5
P_5	5	2

□ Priority scheduling Gantt Chart



□ Average waiting time = 8.2 msec





Round Robin (RR)

- ❑ Each process gets a small unit of CPU time (**time quantum** q), usually 10-100 milliseconds. After this time has elapsed, the process is preempted and added to the end of the ready queue.
- ❑ Timer interrupts every quantum to schedule next process
- ❑ Performance
 - ❑ q large \Rightarrow FIFO (Circular Queue)
 - ❑ q small \Rightarrow q must be large with respect to context switch, otherwise overhead is too high






Example of RR with Time Quantum = 4

<u>Process</u>	<u>Burst Time</u>
P_1	24
P_2	3
P_3	3

□ The Gantt chart is:

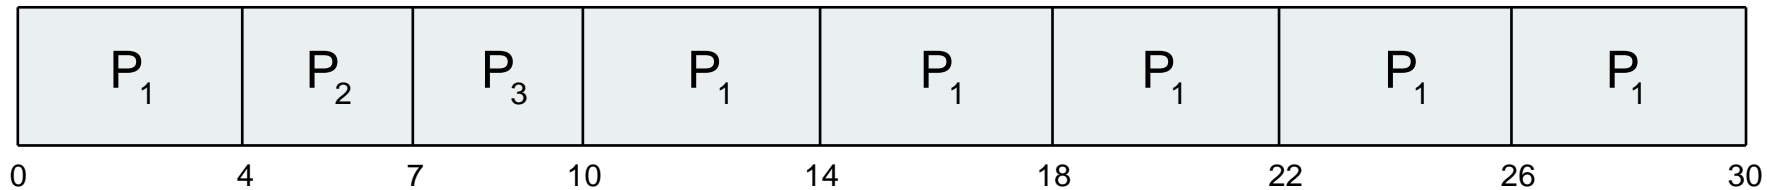


- Typically, higher average turnaround than SJF, but better **response**
- q should be large compared to context switch time
- q usually 10ms to 100ms, context switch < 10 usec





Time Quantum and Context Switch Time

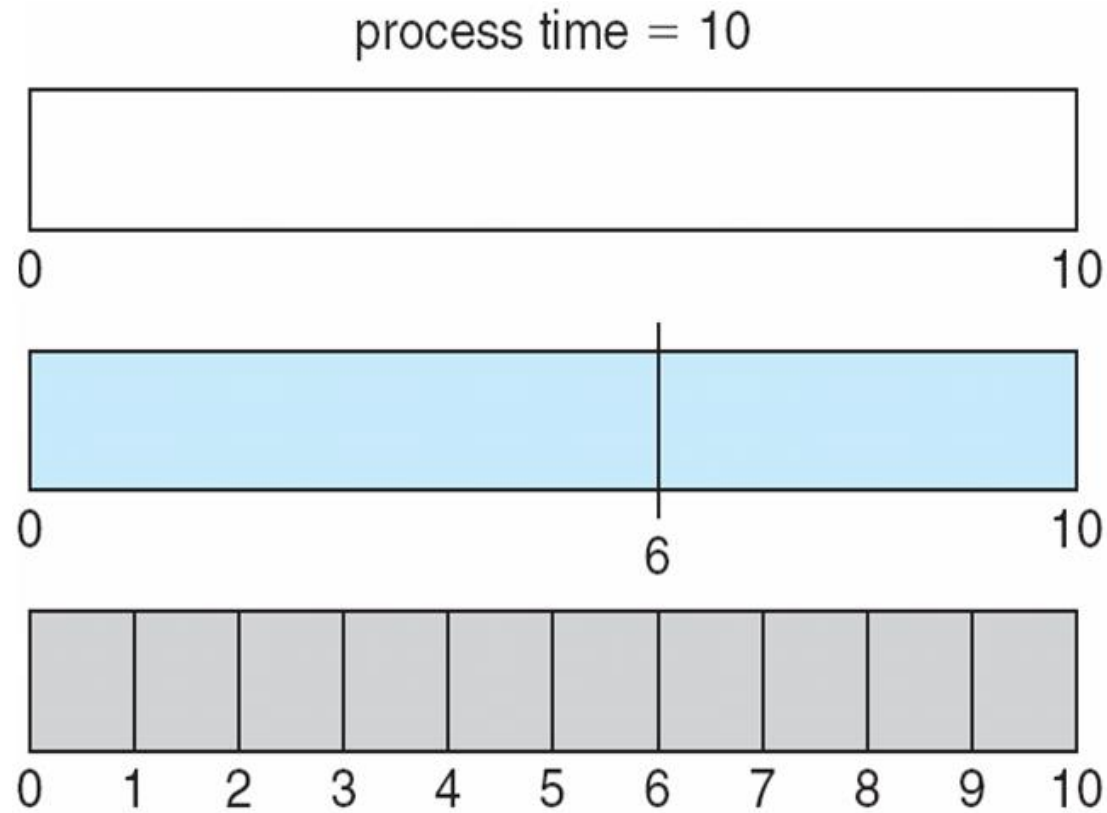


quantum	context switches
12	0
6	1
1	9





Turnaround Time Varies With The Time Quantum

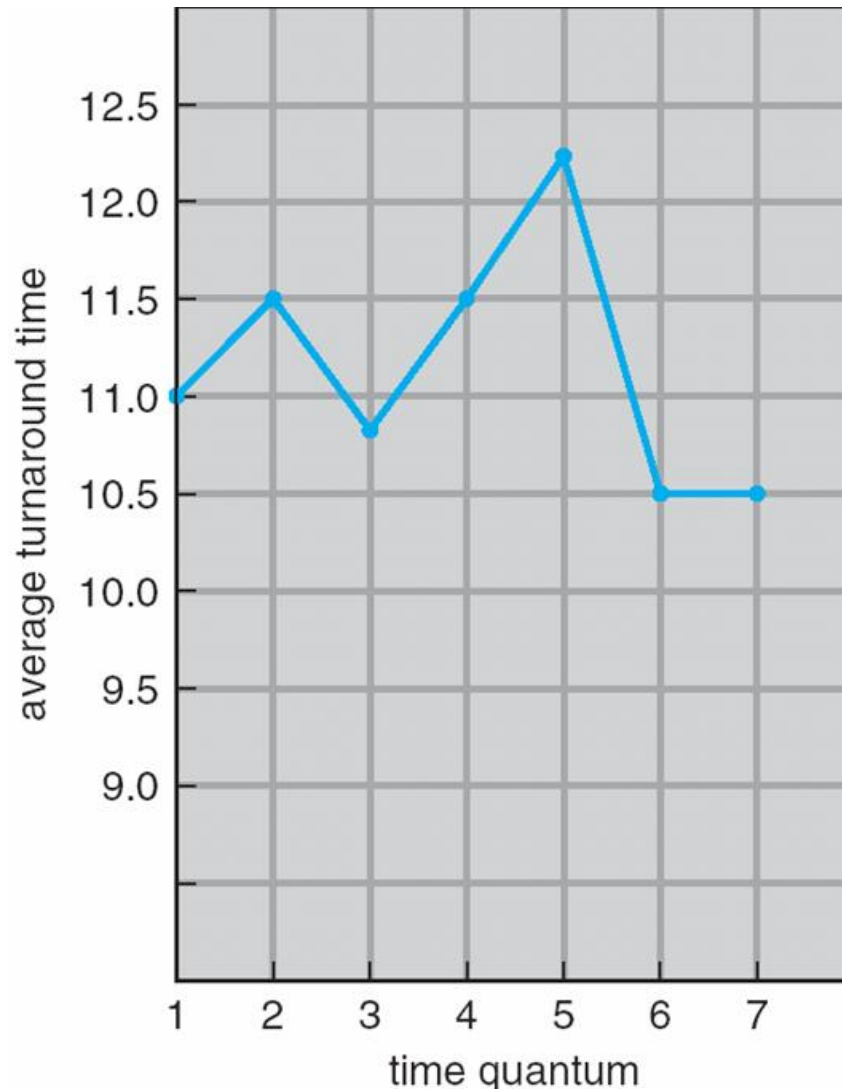

process	time
P_1	6
P_2	3
P_3	1
P_4	7

80% of CPU bursts
should be shorter than q





Example of RR

- Consider a system running ten I/O bound tasks and one CPU bound task. Assume that the I/O bound tasks issue an I/O operation once for every millisecond of CPU computing and that each I/O operation takes 10 milliseconds to complete. Also assume that the context switching overhead is 0.1 millisecond and that all processes are long running tasks. Describe the CPU utilization for Round Robin scheduler when:
 - The time quantum is 1ms
 - The time quantum is 10 ms

