
CS-364: INTRODUCTION TO CRYPTOGRAPHY AND NETWORK SECURITY LAB
LAB ASSIGNMENT IV

Course Instructor: Dr. Dibyendu Roy

Due: April 22, 2024, 05:00 pm

Instructions: Code must be written in C and well commented. Submission of code in any other file extension (.pdf, .docx etc) will not be considered. The file name of the code will be YOUR ROLL NO.c. Write Your Name and Roll Number on the top of your code. Your submission will not be considered if you submit late or email your submission. Note that the assignment is of 2 pages.

You need to implement the following protocol in C programming language.

1. Consider the prime number $p = 1021$ and the Elliptic curve EL: $y^2 = x^3 + 449x + 233$ over \mathbb{Z}_p .
2. Consider the point at infinity $\Theta = (0, 1)$.
3. Select a point $\alpha (\neq \Theta)$ on the curve EL. This α needs to be obtained inside your code. Print α . (Output)
4. Alice and Bob have agreed on the same curve EL and the point α .
5. Your code will ask for Alice's private key $n_A \in [1, 330]$ and Bob's private key $n_B \in [1, 330]$. (Input)
6. Using n_A and n_B Alice and Bob perform Diffie-Hellman key exchange on the curve EL with the point α and establish a shared secret key $SK = (x_1, y_1) \in \text{EL}$. Print the SK. (Output)
7. Alice uses SHA-256 hash function and computes a key $K_A = \text{SHA-256}(x_1 || y_1)$.
8. Bob uses SHA-256 hash function and computes a key $K_B = \text{SHA-256}(x_1 || y_1)$.
9. Print $K_A = K_1 || K_2$ and $K_B = K_1 || K_2$ in the form of 32 bytes (space separated). (Output)
10. Program will ask for Alice's 128-bit message (say M_A). Input will be 16 space separated bytes in hexadecimal. For example : $M_A = 00\ 11\ 22\ 33\ 44\ 55\ 66\ 77\ 88\ 99\ aa\ bb\ cc\ dd\ ee\ ff$. (Input)
11. Alice will encrypt the given message M_A using Triple-AES' - 128 bit encryption algorithm. Let the generated ciphertext be C_A . i.e., $C_A = \text{TEnc}_{\text{AES}'-128}(M_A, K_A)$.
12. $C_A = \text{TEnc}_{\text{AES}'-128}(M_A, K_A) = \text{Enc}_{\text{AES}'-128}(\text{Dec}_{\text{AES}'-128}(\text{Enc}_{\text{AES}'-128}(M_A, K_1), K_2), K_1)$.
13. Alice will generate a MAC for M_A using the described algorithm. The description of MAC is $\text{MAC}_A = \text{SHA-256}((K_A \oplus 125) || \text{SHA-256}((K_A \oplus 215) || M_A))$. Here the constants are in decimal.
14. Your program will display the ciphertext C_A and MAC_A in the form of bytes (space separated). (Output).
15. Alice will pass the ciphertext C_A , MAC_A to Bob. This will be passed inside your code.
16. Bob will decrypt C_A using Triple-AES' - 128 bit decryption algorithm with his key K_B . Let the decrypted text be M_B . i.e., $M_B = \text{TDec}_{\text{AES}'-128}(C_A, K_B)$.
17. Bob will generate $\text{MAC}_B = \text{SHA-256}((K_B \oplus 125) || \text{SHA-256}((K_B \oplus 215) || M_B))$. Here the constants are in decimal.
18. Your program will display M_B and MAC_B in the form of bytes (space separated). (Output)

If your code is correct ! then $K_A = K_B$, $M_A = M_B$ and $\text{MAC}_A = \text{MAC}_B$ for every possible inputs.

The description of AES' – 128 block cipher is given here.

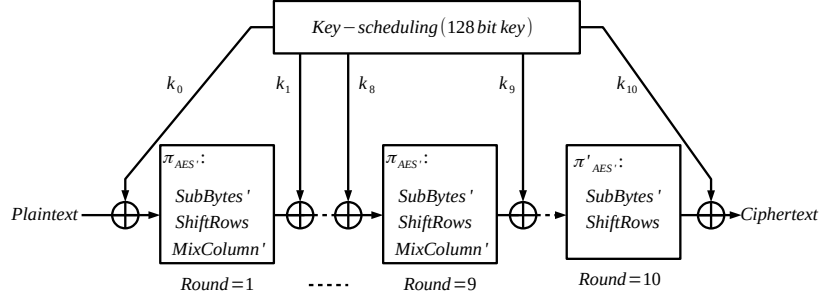


Figure 1: AES'-128

Consider the Subbyte function Sub (given in Figure 2) of AES. Using the Sub (Figure 2) define a Subbyte'

X	Y															
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	63	7C	77	7B	F2	6B	6F	C5	30	01	67	2B	FE	D7	AB	76
1	CA	82	C9	7D	FA	59	47	F0	AD	D4	A2	AF	9C	A4	72	C0
2	B7	FD	93	26	36	3F	F7	CC	34	A5	E5	F1	71	D8	31	15
3	04	C7	23	C3	18	96	05	9A	07	12	80	E2	EB	27	B2	75
4	09	83	2C	1A	1B	6E	5A	A0	52	3B	D6	B3	29	E3	2F	84
5	53	D1	00	ED	20	FC	B1	5B	6A	CB	BE	39	4A	4C	58	CF
6	D0	EF	AA	FB	43	4D	33	85	45	F9	02	7F	50	3C	9F	A8
7	51	A3	40	8F	92	9D	38	F5	BC	B6	DA	21	10	FF	F3	D2
8	CD	0C	13	EC	5F	97	44	17	C4	A7	7E	3D	64	5D	19	73
9	60	81	4F	DC	22	2A	90	88	46	EE	B8	14	DE	5E	0B	DB
A	E0	32	3A	0A	49	06	24	5C	C2	D3	AC	62	91	95	E4	79
B	E7	C8	37	6D	8D	D5	4E	A9	6C	56	F4	EA	65	7A	AE	08
C	BA	78	25	2E	1C	A6	B4	C6	E8	DD	74	1F	4B	BD	8B	8A
D	70	3E	B5	66	48	03	F6	0E	61	35	57	B9	86	C1	1D	9E
E	E1	F8	98	11	69	D9	8E	94	9B	1E	87	E9	CE	55	28	DF
F	8C	A1	89	0D	BF	E6	42	68	41	99	2D	0F	B0	54	BB	16

Figure 2: AES-Subbytes (Sub)

function $Subbyte' : \{0, 1\}^8 \rightarrow \{0, 1\}^8$ as per the following rule,

$$Subbyte'(x) = Sub((221 * x) + 125). \quad (1)$$

Here $+$, $*$ are the two binary operations of the field $\mathbb{F}_2[x] / \langle x^8 + x^4 + x^3 + x + 1 \rangle$.

Consider the following matrix M (given in Equation (2), in decimal) instead of original mixcolumn matrix of AES.

$$M = \begin{bmatrix} 1 & 4 & 4 & 5 \\ 5 & 1 & 4 & 4 \\ 4 & 5 & 1 & 4 \\ 4 & 4 & 5 & 1 \end{bmatrix} \quad (2)$$

The inverse of M is given in Equation (3) (in decimal).

$$M^{-1} = \begin{bmatrix} 165 & 7 & 26 & 115 \\ 115 & 165 & 7 & 26 \\ 26 & 115 & 165 & 7 \\ 7 & 26 & 115 & 165 \end{bmatrix} \quad (3)$$

Using M we will perform our Mixcolumn' operation. We will use the same key-scheduling as in AES-128 encryption algorithm. With this setup implement 10 rounds of AES' – 128. The pictorial design of 10 rounds of AES' – 128 is given in Figure 1.