



CSS Class Day 4

CSS Notes

| Font, Link & List Property



INDEX

1	Font Property
2	Link Property
3	List Property



Font Property

- The CSS font properties define the font family, boldness, size, and the style of a text.
- The font family of a text is set with the font-family property.



Example

- `h1 { font-family: monospace; }`
`h2 { font-family: sans-serif; }`
- `<h1>This is h1 tag</h1>`
`<h2>This is h2 tag</h2>`

This is h1 tag

This is h2 tag



Font-style

- The font-style property is mostly used to specify italic text.
- Example :-
 - #d1 { font-style: italic; }
 - #d2 { font-style: normal; }
- <p id="d1">This italic text....</p>
<p id="d2">This is normal text</p>



Output

This italic text....

This is normal text



Font Size

- The font-size property sets the size of the text.

- Example :-

- ```
p {
 font-size: 50px;
}
```
- ```
<p
```
- ```
>Hello world...</p>
```



Hello world





# Font Weight

- The font-weight property specifies the weight of a font.
- Example :-
- `#p1 { font-weight: bold; }`
- `<p id="p1">Hello world</p>`



# Font Variant

- The font-variant property specifies whether or not a text should be displayed in a small-caps font.

- Example :-

- #p1 {  
font-weight: bold;  
font-size: 25px;  
font-variant: small-caps;  
}
- <p id="p1">Hello world</p>
- <p>Hello world</p>



# Output

**HELLO WORLD**

Hello world



# Links

- With CSS, links can be styled in different ways.
- Example :-
- `a { color: blueviolet; }`
- `<a href="#">Normal Link</a>`



## Cont...

- Links can be styled differently depending on what state they are in.
- The four links states are:
  - a:link - a normal, unvisited link
  - a:visited - a link the user has visited
  - a:hover - a link when the user mouse over it
  - a:active - a link the moment it is clicked



# Example

- `a:link { color: red; }`  
`a:visited { color: yellow; }`  
`a:hover { color: blueviolet; }`  
`a:active { color: black; }`
- `<a href="#">Normal Link</a>`



# Text Decoration

- The text-decoration property is mostly used to remove underlines from links.

- Example :-

- a {  
color: red;  
text-decoration: none;  
}
- <a href="#">Normal Link</a>



# Example with hover

- ```
a {  
  text-decoration: none;  
  background-color: #f44336;  
  color: white;  
  padding: 10px;  
  text-align: center;  
  text-decoration: none;  
}  
a:hover {  
  background: brown;  
  color: white;  
  font-size: 35px;  
}
```
- `Normal Link`



Lists

- The list-style-type property specifies the type of list item marker.
- list-style-type: circle;
- list-style-type: square;
- list-style-type: upper-roman;
- list-style-type: lower-alpha;



Example

- `ul { list-style-type: circle; }`


- ``

- `Item 1`

- `Item 2`

- `Item 3`

- ``

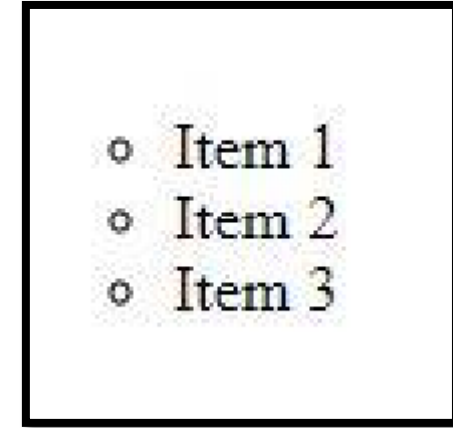

Example

```
ul { list-style-type: square; }
```


```
<ul>
```

```
<li>Item 1</li>
```

```
<li>Item 2</li>
```

```
<li>Item 3</li>
```

```
</ul>
```

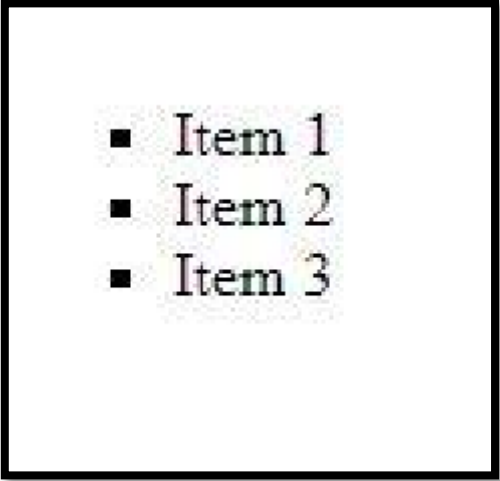- 
- Item 1
 - Item 2
 - Item 3



Example

- `ul{ list-style-type: upper-roman; }`


- ``

- `Item 1`

- `Item 2`

- `Item 3`

- ``

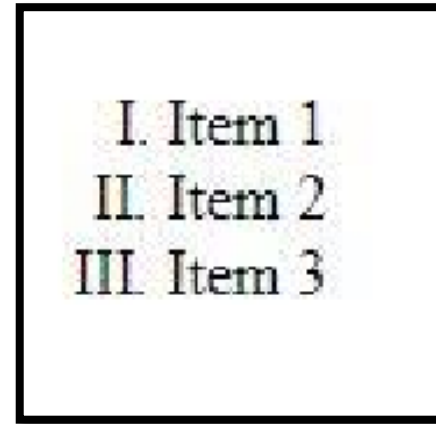

Example

- `ul{ list-style-type: lower-alpha; }`


- ``

- `Item 1`

- `Item 2`

- `Item 3`

- ``

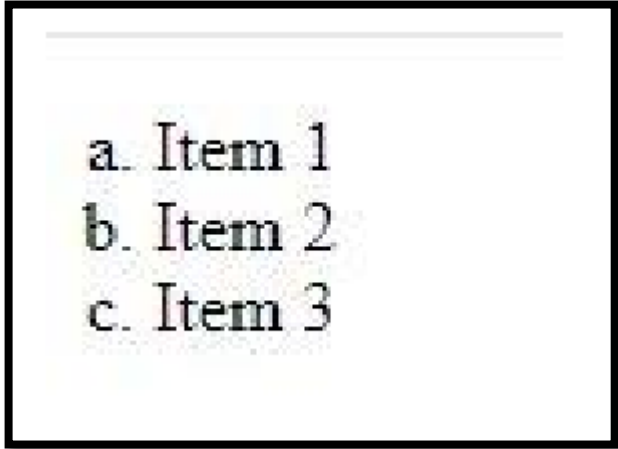

a. Item 1
b. Item 2
c. Item 3



Get Exclusive Video Tutorials



www.apptutorials.com

<https://www.youtube.com/user/Akashtips>





Get More Details

www.akashsir.com



If You Liked It !

Rating Us Now




Just Dial

https://www.justdial.com/Ahmedabad/Akash-Technolabs-Navrangpura-Bus-Stop-Navrangpura/079PXX79-XX79-170615221520-S5C4_BZDET



Sulekha

<https://www.sulekha.com/akash-technolabs-navrangpura-ahmedabad-contact-address/ahmedabad>

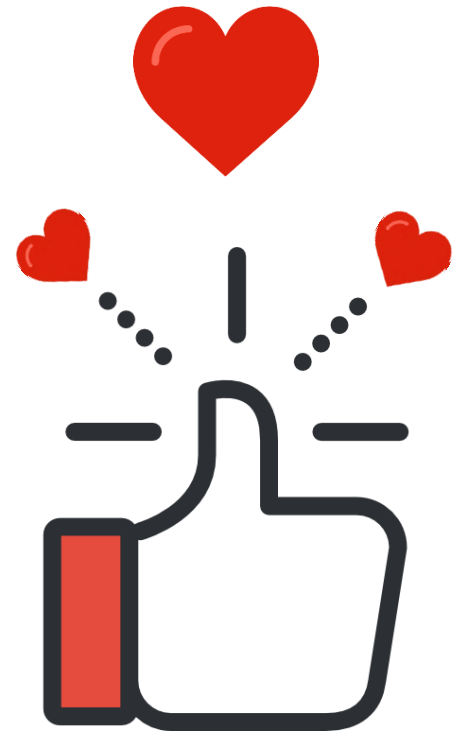

Connect With Me



Akash Padhiyar
#AkashSir

www.akashsir.com
www.akashtechlabs.com
www.akashpadhiyar.com
www.apptutorials.com

Social Info



Akash.padhiyar



Akashpadhiyar



Akash_padhiyar



+91 99786-21654



#Akashpadhiyar
#apptutorials