


- Q.2** Swing is based on ____ architecture.
- ☐ a client server ☐ b model view controller
☐ c layered ☐ d none of these
- Q.3** Swing is not a part of JFC (Java Foundation Classes) that is used to create GUI application.
- ☐ a True ☐ b False
- Q.4** The Java Foundation Classes (JFC) is a set of GUI components which simplify the development of desktop applications.
- ☐ a True
☐ b False
- Q.5** Following letter used as a prefix to swing component ____.
- ☐ a A ☐ b S
☐ c G ☐ d J
- Q.6** ____ is one of the features of object oriented programming that allows the creation of hierarchical classifications.
- ☐ a Polymorphism ☐ b Class
☐ c Inheritance ☐ d Object
- Q.7** In Swing JButton class is derived from ____.
- ☐ a AbstractButton ☐ b JToggleButton
☐ c JComponent ☐ d none of these
- Q.8** The JTextComponent derives two components JTextField and ____.
- ☐ a JComboBox
☐ b JTextArea
☐ c JSlider
☐ d all of the above
- Q.9** In Swing class hierarchy the class present at the root is ____.
- ☐ a component ☐ b window
☐ c container ☐ d object
- Q.10** ____ pane can be used to add component to container.
- ☐ a Glass ☐ b Content
☐ c Container ☐ d All of above

Q.11 Select the correct source code using swing for generating following output.

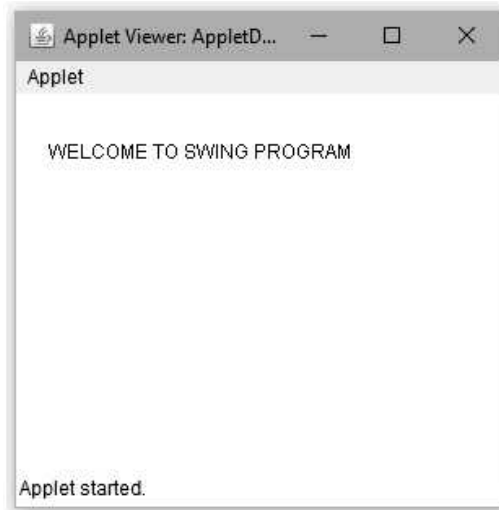

- a**
- ```
public class AppletDemo extends JApplet
{
 public void paint(Graphics g)
 {

 g.msg("WELCOME TO SWING PROGRAM",20,40);
 }
}
```
- b**
- ```
public class AppletDemo extends JApplet
{
    public void paint(Graphics g)
    {
        g.drawString("WELCOME TO SWING PROGRAM",20,40);
    }
}
```
- c**
- ```
public class AppletDemo
{
 public void paint(Graphics g)
 {

 g.drawString("WELCOME TO SWING PROGRAM",20,40);
 }
}
```


☐ d

```
public class AppletDemo extends JApplet
{
 public void paint(Graphics g)
 {

 g.display("WELCOME TO SWING PROGRAM",20,40);

 }
}
```

**Q.12** The components used to display following image are \_\_\_\_\_.

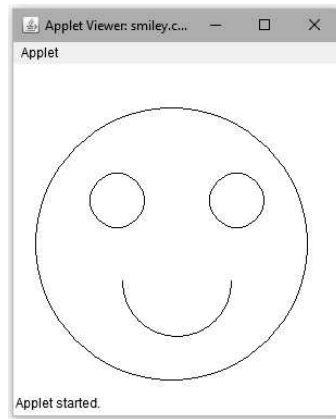

- ☐ a two circle, two arcs
- ☐ b three circle, one arc and one rectangle
- ☐ c four circles
- ☐ d three circles and one arc

**Q.13** To represent Icon file in swing label we use \_\_\_\_\_.

- ☐ a setimg
- ☐ b setIcon
- ☐ c serLabelIcon
- ☐ d none of this

**Q.14** Which of the following component allows multiple selection ?

- ☐ a JList
- ☐ b JComboBox
- ☐ c JLabel
- ☐ d All of the above

**Q.15**

To generate above output we need \_\_\_\_\_.

- ☐ a List, choiceButton, ImageIcon
- ☐ b ComboBox, Image Icon, Label
- ☐ c List and Image Icon
- ☐ d ComboBox and Image Icon

**Q.16** To generate following output the components that are used are \_\_\_\_\_.



- ☐ a Checkbox, Textbox
- ☐ b Radiobutton, Textbox
- ☐ c Checkbox, button
- ☐ d List, Textbox

**Q.17** The subclass of JToggleButton is \_\_\_\_\_.

- ☐ a JButton
- ☐ b JCheckBox
- ☐ c JRadioButton
- ☐ d both b and c

**Q.18** The Swing Component classes that are used in Encapsulates a mutually exclusive set of buttons ?

☐ a) AbstractButton

☐ b) ButtonGroup

☐ c) JButton

☐ d) ImageIcon


**Q.19** Select the correct output generated by following code.


```
import java.awt.*;
import java.applet.*;
/*<applet code=Test.class height=200 width=200>
</applet>*/
public class Test extends Applet
{
 public void init()
 {
 List l= new List(2,true);
 l.add("Java");
 l.add("C++");
 l.add("Python");
 add(l);
 }
}
```

☐ a



☐ b

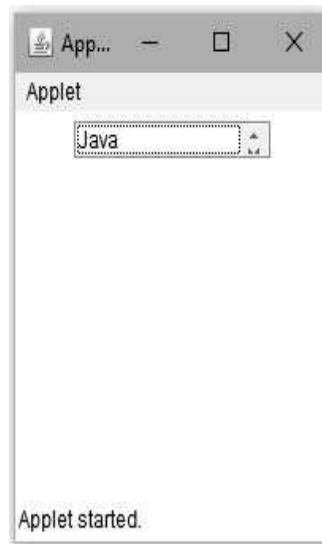

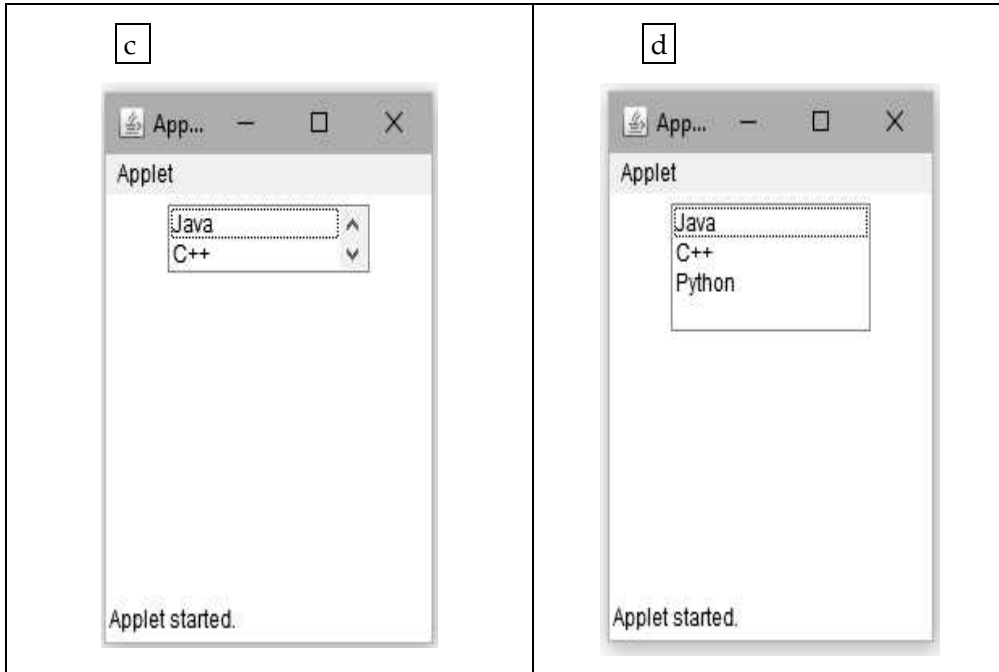

**Q.20 Which method of the component class is used to set the position and size of a component ?**

- ☐ a setPostion                      ☐ b setBounds  
☐ c setSize                           ☐ d none of these

**Q.21 Select the correct option.**

**I. Canvas is a component.**

**II. ScrollPane is a container.**

- ☐ a I is True and II is False                      ☐ b I is False and II is True  
☐ c I and II both are False                        ☐ d I and II both are true

**Q.22 The difference between Scrollbar and Scrollpane is \_\_\_\_\_.**

- ☐ a Scrollbar is component and Scrollpane is container  
☐ b Scrollbar is container and Scrollpane is component  
☐ c Scrollbar and Scrollpane both are components and not containers  
☐ d Scrollbar and Scrollpane both are container and not components

**Q.23 Frame class Extends Window.**

- ☐ a True                                              ☐ b False

**Q.24 Which is the container class ?**☐ a Window☐ b Frame☐ c Dialog☐ d All of the above**Q.25 Following is uneditable control.**☐ a Button☐ b Textfield☐ c Label☐ d List**Q.26 Debug the following program**

```
import javax.swing.*;
import java.awt.*;
import javax.swing.tree.*;
/*
<applet code="TableDemo" width=300 height=100>
</applet>
*/
public class TableDemo extends JApplet
{
 public void init()
 {
 Container contentPane = getContentPane();
 contentPane.setLayout(new BorderLayout());
 final String[] th = { "Name", "City", "Salary", "Designation" };
 final Object[][] mytable = {
 { "Arun", "Pune", "5000", "Accountant" },
 { "Archana", "Mumbai", "7000", "Executive" },
 { "Shivani", "Banglore", "10000", "Manager" },
 { "Priyanka", "Chennai", "8000", "Programmer" },
 { "Monika", "Hyderabad", "10000", "Designer" },
 { "Shilpa", "Hyderabad", "12000", "Director" },
 { "Anuja", "Delhi", "17000", "Director" },
 { "Kumar", "Pune", "10000", "Manager" }
 };

 JTable table = new JTable(mytable);


 int vscrollbar = ScrollPaneConstants.
VERTICAL_SCROLLBAR_AS_NEEDED;
 int hscrollbar = ScrollPaneConstants.
HORIZONTAL_SCROLLBAR_AS_NEEDED;
 JScrollPane mypane = new JScrollPane(table, vscrollbar, hscrollbar);
 contentPane.add(mypane, BorderLayout.CENTER);
 }
}
```

- ☐ a Error in statement in which JTable is created.
- ☐ b Error in statement in which JScrollPane is created.
- ☐ c Error in statement in which applet tag is declared.
- ☐ d None of these

**Q.27** JPanel and Applet use \_\_\_\_\_ as their default layout.

- ☐ a FlowLayout
- ☐ b GridLayout
- ☐ c BorderLayout
- ☐ d GridBagLayout

**Q.28** Which components are used to generate following output ?

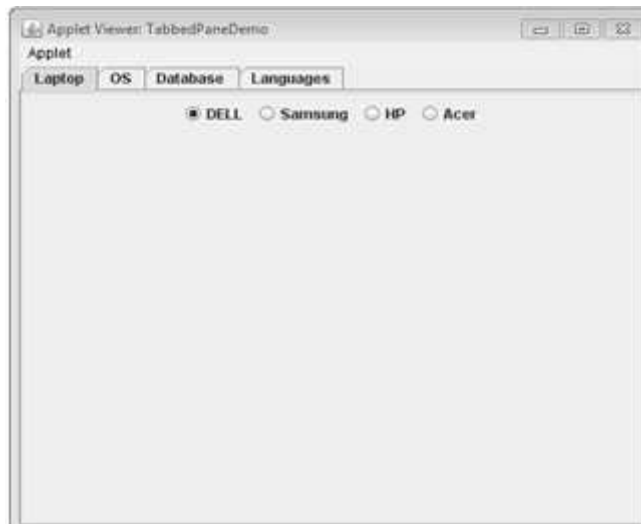

- ☐ a Panel, TabbedPane, Radio button
- ☐ b TabbedPane, List
- ☐ c TabbedPane, Panel
- ☐ d Label, TabbedPane, Checkbox

**Q.29** MVC stands for \_\_\_\_\_.

- ☐ a Model Version Control
- ☐ b Model View Controller
- ☐ c Mini View Controller
- ☐ d Major View Controller

**Q.30** MVC architecture is used by swing.

- ☐ a True
- ☐ b False

**Q.31** In swing \_\_\_\_ gives the visual representation of the component.

- ☐ a model
- ☐ b view
- ☐ c controller
- ☐ d none of these

**Q.32** In swing the event handling task is carried out by \_\_\_\_.

- ☐ a model
- ☐ b view
- ☐ c controller
- ☐ d none of these



**Q.33** \_\_\_\_\_ represents enterprise data and the business rules that gives access to enterprise data.

- ☐ a Model
- ☐ b View
- ☐ c Controller
- ☐ d None of these

**Answer Keys for Multiple Choice Questions :**

|      |   |      |   |      |   |      |   |
|------|---|------|---|------|---|------|---|
| Q.1  | a | Q.2  | b | Q.3  | b | Q.4  | a |
| Q.5  | d | Q.6  | c | Q.7  | a | Q.8  | b |
| Q.9  | d | Q.10 | b | Q.11 | b | Q.12 | d |
| Q.13 | b | Q.14 | a | Q.15 | b | Q.16 | a |
| Q.17 | d | Q.18 | b | Q.19 | c | Q.20 | b |
| Q.21 | d | Q.22 | a | Q.23 | a | Q.24 | d |
| Q.25 | c | Q.26 | a | Q.27 | a | Q.28 | a |
| Q.29 | b | Q.30 | a | Q.31 | b | Q.32 | c |
| Q.33 | a |      |   |      |   |      |   |

**Explanations :**

**Q.19 :** In above code we have pass 2 as a first parameter to the constructor **list**. Hence first two items of the list will be displayed. The second parameter to **list** is true that means this list is a scrollable. Hence the correct option is c.

**Q.21 :** Canvas is a rectangular area where the application can draw or trap input events. ScrollPane implements horizontal and vertical scrolling.

**Q.26 :** While creating the JTable we need to pass both table data and header data. The correct statement is

```
JTable table = new JTable(mytable,th);
```

