BUSINESS INTELLIGENCE / WORKSHOP 2

Customer concentration: from EDA to credible validation

A descriptive validation and sampling study of UCI Online Retail

Moisés Medina and Ignacia Castillo Revised 8 November 2026

Submission role. This is a supplemental report; the executed English notebook and README are the primary artifacts. The original analysis was prepared on 20 October for the specific W2 deadline of 29 October 2026, 23:59, Chile. This correction, recorded on 8 November after feedback, makes the executable evidence accessible. It does not claim that the missing artifacts were received on time or that the grade changed.

Repository: `https://github.com/DirtyCheese02/online-retail-bi-medina-castillo`

Corrective release: `w2-feedback-2026-11-08`; executed notebook; README and execution instructions.

Immutable analytical baseline SHA: `d33a27c97a3bb9e6b31fb9cb23be83156c11d0f3`. This is the pre-feedback code/data baseline; the corrective release has its own later commit.

1 Continuity, decision and measurement

We retain the W1/C1 question: how much eligible recorded purchase value is attributable to the highest-value 10% of identifiable customers, and how much value cannot enter that ranking because an ID is missing? A proposed commercial analyst could use the evidence for a retrospective account review and a review of ID capture. This is a proposed use, not the anonymous retailer's documented strategy.

The team reports 100/100 in C1. The initial W2 self-audits remain identified as such in Section 4. Actual W2 feedback, recorded later from the team, concerns missing received evidence and traceability; Section 11 responds to it. The original W1/C1 submissions and earlier W2 tags remain preserved.

Let v_i denote eligible recorded value for known customer i, N the known-ID population and $k = \lceil 0.10N \rceil$. Sorting v_i from highest to lowest,

$$K_{10} = 100\frac{\sum_{i=1}^{k} v_i}{\sum_{i=1}^{N} v_i}, \qquad C_{ID} = 100\frac{\text{known-ID eligible value}}{\text{all eligible purchase value}}.$$

Values use pounds sterling; both measures are percentages. Cutoffs round upward to whole IDs. ID coverage is value-weighted, not a fraction of rows. Neither measure is net revenue, margin, loyalty, lifetime value or an established risk tolerance.

Reproduced C1 baseline	W2 result
Source invoice lines	516,384
Eligible positive purchase lines	500,531
Identifiable customers / top-decile IDs	4,293 / 430
K10 / ID-value coverage	60.5001% / 85.6628%
Eligible value / known-ID value	£9,610,990.56 / £8,233,040.56

The baseline matches C1 numerically within the executable floating-point tolerance. We retain its bounded concentration conclusion. W2 strengthens the checkable evidence and the interpretation of coverage and validation; it does not establish a current operational effect.

2 Source, dictionary and analytical scope

UCI Online Retail (Chen, 2015; DOI 10.24432/C5BW33; CC BY 4.0) describes an online gift retailer based in the UK with many wholesale customers. Its original file has 541,909 records from 1 December 2010 to 9 December 2011. The unchanged case input keeps all 516,384 rows through 30 November 2011, excluding only the final nine-day December fragment. Complete months have unequal lengths and activity; complete date coverage does not prove complete capture of real transactions.

One row is one recorded invoice line. An invoice contains multiple lines and a CustomerID can link multiple invoices. InvoiceNo is therefore not a unique row key. A C prefix identifies a cancellation record; there is no verified original-purchase link. Country is a label on the record, not a verified delivery destination or a necessarily stable attribute of an ID.

Original field	Meaning / unit	Type and missingness
InvoiceNo	Invoice identifier; C prefix marks a cancellation record	string; Not expected; cannot identify invoice if absent
StockCode	Source item/special-code identifier, not commercial category	string; Not expected; flag rather than invent item
Description	Recorded item description	nullable string; Unknown/unrecorded description; not proof of zero activity
Quantity	Signed units on an invoice line	integer; Not expected; cannot calculate line value
InvoiceDate	Recorded invoice-line timestamp	datetime; Not expected; cannot assign period
UnitPrice	Recorded unit price in GBP	numeric; Not expected; no price imputation
CustomerID	Identifier linking recorded lines to a customer account	nullable integer; Unidentified purchase; no ID imputation
Country	Customer country recorded on this line	string; Meaning unknown if absent; not delivery destination

The full machine-readable dictionary also covers derived flags, source row, row groups, split membership, value and KPI formulas.

Eligibility. A purchase must have positive Quantity and UnitPrice, no C prefix and a StockCode matching five digits with an optional final letter. The pattern is a provisional scope rule, not a verified commercial classification. Eligible line value is Quantity times UnitPrice. Eligible cancellation records instead require a C prefix, negative quantity, positive price and the same code rule. All remaining rows stay in the prepared file outside both measures.

Retention rationale. A missing ID prevents ranking but does not erase recorded value. A missing description alone does not affect the calculation. A zero or negative price is outside the positive-value measure; substituting another price would invent a charge without knowing the reason. Exact repeats remain in the baseline because no source-line identifier establishes which are erroneous. We test alternatives instead of silently deleting records. An undefined derived value outside the purchase scope is not an observed zero.

Mutually exclusive group	Rows
other_retained	7,502
priced_C_record	8,351
priced_purchase	500,531

The input SHA-256 is checked before analysis. Original fields and the one-to-one source-row identifier are preserved in the prepared table. No source lines are lost; flags may overlap, whereas the three row groups do not.

3 Quality validation and consequential checks

The notebook implements seventeen checks. Structural violations stop execution; scoped exceptions are flagged with a documented treatment. "Flag" does not mean the record has been proved wrong. The source and prepared counts both remain 516,384.

Check	Count / status	Treatment
Q01 Schema and numeric/time types	0 / PASS	retain
Q02 Invalid/missing timestamps or outside case bounds	0 / PASS	retain
Q03 Missing invoice or item identifier	0 / PASS	retain
Q04 Nonpositive unit prices	2,463 / FLAG	retain source; exclude from positive-value measures
Q05 Nonpositive quantities	10,234 / FLAG	retain; separate eligible negative C records
Q06 Missing CustomerID	127,216 / FLAG	retain eligible value; exclude from customer rank
Q07 Missing description	1,439 / FLAG	retain if otherwise eligible
Q08 Exact repeated rows beyond first copy	4,989 / FLAG	retain baseline; compare deduplicated sensitivity
Q09 Outside provisional merchandise-code pattern	5,072 / FLAG	retain source; exclude baseline; test alternative patterns
Q10 Negative quantity without C prefix	1,306 / FLAG	retain outside both eligible measures
Q11 Source-row conservation and disjoint partition violations	0 / PASS	retain
Q12 Eligible purchase invoices with multiple known IDs	0 / PASS	retain
Q13 Invoice numbers with multiple timestamps	43 / FLAG	retain; use min/max interval and check split boundaries
Q14 Customer IDs with multiple country labels	8 / FLAG	retain country at line level; flag identity consistency
Q15 Invoices crossing chronological partition boundaries	0 / PASS	retain
Q16 Missing quantities or prices	0 / PASS	retain
Q17 Purchase invoices mixing identified and unidentified lines	0 / PASS	retain

Invoice timestamps vary within 43 InvoiceNo values; the maximum observed span, in minutes, is 1, and 0 of these intervals cross a calendar day. We preserve original timestamps and use first/last times to verify boundaries. None crosses the specified train/validation/test boundaries. Eight IDs have multiple country labels. We retain country at line level rather than asserting fixed residence or overwriting an ID's history. Exception tables list the affected identifiers and evidence.

4 Feedback-to-action and changes to conclusions

The entries below are self-audits or W2 extensions. They are not attributed to the instructor. The full table includes notebook sections, generated evidence paths and the reason for each action.

Issue	Action	Consequence
A provisional product-code scope could be mistaken for a verified category	Keep the rule explicit and repeat narrow/broad code sensitivities	K10 is conditional on the stated merchandise rule
43 invoices have multiple timestamps	Inspect first/last timestamps and assert no invoice crosses split boundaries	Retain invoice lines; do not assign future lines to an earlier partition
8 CustomerIDs have multiple country labels	Keep source country per line; use line-value country proportions; do not force one country per ID	Country comparisons do not establish fixed residence or stable identity
K10 monthly ranking changes with observed IDs and coverage	Show monthly N and ID-value coverage alongside K10	A lower K10 alone does not establish diversification
Entire source period was explored in W1/C1	Freeze W2 rules and use chronological held periods with prior-exposure disclosure	No predictive-accuracy or virgin-holdout conclusion

What changed and what did not

The numerical full-case K10 and coverage remain unchanged. The product-code interpretation is made explicitly provisional. Invoice time and country consistency receive new executable checks. The monthly narrative states that population mix and missingness are possible explanations, rather than claiming a causal mechanism. The temporal holdout is documented as reused historical evidence because W1/C1 already inspected all periods. No claim of predictive performance is added.

Five Cs carried forward

Clean: observable checks and justified retention are exported. Consistent: unchanged purchase and KPI rules apply across the twelve months. Conformed: no external join is forced; cross-source agreement is not applicable. Current: 2010–2011 records support historical analysis; recent data are needed for operational use. Comprehensive: unidentified value, provisional product scope, missing financial costs/payments and absent purchase–cancellation links remain limitations.

5 Revised exploratory evidence

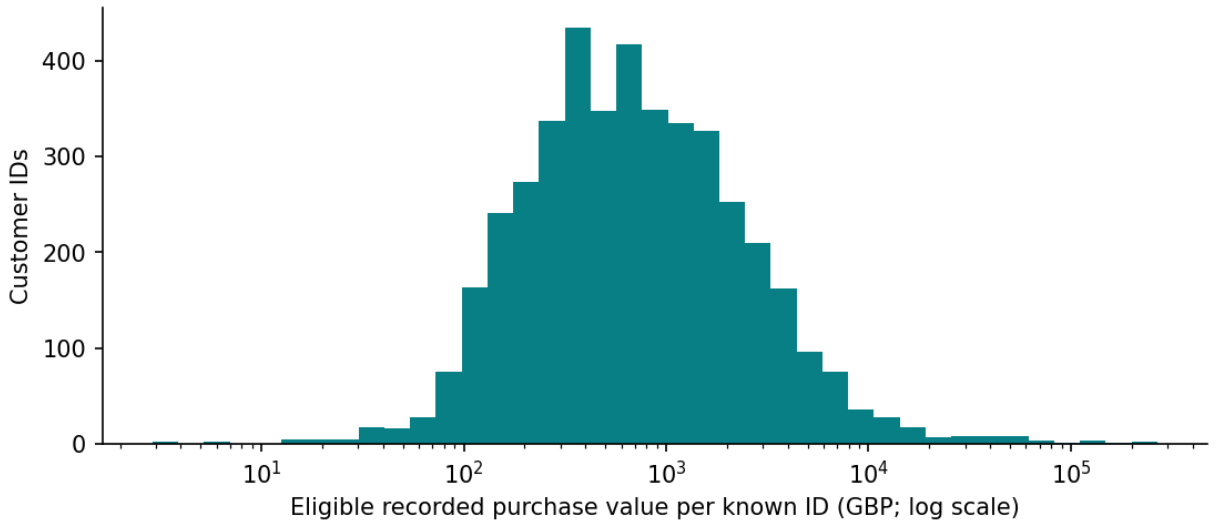


Figure 1: Known-ID eligible purchase value over the full twelve-month case. The logarithmic x-axis makes the long upper range visible; it does not remove large accounts.

The median is £652.80, the mean £1,917.78, and the maximum £267,410.00. The mean is not representative of every customer. A large recorded account is not, by itself, proof of an error or of loyalty.

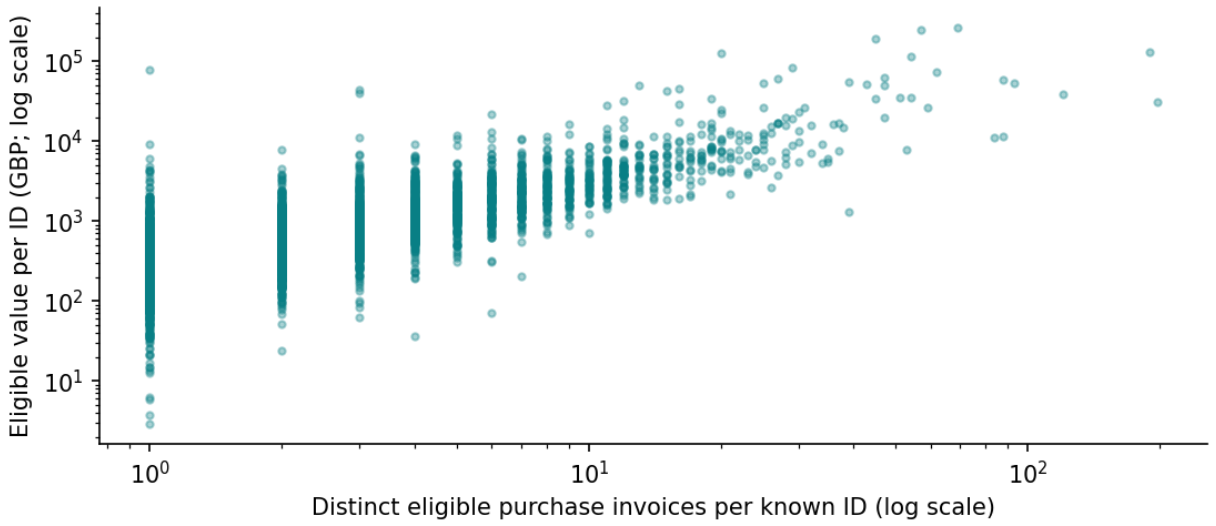


Figure 2: Eligible invoice frequency and recorded value per known ID. Both axes use logarithms; each point is a known customer in this window.

Spearman correlation is 0.803; Pearson correlation is 0.569. More observed invoices give more opportunities to accumulate value, so the relationship is partly arithmetic. It does not establish that an intervention would cause higher loyalty, revenue or profit.

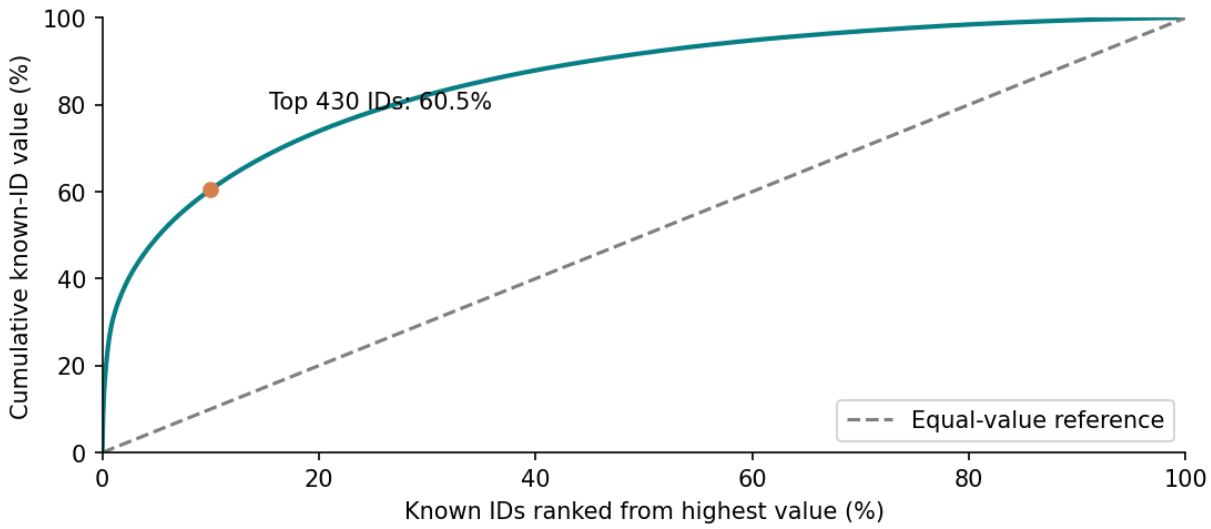


Figure 3: Cumulative known-ID value ranked from highest to lowest; the diagonal is an equal-value reference. The top group is rounded to 430 IDs.

The top 430 of 4,293 identified customers account for 60.5% of known purchase value. This concentration is conditional on IDs covering 85.7% of all eligible value. Sensitivity checks give K10 between 59.22% and 60.58%; they do not recover unidentified purchases.

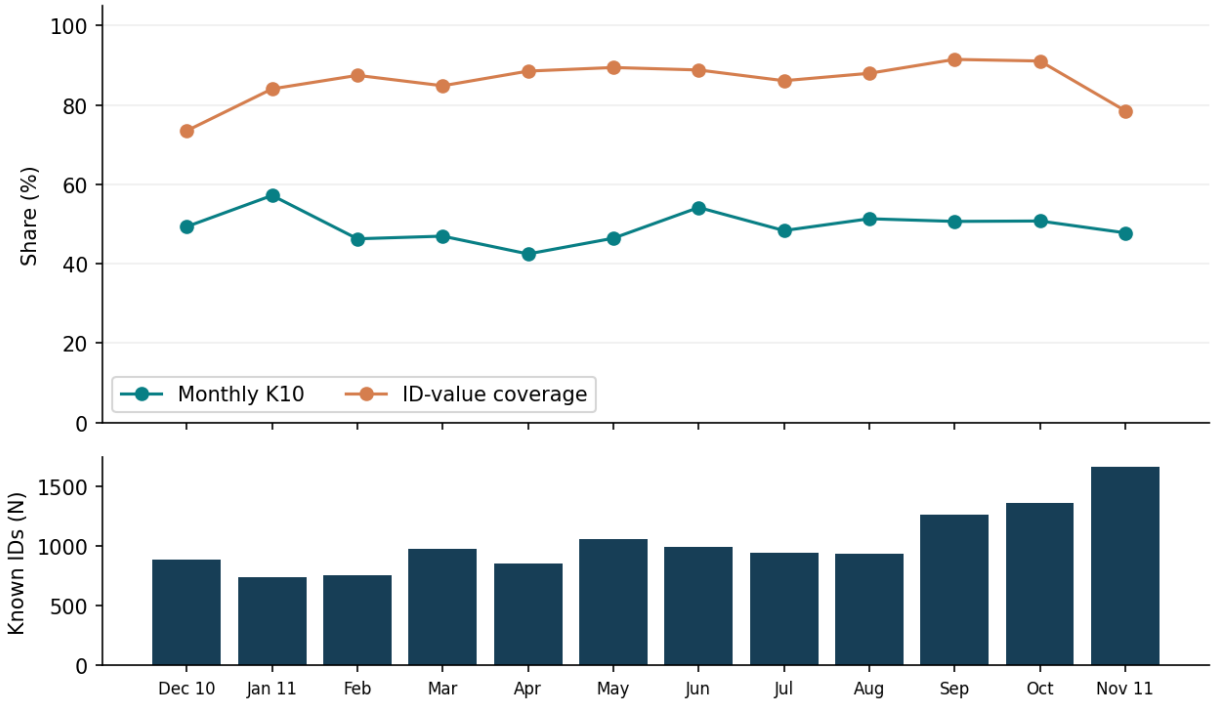


Figure 4: Monthly K10 and ID-value coverage share a 0–100 percent scale; the lower panel reports known-ID population N. IDs are re-ranked within each month.

October K10 is 50.8% and November K10 47.8%, while ID coverage falls from 91.1% to 78.6%. This does not establish diversification or prove that missing IDs caused the change. Different account mixes, identification processes and activity could affect the observed ranking. One annual cycle cannot establish a recurring Christmas effect.

6 Sampling and representativeness

The historical target is relevant purchase activity for the retailer during the selected year. The observed population consists of the available source records within our complete-month extract. The value dataset includes eligible purchase lines; K10 additionally requires identifiable customer aggregates. None is a probability sample of UK retailers. A future operational target would require recent accounts and processes.

Plausible coverage biases include unidentified purchases, unrecorded activity in the operational source, the single historical gift retailer and provisional item-code exclusions. Splitting records cannot repair these source-coverage mechanisms.

We select approximately 25% of distinct invoices within each earliest-invoice-month, using seed 4232026 and whole-invoice rounding. All lines of selected invoices remain together. The size is an instructional subsampling exercise, not a claim of population power or precision. Varying invoice sizes and rounding make the realized row percentage slightly different. The seed is fixed; it is not selected to make the sample look representative.

Measure	Complete case	Invoice sample	Difference
Source rows	516,384	130,912	25.35% of source rows
Known customers	4,293	2,217	Ranking population changes
K10	60.50%	54.01%	-6.49 pp
ID-value coverage	85.66%	85.21%	-0.45 pp
UK share of eligible value	84.62%	83.13%	-1.49 pp

UK share uses the recorded country of each eligible purchase line and includes unidentified value. It does not force a permanent country onto a customer. Invoice sampling reduces observed history per ID and removes some IDs entirely; the observed top decile therefore changes. Sample K10 is not an unbiased reconstruction guarantee for the full customer's annual portfolio. These differences describe one fixed sample, not confidence intervals or proof of sampling bias. The complete case remains our main descriptive population. Sampling is separate from the chronological split and is not used to decide which rows fit preprocessing.

Month	Invoices: available / sampled	Rows: available / sampled
2010-12	2,025 / 506	42,481 / 10,569
2011-01	1,476 / 369	35,147 / 8,485
2011-02	1,393 / 348	27,707 / 6,971
2011-03	1,983 / 496	36,748 / 9,410
2011-04	1,744 / 436	29,916 / 7,824
2011-05	2,162 / 540	37,030 / 8,830
2011-06	2,012 / 503	36,874 / 9,177
2011-07	1,927 / 482	39,518 / 10,596
2011-08	1,737 / 434	35,284 / 8,261
2011-09	2,327 / 582	50,226 / 11,938
2011-10	2,637 / 659	60,742 / 16,089
2011-11	3,462 / 866	84,711 / 22,762

7 Temporal holdout and validation procedure

The proposed decision time is after month-end. Completed invoices up to the cut-off are available for account review. Full-year future totals and ranks would not be legitimate earlier-period features. We partition the complete source case, not its 25% invoice sample. All row groups, including missing-ID and non-measure records, are saved in the actual split files.

First, October–November is reserved as test. The earlier December–September development pool is the initial training pool before validation is removed. Second, August–September is carved out of that pool as validation, leaving December–July for fitting. Validation contains no test rows. This hierarchy and its parent-relative proportions are exported in `data/processed/split_hierarchy.csv`.

Partition / inclusive months	Source rows	Row share	Invoices	Eligible known IDs
train: Dec 2010–Jul 2011	285,421	55.27%	14,722	3,145
validation: Aug–Sep 2011	85,510	16.56%	4,064	1,769
test: Oct–Nov 2011	145,453	28.17%	6,099	2,405

The boundaries are 1 August, 1 October and 1 December 2011, with half-open intervals. Calendar duration is not an imposed 80/20 row ratio; activity differs across months. Structural checks confirm every source row belongs to one partition, no invoice crosses a boundary and no exact source-record hash appears in two partitions.

Comparison	Source-row overlap	Invoice overlap	Known-ID overlap
train / validation	0	0	1352
train / test	0	0	1566
validation / test	0	0	1156

Repeated customers are intentional for reviewing the same account population in later periods. The held periods are separate observations, but not independent new-customer samples. A new-customer generalization claim would require grouped validation. We use period-specific aggregates and explicitly report overlap instead of asserting customer independence.

Training-only fitted operation

For each eligible invoice we sum its positive purchase value, apply log1p and fit StandardScaler on training invoices only. Invoice value is available after completion for the stated review; it would not be a valid predictor of itself before purchase. No CustomerID or price is imputed. K10 continues to use original pounds, not scaled values.

Partition	Eligible invoices	Mean scaled log value	SD scaled log value
train	11,040	-0.0000	1.0000
validation	3,157	0.1457	0.9591
test	4,756	0.0871	0.9672

The fitted mean is 5.508743 and scale 1.194544, estimated from 11,040 training invoices. The validation gate requires finite transformed values, positive eligible invoice totals, unique invoice keys and unchanged training parameters. Failure stops execution before test transformation. The ordered fit, validation gate and test transformation are exported in `data/processed/validation_execution.csv`. These are applicability checks; no predictive-performance target or test-driven tuning is introduced. Nonzero held-period means do not justify refitting on them.

Exposure limit. W1/C1 already inspected all twelve months. The protocol was fixed before W2 result tables, but the current holdout cannot become an untouched prospective test by relabeling it. It is a descriptive robustness comparison. We report monthly KPIs rather than interpreting unequal-duration partition totals as comparable. No predictive model, outcome label or accuracy metric is produced.

7 Temporal holdout: descriptive findings

After validation, we recalculate K10 and coverage separately within each month using only that month's purchases and known IDs. Each month receives equal weight in the summary below. These are means of monthly shares, not a pooled-period K10 or a comparison of raw totals from unequal windows.

Partition / months	Mean monthly K10	Monthly K10 range	Mean monthly ID coverage
train / 8	48.91%	42.48% – 57.21%	85.34%
validation / 2	51.01%	50.67% – 51.34%	89.72%
test / 2	49.28%	47.79% – 50.77%	84.81%

Test mean monthly K10 differs from training by +0.37 percentage points. Concentration remains substantial in the held months, while its level varies. The annual K10 of 60.50% pools longer customer histories; it is not a target expected in every month.

Interpretation. Observed customer mix, invoice histories and ID coverage differ between months. These descriptive differences do not identify a cause, establish a seasonal effect or measure predictive accuracy. The detailed monthly table includes each denominator and is saved as `data/processed/holdout_monthly_kpi.csv`.

Audit amendment, 21 October 2026. The explicit development hierarchy, ordered validation gate and this holdout table strengthen the evidence for criterion F. They preserve the previously fixed dates, eligibility and scaler. They were added after prior full-case exposure; no claim of newly unseen test data is made, and no observed difference selects a transformation or rule. A genuinely later period remains necessary for prospective evaluation.

8 Context-specific leakage audit

The audit reports observed risks, conditional future risks and implemented safeguards. Status is contextual: shared customer IDs do not alone imply inappropriate leakage for the same-account scenario, but invalidate an independent new-customer claim.

Risk / status	Evidence	Consequence and mitigation
Future full-case customer totals/rank / present in prior artifacts	C1 aggregates span Dec 2010–Nov 2011; not W2 pre-cutoff features	Would reveal later purchases before review date. Rebuild invoice/period aggregates from rows available at that cut-off; exclude full-year rank from features
Repeated customer accounts / present	1566 known IDs occur in both train and test	Invalid new-customer independence claim; global customer aggregation could leak future history. Allow repeated IDs for same-account time review; disclose dependence; no full-case profile reuse
Duplicated event lines across partitions / absent across chosen partitions	4989 extra exact repeats within source; zero record-hash and invoice overlap across partitions	Random line splitting could put copies or sibling invoice lines on both sides. Partition by recorded time and verify invoice/record-hash boundaries; retain baseline repeats with sensitivity
Preprocessing learned on validation/test / absent in W2	Scaler fit on 11040 train invoices; parameters unchanged after transformations	Full-data mean/scale would let held data influence fitted rule. Fit once on train; transform validation/test; export fit parameters and invariance checks
Target-derived variables in hypothetical prediction / uncertain for future use; no target/model in W2	Invoice value, period value and K10 use completed purchases	Predicting the same purchase value from its total/rank would be circular. Define any future outcome and horizon first; use only prior-cutoff information; no accuracy claim here
Prior full-case exploration / analyst leakage / present	W1/C1 inspected all twelve months, including Oct–Nov; source snapshots retained	Current test cannot be described as untouched prospective evidence. Prespecify W2 transformations; treat as descriptive robustness; collect a genuinely later period before prospective evaluation
Linked external tables / absent / not applicable	Single UCI source; W2 performs no external join	Future joins could leak later customer states or create duplicate rows. No forced join; require as-of keys, cardinality and match checks before future integration

A future predictive task must specify an outcome and horizon, and restrict inputs to what exists at the decision cut-off. Customer-profile clustering remains a possible later descriptive extension with no invented target labels. W2 establishes boundaries and a fitted transformation, not model feasibility or performance.

9 Management summary

Our historical account-review question and K10 definition remain unchanged from C1. The complete case still contains 4,293 identifiable customers: the highest-value 10% account for 60.5% of known purchase value, while IDs cover 85.7% of eligible value. W2 adds explicit validation, a month-stratified invoice sample and chronological training, validation and test partitions. We retained 43 invoices with multiple timestamps and 8 IDs with multiple country labels, documenting their interpretation rather than overwriting records. The sample contains 25.4% of source lines and yields K10 of 54.0%, illustrating the effect of observing fewer invoices per customer. Train-only preprocessing prevents held periods from determining the fitted scale. However, missing IDs, provisional product codes and prior exploration of all periods still limit generalization. We recommend reviewing major accounts and ID capture together, then obtaining recent transactions and verified identity/code definitions before operational use or prospective evaluation.

10 Process record and rubric evidence

Decisions and checks

The unchanged input hash, source-row conservation, baseline reproduction, seventeen quality checks, whole-invoice sample, partition overlaps and scaler parameters are executable evidence. `evidence/protocol.json` records seed, row rules, time windows, exposure history and the no-test-tuning policy. The notebook is run from a fresh kernel with saved outputs. Exported tables and figures are regenerated from that same code; this report's numeric content is generated from those outputs.

Feedback and contributions

The team-reported C1 result is 100/100. Section 4 retains five original self-audit/extension entries. Actual W2 feedback is recorded separately in `evidence/W2_feedback_response.csv` and Section 11; it is not retroactively attributed to C1. The members are Moisés Medina and Ignacia Castillo; no new individual task division or reflection is asserted.

AI use and verification

OpenAI Codex assisted with code, notebook/report drafts and formatting. The implementation request prescribed continuity, invoice sampling, fixed seed, time partitions and a training-only scaler. Accepted suggestions include explicit flags and exported check evidence. Claims that zero prices have a proven discount cause, repeats are proven errors, C invoices establish matched returns, or the holdout is pristine are excluded. Assertions and automated reruns verify consequential suggestions. Those are automated checks, not claims that a particular student personally performed each check. The team is responsible for reviewing and defending the final analysis.

W2 criterion	Inspectable evidence
A Continuity and feedback	Notebook 1–3; preserved assessments; feedback_to_action.csv; unchanged baseline
B Revised EDA	Notebook 4; four labelled figures; statistics, denominators and limits
C Validation	Notebook 2–3; dictionary; quality_checks.csv; row_flow.csv; exception tables
D Sampling	Notebook 5; sample_strata.csv; actual sample; KPI/UK comparison and bias discussion
E Leakage	Notebook 7; seven contextual risks with evidence, status and safeguards
F Holdout and validation	Notebook 6; actual split files, counts, overlaps, fit parameters and prior-exposure limit
G Communication	Executed English notebook; README; summary; AI statement; repository commit/tag

11 Actual W2 feedback: correction and direct evidence

The instructor reported that only this supplemental PDF was received, without the executable notebook, code/subsets or a direct versioned repository link. The analytical files already existed, but local verification did not establish completeness of the received hand-in. We correct that delivery gap below; original rules, seed, windows and baseline results remain unchanged.

Read or rerun the primary evidence. Open the notebook and README through the front-page links. For execution, clone the repository at the corrective release tag, install `requirements.txt`, and run `pythonsrc/execute_notebook.py`. The notebook imports the included source modules and reads the included public data; the PDF or notebook alone is not a self-contained execution package.

Feedback	Correction	Clickable evidence
C2 (-3)	Inspect the seventeen executable quality checks.	validate implementation; saved quality results
D2 (-2)	Reproduce the fixed-seed invoice sample and inspect selected IDs.	sampling implementation; sample IDs; actual sample
F2 (-4)	Inspect actual subsets and verify membership/overlap.	split implementation; train; validation; test; overlap results
F3 (-2)	Verify the training-only fitted scaler and unchanged transforms.	preprocessing implementation; fitted parameters; invoice-level transforms
F4 (-2)	Verify the validation gate precedes test transformation.	gate implementation; ordered execution log; development hierarchy
G1 (-2)	Attach the primary files and include the direct repository link.	executed notebook; README; hand-in instructions
G2 (-1)	Identify an inspectable W2 version in the report itself.	release tree; version identity

Receipt control. Attach the executed notebook and README when required, include this PDF as a supplement, and paste the repository URL, full submitted SHA and direct versioned tree into the submission form. Resolve the release tag to its full SHA with `gitrev-parse'w2-feedback-2026-11-08^{commit}'`. The baseline SHA on page 1 identifies the unchanged pre-feedback analysis, not this PDF's own commit.

The criterion codes and deductions above are the W2 scoring comments relayed by the team; "C2" in this table is a rubric subcriterion, not Certamen 2. No regrade or late-submission acceptance is asserted.

12 C2 continuation: value coverage and stability

The instructor recommends testing concentration in a later period or a recently observed cohort, and examining which commercial decisions remain defensible when unidentified value is kept separate. These are next-stage questions, not completed C2 results.

Initial decomposition of value scope

We keep the known-ID top group fixed at the existing 430 accounts. The following accounting decomposition changes only the denominator to all eligible purchase value. K10 itself remains a known-ID measure.

Value bucket	Share of all eligible purchase value
Known-ID top 10% group	51.83%
Other known-ID purchases	33.84%
Unidentified purchases	14.34%

The known top group has attributable purchase value equal to $K_{10} \times C_{ID}/100$ percent of all eligible value. Unidentified purchases form an aggregate bucket which may contain many people; they are never treated as one customer or assigned a fabricated ID. The three shares sum to 100% before rounding.

Defensible decisions. Review the identified high-contribution accounts and their invoices, and investigate the separate unidentified-value bucket through ID-capture diagnostics. The evidence does not establish that the identified group is the top 10% of all real customers, or that a discount/loyalty intervention would improve profit. Customer-level allocation of the unidentified bucket requires verified linkage.

Planned temporal and cohort extension

Freeze an earlier ranking using information through 30 September 2011, then follow those same accounts in October–November. Contrast their later value share with a contemporaneous re-ranked top decile, reporting active counts, coverage and denominators. This distinguishes persistence of important accounts from the mere existence of concentration in each month.

A separate first-observed cohort comparison should use equal follow-up windows and flag incomplete histories. First observed in this file is not proof of actual acquisition. All existing 2011 periods were previously explored: this would be a retrospective extension, not prospective validation or evidence about recent 2026 customers. Genuinely recent data are not currently available. The detailed proposed protocol is in `docs/C2_FEEDBACK_PLAN.md`; no new model or unseen-data conclusion is claimed here.

References and source attribution

1. Chen, D. (2015). *Online Retail*. UCI Machine Learning Repository. DOI: 10.24432/C5BW33. Dataset/dictionary/licence: `https://archive.ics.uci.edu/dataset/352/online-retail`. CC BY 4.0. Original retrieval evidence remains in the preserved source manifest; W2 uses the unchanged local extract.

2. Fontecilla, T. (2026). *Workshop 2: From Exploratory Analysis to Credible Validation*. Student brief and rubric supplied in the course workspace. Deadline printed: 29 October 2026.

3. Course notebooks (2026): *Validation, Leakage and Reproducible Pipelines*; *Guided Validation Case*; *Sampling, Regression and Classification*. Used for split selection, leakage and training-only preprocessing. Course files are cited but not redistributed.

4. Medina, M., and Castillo, I. (2026). W1 and C1 submitted project reports and executed notebooks, preserved under `assessments/`. Prior concentration evidence and source limitations are retained for continuity.