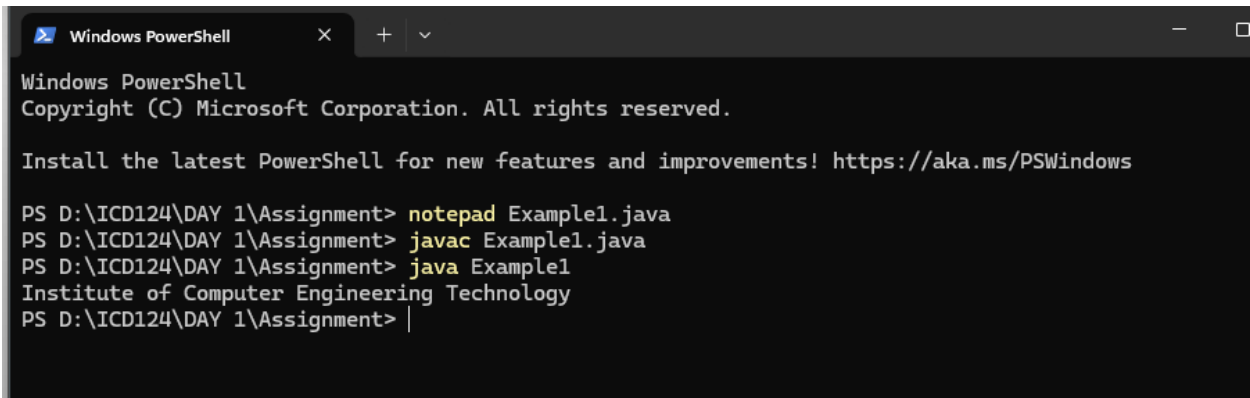


01.

```
class Example1{  
    public static void main(String args[]) {  
        System.out.println("Institute of Computer Engineering Technology");  
    }  
}
```

Output


A screenshot of a Windows PowerShell terminal window. The window title is "Windows PowerShell". The text inside shows the standard PowerShell startup messages: "Windows PowerShell", "Copyright (C) Microsoft Corporation. All rights reserved.", and "Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows". Below these, the user enters a series of commands at the prompt "PS D:\ICD124\DAY 1\Assignment>": "notepad Example1.java", "javac Example1.java", and "java Example1". The output of the last command is "Institute of Computer Engineering Technology". The prompt is then followed by a vertical bar character "|".

```
Windows PowerShell  
Copyright (C) Microsoft Corporation. All rights reserved.  
  
Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows  
  
PS D:\ICD124\DAY 1\Assignment> notepad Example1.java  
PS D:\ICD124\DAY 1\Assignment> javac Example1.java  
PS D:\ICD124\DAY 1\Assignment> java Example1  
Institute of Computer Engineering Technology  
PS D:\ICD124\DAY 1\Assignment> |
```

02.

```
class Example2 {  
    public static void main(String args[]){  
        System.out.println("Institute of computer Engineering Technology");  
        System.out.println("223 A,");  
        System.out.println("Galle Road,");  
        System.out.println("Panadura.");  
    }  
}
```

Output

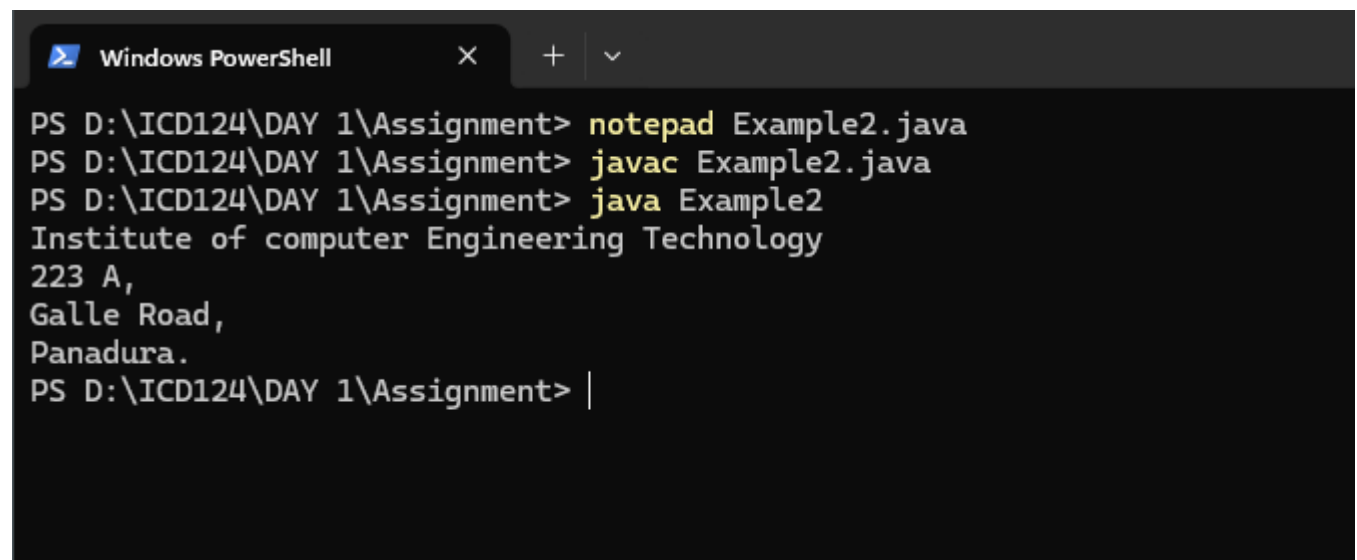


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example2.java  
PS D:\ICD124\DAY 1\Assignment> javac Example2.java  
PS D:\ICD124\DAY 1\Assignment> java Example2  
Institute of computer Engineering Technology  
223 A,  
Galle Road,  
Panadura.  
PS D:\ICD124\DAY 1\Assignment> |
```

03.

```
class Example3 {  
    public static void main (String args[]){  
        System.out.println("J");  
        System.out.println("A");  
        System.out.println("V");  
        System.out.println("A");  
    }  
}
```

output

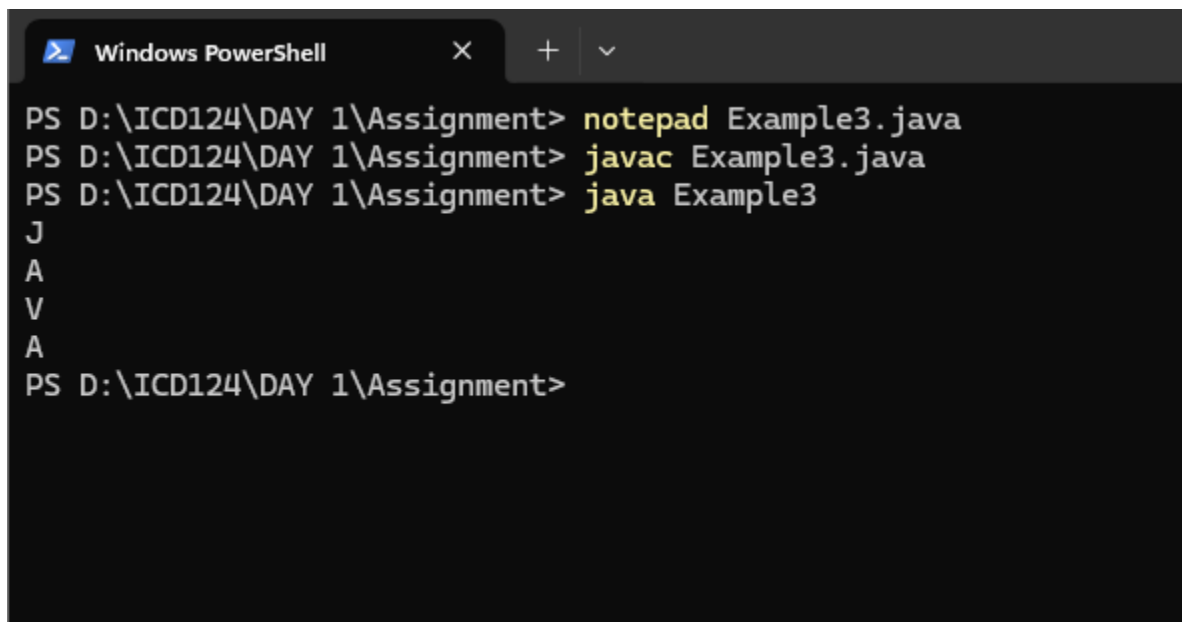


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example3.java  
PS D:\ICD124\DAY 1\Assignment> javac Example3.java  
PS D:\ICD124\DAY 1\Assignment> java Example3  
J  
A  
V  
A  
PS D:\ICD124\DAY 1\Assignment>
```

04.

```
class Example4 {  
    public static void main(String args[] ){  
        System.out.println("1");  
        System.out.println(1000);  
        System.out.println(1.23);  
    }  
}
```


Output

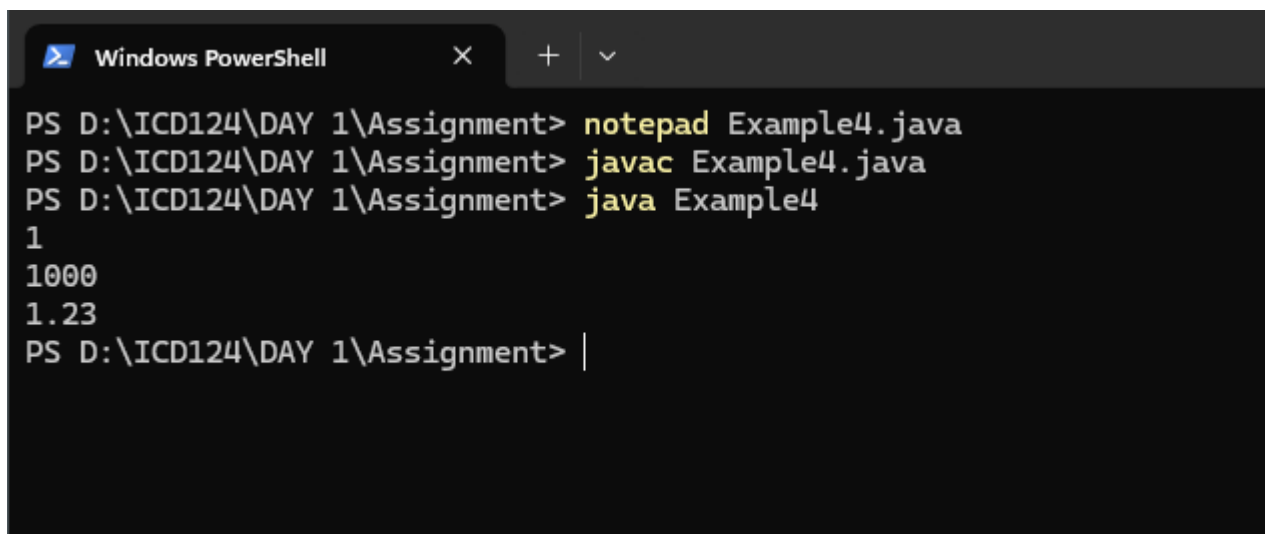

```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example4.java  
PS D:\ICD124\DAY 1\Assignment> javac Example4.java  
PS D:\ICD124\DAY 1\Assignment> java Example4  
1  
1000  
1.23  
PS D:\ICD124\DAY 1\Assignment> |
```

05.

```
class Example5 {  
    public static void main(String args[]){  
        System.out.println("Hello");  
        System.out.println("A");  
        System.out.println(1234);  
        System.out.println(-1234);  
        System.out.println(1.2334);  
        System.out.println(0.0032);  
        System.out.println(-0.0023);  
        System.out.println('A');  
        System.out.println('6');  
        System.out.println(true);  
        System.out.println(false);  
    }  
}
```

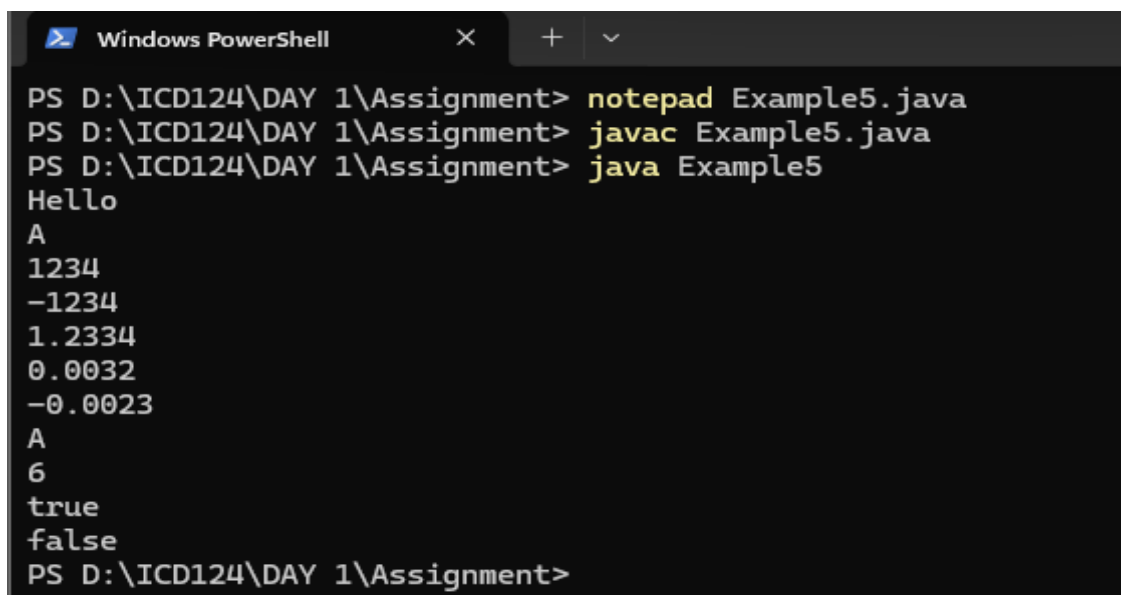


The screenshot shows a Windows PowerShell window with the following commands and output:

```
PS D:\ICD124\DAY 1\Assignment> notepad Example5.java  
PS D:\ICD124\DAY 1\Assignment> javac Example5.java  
PS D:\ICD124\DAY 1\Assignment> java Example5  
Hello  
A  
1234  
-1234  
1.2334  
0.0032  
-0.0023  
A  
6  
true  
false  
PS D:\ICD124\DAY 1\Assignment>
```

06.

```
class Example6 {  
    public static void main(String args[]){  
        System.out.println("A");  
        System.out.println("B");  
        System.out.println("C");  
        System.out.println("D");  
    }  
}
```

Output

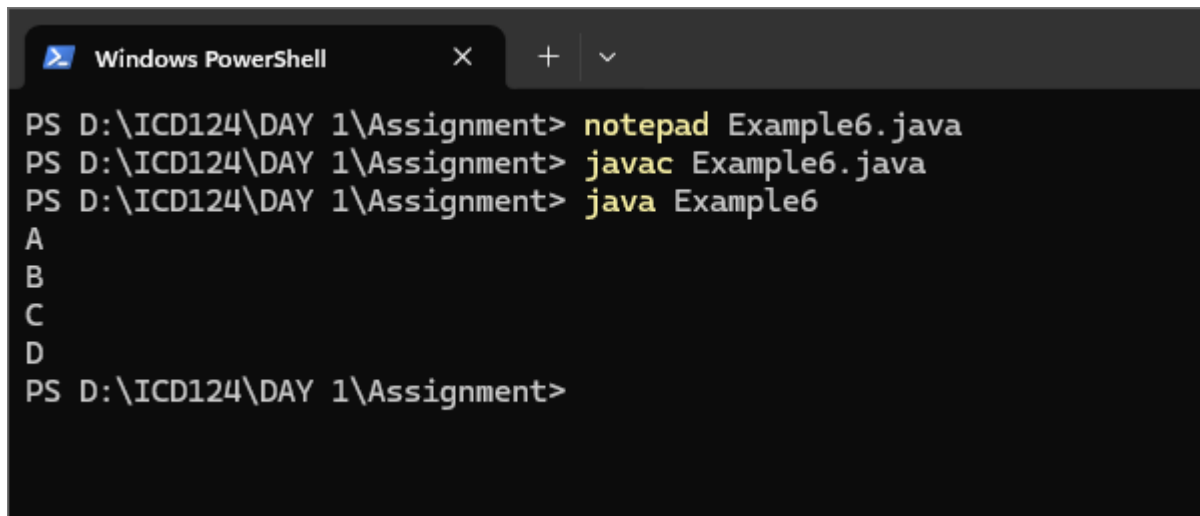


A screenshot of a Windows PowerShell terminal window. The title bar shows 'Windows PowerShell' with a close button and window controls. The terminal displays the following commands and output:

```
PS D:\ICD124\DAY 1\Assignment> notepad Example6.java  
PS D:\ICD124\DAY 1\Assignment> javac Example6.java  
PS D:\ICD124\DAY 1\Assignment> java Example6  
A  
B  
C  
D  
PS D:\ICD124\DAY 1\Assignment>
```

07.

```
class Example7 {  
    public static void main (String args[]){  
        System.out.println("1");  
        System.out.print("2 ");  
        System.out.println("3 ");  
        System.out.print("4 ");  
        System.out.print("5 ");  
        System.out.println("6 ");  
        System.out.print("7 ");  
        System.out.print("8 ");  
        System.out.print("9 ");  
        System.out.println("10 ");  
    }  
}
```

Output

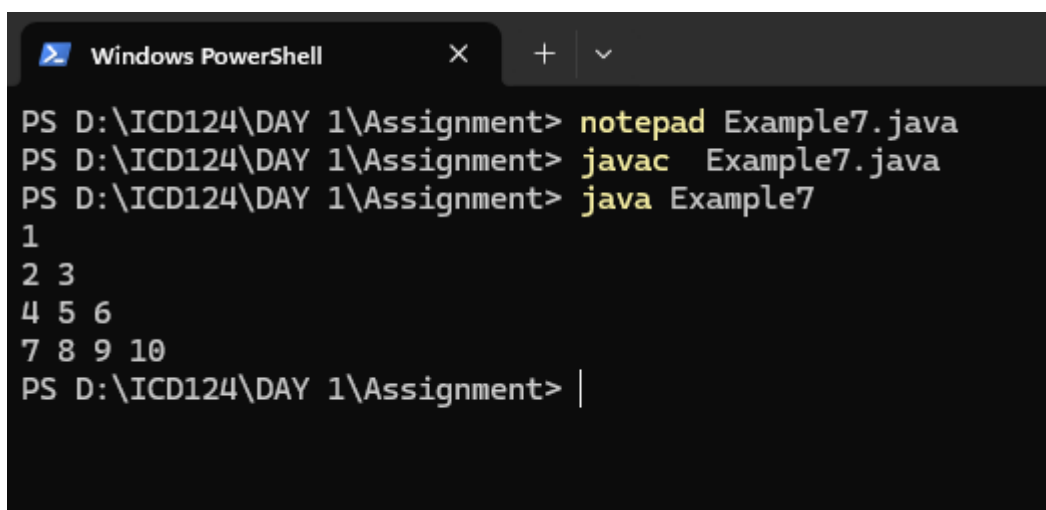


```
Windows PowerShell  X + v  
PS D:\ICD124\DAY 1\Assignment> notepad Example7.java  
PS D:\ICD124\DAY 1\Assignment> javac Example7.java  
PS D:\ICD124\DAY 1\Assignment> java Example7  
1  
2 3  
4 5 6  
7 8 9 10  
PS D:\ICD124\DAY 1\Assignment> |
```

08

```
class Example8 {  
    Public static void main(String args[]){  
        System.out.print("1");  
        System.out.println();  
        System.out.print("2 ");  
        System.out.print("3 ");  
        System.out.println();  
        System.out.print("4 ");  
        System.out.print("5 ");  
        System.out.print("6 ");  
        System.out.println();  
        System.out.print("7 ");  
        System.out.print("8 ");  
        System.out.print("9 ");  
        System.out.print("10 ");  
    }  
}
```

Output

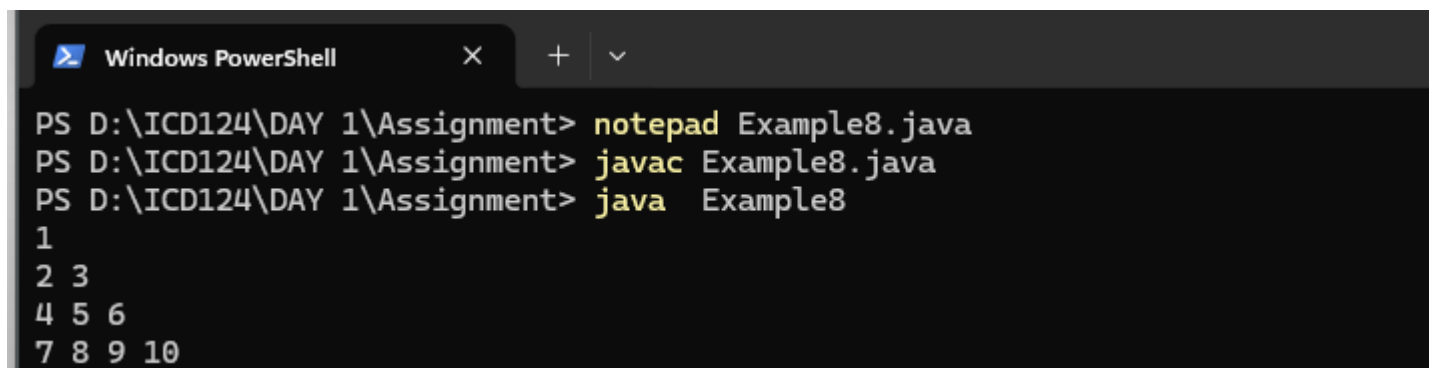


The screenshot shows a Windows PowerShell terminal window with the following commands and output:

```
PS D:\ICD124\DAY 1\Assignment> notepad Example8.java  
PS D:\ICD124\DAY 1\Assignment> javac Example8.java  
PS D:\ICD124\DAY 1\Assignment> java Example8  
1  
2 3  
4 5 6  
7 8 9 10
```

09.

```
class Example9 {  
    public static void main(String args[]){  
        System.out.println("A");  
        System.out.println("B");  
        System.out.println();  
        System.out.println("C");  
        System.out.println("D");  
        System.out.print("");  
    }  
}
```

Output

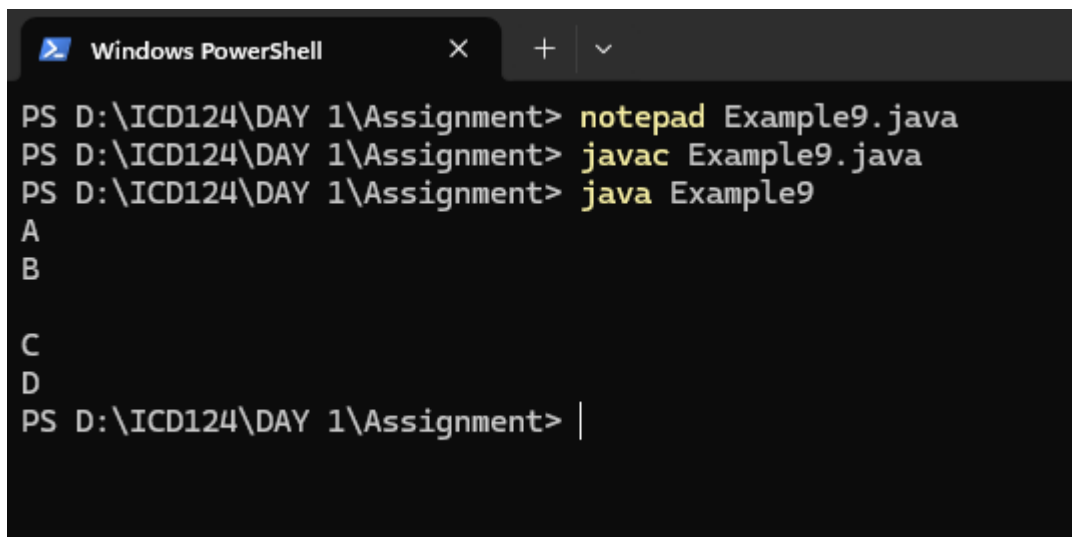

```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example9.java  
PS D:\ICD124\DAY 1\Assignment> javac Example9.java  
PS D:\ICD124\DAY 1\Assignment> java Example9  
A  
B  
  
C  
D  
PS D:\ICD124\DAY 1\Assignment> |
```

10.

```
class Example10 {  
    public static void main(String args[]){  
        System.out.println("A");  
        System.out.println("B");  
        System.out.print();  
        System.out.println("C");  
        System.out.println("D");  
    }  
}
```

Output


```
PS D:\ICD124\DAY 1\Assignment> notepad Example10.java  
PS D:\ICD124\DAY 1\Assignment> javac Example10.java  
Example10.java:5: error: no suitable method found for print(no arguments)  
    System.out.print();  
                   ^  
method PrintStream.print(boolean) is not applicable  
  (actual and formal argument lists differ in length)  
method PrintStream.print(char) is not applicable  
  (actual and formal argument lists differ in length)  
method PrintStream.print(int) is not applicable  
  (actual and formal argument lists differ in length)  
method PrintStream.print(long) is not applicable  
  (actual and formal argument lists differ in length)  
method PrintStream.print(float) is not applicable  
  (actual and formal argument lists differ in length)  
method PrintStream.print(double) is not applicable  
  (actual and formal argument lists differ in length)  
method PrintStream.print(char[]) is not applicable  
  (actual and formal argument lists differ in length)  
method PrintStream.print(String) is not applicable  
  (actual and formal argument lists differ in length)  
method PrintStream.print(Object) is not applicable  
  (actual and formal argument lists differ in length)  
1 error  
PS D:\ICD124\DAY 1\Assignment> |
```

- Error because not **double Quats** or not **println**

11.

```
class Example11 {  
    public static void main(String args[]){  
        int a;  
        a=100;  
        System.out.println("a");  
        System.out.println(a);  
    }  
}
```

Output

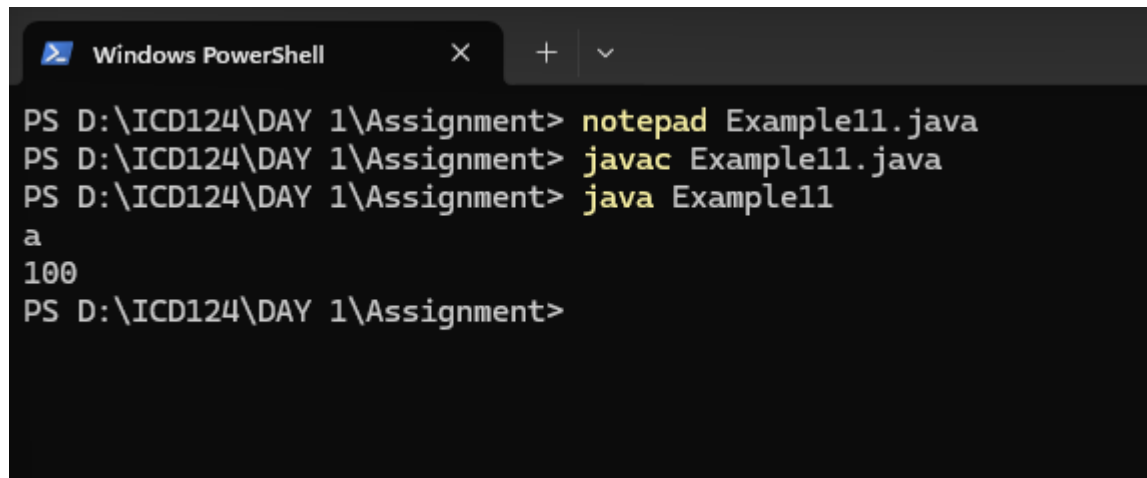


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example11.java  
PS D:\ICD124\DAY 1\Assignment> javac Example11.java  
PS D:\ICD124\DAY 1\Assignment> java Example11  
a  
100  
PS D:\ICD124\DAY 1\Assignment>
```

12.

```
class Example12{  
    public static void main(String args[]){  
        int a;  
        System.out.println("a");  
        System.out.println(a);  
    }  
}
```

Output

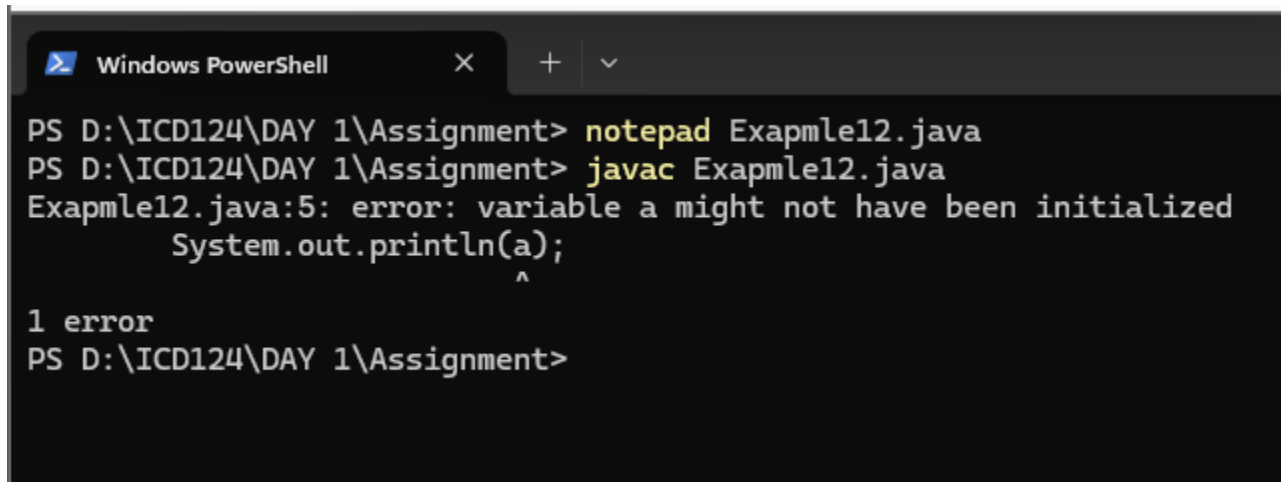


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Exapmle12.java  
PS D:\ICD124\DAY 1\Assignment> javac Exapmle12.java  
Exapmle12.java:5: error: variable a might not have been initialized  
    System.out.println(a);  
                        ^  
1 error  
PS D:\ICD124\DAY 1\Assignment>
```

- Error because it doesn't have an assign a value

13.

```
class Example13{  
    public static void main(String args[]){  
        int a = 100;  
        System.out.println(a);  
    }  
}
```

Output

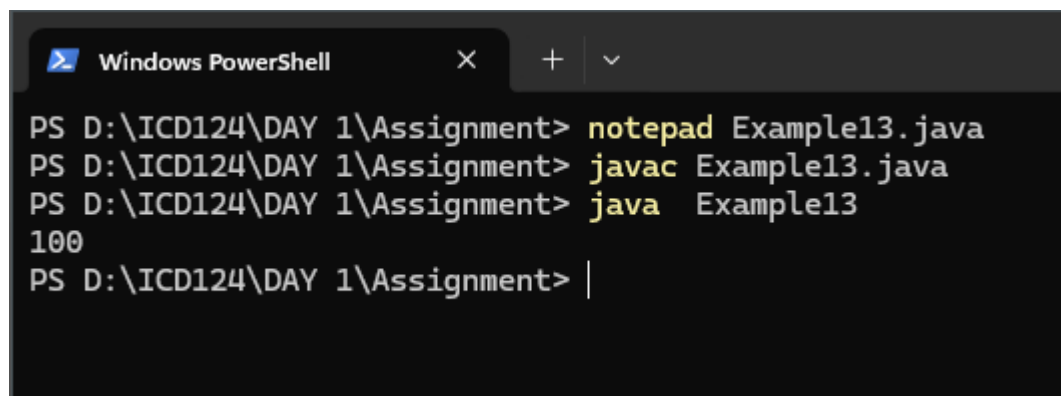


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example13.java  
PS D:\ICD124\DAY 1\Assignment> javac Example13.java  
PS D:\ICD124\DAY 1\Assignment> java Example13  
100  
PS D:\ICD124\DAY 1\Assignment> |
```

14.

```
class Example14{  
    public static void main(String args[]){  
        int a;  
        System.out.println(a);  
        a = 100;  
    }  
}
```

Output

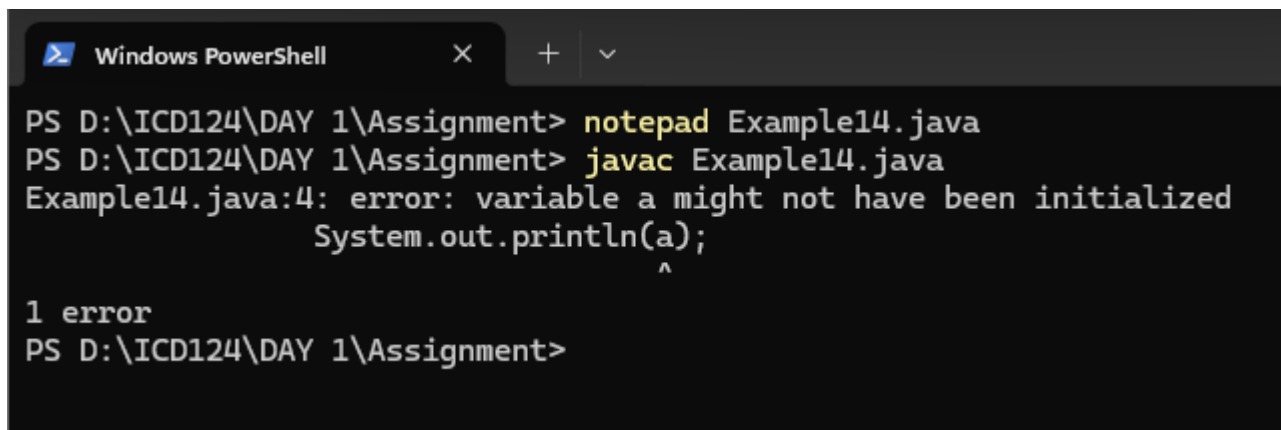


```
Windows PowerShell  X  +  v  
PS D:\ICD124\DAY 1\Assignment> notepad Example14.java  
PS D:\ICD124\DAY 1\Assignment> javac Example14.java  
Example14.java:4: error: variable a might not have been initialized  
    System.out.println(a);  
                        ^  
1 error  
PS D:\ICD124\DAY 1\Assignment>
```

- Error because **java executes line by line** then it **executes without assigning a value**

15.

```
class Example15{  
    public static void main(String args[]){  
        int x;  
        x=100;  
        x=200;  
        System.out.println(x);  
    }  
}
```

Output

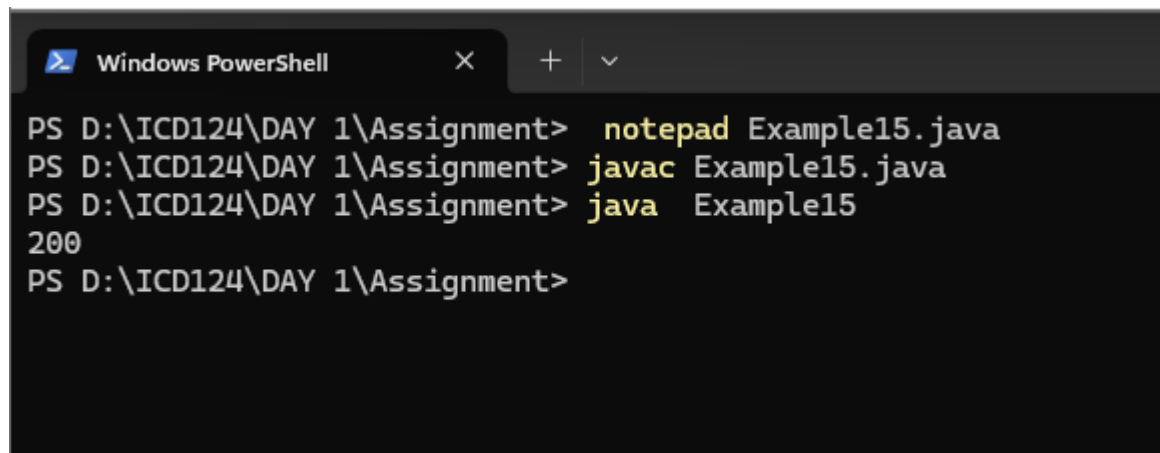


A screenshot of a Windows PowerShell terminal window. The title bar shows 'Windows PowerShell' with a blue icon, a close button (X), and a dropdown arrow. The terminal content shows the following commands and output:

```
PS D:\ICD124\DAY 1\Assignment> notepad Example15.java  
PS D:\ICD124\DAY 1\Assignment> javac Example15.java  
PS D:\ICD124\DAY 1\Assignment> java Example15  
200  
PS D:\ICD124\DAY 1\Assignment>
```

16.

```
class Example16{  
    public static void main(String args[]){  
        int x;  
        x=100;  
        System.out.println(x);  
        x=200;  
        System.out.println(x);  
    }  
}
```

Output

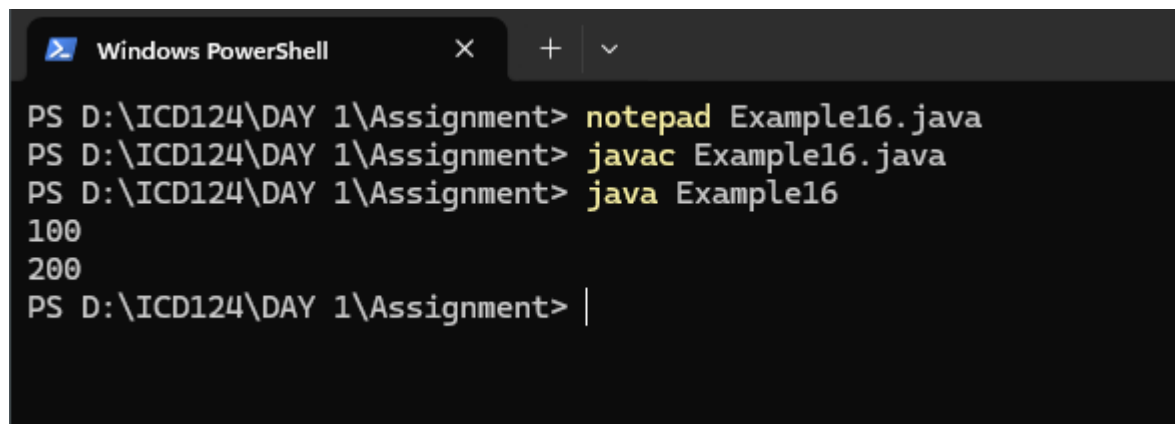


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example16.java  
PS D:\ICD124\DAY 1\Assignment> javac Example16.java  
PS D:\ICD124\DAY 1\Assignment> java Example16  
100  
200  
PS D:\ICD124\DAY 1\Assignment> |
```

17.

```
class Example17{  
    public static void main(String args[]){  
        int x= 100;  
        int y =200;  
        System.out.println(x);  
        System.out.println(y);  
    }  
}
```

Output

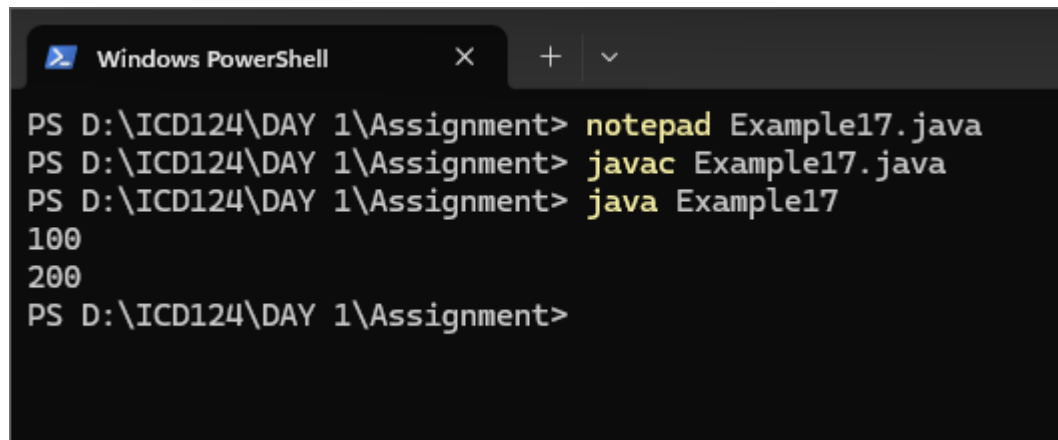


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example17.java  
PS D:\ICD124\DAY 1\Assignment> javac Example17.java  
PS D:\ICD124\DAY 1\Assignment> java Example17  
100  
200  
PS D:\ICD124\DAY 1\Assignment>
```

18.

```
class Example18{  
    public static void main(String args[]){  
        int x;  
        x=1000;  
        System.out.println(x);  
        var y =2000;  
        System.out.println(y);  
    }  
}
```

Output

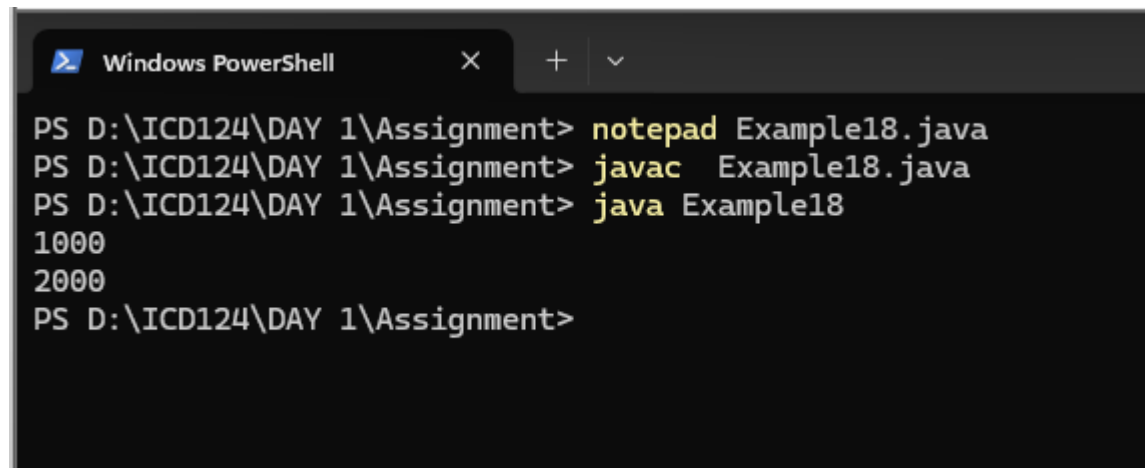


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example18.java  
PS D:\ICD124\DAY 1\Assignment> javac Example18.java  
PS D:\ICD124\DAY 1\Assignment> java Example18  
1000  
2000  
PS D:\ICD124\DAY 1\Assignment>
```

19.

```
class Example19{  
    public static void main(String args[]){  
        int x=100;  
        int y=200;  
        int z;  
        System.out.println(x);  
        System.out.println(y);  
        System.out.println(z);  
    }  
}
```

Output

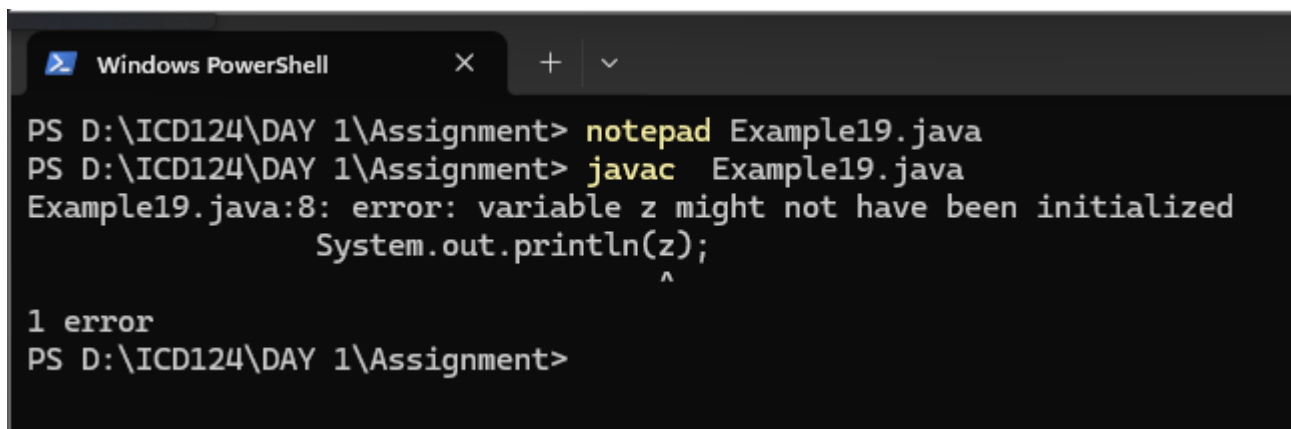


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example19.java  
PS D:\ICD124\DAY 1\Assignment> javac Example19.java  
Example19.java:8: error: variable z might not have been initialized  
        System.out.println(z);  
                           ^  
1 error  
PS D:\ICD124\DAY 1\Assignment>
```

- Error because there is a variable without assigning a value

20.

```
class Example20{  
    public static void main(String args[]){  
        int x = 100,y,z=200;  
        System.out.println(x);  
        y="java";  
        System.out.println(y);  
        System.out.println(z);  
    }  
}
```

Output

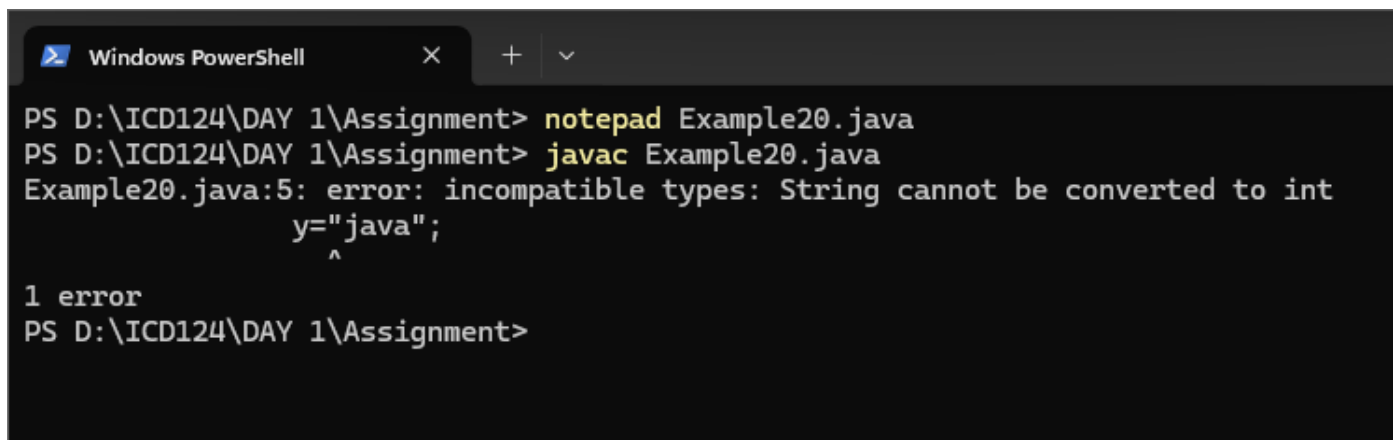


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example20.java  
PS D:\ICD124\DAY 1\Assignment> javac Example20.java  
Example20.java:5: error: incompatible types: String cannot be converted to int  
        y="java";  
        ^  
1 error  
PS D:\ICD124\DAY 1\Assignment>
```

- Error because of invalid typecasting

21.

```
class Example21{  
    public static void main(String args[]){  
        System.out.println("A");  
        //System.out.println("B");  
        System.out.println("C");  
        //System.out.println("D");  
        System.out.println("E");  
    }  
}
```

Output

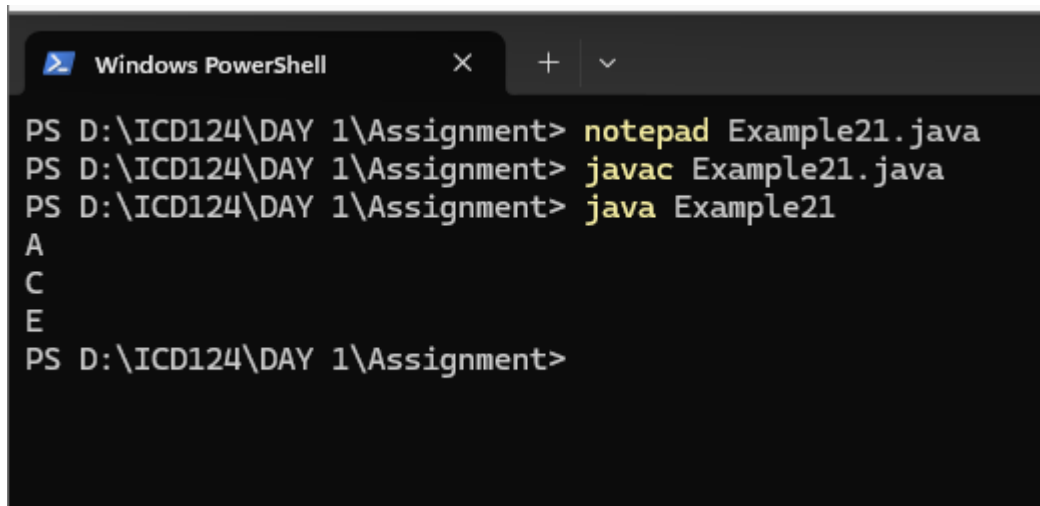


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example21.java  
PS D:\ICD124\DAY 1\Assignment> javac Example21.java  
PS D:\ICD124\DAY 1\Assignment> java Example21  
A  
C  
E  
PS D:\ICD124\DAY 1\Assignment>
```

22.

```
class Example22{  
    public static void main(String args[]){  
        System.out.println("A");  
        System.out.println("B");  
        /*System.out.println("C");  
        System.out.println("D");  
        System.out.println("E");*/  
        System.out.println("F");  
    }  
}
```

Output

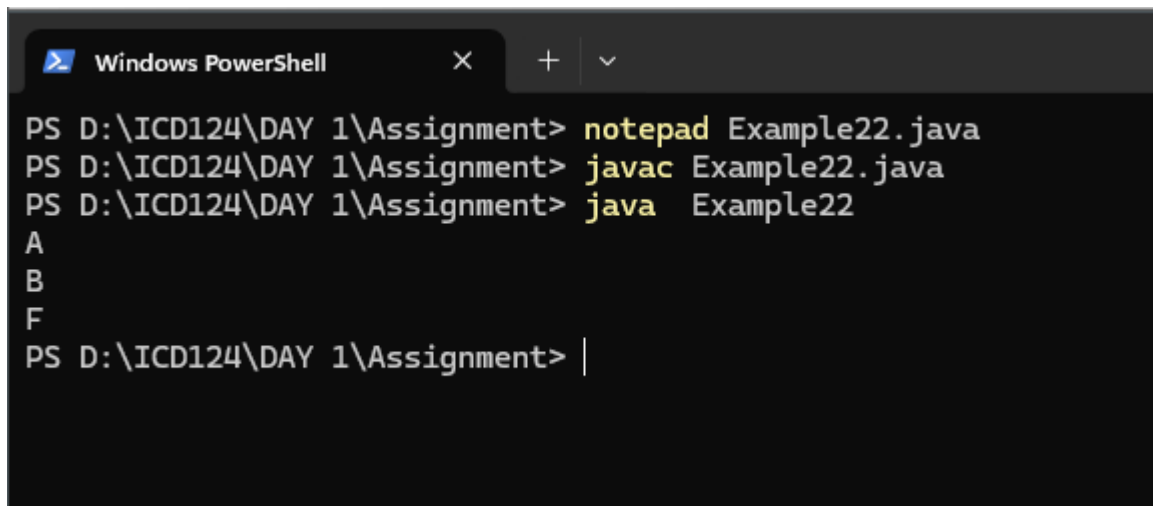


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example22.java  
PS D:\ICD124\DAY 1\Assignment> javac Example22.java  
PS D:\ICD124\DAY 1\Assignment> java Example22  
A  
B  
F  
PS D:\ICD124\DAY 1\Assignment> |
```

23.

```
class Example23{  
    public static void main (String args[]){  
        int x=100;  
        int y=200;  
        System.out.println(x);  
        System.out.println(y);  
        x=y;  
        System.out.println(x);  
        System.out.println(y);  
    }  
}
```

Output

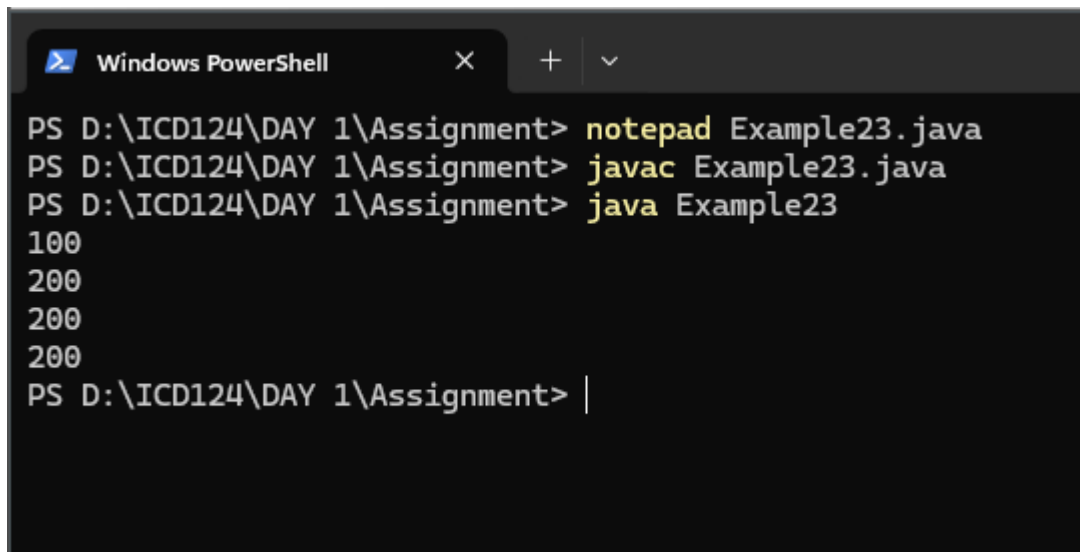


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example23.java  
PS D:\ICD124\DAY 1\Assignment> javac Example23.java  
PS D:\ICD124\DAY 1\Assignment> java Example23  
100  
200  
200  
200  
PS D:\ICD124\DAY 1\Assignment> |
```

24.

```
class Example24{  
    public static void main (String args[]){  
        System.out.println(true);  
        System.out.println("true");  
    }  
}
```

output

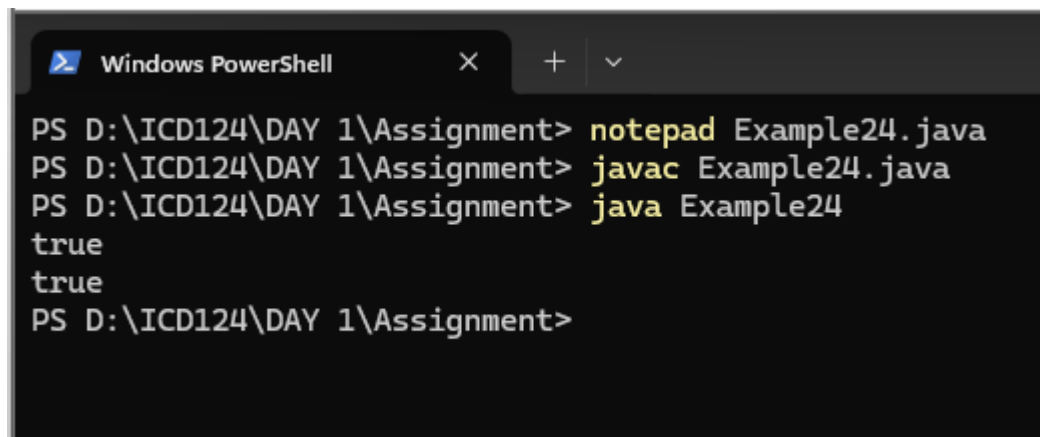


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example24.java  
PS D:\ICD124\DAY 1\Assignment> javac Example24.java  
PS D:\ICD124\DAY 1\Assignment> java Example24  
true  
true  
PS D:\ICD124\DAY 1\Assignment>
```

25.

```
class Example25{  
    public static void main(String args[]){  
        System.out.println(Java);  
        System.out.println("Java");  
    }  
}
```

Output

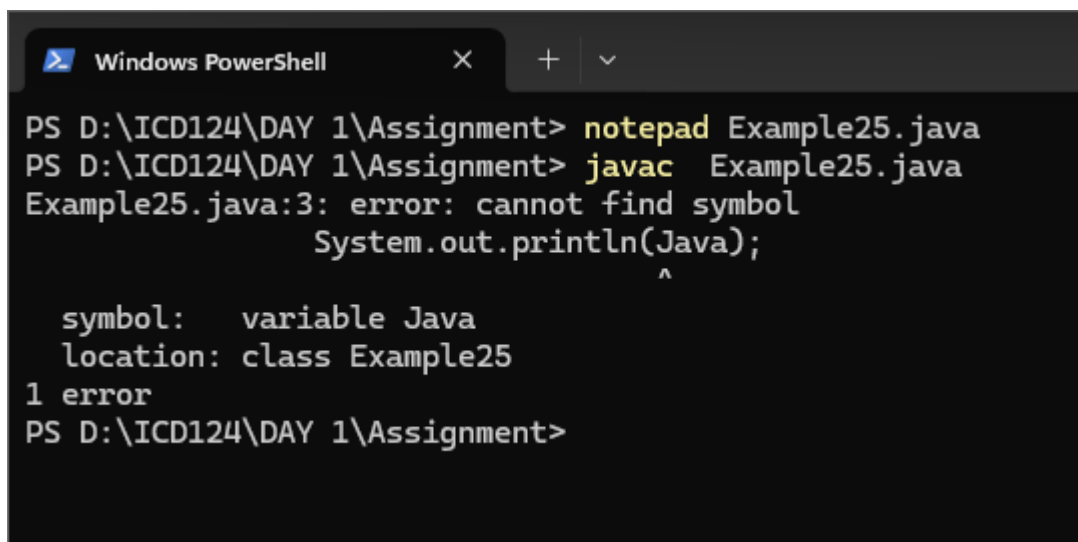


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example25.java  
PS D:\ICD124\DAY 1\Assignment> javac Example25.java  
Example25.java:3: error: cannot find symbol  
        System.out.println(Java);  
                           ^  
symbol:   variable Java  
location: class Example25  
1 error  
PS D:\ICD124\DAY 1\Assignment>
```

- Error because there is no value assign for that variable

26.

```
class Example26{  
    public static void main(String args[]){  
        System.out.println('A');  
        System.out.println("A");  
        System.out.println('2');  
        System.out.println("2");  
        System.out.println('JAVA');  
        System.out.println("JAVA");  
    }  
}
```

Output

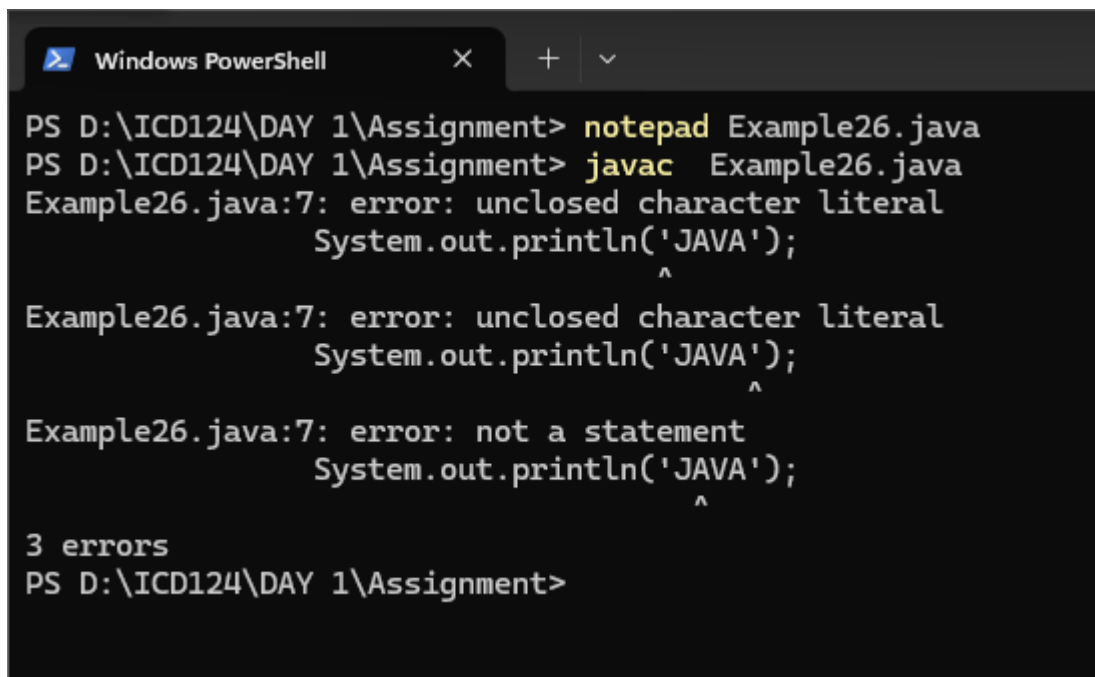

The screenshot shows a Windows PowerShell terminal window with the following commands and output:


```
PS D:\ICD124\DAY 1\Assignment> notepad Example26.java  
PS D:\ICD124\DAY 1\Assignment> javac Example26.java  
Example26.java:7: error: unclosed character literal  
        System.out.println('JAVA');  
                           ^  
Example26.java:7: error: unclosed character literal  
        System.out.println('JAVA');  
                           ^  
Example26.java:7: error: not a statement  
        System.out.println('JAVA');  
                           ^  
3 errors  
PS D:\ICD124\DAY 1\Assignment>
```

- Error, unclosed character literal

27.

```
class Example27{  
    public static void main(String args[]){  
        System.out.println("Hellooooo\tJAVA");  
        System.out.println("Hellooooo\t\t\t\t\tJAVA");  
    }  
}
```

output

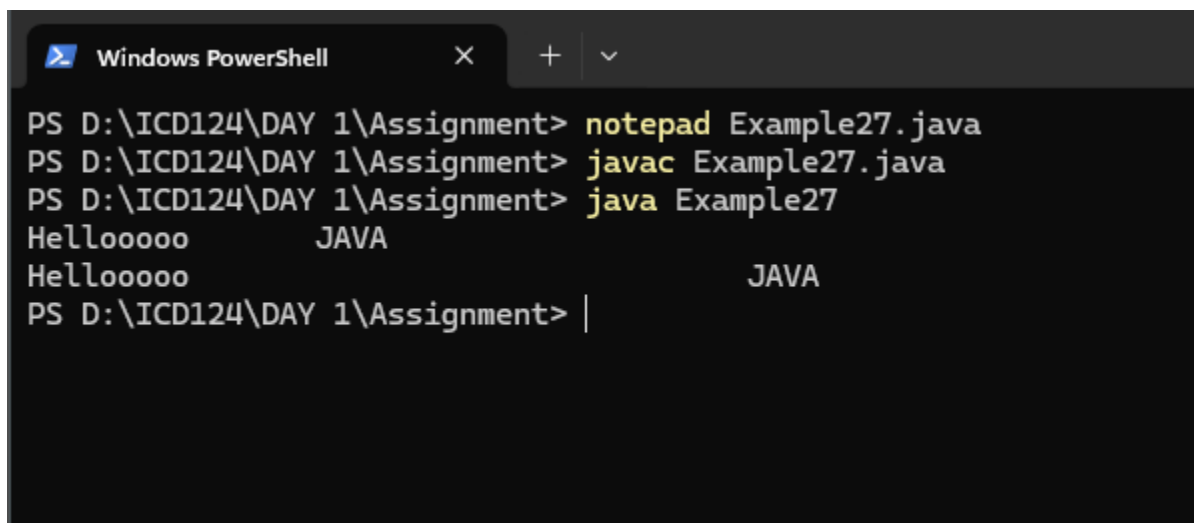


A screenshot of a Windows PowerShell terminal window. The title bar shows 'Windows PowerShell' with standard window controls. The terminal content shows the following commands and output:

```
PS D:\ICD124\DAY 1\Assignment> notepad Example27.java  
PS D:\ICD124\DAY 1\Assignment> javac Example27.java  
PS D:\ICD124\DAY 1\Assignment> java Example27  
Hellooooo      JAVA  
Hellooooo      JAVA  
PS D:\ICD124\DAY 1\Assignment> |
```

28.

```
class Example28{  
    public static void main(String args[]){  
        System.out.println("Hi\tJAVA");  
        System.out.println("Hello\tWorld");  
    }  
}
```

Output

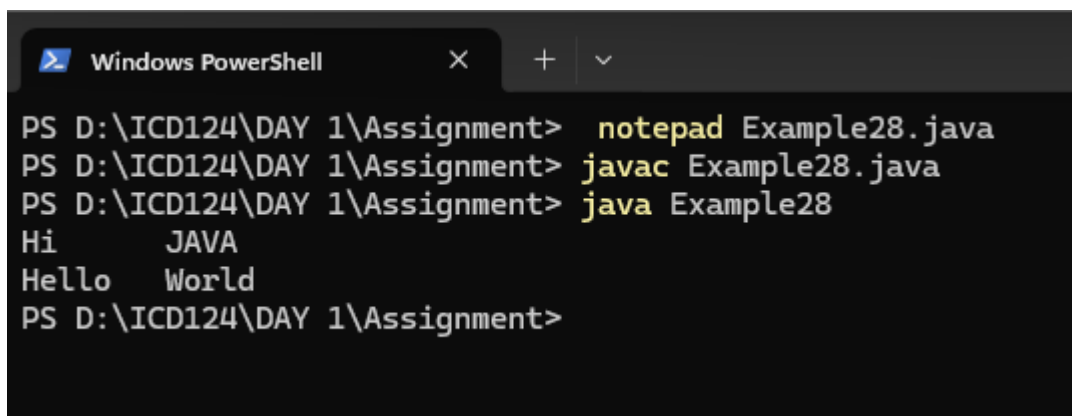


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example28.java  
PS D:\ICD124\DAY 1\Assignment> javac Example28.java  
PS D:\ICD124\DAY 1\Assignment> java Example28  
Hi      JAVA  
Hello   World  
PS D:\ICD124\DAY 1\Assignment>
```

29.

```
class Example29{  
    public static void main(String args[]){  
        System.out.println("AB\nCD");  
        System.out.println("");  
        System.out.println("EF\tGH\n\nIJ\tKL");  
    }  
}
```

output

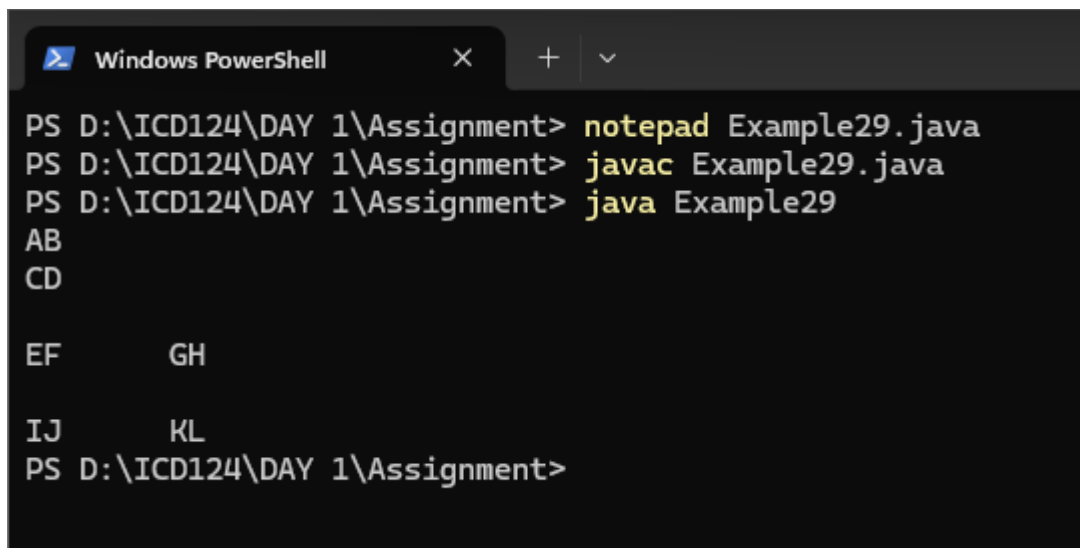


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example29.java  
PS D:\ICD124\DAY 1\Assignment> javac Example29.java  
PS D:\ICD124\DAY 1\Assignment> java Example29  
AB  
CD  
  
EF      GH  
  
IJ      KL  
PS D:\ICD124\DAY 1\Assignment>
```

30.

```
class Example{  
    public static void main(String args[]){  
        System.out.println("time - "17:56:02");  
    }  
}
```

Output

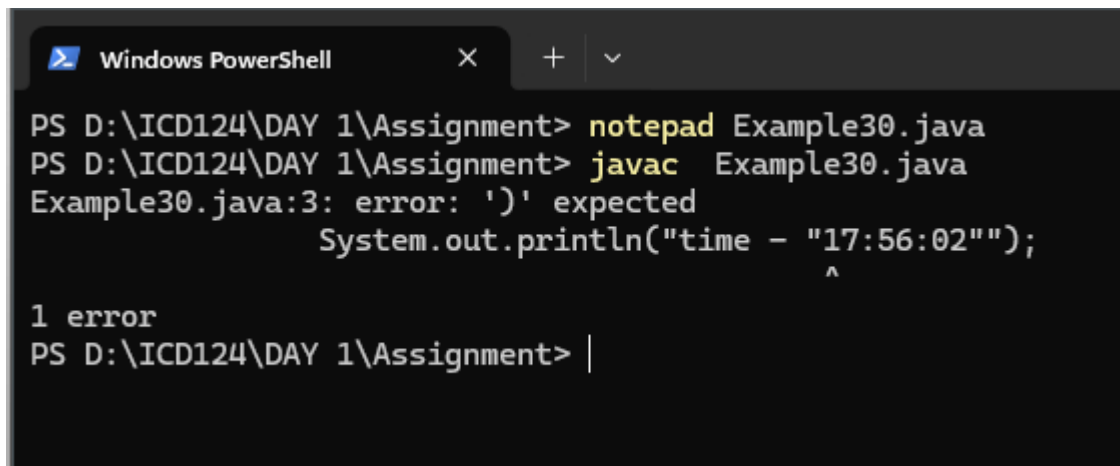

The screenshot shows a Windows PowerShell terminal window with the following text:


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example30.java  
PS D:\ICD124\DAY 1\Assignment> javac Example30.java  
Example30.java:3: error: ')' expected  
        System.out.println("time - "17:56:02");  
                                   ^  
1 error  
PS D:\ICD124\DAY 1\Assignment> |
```

- Error, runtime error.

31.

```
class Example31{  
    public static void main(String args[]){  
        System.out.println("\'iCET\'");  
        System.out.println("\'Institute of Computer Engineering technology\'");  
    }  
}
```

Output

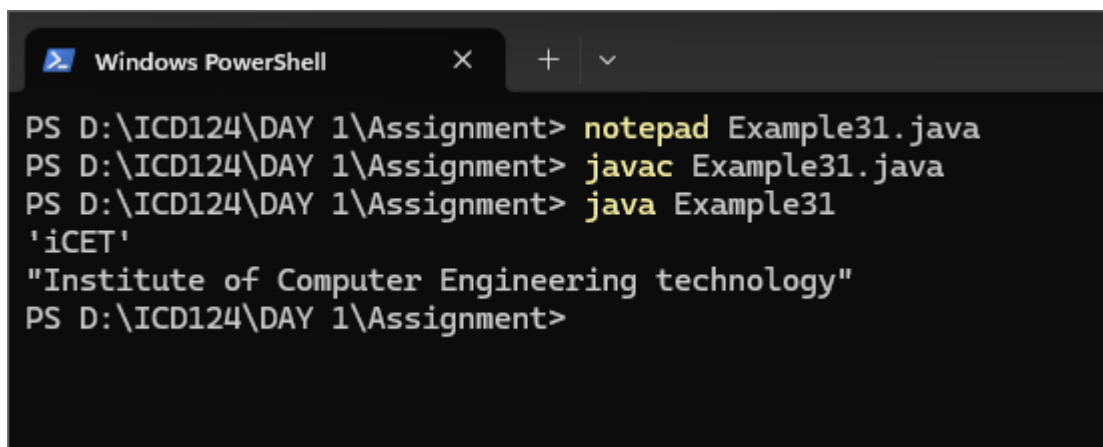


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example31.java  
PS D:\ICD124\DAY 1\Assignment> javac Example31.java  
PS D:\ICD124\DAY 1\Assignment> java Example31  
'iCET'  
"Institute of Computer Engineering technology"  
PS D:\ICD124\DAY 1\Assignment>
```

32.

```
class Example32{  
    public static void main(String args[]){  
        System.out.println("first Line \nSecond Line");  
        System.out.println("A\tB\tC");  
        System.out.println("D\tE\tF");  
    }  
}
```

Output

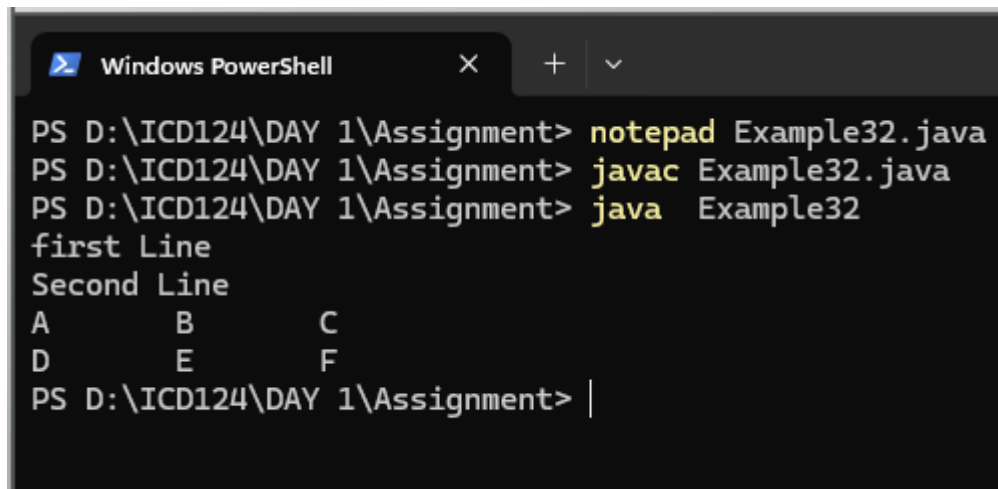


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example32.java  
PS D:\ICD124\DAY 1\Assignment> javac Example32.java  
PS D:\ICD124\DAY 1\Assignment> java Example32  
first Line  
Second Line  
A      B      C  
D      E      F  
PS D:\ICD124\DAY 1\Assignment> |
```

33.

```
class Example33{  
    public static void main (String args[]){  
        System.out.println("AB\nCD");  
        System.out.println("AB\tCD");  
        System.out.println("AB\fCD");  
        System.out.println("AB\bCD");  
        System.out.println("AB\rCD");  
        System.out.println("AB\\CD");  
    }  
}
```

Output

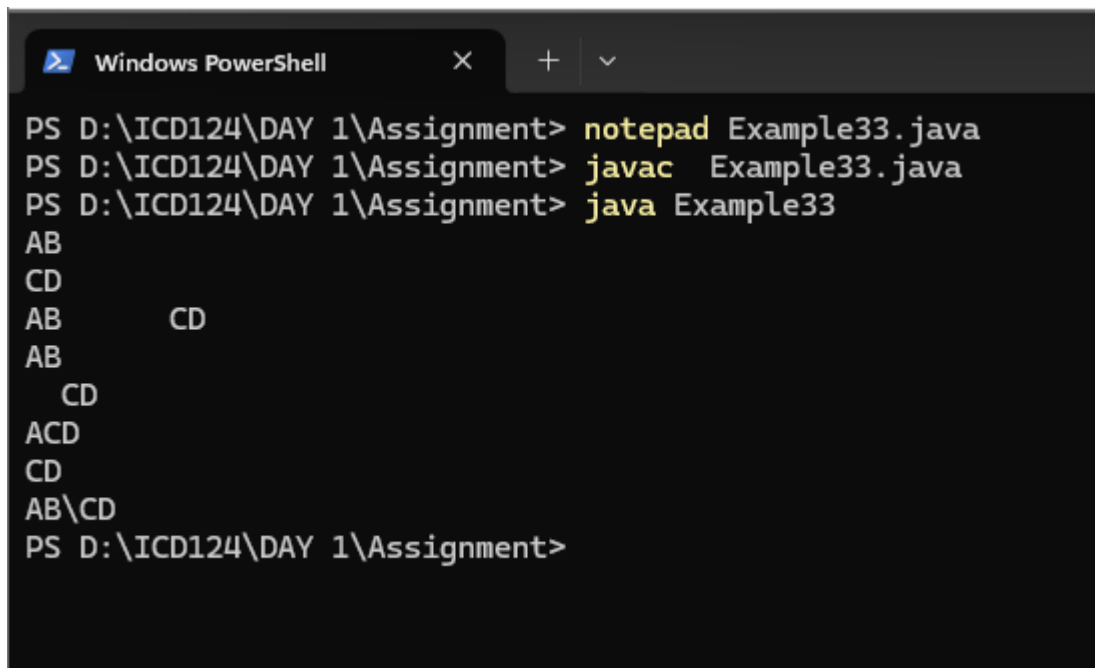


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example33.java  
PS D:\ICD124\DAY 1\Assignment> javac Example33.java  
PS D:\ICD124\DAY 1\Assignment> java Example33  
AB  
CD  
AB      CD  
AB  
  CD  
ACD  
CD  
AB\CD  
PS D:\ICD124\DAY 1\Assignment>
```

34.

```
class Example34{  
    public static void main(String args[]){  
        System.out.println(10+20);  
        System.out.println("10"+"20");  
        System.out.println("10"+20);  
        System.out.println(10+"20");  
    }  
}
```

Output

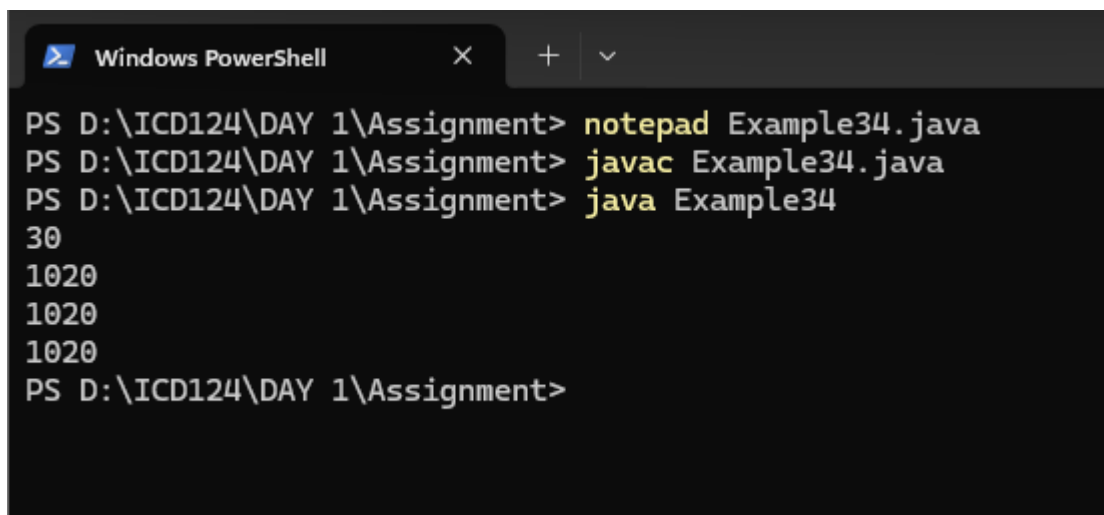


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example34.java  
PS D:\ICD124\DAY 1\Assignment> javac Example34.java  
PS D:\ICD124\DAY 1\Assignment> java Example34  
30  
1020  
1020  
1020  
PS D:\ICD124\DAY 1\Assignment>
```

35.

```
class Example35{  
    public static void main(String args[]){  
        System.out.println(20230326);  
        System.out.println("2023-03-26");  
    }  
}
```

Output

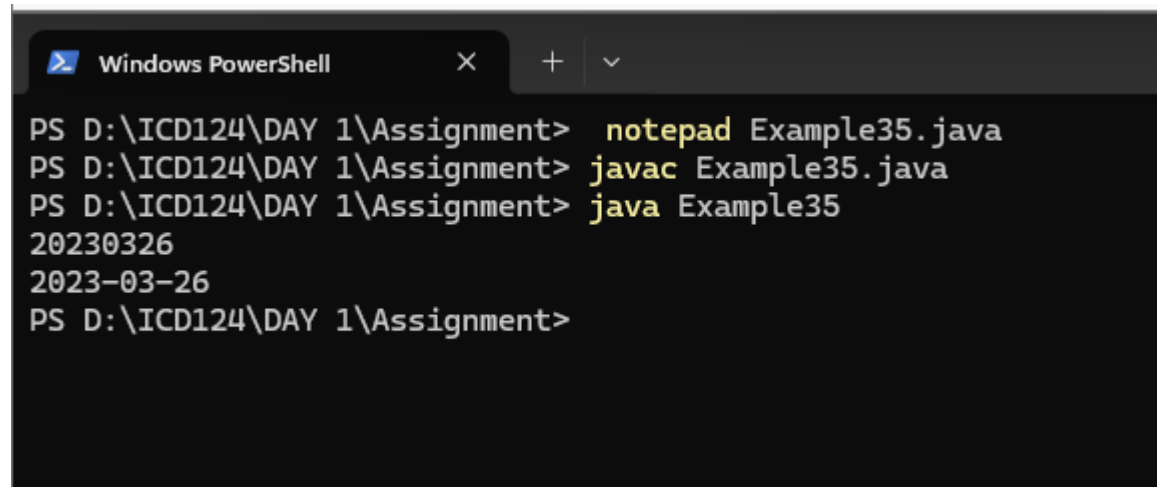
A screenshot of a Windows PowerShell terminal window. The title bar shows 'Windows PowerShell' with a blue icon, a close button, and window control buttons. The terminal content shows the following commands and output:
PS D:\ICD124\DAY 1\Assignment> notepad Example35.java
PS D:\ICD124\DAY 1\Assignment> javac Example35.java
PS D:\ICD124\DAY 1\Assignment> java Example35
20230326
2023-03-26
PS D:\ICD124\DAY 1\Assignment>

```
PS D:\ICD124\DAY 1\Assignment> notepad Example35.java  
PS D:\ICD124\DAY 1\Assignment> javac Example35.java  
PS D:\ICD124\DAY 1\Assignment> java Example35  
20230326  
2023-03-26  
PS D:\ICD124\DAY 1\Assignment>
```

36.

```
class Example36{  
    public static void main(String args[]){  
        int x,y,z;  
        x=10;  
        y=20;  
        z=x+y;  
        System.out.println(x+"+"+y+"="+z);  
    }  
}
```

Output

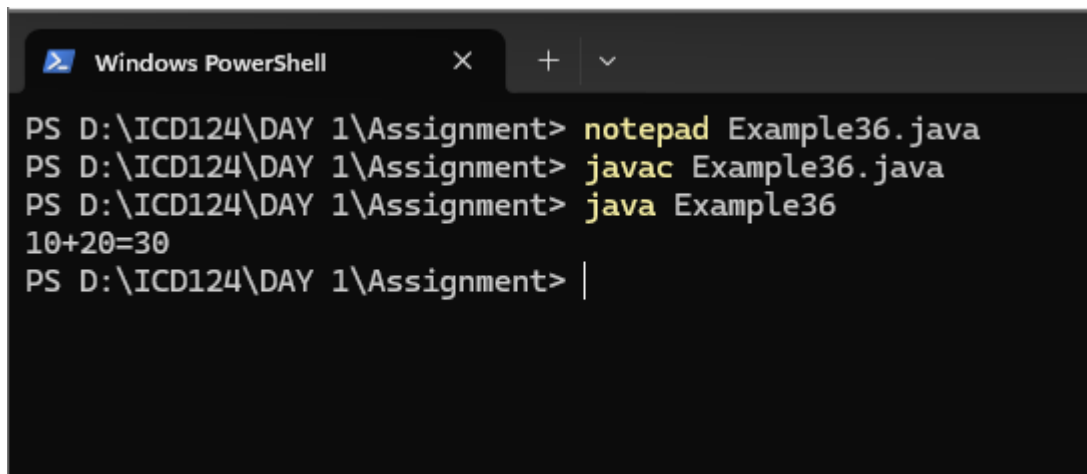


```
Windows PowerShell  X + v  
PS D:\ICD124\DAY 1\Assignment> notepad Example36.java  
PS D:\ICD124\DAY 1\Assignment> javac Example36.java  
PS D:\ICD124\DAY 1\Assignment> java Example36  
10+20=30  
PS D:\ICD124\DAY 1\Assignment> |
```

37.

```
class Example37{  
    public static void main(String args[]){  
        int x=10,y=20;  
        System.out.println(x+y);  
        System.out.println("x"+"y");  
        System.out.println("x+y");  
        System.out.println("x"+y);  
        System.out.println(x+"y");  
    }  
}
```

Output

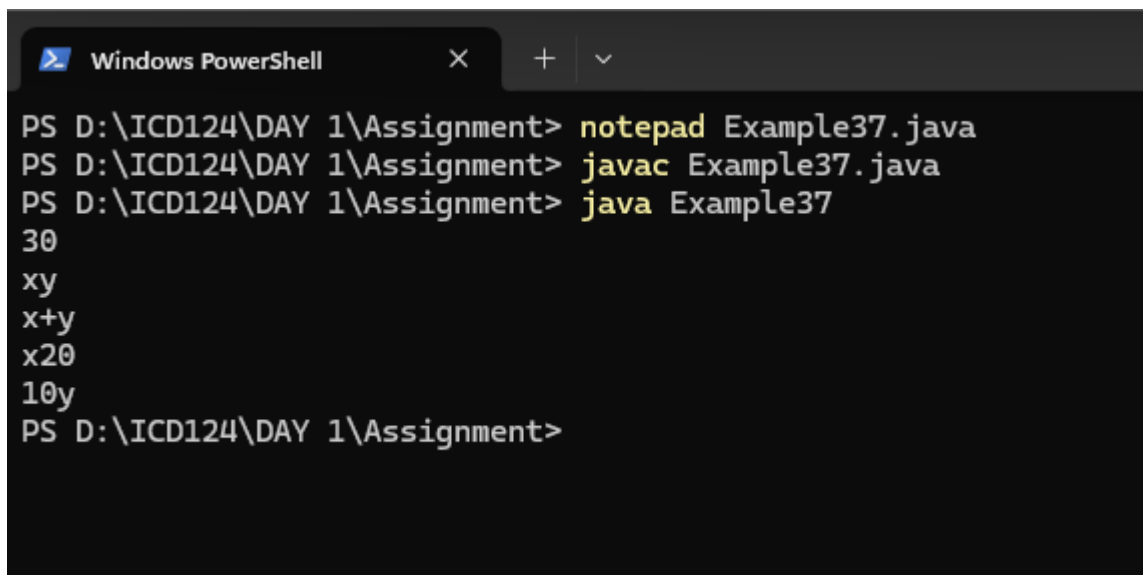


```
Windows PowerShell X + v  
PS D:\ICD124\DAY 1\Assignment> notepad Example37.java  
PS D:\ICD124\DAY 1\Assignment> javac Example37.java  
PS D:\ICD124\DAY 1\Assignment> java Example37  
30  
xy  
x+y  
x20  
10y  
PS D:\ICD124\DAY 1\Assignment>
```

38.

```
class Example{  
    public static void main (String args[]){  
        System.out.println(10+20+30);  
        System.out.println("10+20+30");  
        System.out.println(10+20+30);  
        System.out.println("10+20"+30);  
        System.out.println("10"+"20"+"30");  
        System.out.println("10"+20+30);  
        System.out.println(10+20+"30");  
        System.out.println(10+"20"+30);  
    }  
}
```

Output

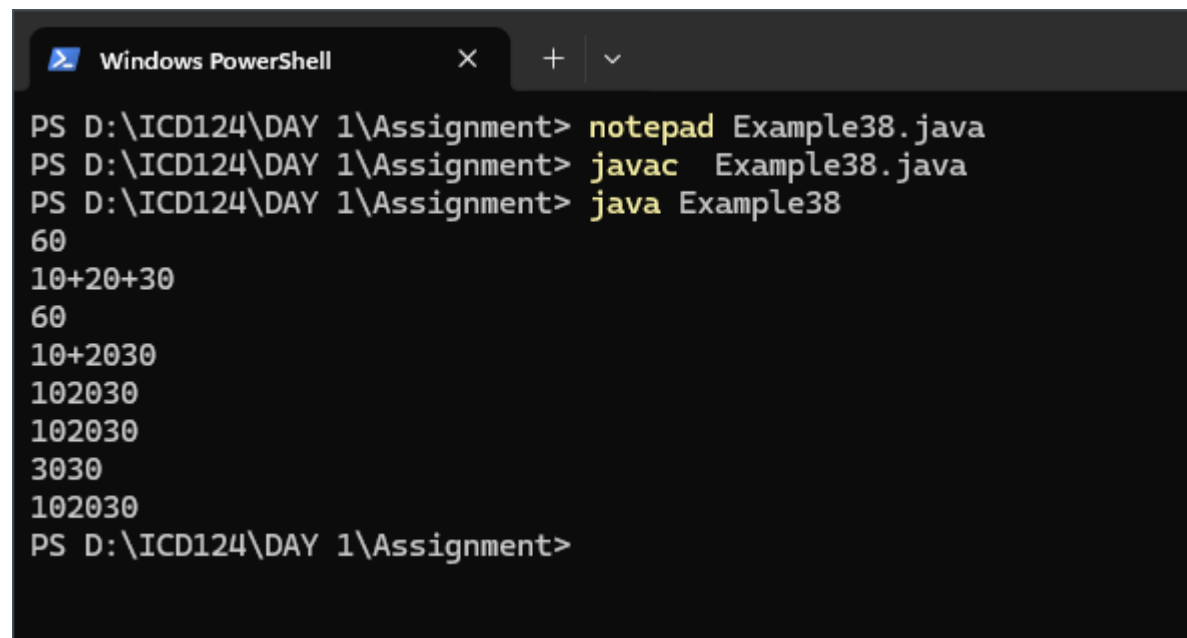


A screenshot of a Windows PowerShell terminal window. The title bar shows 'Windows PowerShell' with standard window controls. The terminal content shows the following commands and output:

```
PS D:\ICD124\DAY 1\Assignment> notepad Example38.java  
PS D:\ICD124\DAY 1\Assignment> javac Example38.java  
PS D:\ICD124\DAY 1\Assignment> java Example38  
60  
10+20+30  
60  
10+2030  
102030  
102030  
3030  
102030  
PS D:\ICD124\DAY 1\Assignment>
```

39.

```
class Example39{  
    public static void main(String args[]){  
        String s1="Hello";  
        System.out.println(s1);  
        System.out.println(s1.concat("JAVA"));  
    }  
}
```

Output

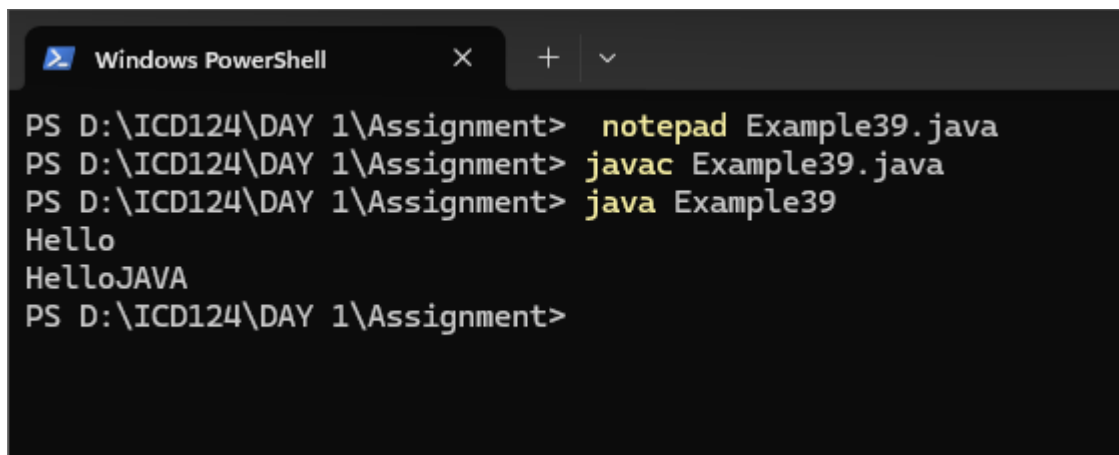


A screenshot of a Windows PowerShell terminal window. The title bar shows 'Windows PowerShell' with a blue icon, a close button (X), and a dropdown menu with a plus sign and a downward arrow. The terminal content shows the following commands and output:

```
PS D:\ICD124\DAY 1\Assignment> notepad Example39.java  
PS D:\ICD124\DAY 1\Assignment> javac Example39.java  
PS D:\ICD124\DAY 1\Assignment> java Example39  
Hello  
HelloJAVA  
PS D:\ICD124\DAY 1\Assignment>
```

40.

```
class Example40{  
    public static void main(String args[]){  
        int x,y,z;  
        x=10;  
        y=20;  
        z=x+y;  
        System.out.println(x+" "+"y"+"="+z);  
        z=x-y;  
        System.out.println(x+"-"+y+"="+z);  
        z=x*y;  
        System.out.println(x+"*" +y+"="+z);  
    }  
}
```

Output

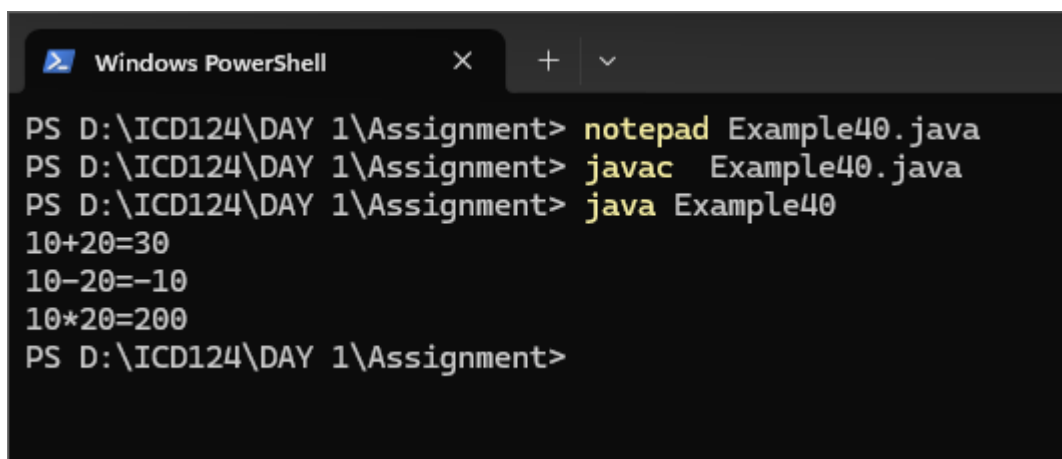


```
Windows PowerShell  X + v  
PS D:\ICD124\DAY 1\Assignment> notepad Example40.java  
PS D:\ICD124\DAY 1\Assignment> javac Example40.java  
PS D:\ICD124\DAY 1\Assignment> java Example40  
10+20=30  
10-20=-10  
10*20=200  
PS D:\ICD124\DAY 1\Assignment>
```

41.

```
class Example41{  
    public static void main(String args[]){  
        int x,y,z;  
        x=10;  
        y=20;  
        System.out.println(x+" "+"y+" = "+(x+y));  
        System.out.println(x+"-"+y+" = "+(x-y));  
        System.out.println(x+"*"+y+" = "+(x*y));  
    }  
}
```

Output

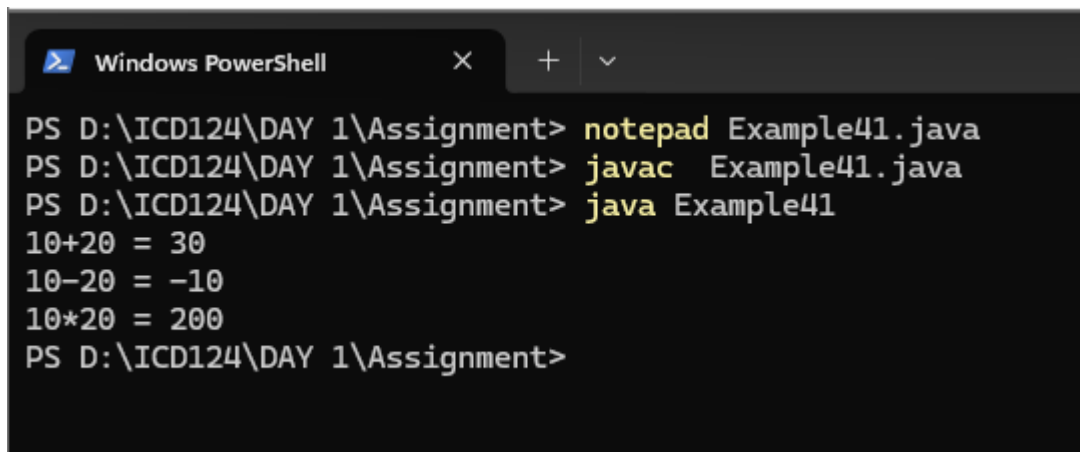


```
Windows PowerShell  X + v  
PS D:\ICD124\DAY 1\Assignment> notepad Example41.java  
PS D:\ICD124\DAY 1\Assignment> javac Example41.java  
PS D:\ICD124\DAY 1\Assignment> java Example41  
10+20 = 30  
10-20 = -10  
10*20 = 200  
PS D:\ICD124\DAY 1\Assignment>
```

42.

```
class Example42{  
    public static void main(String args[]){  
        int x,y,z;  
        x=100;  
        y=200;  
        System.out.println(x);  
        System.out.println(y);  
        y=x;  
        System.out.println(x);  
        System.out.println(y);  
    }  
}
```

Output

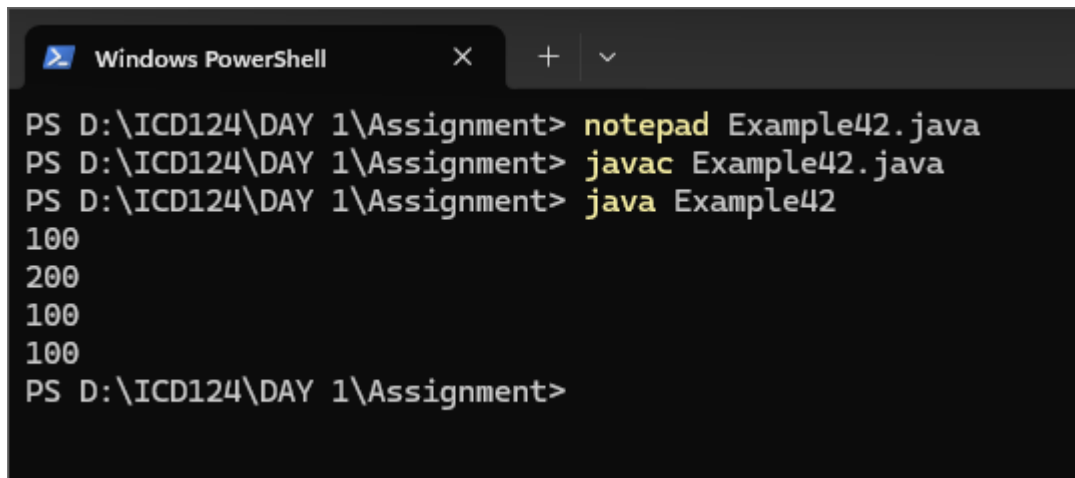


```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example42.java  
PS D:\ICD124\DAY 1\Assignment> javac Example42.java  
PS D:\ICD124\DAY 1\Assignment> java Example42  
100  
200  
100  
100  
PS D:\ICD124\DAY 1\Assignment>
```

43.

```
class Example43{  
    public static void main(String args[]){  
        int num=103;  
        if(num>0){  
            System.out.println(num+" is positive number");  
        }else if(num<0){  
            System.out.println(num+" is negative number");  
        }else{  
            System.out.println(num+" is 0");  
        }  
    }  
}
```

Output

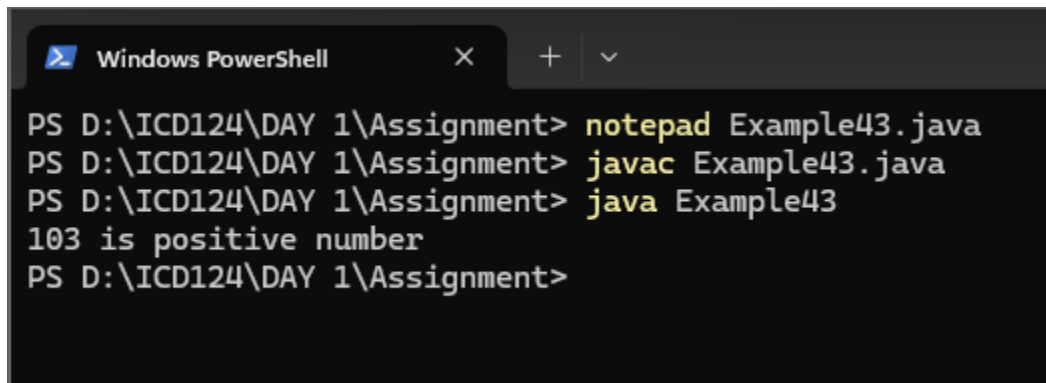

```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example43.java  
PS D:\ICD124\DAY 1\Assignment> javac Example43.java  
PS D:\ICD124\DAY 1\Assignment> java Example43  
103 is positive number  
PS D:\ICD124\DAY 1\Assignment>
```

44.

```
import java.util.*;

class Example44{

    public static void main(String args[]){

        Scanner input= new Scanner(System.in);

        System.out.print("Input number - ");

        int num=input.nextInt();

        if(num>0){

            System.out.println(num+" is positive number");

        }else if(num<0){

            System.out.println(num+" is negative number");

        }else{


            System.out.println(num+" is 0");

        }

    }

}
```

Output

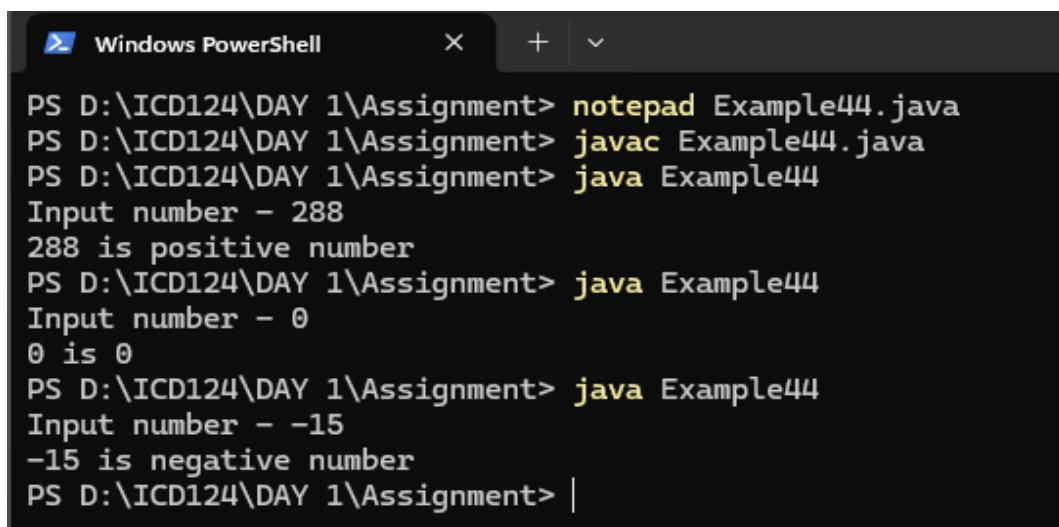

```
Windows PowerShell
PS D:\ICD124\DAY 1\Assignment> notepad Example44.java
PS D:\ICD124\DAY 1\Assignment> javac Example44.java
PS D:\ICD124\DAY 1\Assignment> java Example44
Input number - 288
288 is positive number
PS D:\ICD124\DAY 1\Assignment> java Example44
Input number - 0
0 is 0
PS D:\ICD124\DAY 1\Assignment> java Example44
Input number - -15
-15 is negative number
PS D:\ICD124\DAY 1\Assignment> |
```

45.

```
import java.util.*;

class Example45{

    public static void main(String args[]){

        Scanner input=new Scanner(System.in);

        System.out.print("Enter your mark - ");

        int mark=input.nextInt();

        if(mark>=75){

            System.out.println("your grade is A");

        }else if(mark>=65){

            System.out.println("your grade is B");

        }else if(mark>=50){

            System.out.println("your grade is C");

        }else{


            System.out.println("your grade is F");

        }

    }

}
```

Output

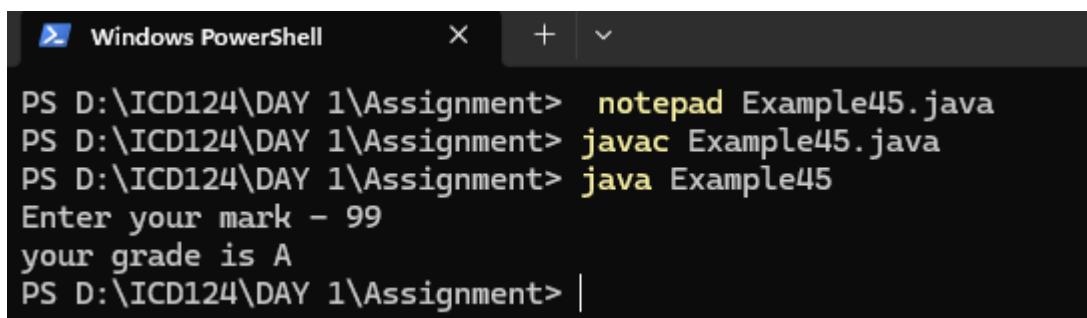

```
Windows PowerShell
PS D:\ICD124\DAY 1\Assignment> notepad Example45.java
PS D:\ICD124\DAY 1\Assignment> javac Example45.java
PS D:\ICD124\DAY 1\Assignment> java Example45
Enter your mark - 99
your grade is A
PS D:\ICD124\DAY 1\Assignment> |
```

46.

```
import java.util.*;

class Example46{

    public static void main(String args[]){

        Scanner input=new Scanner(System.in);

        System.out.print("Enter Your age - ");

        int age=input.nextInt();

        if(age<18){

            System.out.println("age is not valid for vote");

        }else{


            System.out.println("welcome to vote");

        }

    }

}
```

Output

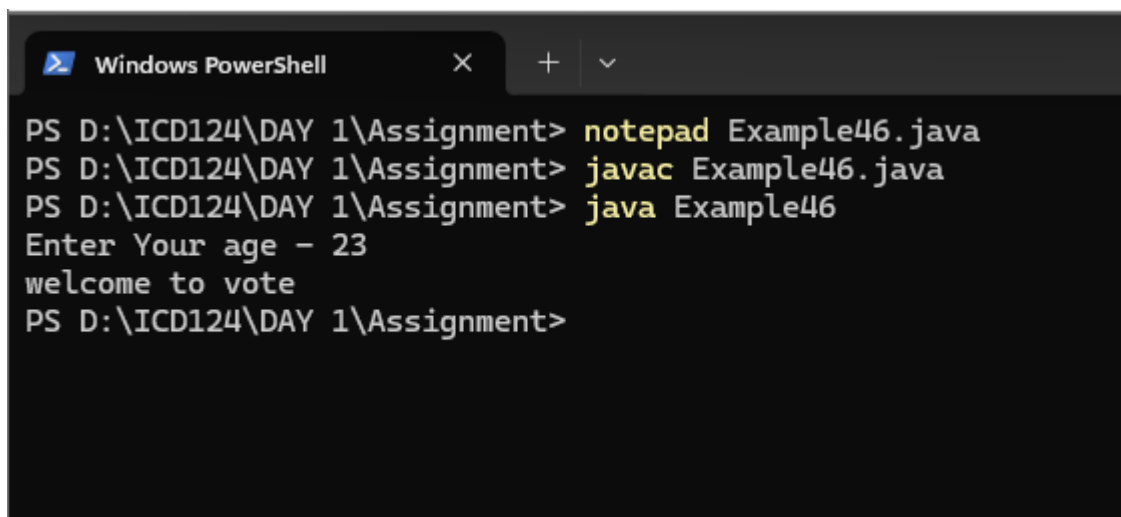
A screenshot of a Windows PowerShell terminal window. The title bar shows 'Windows PowerShell' with standard window controls. The terminal content shows the following sequence of commands and output: 1. 'PS D:\ICD124\DAY 1\Assignment> notepad Example46.java' 2. 'PS D:\ICD124\DAY 1\Assignment> javac Example46.java' 3. 'PS D:\ICD124\DAY 1\Assignment> java Example46' 4. The program prompts 'Enter Your age -' and the user enters '23'. 5. The program outputs 'welcome to vote'. 6. The prompt returns to 'PS D:\ICD124\DAY 1\Assignment>'.

```
Windows PowerShell
PS D:\ICD124\DAY 1\Assignment> notepad Example46.java
PS D:\ICD124\DAY 1\Assignment> javac Example46.java
PS D:\ICD124\DAY 1\Assignment> java Example46
Enter Your age - 23
welcome to vote
PS D:\ICD124\DAY 1\Assignment>
```

47.

```
class Example47{  
    public static void main (String args[]){  
        double x,y,z;  
        x=3;  
        y=4;  
        z=Math.sqrt(x*x+y*y);  
        System.out.println("Hypotenuse is "+z);  
    }  
}
```

Output

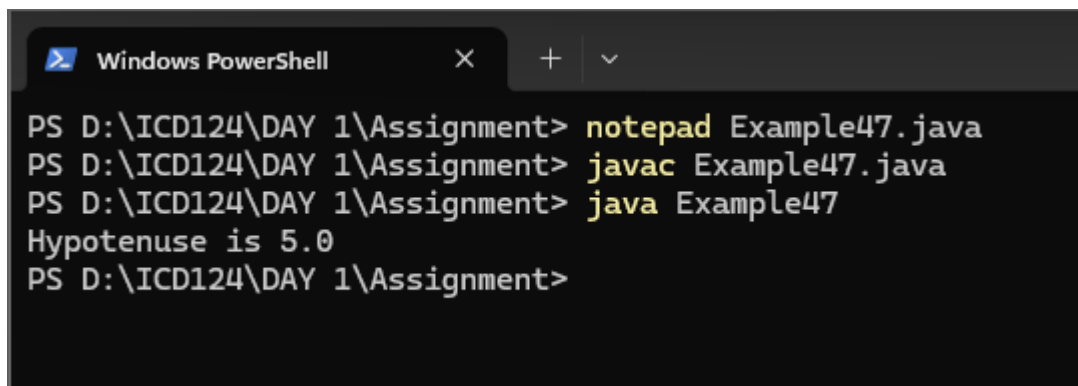

```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example47.java  
PS D:\ICD124\DAY 1\Assignment> javac Example47.java  
PS D:\ICD124\DAY 1\Assignment> java Example47  
Hypotenuse is 5.0  
PS D:\ICD124\DAY 1\Assignment>
```

48.

```
import java.util.*;

class Example48{

    public static void main(String args[]){

        Scanner input=new Scanner(System.in);

        System.out.print("Enter any number - ");

        int num=input.nextInt();

        int fact=1;

        for(int i=1;i<num;i++){

            fact=fact*i;


        }

        System.out.println("The factorial of "+num+" is "+fact);

    }

}
```

Output

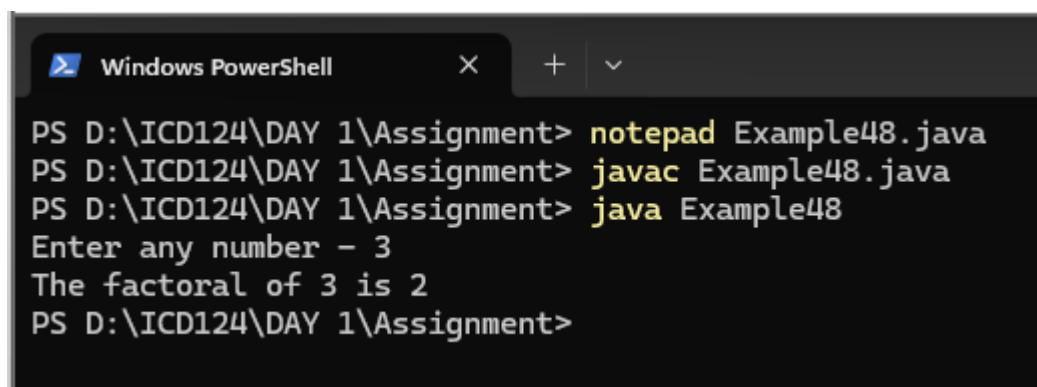

```
Windows PowerShell
PS D:\ICD124\DAY 1\Assignment> notepad Example48.java
PS D:\ICD124\DAY 1\Assignment> javac Example48.java
PS D:\ICD124\DAY 1\Assignment> java Example48
Enter any number - 3
The factorial of 3 is 2
PS D:\ICD124\DAY 1\Assignment>
```

49.

```
import java.util.*;

class Example49{

    public static void main(String args[]){

        Scanner input=new Scanner(System.in);

        System.out.print("Input your age - ");

        int age=input.nextInt();

        if(age<18){

            System.out.println("age is not valid to vote");

        }

        else{


            System.out.println("welcome to vote");

        }

    }

}
```

Output

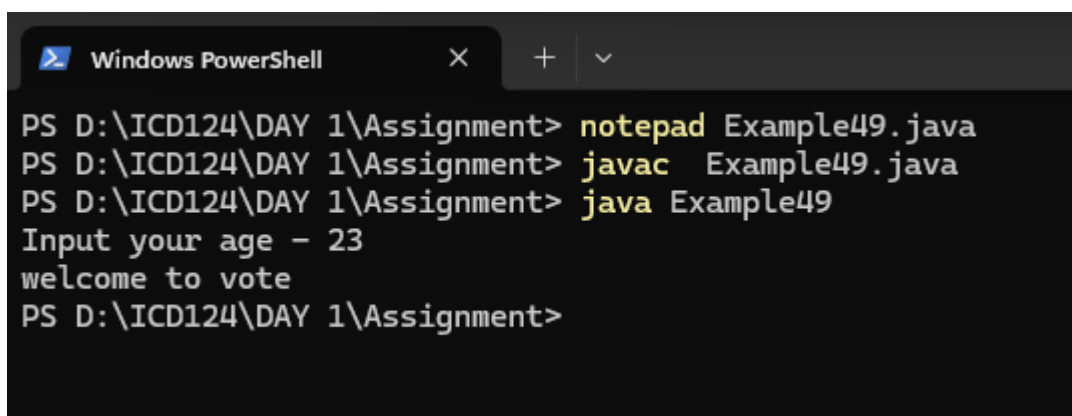


```
Windows PowerShell
PS D:\ICD124\DAY 1\Assignment> notepad Example49.java
PS D:\ICD124\DAY 1\Assignment> javac Example49.java
PS D:\ICD124\DAY 1\Assignment> java Example49
Input your age - 23
welcome to vote
PS D:\ICD124\DAY 1\Assignment>
```

50.

```
public class Example50{  
    public static void main(String args[]){  
        for(int i=-5;i<6;i++){  
            int result =i!=0?100/i:0;  
            if(i!=0){  
                System.out.println("100/"+i+"is"+result);  
            }  
        }  
    }  
}
```

Output

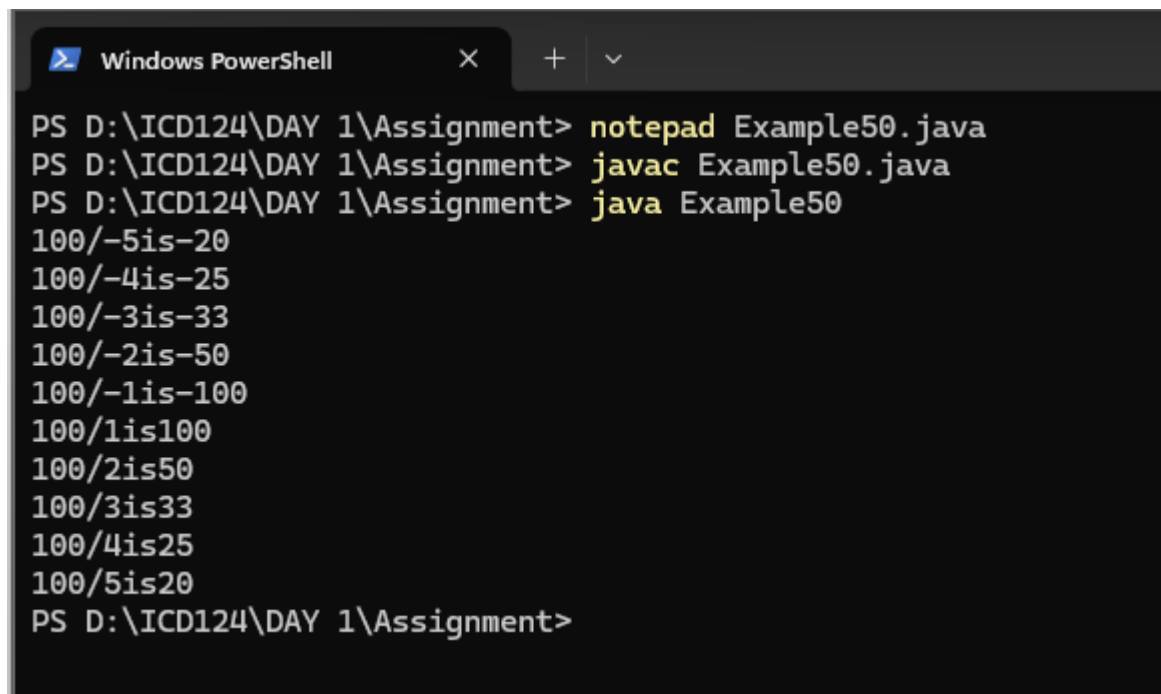

```
Windows PowerShell  
PS D:\ICD124\DAY 1\Assignment> notepad Example50.java  
PS D:\ICD124\DAY 1\Assignment> javac Example50.java  
PS D:\ICD124\DAY 1\Assignment> java Example50  
100/-5is-20  
100/-4is-25  
100/-3is-33  
100/-2is-50  
100/-1is-100  
100/1is100  
100/2is50  
100/3is33  
100/4is25  
100/5is20  
PS D:\ICD124\DAY 1\Assignment>
```