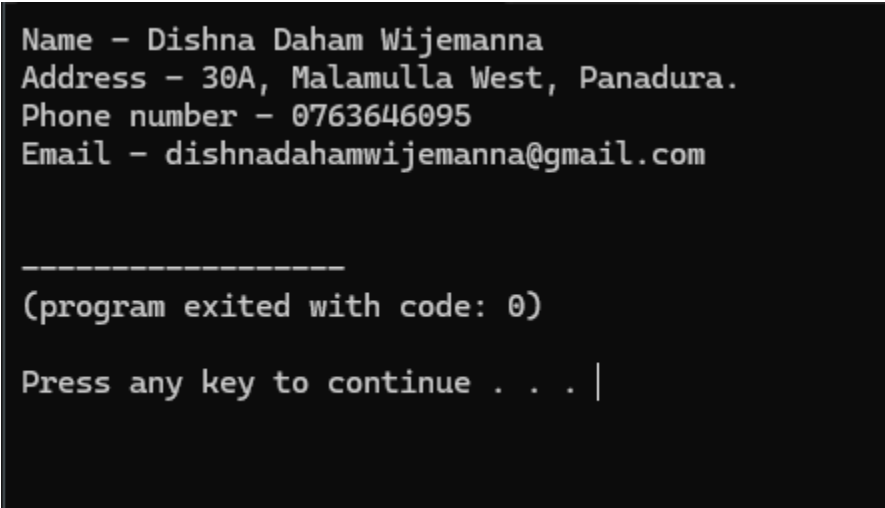


Q1.

Code-

```
class Q1{  
    public static void main(String args[]){  
        System.out.println("Name - Dishna Daham Wijemanna");  
        System.out.println("Address - 30A, Malamulla West, Panadura.");  
        System.out.println("Phone number - 0763646095");  
        System.out.println("Email -  
dishnadahamwijemanna@gmail.com");  
    }  
}
```

A screenshot of a terminal window with a black background and white text. It shows the output of a Java program: 'Name - Dishna Daham Wijemanna', 'Address - 30A, Malamulla West, Panadura.', 'Phone number - 0763646095', and 'Email - dishnadahamwijemanna@gmail.com'. Below this, there is a horizontal line of dashes, followed by '(program exited with code: 0)', and then 'Press any key to continue . . . |' with a cursor.

```
Name - Dishna Daham Wijemanna  
Address - 30A, Malamulla West, Panadura.  
Phone number - 0763646095  
Email - dishnadahamwijemanna@gmail.com
```

```
-----  
(program exited with code: 0)
```

```
Press any key to continue . . . |
```

Q2.

Code-

```
class Q2{  
    public static void main(String args[]){  
        System.out.println("");  
        System.out.println("* *");  
        System.out.println("* * *");  
        System.out.println("* * * *");  
        System.out.println("* * * * *");  
        System.out.println("* * * * * *");  
        System.out.println("* * * * * * *");  
    }  
}
```

Output




```
*  
* *  
* * *  
* * * *  
* * * * *  
* * * * * *  
* * * * * * *  
  
-----  
(program exited with code: 0)  
Press any key to continue . . . |
```

Q3.

Code-

```
class Q3{  
    public static void main(String args[]){  
  
        System.out.println("    299");  
        System.out.println("+    800");  
        System.out.println("-----");  
        System.out.println("    1099");  
        System.out.println("=====");  
    }  
}
```

Output-

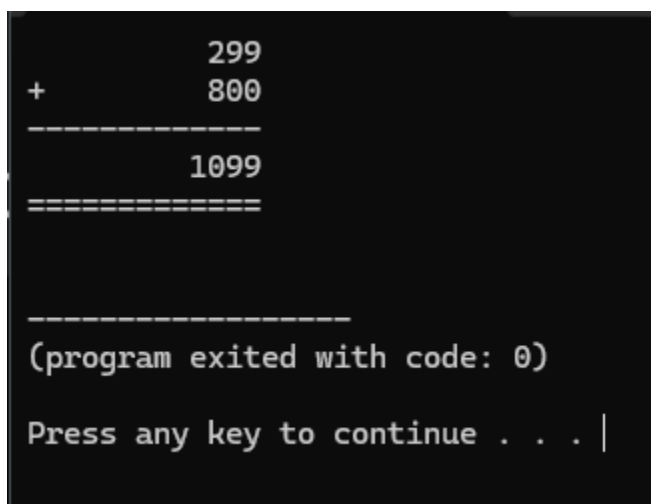

```
    299  
+    800  
-----  
    1099  
=====
```

(program exited with code: 0)
Press any key to continue . . . |

Q4.

Code-

[illegible]

Output

```
* * * * * =====  
* * * * * =====  
* * * * * =====  
* * * * * =====  
* * * * * =====  
* * * * * =====  
* * * * * =====  
* * * * * =====  
  
=====
```

(program exited with code: 0)


Press any key to continue . . . |

Q5A.

Code-

```
class Q5A{  
    public static void main(String args[]){  
        System.out.println("Institute of Computer Engineering  
Technology");  
        System.out.println("223 A,");  
        System.out.println("Galle Roud,");  
        System.out.println("Panadura.");  
    }  
}
```

Output-

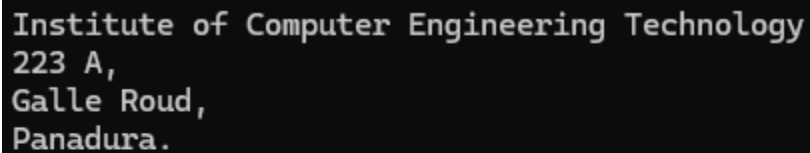A screenshot of a terminal window showing the output of a Java program. The text is displayed in a monospaced font on a dark background. The output consists of four lines: "Institute of Computer Engineering Technology", "223 A,", "Galle Roud,", and "Panadura.".

```
Institute of Computer Engineering Technology  
223 A,  
Galle Roud,  
Panadura.
```

```
-----  
(program exited with code: 0)
```


```
Press any key to continue . . . |
```

Q5B.

Code-

```
class Q5B{
    public static void main(String args[]){
        System.out.println("Institute of Computer Engineering Technology");
        System.out.print("223 A,");
        System.out.print("Galle Road,");
        System.out.print("Panadura.");
    }
}
```

Output-

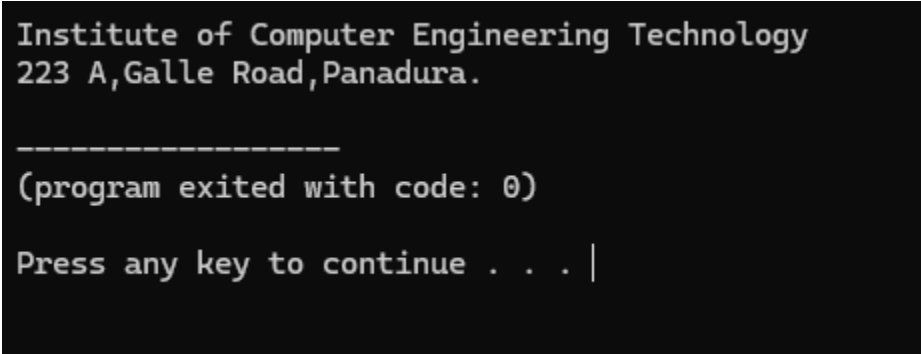A screenshot of a terminal window showing the output of a Java program. The output consists of three lines: "Institute of Computer Engineering Technology", "223 A,Galle Road,Panadura.", and a separator line of ten dashes. Below the dashes, it says "(program exited with code: 0)". At the bottom, it prompts "Press any key to continue . . . |" with a vertical cursor.

```
Institute of Computer Engineering Technology
223 A,Galle Road,Panadura.
-----
(program exited with code: 0)
Press any key to continue . . . |
```

Q6.

Code-

```
1 class Q6{
2     public static void main(String args[]){
3         System.out.print("I'm Daham Wijemanna.");
4         System.out.print("I'm 23 years old."); // to this point its prints like this--> I'm Daham Wijemanna.I'm 23 years old
5
6         System.out.println("I live in panadura"); //after this point ---> I'm Daham Wijemanna.I'm 23 years old.
7         System.out.println("I'm a Software Engineering student"); //I'm a Software Engineering student
8
9         //print- printing in a line
10        //println - creating new lines after every println
11    }
12 }
13 }
```

Output-

```
I'm Daham Wijemanna.I'm 23 years old.I live in panadura
I'm a Software Engineering student
```

```
//print- printing in a line
//println - creating new lines after every println
```


-

Q7.

Code-

```
class Q7{  
    public static void main(String args[]){  
        System.out.println("a");    //line 1  
        System.out.println('a');    //line 2  
    }  
}
```

Output-

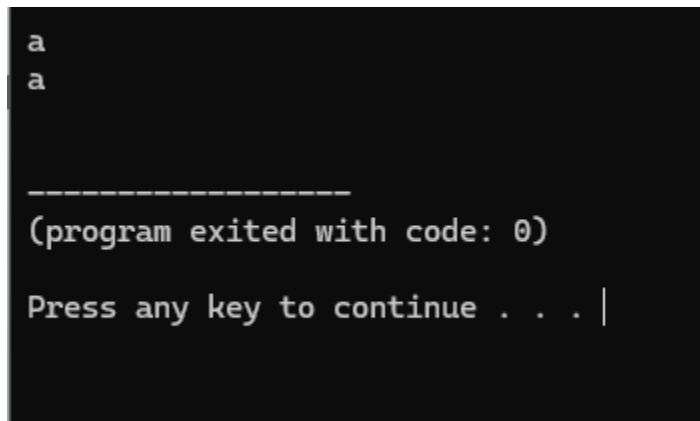

```
a  
a  
  
-----  
(program exited with code: 0)  
Press any key to continue . . . |
```

- Output is the same but different is the first (a) is a String because it has (“ ”)s.
- And second (a) is a char because it has (‘ ’)s.

Q8.

Code-

```
class Q8{
    public static void main(String args[]){
        System.out.println(7);    //line 1
        System.out.println(7.0);  //line 2
        System.out.println("7");  //line 3
        System.out.println('7');  //line 4

    }
}
```

Output –



```
7
7.0
7
7

-----
(program exited with code: 0)
Press any key to continue . . . |
```

- The first 7 is an integer
- The Second 7 is a double
- The third 7 is a String
- The fourth 7 is a char

Q9.

What are the type of java literals? Explain with a suitable example.

```
class Q9{
    public static void main(String args[]){
        // 1. Integer Literals
        int decimalInt = 100;
        int hexInt = 0x64;    // 100 in hexadecimal
        long longInt = 100000000000L; // 'L' marks it as a Long

        // 2. Floating-Point Literals
        double piDouble = 3.14159; // Default is double
        float piFloat = 3.14F;    // 'F' marks it as a float

        // 3. Character Literal
        char letterA = 'A';

        // 4. String Literal
        String greeting = "Hello, Java!";
        System.out.print("hello") //print a string literal without creating a variable


        // 5. Boolean Literal
        boolean isJavaFun = true;
    }
}
```

Q10.

Code-

```
class Q10{  
    public static void main(String args[]){  
        System.out.println(1100100); //line 1  
        System.out.println(0B1100100); //line 2  
        System.out.println(01100100); //line 3  
        System.out.println(0x1100100); //line 4  
    }  
}
```

Output-

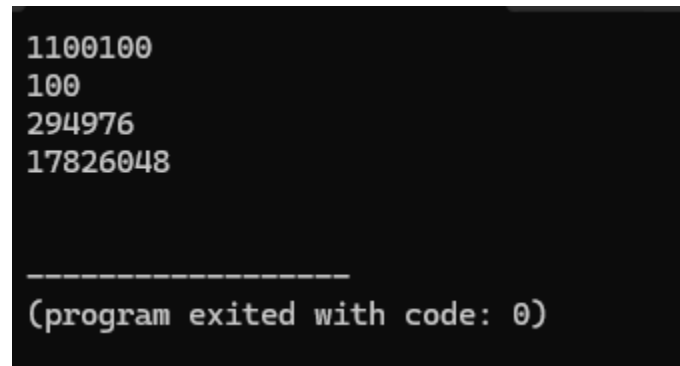A screenshot of a terminal window with a black background and white text. The output shows four lines of numbers: 1100100, 100, 294976, and 17826048. Below these is a dashed line and the text "(program exited with code: 0)".

```
1100100  
100  
294976  
17826048  
  
-----  
(program exited with code: 0)
```

- Line1 - Since there is no prefix, Java interprets this as a standard base-10 number.
- Line2 - The prefix 0B (or 0b) tells Java that this is a binary number (base-2).
- Line3 - A leading 0 with no trailing letters indicates an octal number (base-8).
- Line4 - The prefix 0x (or 0X) specifies a hexadecimal number (base-16).

Q11.

```
class Example{
    public static void main(String args[]){
        System.out.println(0B11100100); //Line 1
        System.out.println(0b11100100); //Line 2
        System.out.println(0B11100200); //Line 3
        System.out.println(0144); //Line 4
        System.out.println(0148); //Line 5
        System.out.println(0x64); //Line 6
        System.out.println(0xabc); //Line 7
        System.out.println(0xabcg); //Line 8
        System.out.println(0X); //Line 9
        System.out.println(0xffffffff); //Line 10
    }
}
```

Explain -

- Line1- Binary literals in Java can start with either uppercase 0B or lowercase 0b. Every digit following the prefix is either a 1 or a 0, making them perfectly legal.
→valid
- Line2- I had explain it in line 1 Example . → Valid
- Line3- The 0B prefix demands a binary number. Because binary numbers can *only* consist of 0 and 1, the inclusion of the digit **2** triggers a compile-time syntax error.
→Invalid
- Line4- The leading 0 designates this as an octal literal. Octal numbers use digits from 0 to 7. Because 1, 4, and 4 are all valid octal digits, this compiles cleanly (it evaluates to decimal 100). → valid
- Line5 - the leading 0 indicates an octal literal. However, octal systems do not contain the digit **8** (only 0-7). Java will flag this as an integer number too large or an invalid octal digit. → invalid
- Line6 & Line7 - Hexadecimal literals use the 0x or 0X prefix and can contain numbers 0-9 and letters a-f (case-insensitive). Both statements stay perfectly within those boundaries. → valid
- Line 8 - Hexadecimal digits only go up to the letter f (representing 15). The letter **g** is not a valid hexadecimal character, causing a compilation failure. → invalid
- Line 9 - You cannot provide a number base prefix (0X) without providing a value after it. The compiler expects hex digits to follow the prefix. → invalid
- Line 10 - A standard Java int is a signed 32-bit value. Writing eight fs in hex fills all 32 bits with 1s (1111...1111). In two's complement binary arithmetic, this represents the value -1, which fits perfectly inside a standard Java integer. → valid

Q12.

```
}
```

12. What is the result of attempting to compile and run the program?

```
class Example{  
    public static void main(String args[]){  
        System.out.print("A\nB");  
        System.out.println("CD");  
        System.out.print("\nEF\n");  
        System.out.print("G\nH")  
    }  
}
```



Output-

Error- syntax error (no semicolon in line 4)

Q13.

```
class Q13{  
    public static void main(String args[]){  
        System.out.print("i\tiCM - iCET CERTIFIED  
MASTER\n\nii.\tiCM\n\n\tiCET\n\tCERTIFIED\n\tMASTER\n\niii.\tiCM\n\n\tiCET CERTIFIED MASTER");  
    }  
}
```




```
i      iCM - iCET CERTIFIED MASTER  
  
ii.    iCM  
  
       iCET  
       CERTIFIED  
       MASTER  
  
iii.   iCM  
  
       iCET CERTIFIED MASTER  
  
-----  
(program exited with code: 0)  
Press any key to continue . . . |
```

Q14.

Code -

```
class Q14{
    public static void main(String args[]){
        System.out.println("Hello\nJAVA");
        System.out.println("Hello\tJAVA");
        System.out.println("Hello\bJAVA");
        System.out.println("\\Hello JAVA\\");
        System.out.println("\"Hello\nJAVA\"");
        System.out.println("'Hello\nJAVA'");
    }
}
```

Output –

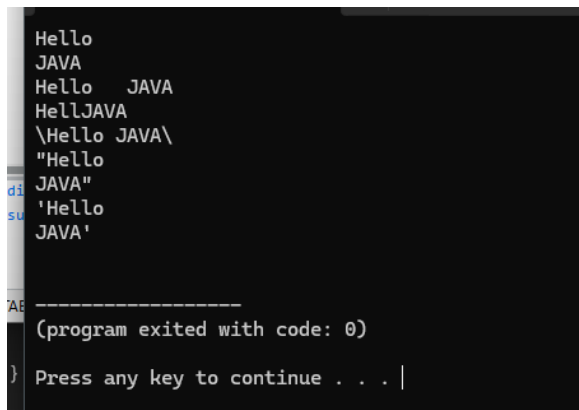

```
Hello
JAVA
Hello  JAVA
HellJAVA
\Hello JAVA\
"Hello
JAVA"
'Hello
JAVA'

-----
(program exited with code: 0)
Press any key to continue . . . |
```

Explain


- Line 1 - The `\n` breaks the text , sending JAVA to the next line.
- Line 2 - The `\t` inserts a standard horizontal tab space between the words.
- Line 3 - The `\b` acts as a backspace character, which deletes the trailing letter 'o' from "Hello" before printing JAVA.
- Line 4 - Each `\\` translates to a single literal backslash.
- Line 5 - Prints a double quote `\"` , prints Hello, snaps to a newline via `\n`, prints JAVA, and ends with two consecutive double quotes `\""` .
- Line 6 - Prints a single quote `\'`, prints Hello, drops to a newline via `\n`, prints JAVA, and ends with a double quote `\'` .

Q15.

Code –

```
class Q15{
    public static void main(String args[]){
        System.out.println("a. Java is a typed language\nb. AB\"CB\nc.
AB\\CD\nd. C:\\Windows\\Program\ne. AB\\\"CD\nf. AB\\\\\\\"CD\ng. AB\\nCD\nh.
AB\\tCD\ni. AB\\bCD");
    }
}
```

Output –

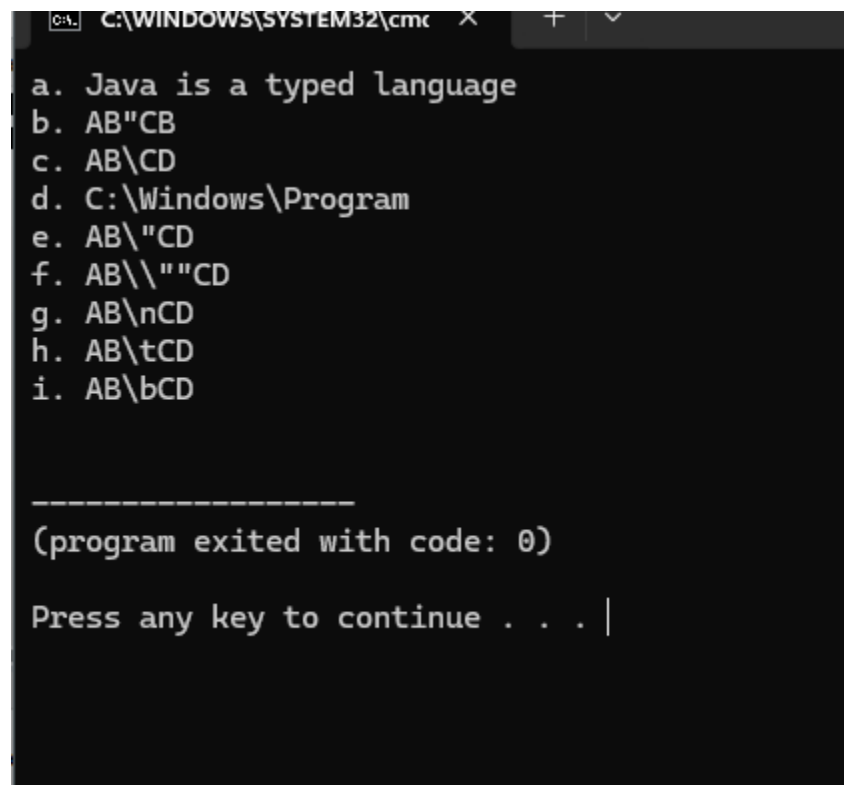

```
C:\WINDOWS\SYSTEM32\cmd.exe
a. Java is a typed language
b. AB"CB
c. AB\CD
d. C:\Windows\Program
e. AB\"CD
f. AB\\\"CD
g. AB\nCD
h. AB\tCD
i. AB\bCD


-----
(program exited with code: 0)
Press any key to continue . . . |
```

Q16.

Code –

```
class Q16{
    public static void main(String args[]){
        System.out.println(" _ _ _ _ _ ");
        System.out.println("( )/ _ _ | _ _ | _ _ |");
        System.out.println("_ | | _ | _ | |");
        System.out.println("| | | | _ | | |");
        System.out.println("| | | _ _ | _ _ | |");
        System.out.println("|_|\\ _ _ | _ _ | |_|");
    }
}
```

Output –

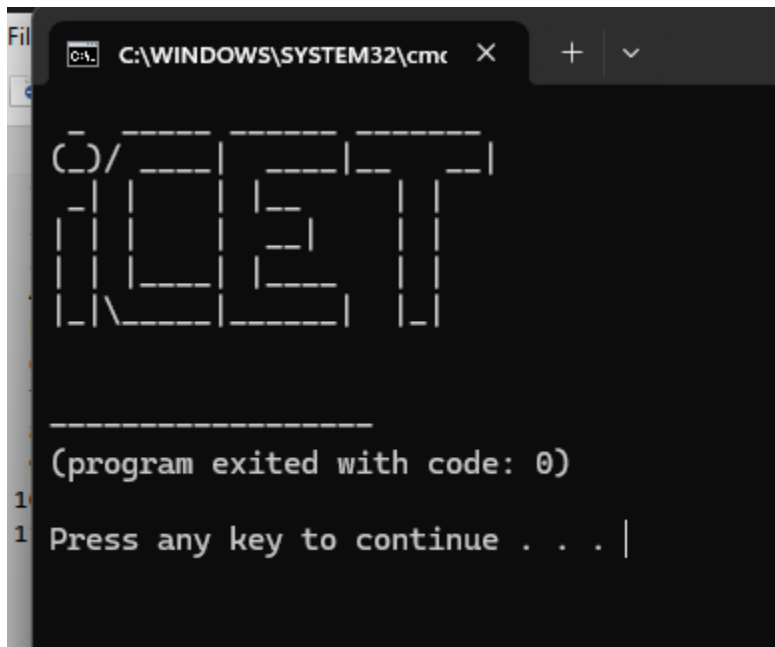

```
C:\WINDOWS\SYSTEM32\cmd.exe
( )/ _ _ | _ _ | _ _ |
 _ | | _ | _ | |
| | | | _ | | |
| | | _ _ | _ _ | |
|_|\\ _ _ | _ _ | |_|

(program exited with code: 0)
1
1 Press any key to continue . . . |
```


Q17.

Code –

```
class Q17{
```

```
public static void main(String args[]){
    System.out.println("    +\"\\\"\\\"\\\"\\\"+");
    System.out.println("    [| o o |]");
    System.out.println("    | ^ |");
    System.out.println("    | ' ' |");
    System.out.println("    +\"\"\"\"+");
    System.out.println("    |||||");
    System.out.println("    ^^^\\|||\\|||\\|||\\|||\\");
    System.out.println("    |||||");
    System.out.println("    |||||");
    System.out.println("    |||||");
    System.out.println("    |||||");
    System.out.println("    |||||");
    System.out.println("    \\  /");
}
```

}

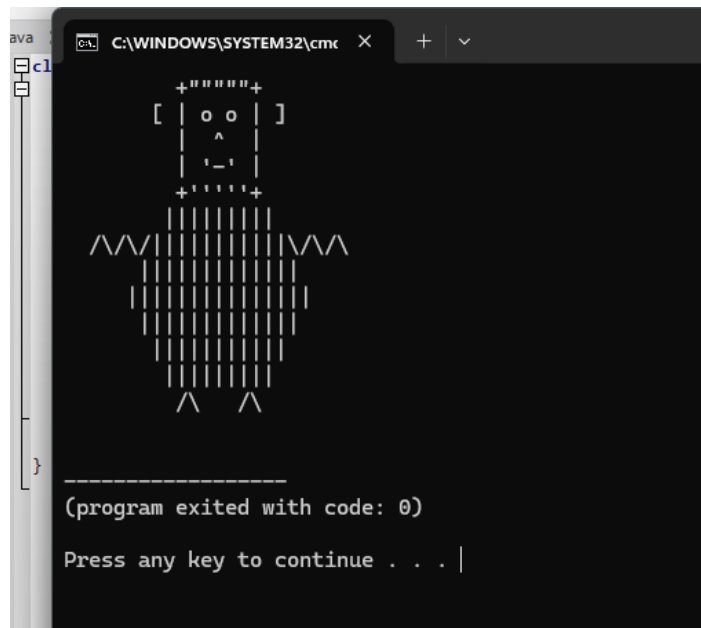

Q18.

Code -

```
class Q18{  
    public static void main(String args[]){  
        int i; //line 1  
        i=103; //line 2  
        System.out.println(i); //line 3  
    }  
}
```


Explain -

- Line 1 – create a integer variable name “ i “
- Line 2 – Assign a 103 value to “ i ”variable
- Line 3 – print “ i ” variable

Q19.

```
class Q19{  
    public static void main(String args[]){  
        int x;  
        int y;  
        x = 102;  
        y = 103;  
        System.out.println(x+"\t"+y);  
        System.out.println(y+"\t"+x);  
    }  
}
```

Output-

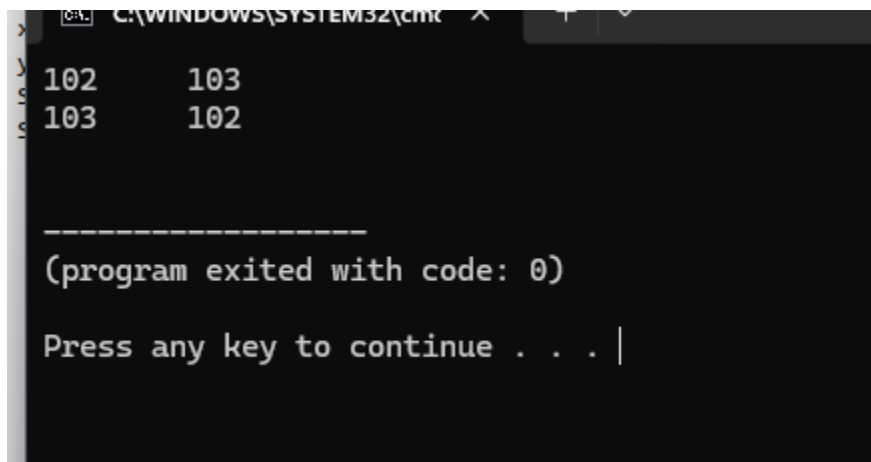

```
C:\WINDOWS\SYSTEM32\cmd.exe  
102    103  
103    102  
  
-----  
(program exited with code: 0)  
Press any key to continue . . . |
```

Q20.

```
class Example{  
    public static void main(String args[]){  
        int x;  
        System.out.println(x);  
    }  
}
```

Answer –

- V-compile time error

Q21.

Code-

```
class Q21{  
    public static void main(String args[]){  
        int x=10,y=20,z=30;  
        System.out.println(x);  
        System.out.println(y);  
        System.out.println(z);  
        int y=200;  
        System.out.println(y);  
    }  
}
```

21. What is the result of attempting to compile and run the program?

```
class Example{  
    public static void main(String args[]){  
        int x=10,y=20,z=30;  
        System.out.println(x);  
        System.out.println(y);  
        System.out.println(z);  
        int y=200;  
        System.out.println(y);  
    }  
}
```

Error-


- Creating same “y” variable twice.

Q22.

Code-

```
public static void main(String args[]){  
    int x,y;  
    x=100;  
    y=200;  
    System.out.println(x);  
    System.out.println(y);  
    y=300;  
    System.out.println(x);  
    System.out.println(y);  
}  
}
```

Output-

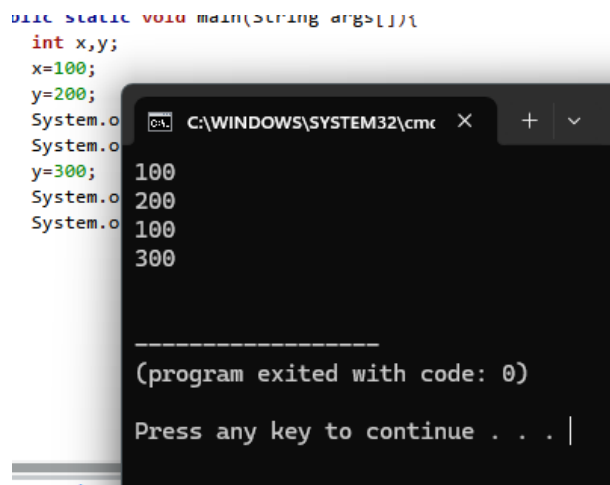

The screenshot shows a code editor on the left with the following code:

```
public static void main(String args[]){  
    int x,y;  
    x=100;  
    y=200;  
    System.out.println(x);  
    System.out.println(y);  
    y=300;  
    System.out.println(x);  
    System.out.println(y);  
}
```

On the right, a command prompt window titled "C:\WINDOWS\SYSTEM32\cmd" displays the output of the program:

```
100  
200  
100  
300  
  
-----  
(program exited with code: 0)  
Press any key to continue . . . |
```

Explain-

- Line 1,2,3,4,5 - and First creating x,y variable as int data type and assign value 100 and 200 to each variable and print those
- Line 6,7,8 – assign a new 300 value to the y variable and prints it.

Q23.

Code-

```
class Q23{
    public static void main(String args[]){
        int x;
        x =100;//line12      → B
        System.out.println(x);
    }
}
```

Explain -

- A - compile error , java would not allow to do this without assign a value to a variable.
- B- correct answer , assign a value to a variable
- C-Compile error, semicolon is missing and if it add to this it still crash because of x , because it doesn't have a value
- D- error because it will create x variable twice
- E – error because then x didn't have a value

Q24.

Code-

```
class Example{
    public static void main( String args[] ){
        int x,y,z; //line 1
        x=y=z=10; //line 2
        int a=12,b,c=4; //line 3
        int p=10; //line 4
        int q=p; //line 5
        int i=j=k=10; //line 6
    }
}
```

Error-

```
Q24.java:8: error: cannot find symbol
        int i=j=k=10; //line 6
              ^
symbol:   variable j
location: class Example
Q24.java:8: error: cannot find symbol
        int i=j=k=10; //line 6
              ^
symbol:   variable k
location: class Example
2 errors
Compilation failed.
```

Answer- D. compile error at line 6.

Q25

Code-

```
class Q25{  
    public static void main(String args[]){  
        System.out.println("10"+"20"); //line 1  
        System.out.println(10+20); //line 2  
    }  
}
```

Explain –

Line 1- its prints 1020, it is joining two string variables and prints it

Line 2 – its prints 30, adding two integers and prints it

Q26.

Code –

```
class Q26{
    public static void main(String args[]){
        System.out.println(10+20+30);
        System.out.println("10+20+30");
        System.out.println("10+20"+30);
        System.out.println("10"+"20"+"30");
        System.out.println("10"+20+30);
        System.out.println(10+20+"30");
        System.out.println(10+"20"+30);
    }
}
```

Error

26. What will be the output when you compile run the following |

```
class Example{
    public static void main(String args[]){
        System.out.println(10+20+30);
        System.out.println("10+20+30");
        System.out.println("10+20"+30);
        System.out.println("10"+"20"+"30");
        System.out.println("10"+20+30);
        System.out.println(10+20+"30");
        System.out.println(10+"20"+30);
    }
}
```

- (pubic) must be public.


```
public static void main(String args[]){
```

Q27.

Code –

```
class Q27{
    public static void main(String args[]){
        System.out.println(1+2+3);
        System.out.println("1"+"2"+"3");
        System.out.println('1'+2+'3');
        System.out.println('1'+" "+"2'+" "+"3');
        System.out.println('A'+B+'C');
        System.out.println("A"+"B"+"C");
        System.out.println('A'+100+200);
        System.out.println('A'+" "+"B'+" "+"C');
    }
}
```

Output-

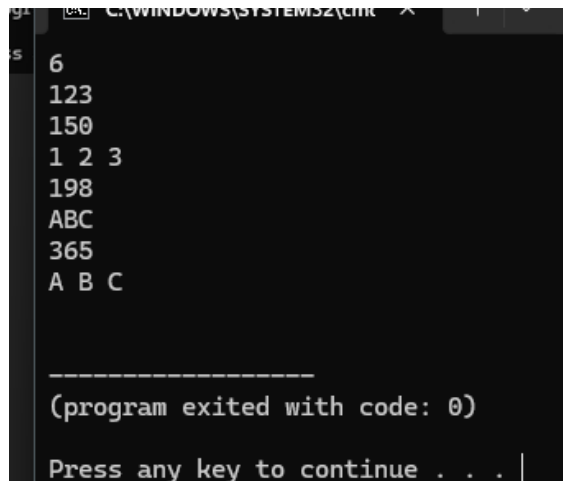

```
6
123
150
1 2 3
198
ABC
365
A B C

-----
(program exited with code: 0)
Press any key to continue . . . |
```

- Line 1 - operator performs standard mathematical addition: $1 + 2 + 3 = 6$.
- Line 2 - that ("1"+"2"+"3") prints in string format
- Line 3 - getting values from ASCII table and adding together
- Line 4 – because of space character(" ") it print in string format
- Line5 – getting value from ASCII table and prints value
- Line6 – its print in String format
- Line7 – getting Value from ASCII table for A and adding values and print
- Line8 - because of space character(" "), it print in string format

Q28.

28. What is the different between Question 20 program and following program.

```
import java.util.*;
class Example{
    public static void main(String[] args){
        int i;
        i=input.nextInt();
        System.out.println(i);
    }
}
```

20. What is the result of attempting to compile and run the program?

```
class Example{
    public static void main(String args[]){
        int x;
        System.out.println(x);
    }
}
```

- | | | |
|---------------------|-----------------------|-------------------|
| i. prints : nothing | ii. prints : x | iii. prints : 100 |
| iv. Runtime error | v. Compile time error | |

Explain –

- Both are error but in 28 question there is a import java libraries .

Q29.

Code –


```
import java.util.Scanner;
class Q29{
    public static void main(String args[]){
        Scanner input = new Scanner(System.in);
        System.out.print("Enter the 1 st number : ");
        int firstNum = input.nextInt();

        System.out.print("Enter the 2 nd number : ");
        int secondNum = input.nextInt();

        input.close();

        int sum = firstNum + secondNum;
        System.out.print(firstNum+" "+"+"+" "+secondNum+" "+"="+" "+sum);
    }
}
```

Output-

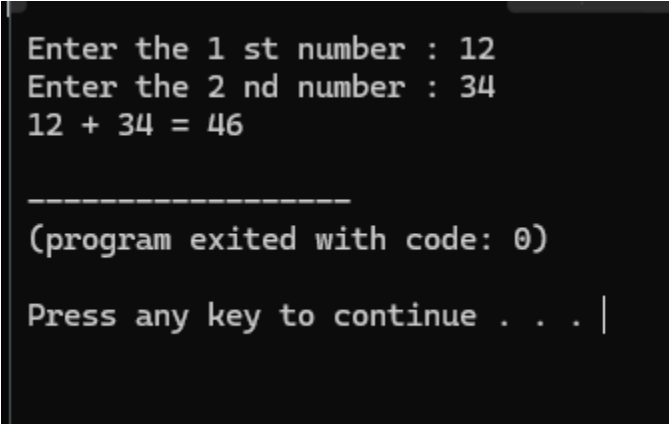

```
Enter the 1 st number : 12
Enter the 2 nd number : 34
12 + 34 = 46

-----
(program exited with code: 0)

Press any key to continue . . . |
```

Q30.


Code –

```
import java.util.Scanner;
class Q30{
    public static void main(String args[]){
        Scanner input = new Scanner(System.in);
        System.out.print("Enter a number : ");
        int num = input.nextInt();

        String strConcat = ""+ num + num + num;
        System.out.println(strConcat);

        int aricAdd = num+num+num;
        System.out.print(aricAdd);
    }
}
```

Output-

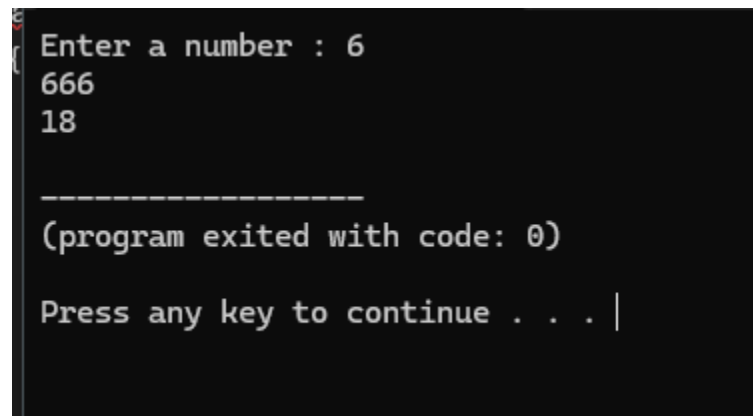

```
Enter a number : 6
666
18
-----
(program exited with code: 0)
Press any key to continue . . . |
```

Q31.

Code –

```
import java.util.Scanner;
class Q31{
    public static void main(String args[]){
        Scanner input = new Scanner(System.in);
        System.out.print("Combined Maths - ");
        int cMaths = input.nextInt();

        System.out.print("Chemistry   - ");
        int chem = input.nextInt();

        System.out.print("Physics    - ");
        int phy = input.nextInt();


        System.out.print("English   - ");
        int eng = input.nextInt();

        int sum = cMaths + chem + phy + eng ;

        System.out.println("Total      - " + sum);

    }
}
```

Output

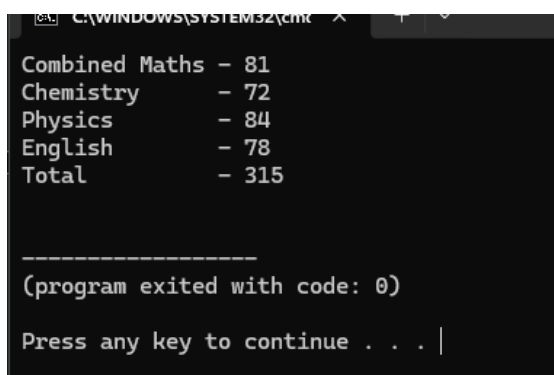

```
C:\WINDOWS\SYSTEM32\cmd.exe
Combined Maths - 81
Chemistry      - 72
Physics        - 84
English        - 78
Total          - 315

-----
(program exited with code: 0)
Press any key to continue . . . |
```

Q32.

Code –


```
import java.util.Scanner;
class Q32{
    public static void main(String args[]){
        Scanner input = new Scanner(System.in);
        System.out.print("Enter Red value : ");
        int red = input.nextInt();

        System.out.print("Enter Green value : ");
        int green = input.nextInt();

        System.out.print("Enter Blue value : ");
        int blue = input.nextInt();

        int redInv = 255 - red;
        int greenInv = 255 - green;
        int blueInv = 255 - blue;

        System.out.println("Inversion of given colour - "
+"[" +redInv+", "+greenInv+", "+blueInv+"]");
    }
}
```

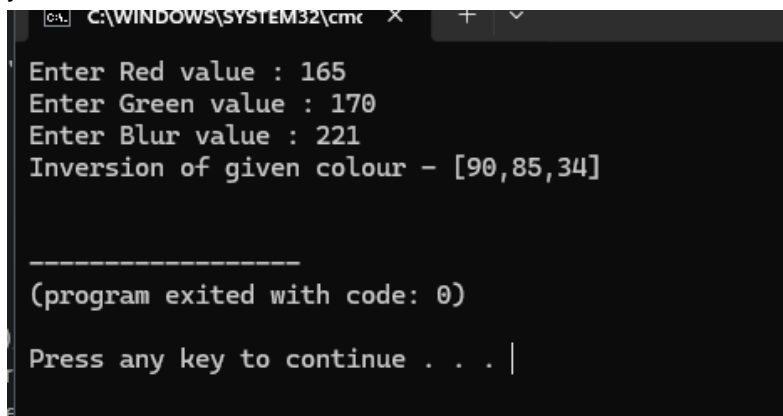

```
C:\WINDOWS\SYSTEM32\cmd.exe
Enter Red value : 165
Enter Green value : 170
Enter Blue value : 221
Inversion of given colour - [90,85,34]

-----
(program exited with code: 0)
Press any key to continue . . . |
```

Q33.

Data type	Size	Description
byte	1 byte	-128 to 127
short	2 bytes	-32 768 to 32 767
int	4 bytes	-2,147,483,648 to 2,147,483,647
long	8 bytes	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807
float	4 bytes	Stores fractional numbers. Sufficient for storing 6 to 7 decimal digits.
double	8 bytes	Stores fractional numbers. Sufficient for storing 15 decimal digits.
boolean	1 bit	Stores true or false values.
char	2 bytes	Stores a single character/letter or Unicode values (0 to 65,535).

Q34.

- new – Not Valid.
- @name – Not Valid.
- user-input – Not Valid.
- My Variable – Not Valid.
- 123num – Not Valid.
- java.org – Not Valid.

Q35.

35. Study following code and explain what are the different between line 1 and line 2.

```
class Example{  
    public static void main(String[] args) {  
        System.out.println("iCET"); //line 1  
        String s="connect intelligents_";  
        System.out.println(s); //line 2  
    }  
}
```

Explain


- line 1- it is print a statement without creating a variable
- line 2 – it is print a variable

Q36.

```
import java.util.Scanner;
class Q36{
    public static void main(String args[]){
        Scanner input = new Scanner(System.in);
        System.out.print("Whats your name : ");
        String name = input.next();
        input.nextLine();

        System.out.print("Hello "+ name+";"+" "+"nice to meet you!");
    }
}
```

Output-

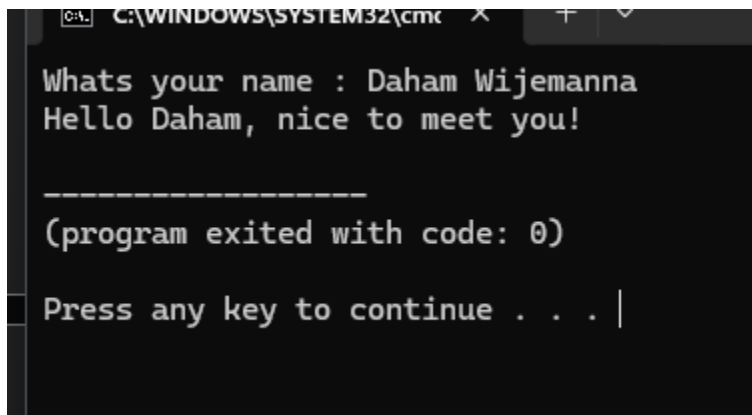

```
C:\WINDOWS\SYSTEM32\cmd.exe
Whats your name : Daham Wijemanna
Hello Daham, nice to meet you!

-----
(program exited with code: 0)
Press any key to continue . . . |
```


- i use the (.next) method because i wanted to get first name only.

Q37.

Code.

```
class Q37{  
    public static void main(String args[]){  
        int x =10;  
        int y = 5;  
        String z = x +'y'+"y"+ x + y +'z';  
        System.out.println("Z is: " +z);  
    }  
}
```

Output-

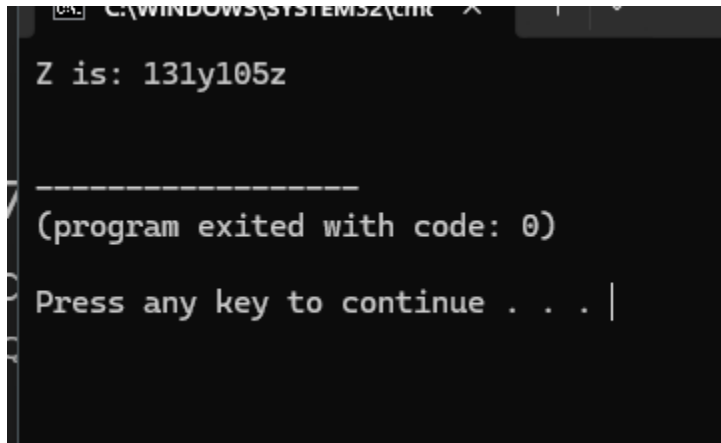A screenshot of a Windows command prompt window. The title bar shows the path 'C:\WINDOWS\SYSTEM32\cmd.exe'. The command prompt displays the output of the Java program: 'Z is: 131y105z'. Below this, a horizontal dashed line is shown, followed by the text '(program exited with code: 0)'. At the bottom, it says 'Press any key to continue . . . |'.

Problem – all given Answers are incorrect

Q38.

```
import java.util.Scanner;
class Q38{
    public static void main(String args[]){
        Scanner input = new Scanner(System.in);
        System.out.print("Enter your friends name: ");
        String name = input.next();
        input.nextLine();

        System.out.print("Enter your friend's age: ");
        String age = input.nextLine();

        System.out.print("Enter your friend's living place: ");
        String place = input.nextLine();

        System.out.print(name+" is my best friend. He is "+age+" years old
and lives in the beautiful town of "+place+".");

    }
}
```

```
Enter your friends name: Tharush
Enter your friend's age: 20
Enter your friend's living place: Panadura
Tharush is my best friend. He is 20 years old and lives in the beautiful town of Panadura.

-----
(program exited with code: 0)
Press any key to continue . . . |
```

Q39.

Code –

```
import java.util.Scanner;
class Q39{
    public static void main(String args[]){
        System.out.println("----Subject total calculator----");
        System.out.println();
        Scanner input = new Scanner(System.in);
        System.out.print("Subject 1 name - ");
        String sub1 = input.nextLine();
        System.out.print(sub1+" marks - ");
        int s1M = input.nextInt();
        input.nextLine();
        System.out.print("Subject 2 name - ");
        String sub2 = input.nextLine();
        System.out.print(sub2+" marks - ");
        int s2M = input.nextInt();
        input.nextLine();
        System.out.print("Subject 3 name - ");
        String sub3 = input.nextLine();
        System.out.print(sub3+" marks - ");
        int s3M = input.nextInt();
        input.nextLine();
        System.out.printf("%-10s"+"          %15d\n",sub1,s1M);
        System.out.printf("%-10s"+"          %15d\n",sub2,s2M);
        System.out.printf("%-10s"+"          %15d\n",sub3,s3M);
    }
}
```

```
----Subject total calculator----

Subject 1 name - Maths
Maths marks - 100
Subject 2 name - Chemistry
Chemistry marks - 99
Subject 3 name - Physics
Physics marks - 89
Maths                      100
Chemistry                  99
Physics                   89

-----
(program exited with code: 0)
```

Q40.


Code-

```
import java.util.*;
class Q40{
    public static void main(String args[]){
        Scanner input = new Scanner(System.in);
        System.out.print("Input number 1 : ");
        int num1=input.nextInt();
        System.out.print("Input number 2 : ");
        int num2=input.nextInt();
        System.out.println(num1+" "+num2);
        int temp1 =num1;
        int temp2 =num2;

        num1=temp2;
        num2=temp1;

        System.out.print(num1+" "+num2);

    }
}
```

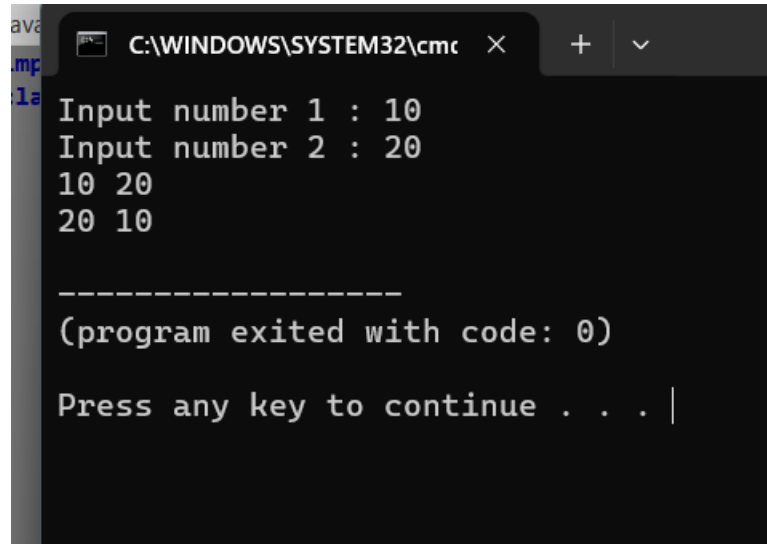

```
C:\WINDOWS\SYSTEM32\cmd
Input number 1 : 10
Input number 2 : 20
10 20
20 10

-----
(program exited with code: 0)
Press any key to continue . . . |
```