

Introduction

Organizor is the backend API for managing tenant environments. It keeps tenant records in a central catalog database and provisions a separate PostgreSQL database for each tenant.

The current implementation focuses on tenant lifecycle operations:

- creating tenant catalog records;
- onboarding tenants by creating a tenant database and applying migrations through internal operations;
- resolving tenant context for tenant-scoped requests;
- upgrading tenant databases by running migrations;
- soft-deleting tenants before hard deletion;
- exposing health checks, OpenAPI JSON, and Scalar API reference in development.

Main Concepts

Concept	Description
Tenant	A customer or isolated workspace tracked by <code>Id</code> , <code>Name</code> , <code>Slug</code> , <code>DatabaseName</code> , lifecycle status, and deletion metadata.
Catalog database	Central PostgreSQL database that stores all tenant records.
Tenant database	PostgreSQL database named from the tenant slug, currently using the <code>organizor_tenant_{slug}</code> convention.
Tenant resolution	Middleware step that reads <code>X-Tenant-Slug</code> , loads the tenant, and stores the current tenant in <code>ITenantContext</code> .
Provisioning workflow	Infrastructure workflow that creates the tenant database and applies tenant migrations.

Project Layout

Project	Responsibility
<code>Code7Dev.Organizor.Api</code>	ASP.NET Core host, controllers, DTOs, mappers, middleware, OpenAPI/Scalar, health checks, CORS, and logging setup.
<code>Code7Dev.Organizor.Application</code>	Tenant service contracts, tenant models, onboarding, lifecycle, upgrade, and catalog-facing application logic.
<code>Code7Dev.Organizor.Domain</code>	Tenant entity and <code>TenantStatus</code> enum.
<code>Code7Dev.Organizor.Infrastructure</code>	EF Core contexts, repository implementation, PostgreSQL connection string building, database creation/deletion, migration, and tenant context storage.

Generated Reference

DocFX builds API reference pages from the C# projects into the `api` section. Use those pages for class, interface, and method signatures, and use these articles for workflow-level documentation. The site is intended for internal developers and as an outside-IDE AI reference, so implementation details are documented where they affect behavior.

Getting Started

Prerequisites

- .NET SDK 10.
- PostgreSQL available to the API.
- A catalog database connection string named `Catalog`.
- PostgreSQL server settings under the `Postgres` configuration section for tenant database creation and resolution.
- DocFX installed as a .NET tool when building documentation locally.

Run the API

From the repository root:

```
dotnet run --project .\Code7Dev.Organizor.Api\Code7Dev.Organizor.Api.csproj
```

Development launch profiles expose:

Profile	URL
<code>http</code>	<code>http://localhost:5100</code>
<code>https</code>	<code>https://localhost:7184</code> and <code>http://localhost:5100</code>

On startup the API:

1. configures Serilog;
2. registers catalog and tenant database services;
3. registers application and infrastructure services;
4. seeds or migrates the catalog database;
5. maps controllers, health checks, OpenAPI, and Scalar in development.

Development Endpoints

Endpoint	Purpose
<code>/health</code>	ASP.NET Core health checks.
<code>/openapi/v1.json</code>	OpenAPI document, available in development.
<code>/scalar</code>	Scalar API reference, available in development.

Example tenant catalog request:

```
Invoke-RestMethod `
  -Method Post `
  -Uri "http://localhost:5100/api/v1/tenants" `
  -ContentType "application/json" `
  -Body '{"name":"Acme","slug":"acme","culture":"en-US"}'
```

Build the Documentation


From the repository root:

```
docfx .\docs\docfx.json
```

DocFX writes the generated site to `docs/_site` and generated API metadata to `docs/api`. Both folders are ignored by git and can be rebuilt.

Architecture

Organizer follows a layered structure around tenant management.

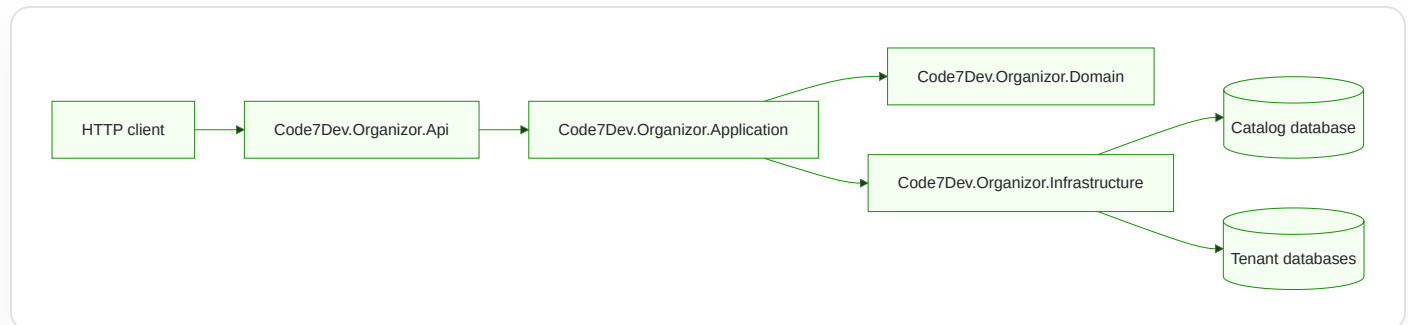

API Layer

The API project owns transport concerns:

- controller routes for public tenant catalog operations and internal tenant operations;
- request and response DTOs;
- mapping between API DTOs and application models;
- correlation ID, exception handling, and tenant resolution middleware;
- Serilog request logging;
- CORS, health checks, OpenAPI, and Scalar setup.

The startup flow in `Program.cs` composes the application by registering catalog persistence, tenant persistence, application services, infrastructure services, and API services.

Application Layer

The application project owns use cases and contracts. It defines interfaces for repository access, tenant database management, migration, provisioning, onboarding, upgrades, and lifecycle operations.

Current services:

Service	Responsibility
TenantService	Creates catalog tenant records and reads tenants by slug or as a list.
TenantOnboardingService	Creates a catalog tenant, runs provisioning, and marks the tenant active or failed.
TenantLifecycleService	Soft-deletes tenants and hard-deletes already soft-deleted tenants.
TenantUpgradeService	Runs migrations for an existing tenant database.

Domain Layer


The domain project currently contains the tenant entity and status enum. A tenant stores identity, slug, database name, creation date, lifecycle status, provisioning failure reason, and deletion metadata.

Infrastructure Layer

The infrastructure project owns external resources:

- `CatalogDbContext` stores tenant records.
- `OrganizorDbContext` connects to the current tenant database after tenant resolution.
- `TenantRepository` implements catalog tenant persistence.
- `ConnectionStringBuilder` builds PostgreSQL connection strings from configuration.
- `TenantDatabaseManager` creates and drops tenant databases.
- `TenantMigrator` applies EF Core migrations to tenant databases.
- `TenantProvisioningWorkflow` creates a tenant database and applies migrations during onboarding.

Request Pipeline

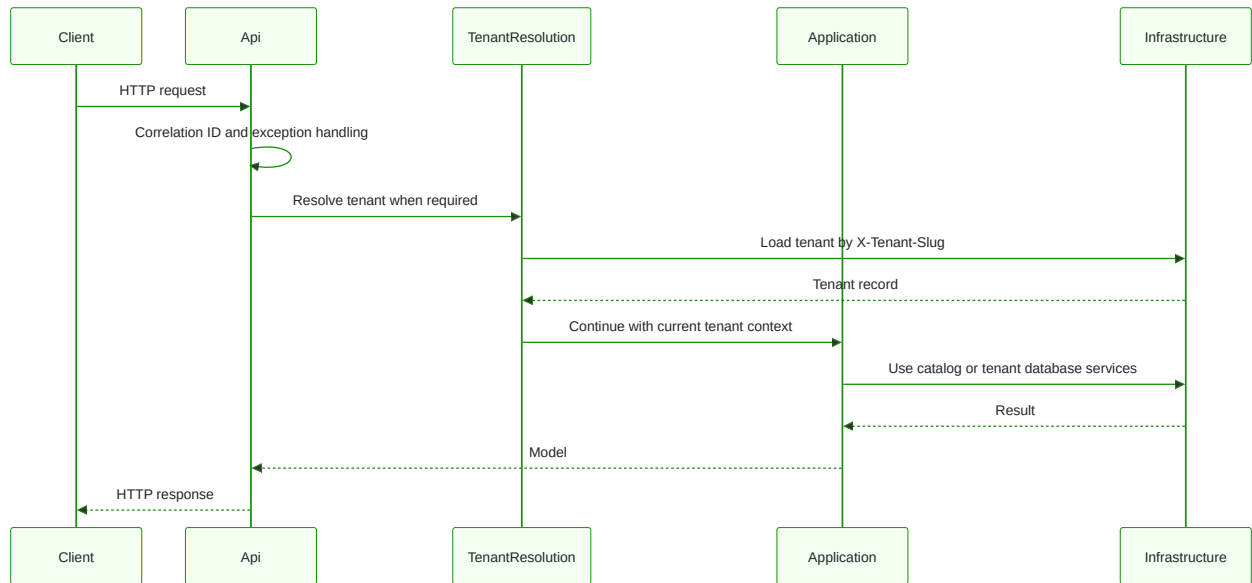

Tenancy

Organizor uses catalog-driven, database-per-tenant tenancy.

Tenant Catalog

The catalog database stores tenant metadata through `CatalogDbContext`. Each tenant includes:

- `Id`;
- `Name`;
- `Slug`;
- `DatabaseName`;
- `CreatedAt`;
- `Status`;
- `FailureReason`;
- soft-delete metadata.

The database name convention is `organizor_tenant_{slug}`. Slugs are normalized to lowercase before they are stored or used for lookups.

Normal catalog reads exclude soft-deleted tenants. Repository methods can include soft-deleted records when an internal operation explicitly asks for them.

Tenant Statuses

Status	Meaning
Pending	Tenant exists in the catalog but provisioning is not complete.
Active	Tenant provisioning completed successfully.
Upgrading	Reserved for upgrade lifecycle state.
Failed	Provisioning failed or an unexpected onboarding error occurred.
Deleted	Tenant has been soft-deleted.

Tenant Resolution

`TenantResolutionMiddleware` resolves tenant context for tenant-scoped routes.

It skips platform endpoints such as:

- `/api/admin`;
- `/api/v1/tenants`;
- `/health`;
- `/scalar`;
- `/openapi`;
- root and common static paths.

For tenant-scoped requests, clients must send:

```
X-Tenant-Slug: acme
```


The middleware loads the tenant from the catalog and stores `TenantInfo` in `ITenantContext`. If the header is missing, the response is `400 Bad Request`. If the slug does not match a catalog tenant, the response is `404 Not Found`.

Tenant Database Resolution

`OrganizorDbContext` uses a fallback in-memory database when no tenant has been resolved. This supports startup, Scalar, migrations, and design-time tooling.

When a tenant is resolved, `PerTenantDbResolver` loads the catalog tenant, builds a PostgreSQL connection string for that tenant database, and `OrganizorDbContext` uses that database.

Provisioning Flow

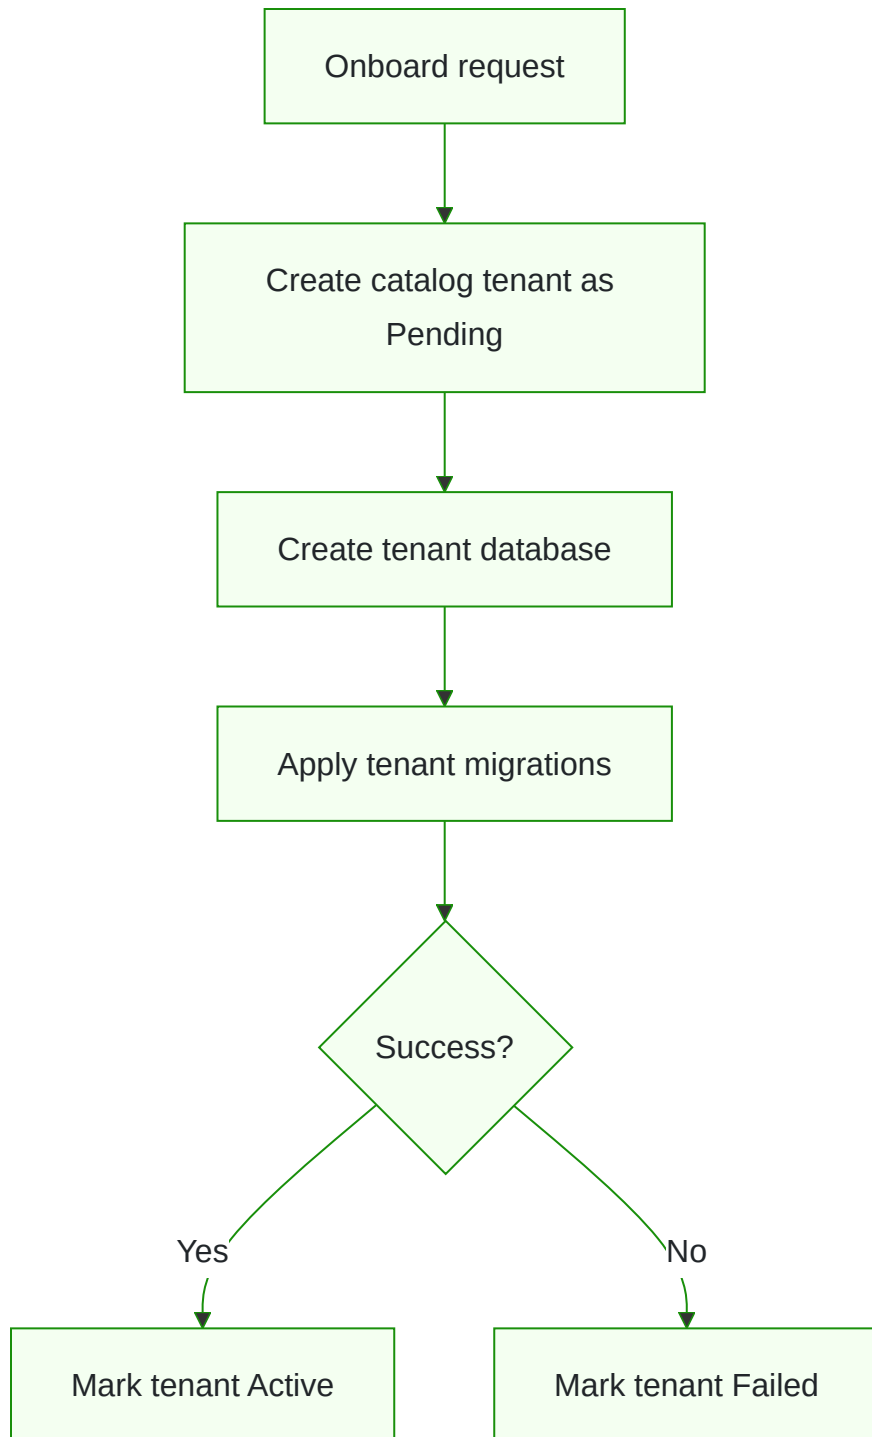

Hard deletion is intentionally guarded: the tenant must be soft-deleted before `TenantLifecycleService` drops the tenant database and removes the catalog record.

API

The public API currently exposes tenant catalog endpoints. Tenant-scoped application endpoints should include the `X-Tenant-Slug` header unless the path is explicitly skipped by tenant resolution.

Internal tenant administration endpoints are documented separately in [Internal Operations](#).

Tenant Catalog

Create Tenant

```
POST /api/v1/tenants
Content-Type: application/json
```

```
{
  "name": "Acme",
  "slug": "acme",
  "culture": "en-US"
}
```

Creates a catalog tenant record with `Pending` status and returns tenant metadata. This route does not provision a tenant database.

Example response:

```
{
  "id": "11111111-1111-1111-1111-111111111111",
  "name": "Acme",
  "slug": "acme",
  "databaseName": "organizor_tenant_acme",
  "createdAt": "2026-05-15T10:00:00Z"
}
```

Possible responses:

Status	Meaning
200 OK	Tenant catalog record was created.
500 Internal Server Error	Duplicate slug or unexpected server error. See Errors and Observability .

Get Tenant By Slug

```
GET /api/v1/tenants/acme
```

Returns a tenant by slug, or `404 Not Found` when no tenant exists. Soft-deleted tenants are excluded.

List Tenants

```
GET /api/v1/tenants
```

Returns all catalog tenants visible through the tenant repository. Soft-deleted tenants are excluded.

Platform Endpoints

Endpoint	Purpose
/health	Public health check endpoint.
/openapi/v1.json	OpenAPI document in development.
/scalar	Scalar API reference in development.

Local API Reference

When the API runs in development:

- OpenAPI JSON is available at `/openapi/v1.json`.
- Scalar is available at `/scalar`.

The DocFX API navigation tab contains the generated C# reference for controllers, DTOs, services, interfaces, middleware, and persistence types.

Errors and Observability

Correlation IDs

Every request passes through `CorrelationIdMiddleware`.

Clients can provide a correlation ID:

```
X-Correlation-ID: request-123
```

If the header is missing, the API generates a GUID. The final value is returned in the response header:

```
X-Correlation-ID: 2ad71e7a-13cb-4ef8-a4c7-f3a37ad9dc71
```

The same value is pushed into Serilog context as `CorrelationId`.

Error Shape

Unhandled exceptions are returned as RFC 7807-style problem details:

```
{
  "type": "https://httpstatuses.com/500",
  "title": "An unexpected error occurred.",
  "status": 500,
  "detail": "Exception message",
  "instance": "/api/v1/tenants",
  "correlationId": "2ad71e7a-13cb-4ef8-a4c7-f3a37ad9dc71"
}
```

The response content type is:

```
application/problem+json
```

NOTE

The current middleware includes exception messages in `detail`. Treat that as useful during development, but review it before exposing production environments.

Tenant Resolution Errors

Tenant-scoped requests require:

`X-Tenant-Slug`: acme

Missing tenant slug returns `400 Bad Request` with a plain text response. Unknown tenant slug returns `404 Not Found` with a plain text response.

Log Context

Serilog output is configured to include:

Property	Source
<code>CorrelationId</code>	Request header or generated GUID.
<code>Id</code>	Resolved tenant ID.
<code>Slug</code>	Resolved tenant slug.
<code>DatabaseName</code>	Tenant database selection when available.
<code>SourceContext</code>	Logger source in file logs.

Database Provisioning

Organizor uses one catalog database and one PostgreSQL database per tenant.

Catalog Database

`CatalogDbContext` stores tenant records in the `tenants` table.

Important constraints:

Field	Constraint
<code>Name</code>	Required, max length 200.
<code>Slug</code>	Required, max length 100, unique index.
<code>DatabaseName</code>	Required, max length 200.
<code>IsDeleted</code>	Required, defaults to <code>false</code> .
<code>DeletionReason</code>	Optional, max length 500.

On startup, the API checks whether the catalog database exists, creates it when needed, and applies catalog migrations.

Tenant Database Naming

Tenant databases use:

```
organizor_tenant_{slug}
```

Example:

```
organizor_tenant_acme
```

Slugs are normalized to lowercase before tenant records are written.

PostgreSQL Requirements

The configured PostgreSQL user must be able to:

- connect to the admin `postgres` database;
- create tenant databases;
- drop tenant databases during hard deletion;
- create extensions in tenant databases.

Tenant database creation currently uses:

```
CREATE DATABASE "{databaseName}" OWNER = postgres ENCODING = 'UTF8';
```

Each tenant database is initialized with:

```
CREATE EXTENSION IF NOT EXISTS "pgcrypto";
CREATE EXTENSION IF NOT EXISTS "citext";
```

Hard deletion uses:

```
DROP DATABASE IF EXISTS "{databaseName}" WITH (FORCE);
```

Migration Flow

`TenantMigrator` builds a tenant-specific connection string, checks pending migrations on `OrganizorDbContext`, applies them, and returns:

Field	Meaning
<code>Database</code>	Tenant database name.
<code>Success</code>	Whether migrations completed.
<code>AppliedMigrations</code>	Count of migrations pending before execution.
<code>Duration</code>	Migration runtime.

Field	Meaning
Error	Error message when migration fails.

Configuration

Organizor reads standard ASP.NET Core configuration from `appsettings.json`, environment-specific files, user secrets, and environment variables.

Catalog Connection String

`CatalogDbContext` expects a connection string named `Catalog`.

Example shape:

```
{
  "ConnectionStrings": {
    "Catalog":
      "Host=localhost;Port=5432;Database=organizor_catalog;Username=postgres;Password=postgres"
  }
}
```

Tenant PostgreSQL Settings

`ConnectionStringBuilder` builds tenant and admin connection strings from the `Postgres` section.

```
{
  "Postgres": {
    "Host": "localhost",
    "Port": "5432",
    "User": "postgres",
    "Password": "postgres"
  }
}
```

The admin connection uses the `postgres` database. Tenant connections use the tenant database name stored in the catalog.

Logging

Serilog is configured in `appsettings.json`.

Current sinks:

- console;
- rolling file logs under `logs/log-.txt`.

Log output includes tenant and request correlation properties when available:

- `Id`;
- `Slug`;
- `DatabaseName`;
- `CorrelationId`.

CORS

The API selects a CORS policy by environment:

- `DevCors` in development allows any origin, header, and method.
- `ProdCors` outside development must be configured with explicit allowed origins before browser clients can call the API.

The current production policy has no origins configured. Treat that as a deployment checklist item, not a complete production setting.

OpenAPI and Scalar

OpenAPI and Scalar endpoints are mapped only in development. This keeps the production surface smaller while retaining local API exploration during development.

Security

CORS

Development CORS allows any origin, method, and header.

Production CORS currently uses `ProdCors`, but no production origins are configured in code. Add explicit origins before relying on browser clients in production.

Internal Admin Routes

Routes under `/api/admin/tenants` are internal operations routes. They perform provisioning, upgrades, soft deletion, and hard deletion.

These endpoints should be protected before production use. The current code maps controllers and authorization middleware, but no authentication or authorization policy is configured yet.

Error Detail

Unhandled exceptions currently include `ex.Message` in problem details. This is useful for internal development and AI-assisted debugging, but it may expose sensitive implementation details in production.

Tenant Resolution

Tenant-scoped routes depend on `X-Tenant-Slug`. Platform routes such as `/api/v1/tenants`, `/api/admin`, `/health`, `/openapi`, and `/scalar` skip tenant resolution.

Destructive Operations

Hard deletion drops the tenant database. The service requires a tenant to be soft-deleted before hard deletion, which protects active tenants from immediate physical removal.

Internal Operations

This page documents internal routes and workflows for developers and operators.

Onboard Tenant

```
POST /api/admin/tenants/onboard
```

```
Content-Type: application/json
```

```
{
  "name": "Acme",
  "slug": "acme"
}
```

The onboarding flow:

1. normalizes the slug to lowercase;
2. creates a catalog tenant with `Pending` status;
3. creates the tenant database using `organizer_tenant_{slug}`;
4. initializes PostgreSQL extensions;
5. applies tenant migrations;
6. marks the tenant `Active` on success or `Failed` on provisioning failure.

Example response:

```
{
  "id": "11111111-1111-1111-1111-111111111111",
  "name": "Acme",
  "slug": "acme",
  "databaseName": "organizer_tenant_acme"
}
```

Upgrade Tenant

```
POST /api/admin/tenants/{id}/upgrade
```

Runs pending migrations for the tenant database.

Example response:

```
{
  "database": "organizer_tenant_acme",
  "success": true,
  "appliedMigrations": 2,
  "duration": "00:00:01.2340000",
  "error": null
}
```

Soft Delete Tenant

```
DELETE /api/admin/tenants/{id}
Content-Type: application/json

{
  "reason": "Customer cancellation"
}
```

Soft deletion marks the tenant as deleted, stores deletion metadata, and sets status to `Deleted`. The tenant database is not dropped.

Hard Delete Tenant

```
POST /api/admin/tenants/{id}/hard-delete
```

Hard deletion requires the tenant to already be soft-deleted. It drops the tenant database and removes the catalog record.

Documentation Deployment

The repository contains a GitHub Actions workflow at `.github/workflows/docfx-deploy.yml`.

On pushes to `master`, it:

1. checks out this repository;
2. installs DocFX;
3. builds `docs/docfx.json`;
4. checks out the public documentation repository;
5. copies `docs/_site` into that repository;
6. commits and pushes the generated documentation.

The workflow uses the `DOCS_DEPLOY_KEY` secret to push to the public docs repository.

Sitemap and Crawlers

DocFX generates `docs/_site/sitemap.xml` from the `build.sitemap.baseUrl` value in `docs/docfx.json`.

The documentation source includes `robots.txt`, which is copied into the generated site and points crawlers to the sitemap.