

Namespace Code7Dev.Organizor.Api.Controllers

Classes

[TenantOperationsController](#)

Exposes internal tenant operations for provisioning, upgrades, and deletion.

[TenantsController](#)

Exposes public tenant catalog operations.

Class TenantOperationsController

Namespace: [Code7Dev.Organizor.Api.Controllers](#)

Assembly: Code7Dev.Organizor.Api.dll

Exposes internal tenant operations for provisioning, upgrades, and deletion.

```
[ApiController]
[Route("api/admin/tenants")]
public class TenantOperationsController : ControllerBase
```

Inheritance

[object](#)  ← [ControllerBase](#)  ← TenantOperationsController

Inherited Members

[ControllerBase.StatusCode\(int\)](#)  , [ControllerBase.StatusCode\(int, object\)](#)  ,
[ControllerBase.Content\(string\)](#)  , [ControllerBase.Content\(string, string\)](#)  ,
[ControllerBase.Content\(string, string, Encoding\)](#)  ,
[ControllerBase.Content\(string, MediaTypeHeaderValue\)](#)  ,
[ControllerBase.NoContent\(\)](#)  , [ControllerBase.Ok\(\)](#)  , [ControllerBase.Ok\(object\)](#)  ,
[ControllerBase.Redirect\(string\)](#)  , [ControllerBase.RedirectPermanent\(string\)](#)  ,
[ControllerBase.RedirectPreserveMethod\(string\)](#)  ,
[ControllerBase.RedirectPermanentPreserveMethod\(string\)](#)  ,
[ControllerBase.LocalRedirect\(string\)](#)  ,
[ControllerBase.LocalRedirectPermanent\(string\)](#)  ,
[ControllerBase.LocalRedirectPreserveMethod\(string\)](#)  ,
[ControllerBase.LocalRedirectPermanentPreserveMethod\(string\)](#)  ,
[ControllerBase.RedirectToAction\(\)](#)  , [ControllerBase.RedirectToAction\(string\)](#)  ,
[ControllerBase.RedirectToAction\(string, object\)](#)  ,
[ControllerBase.RedirectToAction\(string, string\)](#)  ,
[ControllerBase.RedirectToAction\(string, string, object\)](#)  ,
[ControllerBase.RedirectToAction\(string, string, string\)](#)  ,
[ControllerBase.RedirectToAction\(string, string, object, string\)](#)  ,
[ControllerBase.RedirectToActionPreserveMethod\(string, string, object, string\)](#)  ,
[ControllerBase.RedirectToActionPermanent\(string\)](#)  ,
[ControllerBase.RedirectToActionPermanent\(string, object\)](#)  ,
[ControllerBase.RedirectToActionPermanent\(string, string\)](#)  ,
[ControllerBase.RedirectToActionPermanent\(string, string, string\)](#)  ,

[ControllerBase.RedirectToActionPermanent\(string, string, object\)](#) ,
[ControllerBase.RedirectToActionPermanent\(string, string, object, string\)](#) ,
[ControllerBase.RedirectToActionPermanentPreserveMethod\(string, string, object, string\)](#) ,
[ControllerBase.RedirectToRoute\(string\)](#) , [ControllerBase.RedirectToRoute\(object\)](#) ,
[ControllerBase.RedirectToRoute\(string, object\)](#) ,
[ControllerBase.RedirectToRoute\(string, string\)](#) ,
[ControllerBase.RedirectToRoute\(string, object, string\)](#) ,
[ControllerBase.RedirectToRoutePreserveMethod\(string, object, string\)](#) ,
[ControllerBase.RedirectToRoutePermanent\(string\)](#) ,
[ControllerBase.RedirectToRoutePermanent\(object\)](#) ,
[ControllerBase.RedirectToRoutePermanent\(string, object\)](#) ,
[ControllerBase.RedirectToRoutePermanent\(string, string\)](#) ,
[ControllerBase.RedirectToRoutePermanent\(string, object, string\)](#) ,
[ControllerBase.RedirectToRoutePermanentPreserveMethod\(string, object, string\)](#) ,
[ControllerBase.RedirectToPage\(string\)](#) ,
[ControllerBase.RedirectToPage\(string, object\)](#) ,
[ControllerBase.RedirectToPage\(string, string\)](#) ,
[ControllerBase.RedirectToPage\(string, string, object\)](#) ,
[ControllerBase.RedirectToPage\(string, string, string\)](#) ,
[ControllerBase.RedirectToPage\(string, string, object, string\)](#) ,
[ControllerBase.RedirectToPagePermanent\(string\)](#) ,
[ControllerBase.RedirectToPagePermanent\(string, object\)](#) ,
[ControllerBase.RedirectToPagePermanent\(string, string\)](#) ,
[ControllerBase.RedirectToPagePermanent\(string, string, string\)](#) ,
[ControllerBase.RedirectToPagePermanent\(string, string, object, string\)](#) ,
[ControllerBase.RedirectToPagePreserveMethod\(string, string, object, string\)](#) ,
[ControllerBase.RedirectToPagePermanentPreserveMethod\(string, string, object, string\)](#) ,
[ControllerBase.File\(byte\[\], string\)](#) , [ControllerBase.File\(byte\[\], string, bool\)](#) ,
[ControllerBase.File\(byte\[\], string, string\)](#) ,
[ControllerBase.File\(byte\[\], string, string, bool\)](#) ,
[ControllerBase.File\(byte\[\], string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(byte\[\], string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.File\(byte\[\], string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(byte\[\], string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.File\(Stream, string\)](#) , [ControllerBase.File\(Stream, string, bool\)](#) ,
[ControllerBase.File\(Stream, string, string\)](#) ,
[ControllerBase.File\(Stream, string, string, bool\)](#) ,

[ControllerBase.File\(Stream, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(Stream, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.File\(Stream, string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(Stream, string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.File\(string, string\)](#) , [ControllerBase.File\(string, string, bool\)](#) ,
[ControllerBase.File\(string, string, string\)](#) ,
[ControllerBase.File\(string, string, string, bool\)](#) ,
[ControllerBase.File\(string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.File\(string, string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(string, string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.PhysicalFile\(string, string\)](#) ,
[ControllerBase.PhysicalFile\(string, string, bool\)](#) ,
[ControllerBase.PhysicalFile\(string, string, string\)](#) ,
[ControllerBase.PhysicalFile\(string, string, string, bool\)](#) ,
[ControllerBase.PhysicalFile\(string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.PhysicalFile\(string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.PhysicalFile\(string, string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.PhysicalFile\(string, string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.Unauthorized\(\)](#) , [ControllerBase.Unauthorized\(object\)](#) ,
[ControllerBase.NotFound\(\)](#) , [ControllerBase.NotFound\(object\)](#) ,
[ControllerBase.BadRequest\(\)](#) , [ControllerBase.BadRequest\(object\)](#) ,
[ControllerBase.BadRequest\(ModelStateDictionary\)](#) ,
[ControllerBase.UnprocessableEntity\(\)](#) ,
[ControllerBase.UnprocessableEntity\(object\)](#) ,
[ControllerBase.UnprocessableEntity\(ModelStateDictionary\)](#) ,
[ControllerBase.Conflict\(\)](#) , [ControllerBase.Conflict\(object\)](#) ,
[ControllerBase.Conflict\(ModelStateDictionary\)](#) ,
[ControllerBase.Problem\(string, string, int?, string, string\)](#) ,
[ControllerBase.Problem\(string, string, int?, string, string, IDictionary<string, object>\)](#) ,
[ControllerBase.ValidationProblem\(ValidationProblemDetails\)](#) ,
[ControllerBase.ValidationProblem\(ModelStateDictionary\)](#) ,
[ControllerBase.ValidationProblem\(\)](#) ,

[ControllerBase.ValidationProblem\(string, string, int?, string, string, ModelStateDictionary\)](#) ,
[ControllerBase.ValidationProblem\(string, string, int?, string, string, ModelStateDictionary, IDictionary<string, object>\)](#) ,
[ControllerBase.Created\(\)](#) , [ControllerBase.Created\(string, object\)](#) ,
[ControllerBase.Created\(Uri, object\)](#) ,
[ControllerBase.CreatedAtAction\(string, object\)](#) ,
[ControllerBase.CreatedAtAction\(string, object, object\)](#) ,
[ControllerBase.CreatedAtAction\(string, string, object, object\)](#) ,
[ControllerBase.CreatedAtRoute\(string, object\)](#) ,
[ControllerBase.CreatedAtRoute\(object, object\)](#) ,
[ControllerBase.CreatedAtRoute\(string, object, object\)](#) , [ControllerBase.Accepted\(\)](#) ,
[ControllerBase.Accepted\(object\)](#) , [ControllerBase.Accepted\(Uri\)](#) ,
[ControllerBase.Accepted\(string\)](#) , [ControllerBase.Accepted\(string, object\)](#) ,
[ControllerBase.Accepted\(Uri, object\)](#) , [ControllerBase.AcceptedAtAction\(string\)](#) ,
[ControllerBase.AcceptedAtAction\(string, string\)](#) ,
[ControllerBase.AcceptedAtAction\(string, object\)](#) ,
[ControllerBase.AcceptedAtAction\(string, string, object\)](#) ,
[ControllerBase.AcceptedAtAction\(string, object, object\)](#) ,
[ControllerBase.AcceptedAtAction\(string, string, object, object\)](#) ,
[ControllerBase.AcceptedAtRoute\(object\)](#) , [ControllerBase.AcceptedAtRoute\(string\)](#) ,
[ControllerBase.AcceptedAtRoute\(string, object\)](#) ,
[ControllerBase.AcceptedAtRoute\(object, object\)](#) ,
[ControllerBase.AcceptedAtRoute\(string, object, object\)](#) ,
[ControllerBase.Challenge\(\)](#) , [ControllerBase.Challenge\(params string\[\]\)](#) ,
[ControllerBase.Challenge\(AuthenticationProperties\)](#) ,
[ControllerBase.Challenge\(AuthenticationProperties, params string\[\]\)](#) ,
[ControllerBase.Forbid\(\)](#) , [ControllerBase.Forbid\(params string\[\]\)](#) ,
[ControllerBase.Forbid\(AuthenticationProperties\)](#) ,
[ControllerBase.Forbid\(AuthenticationProperties, params string\[\]\)](#) ,
[ControllerBase.SignIn\(ClaimsPrincipal\)](#) ,
[ControllerBase.SignIn\(ClaimsPrincipal, string\)](#) ,
[ControllerBase.SignIn\(ClaimsPrincipal, AuthenticationProperties\)](#) ,
[ControllerBase.SignIn\(ClaimsPrincipal, AuthenticationProperties, string\)](#) ,
[ControllerBase.SignOut\(\)](#) , [ControllerBase.SignOut\(AuthenticationProperties\)](#) ,
[ControllerBase.SignOut\(params string\[\]\)](#) ,
[ControllerBase.SignOut\(AuthenticationProperties, params string\[\]\)](#) ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel\)](#) ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string\)](#) ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string, IValueProvider\)](#) ,

[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string, params Expression<Func<TModel, object>>\[\]\)](#) ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string, Func<ModelMetadata, bool>\)](#) ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string, IValueProvider, params Expression<Func<TModel, object>>\[\]\)](#) ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string, IValueProvider, Func<ModelMetadata, bool>\)](#) ,
[ControllerBase.TryUpdateModelAsync\(object, Type, string\)](#) ,
[ControllerBase.TryUpdateModelAsync\(object, Type, string, IValueProvider, Func<ModelMetadata, bool>\)](#) ,
[ControllerBase.TryValidateModel\(object\)](#) ,
[ControllerBase.TryValidateModel\(object, string\)](#) , [ControllerBase.HttpContext](#) ,
[ControllerBase.Request](#) , [ControllerBase.Response](#) , [ControllerBase.RouteData](#) ,
[ControllerBase.ModelState](#) , [ControllerBase.ControllerContext](#) ,
[ControllerBase.MetadataProvider](#) , [ControllerBase.ModelBinderFactory](#) ,
[ControllerBase.Url](#) , [ControllerBase.ObjectValidator](#) ,
[ControllerBase.ProblemDetailsFactory](#) , [ControllerBase.User](#) ,
[ControllerBase.Empty](#) , [object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) ,
[object.GetHashCode\(\)](#) , [object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) ,
[object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#)

Remarks

These endpoints are intended for internal operators and automation. They should be protected before production use.

Constructors

TenantOperationsController(ITenantOnboardingService, ITenantUpgradeService, ITenantLifecycleService)

```
public TenantOperationsController(ITenantOnboardingService onboarding,
ITenantUpgradeService upgrade, ITenantLifecycleService lifecycle)
```

Parameters

onboarding [ITenantOnboardingService](#)

upgrade [ITenantUpgradeService](#)

lifecycle [ITenantLifecycleService](#)

Methods

HardDelete(Guid)

Permanently deletes a previously soft-deleted tenant and drops its tenant database.

```
[HttpPost("{id:guid}/hard-delete")]  
public Task<IActionResult> HardDelete(Guid id)
```

Parameters

id [Guid](#) 

Tenant catalog identifier.

Returns

[Task](#)  [IActionResult](#) 

A 204 response when the catalog record and database are removed.

Onboard(TenantOnboardingRequest)

Onboards a tenant by creating the catalog record, creating the tenant database, and applying migrations.

```
[HttpPost("onboard")]  
public Task<IActionResult> Onboard(TenantOnboardingRequest request)
```

Parameters

request [TenantOnboardingRequest](#)

Tenant name and slug used to create the catalog record and database name.

Returns

[Task](#) <[IActionResult](#)>

The onboarded tenant metadata when provisioning completes.

SoftDelete(Guid, TenantSoftDeleteRequest)

Soft-deletes a tenant catalog record without dropping the tenant database.

```
[HttpDelete("{id:guid}")]
public Task<IActionResult> SoftDelete(Guid id, TenantSoftDeleteRequest request)
```

Parameters

id [Guid](#)

Tenant catalog identifier.

request [TenantSoftDeleteRequest](#)

Reason captured for the deletion audit trail.

Returns

[Task](#) <[IActionResult](#)>

A 204 response when the tenant is marked as deleted.

Upgrade(Guid, Cancellation_token)

Applies pending migrations to an existing tenant database.

```
[HttpPost("{id:guid}/upgrade")]
public Task<IActionResult> Upgrade(Guid id, Cancellation_token ct)
```

Parameters

id [Guid](#)

Tenant catalog identifier.

ct [CancellationToken](#)

Cancellation token for the migration operation.

Returns

[Task](#) <[IActionResult](#)>

The migration result, including success state, duration, and error details when applicable.

Class TenantsController

Namespace: [Code7Dev.Organizor.Api.Controllers](#)

Assembly: Code7Dev.Organizor.Api.dll

Exposes public tenant catalog operations.

```
[ApiController]
[Route("api/v1/tenants")]
public class TenantsController : ControllerBase
```

Inheritance

[object](#)  ← [ControllerBase](#)  ← TenantsController

Inherited Members

[ControllerBase.StatusCode\(int\)](#)  , [ControllerBase.StatusCode\(int, object\)](#)  ,
[ControllerBase.Content\(string\)](#)  , [ControllerBase.Content\(string, string\)](#)  ,
[ControllerBase.Content\(string, string, Encoding\)](#)  ,
[ControllerBase.Content\(string, MediaTypeHeaderValue\)](#)  ,
[ControllerBase.NoContent\(\)](#)  , [ControllerBase.Ok\(\)](#)  , [ControllerBase.Ok\(object\)](#)  ,
[ControllerBase.Redirect\(string\)](#)  , [ControllerBase.RedirectPermanent\(string\)](#)  ,
[ControllerBase.RedirectPreserveMethod\(string\)](#)  ,
[ControllerBase.RedirectPermanentPreserveMethod\(string\)](#)  ,
[ControllerBase.LocalRedirect\(string\)](#)  ,
[ControllerBase.LocalRedirectPermanent\(string\)](#)  ,
[ControllerBase.LocalRedirectPreserveMethod\(string\)](#)  ,
[ControllerBase.LocalRedirectPermanentPreserveMethod\(string\)](#)  ,
[ControllerBase.RedirectToAction\(\)](#)  , [ControllerBase.RedirectToAction\(string\)](#)  ,
[ControllerBase.RedirectToAction\(string, object\)](#)  ,
[ControllerBase.RedirectToAction\(string, string\)](#)  ,
[ControllerBase.RedirectToAction\(string, string, object\)](#)  ,
[ControllerBase.RedirectToAction\(string, string, string\)](#)  ,
[ControllerBase.RedirectToAction\(string, string, object, string\)](#)  ,
[ControllerBase.RedirectToActionPreserveMethod\(string, string, object, string\)](#)  ,
[ControllerBase.RedirectToActionPermanent\(string\)](#)  ,
[ControllerBase.RedirectToActionPermanent\(string, object\)](#)  ,
[ControllerBase.RedirectToActionPermanent\(string, string\)](#)  ,
[ControllerBase.RedirectToActionPermanent\(string, string, string\)](#)  ,

[ControllerBase.RedirectToActionPermanent\(string, string, object\)](#) ,
[ControllerBase.RedirectToActionPermanent\(string, string, object, string\)](#) ,
[ControllerBase.RedirectToActionPermanentPreserveMethod\(string, string, object, string\)](#) ,
[ControllerBase.RedirectToRoute\(string\)](#) , [ControllerBase.RedirectToRoute\(object\)](#) ,
[ControllerBase.RedirectToRoute\(string, object\)](#) ,
[ControllerBase.RedirectToRoute\(string, string\)](#) ,
[ControllerBase.RedirectToRoute\(string, object, string\)](#) ,
[ControllerBase.RedirectToRoutePreserveMethod\(string, object, string\)](#) ,
[ControllerBase.RedirectToRoutePermanent\(string\)](#) ,
[ControllerBase.RedirectToRoutePermanent\(object\)](#) ,
[ControllerBase.RedirectToRoutePermanent\(string, object\)](#) ,
[ControllerBase.RedirectToRoutePermanent\(string, string\)](#) ,
[ControllerBase.RedirectToRoutePermanent\(string, object, string\)](#) ,
[ControllerBase.RedirectToRoutePermanentPreserveMethod\(string, object, string\)](#) ,
[ControllerBase.RedirectToPage\(string\)](#) ,
[ControllerBase.RedirectToPage\(string, object\)](#) ,
[ControllerBase.RedirectToPage\(string, string\)](#) ,
[ControllerBase.RedirectToPage\(string, string, object\)](#) ,
[ControllerBase.RedirectToPage\(string, string, string\)](#) ,
[ControllerBase.RedirectToPage\(string, string, object, string\)](#) ,
[ControllerBase.RedirectToPagePermanent\(string\)](#) ,
[ControllerBase.RedirectToPagePermanent\(string, object\)](#) ,
[ControllerBase.RedirectToPagePermanent\(string, string\)](#) ,
[ControllerBase.RedirectToPagePermanent\(string, string, string\)](#) ,
[ControllerBase.RedirectToPagePermanent\(string, string, object, string\)](#) ,
[ControllerBase.RedirectToPagePreserveMethod\(string, string, object, string\)](#) ,
[ControllerBase.RedirectToPagePermanentPreserveMethod\(string, string, object, string\)](#) ,
[ControllerBase.File\(byte\[\], string\)](#) , [ControllerBase.File\(byte\[\], string, bool\)](#) ,
[ControllerBase.File\(byte\[\], string, string\)](#) ,
[ControllerBase.File\(byte\[\], string, string, bool\)](#) ,
[ControllerBase.File\(byte\[\], string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(byte\[\], string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.File\(byte\[\], string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(byte\[\], string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.File\(Stream, string\)](#) , [ControllerBase.File\(Stream, string, bool\)](#) ,
[ControllerBase.File\(Stream, string, string\)](#) ,
[ControllerBase.File\(Stream, string, string, bool\)](#) ,

[ControllerBase.File\(Stream, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(Stream, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.File\(Stream, string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(Stream, string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.File\(string, string\)](#) , [ControllerBase.File\(string, string, bool\)](#) ,
[ControllerBase.File\(string, string, string\)](#) ,
[ControllerBase.File\(string, string, string, bool\)](#) ,
[ControllerBase.File\(string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.File\(string, string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.File\(string, string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.PhysicalFile\(string, string\)](#) ,
[ControllerBase.PhysicalFile\(string, string, bool\)](#) ,
[ControllerBase.PhysicalFile\(string, string, string\)](#) ,
[ControllerBase.PhysicalFile\(string, string, string, bool\)](#) ,
[ControllerBase.PhysicalFile\(string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.PhysicalFile\(string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.PhysicalFile\(string, string, string, DateTimeOffset?, EntityTagHeaderValue\)](#) ,
[ControllerBase.PhysicalFile\(string, string, string, DateTimeOffset?, EntityTagHeaderValue, bool\)](#) ,
[ControllerBase.Unauthorized\(\)](#) , [ControllerBase.Unauthorized\(object\)](#) ,
[ControllerBase.NotFound\(\)](#) , [ControllerBase.NotFound\(object\)](#) ,
[ControllerBase.BadRequest\(\)](#) , [ControllerBase.BadRequest\(object\)](#) ,
[ControllerBase.BadRequest\(ModelStateDictionary\)](#) ,
[ControllerBase.UnprocessableEntity\(\)](#) ,
[ControllerBase.UnprocessableEntity\(object\)](#) ,
[ControllerBase.UnprocessableEntity\(ModelStateDictionary\)](#) ,
[ControllerBase.Conflict\(\)](#) , [ControllerBase.Conflict\(object\)](#) ,
[ControllerBase.Conflict\(ModelStateDictionary\)](#) ,
[ControllerBase.Problem\(string, string, int?, string, string\)](#) ,
[ControllerBase.Problem\(string, string, int?, string, string, IDictionary<string, object>\)](#) ,
[ControllerBase.ValidationProblem\(ValidationProblemDetails\)](#) ,
[ControllerBase.ValidationProblem\(ModelStateDictionary\)](#) ,
[ControllerBase.ValidationProblem\(\)](#) ,

[ControllerBase.ValidationProblem\(string, string, int?, string, string, ModelStateDictionary\)](#) ,
[ControllerBase.ValidationProblem\(string, string, int?, string, string, ModelStateDictionary, IDictionary<string, object>\)](#) ,
[ControllerBase.Created\(\)](#) , [ControllerBase.Created\(string, object\)](#) ,
[ControllerBase.Created\(Uri, object\)](#) ,
[ControllerBase.CreatedAtAction\(string, object\)](#) ,
[ControllerBase.CreatedAtAction\(string, object, object\)](#) ,
[ControllerBase.CreatedAtAction\(string, string, object, object\)](#) ,
[ControllerBase.CreatedAtRoute\(string, object\)](#) ,
[ControllerBase.CreatedAtRoute\(object, object\)](#) ,
[ControllerBase.CreatedAtRoute\(string, object, object\)](#) , [ControllerBase.Accepted\(\)](#) ,
[ControllerBase.Accepted\(object\)](#) , [ControllerBase.Accepted\(Uri\)](#) ,
[ControllerBase.Accepted\(string\)](#) , [ControllerBase.Accepted\(string, object\)](#) ,
[ControllerBase.Accepted\(Uri, object\)](#) , [ControllerBase.AcceptedAtAction\(string\)](#) ,
[ControllerBase.AcceptedAtAction\(string, string\)](#) ,
[ControllerBase.AcceptedAtAction\(string, object\)](#) ,
[ControllerBase.AcceptedAtAction\(string, string, object\)](#) ,
[ControllerBase.AcceptedAtAction\(string, object, object\)](#) ,
[ControllerBase.AcceptedAtAction\(string, string, object, object\)](#) ,
[ControllerBase.AcceptedAtRoute\(object\)](#) , [ControllerBase.AcceptedAtRoute\(string\)](#) ,
[ControllerBase.AcceptedAtRoute\(string, object\)](#) ,
[ControllerBase.AcceptedAtRoute\(object, object\)](#) ,
[ControllerBase.AcceptedAtRoute\(string, object, object\)](#) ,
[ControllerBase.Challenge\(\)](#) , [ControllerBase.Challenge\(params string\[\]\)](#) ,
[ControllerBase.Challenge\(AuthenticationProperties\)](#) ,
[ControllerBase.Challenge\(AuthenticationProperties, params string\[\]\)](#) ,
[ControllerBase.Forbid\(\)](#) , [ControllerBase.Forbid\(params string\[\]\)](#) ,
[ControllerBase.Forbid\(AuthenticationProperties\)](#) ,
[ControllerBase.Forbid\(AuthenticationProperties, params string\[\]\)](#) ,
[ControllerBase.SignIn\(ClaimsPrincipal\)](#) ,
[ControllerBase.SignIn\(ClaimsPrincipal, string\)](#) ,
[ControllerBase.SignIn\(ClaimsPrincipal, AuthenticationProperties\)](#) ,
[ControllerBase.SignIn\(ClaimsPrincipal, AuthenticationProperties, string\)](#) ,
[ControllerBase.SignOut\(\)](#) , [ControllerBase.SignOut\(AuthenticationProperties\)](#) ,
[ControllerBase.SignOut\(params string\[\]\)](#) ,
[ControllerBase.SignOut\(AuthenticationProperties, params string\[\]\)](#) ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel\)](#) ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string\)](#) ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string, IValueProvider\)](#) ,

[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string, params Expression<Func<TModel, object>>\[\]\)](#)  ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string, Func<ModelMetadata, bool>\)](#)  ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string, IValueProvider, params Expression<Func<TModel, object>>\[\]\)](#)  ,
[ControllerBase.TryUpdateModelAsync<TModel>\(TModel, string, IValueProvider, Func<ModelMetadata, bool>\)](#)  ,
[ControllerBase.TryUpdateModelAsync\(object, Type, string\)](#)  ,
[ControllerBase.TryUpdateModelAsync\(object, Type, string, IValueProvider, Func<ModelMetadata, bool>\)](#)  ,
[ControllerBase.TryValidateModel\(object\)](#)  ,
[ControllerBase.TryValidateModel\(object, string\)](#)  , [ControllerBase.HttpContext](#)  ,
[ControllerBase.Request](#)  , [ControllerBase.Response](#)  , [ControllerBase.RouteData](#)  ,
[ControllerBase.ModelState](#)  , [ControllerBase.ControllerContext](#)  ,
[ControllerBase.MetadataProvider](#)  , [ControllerBase.ModelBinderFactory](#)  ,
[ControllerBase.Url](#)  , [ControllerBase.ObjectValidator](#)  ,
[ControllerBase.ProblemDetailsFactory](#)  , [ControllerBase.User](#)  ,
[ControllerBase.Empty](#)  , [object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  ,
[object.GetHashCode\(\)](#)  , [object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Remarks

These endpoints manage catalog records only. Creating a tenant through this controller does not provision the tenant database.

Constructors

TenantsController(ITenantService)

```
public TenantsController(ITenantService service)
```

Parameters

service [ITenantService](#)

Methods

Create(TenantRequestDto)

Creates a tenant catalog record with a pending lifecycle status.

```
[HttpPost]
public Task<IActionResult> Create(TenantRequestDto request)
```

Parameters

request [TenantRequestDto](#)

Returns

[Task](#) <[IActionResult](#)>

GetAll()

Lists tenant catalog records that have not been soft-deleted.

```
[HttpGet]
public Task<IActionResult> GetAll()
```

Returns

[Task](#) <[IActionResult](#)>

GetBySlug(string)

Gets an active, non-deleted tenant catalog record by slug.

```
[HttpGet("{slug}")]
public Task<IActionResult> GetBySlug(string slug)
```

Parameters

slug [string](#)

Returns

[Task](#) <[ActionResult](#)>

Namespace Code7Dev.Organizor.Api. Extensions

Classes

[ApplicationBuilderExtensions](#)

[CorsExtensions](#)

[HealthCheckExtensions](#)

[LoggingExtensions](#)

[OpenApiExtensions](#)

[SerilogExtensions](#)

[ServiceCollectionExtensions](#)

Registers API-layer services, including localization, controllers, and scheduled job infrastructure.

Class ApplicationBuilderExtensions

Namespace: [Code7Dev.Organizor.Api.Extensions](#)

Assembly: Code7Dev.Organizor.Api.dll

```
public static class ApplicationBuilderExtensions
```

Inheritance

[object](#)  ← ApplicationBuilderExtensions

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) ,
[object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Methods

MapApiEndpoints(IEndpointRouteBuilder)

```
public static IEndpointRouteBuilder MapApiEndpoints(this  
IEndpointRouteBuilder endpoints)
```

Parameters

endpoints [IEndpointRouteBuilder](#) 

Returns

[IEndpointRouteBuilder](#) 

UseApiPipeline(IApplicationBuilder)

```
public static IApplicationBuilder UseApiPipeline(this IApplicationBuilder app)
```

Parameters

`app` [IApplicationBuilder](#) 

Returns

[IApplicationBuilder](#) 

Class CorsExtensions

Namespace: [Code7Dev.Organizor.Api.Extensions](#)

Assembly: Code7Dev.Organizor.Api.dll

```
public static class CorsExtensions
```

Inheritance

[object](#)  ← CorsExtensions

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Methods

AddApiCors(IServiceCollection)

```
public static IServiceCollection AddApiCors(this IServiceCollection services)
```

Parameters

services [IServiceCollection](#) 

Returns

[IServiceCollection](#) 

Class HealthCheckExtensions

Namespace: [Code7Dev.Organizor.Api.Extensions](#)

Assembly: Code7Dev.Organizor.Api.dll

```
public static class HealthCheckExtensions
```

Inheritance

[object](#)  ← HealthCheckExtensions

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Methods

AddApiHealthChecks(IServiceCollection)

```
public static IServiceCollection AddApiHealthChecks(this  
IServiceCollection services)
```

Parameters

services [IServiceCollection](#) 

Returns

[IServiceCollection](#) 

Class LoggingExtensions

Namespace: [Code7Dev.Organizor.Api.Extensions](#)

Assembly: Code7Dev.Organizor.Api.dll

```
public static class LoggingExtensions
```

Inheritance

[object](#)  ← LoggingExtensions

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Methods

LogCatalogDatabase(WebApplicationBuilder)

```
public static void LogCatalogDatabase(this WebApplicationBuilder builder)
```

Parameters

builder [WebApplicationBuilder](#) 

LogTenantDatabase(WebApplicationBuilder, string)

```
public static void LogTenantDatabase(this WebApplicationBuilder builder,  
string connectionString)
```

Parameters

builder [WebApplicationBuilder](#) 

connectionString [string](#) 

Class OpenApiExtensions

Namespace: [Code7Dev.Organizor.Api.Extensions](#)

Assembly: Code7Dev.Organizor.Api.dll

```
public static class OpenApiExtensions
```

Inheritance

[object](#)  ← OpenApiExtensions

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) ,
[object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Methods

AddApiDocumentation(IServiceCollection)

```
public static IServiceCollection AddApiDocumentation(this  
IServiceCollection services)
```

Parameters

services [IServiceCollection](#) 

Returns

[IServiceCollection](#) 

MapApiDocumentation(IEndpointRouteBuilder)

```
public static IEndpointRouteBuilder MapApiDocumentation(this
```

`IEndpointRouteBuilder endpoints)`

Parameters

`endpoints` [IEndpointRouteBuilder](#) 

Returns

[IEndpointRouteBuilder](#) 

Class SerilogExtensions

Namespace: [Code7Dev.Organizor.Api.Extensions](#)

Assembly: Code7Dev.Organizor.Api.dll

```
public static class SerilogExtensions
```

Inheritance

[object](#)  ← SerilogExtensions

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Methods

AddSerilogLogging(ConfigureHostBuilder)

```
public static void AddSerilogLogging(this ConfigureHostBuilder host)
```

Parameters

host [ConfigureHostBuilder](#) 

CreateBootstrapLogger()

```
public static ILogger CreateBootstrapLogger()
```

Returns

ILogger

Class ServiceCollectionExtensions

Namespace: [Code7Dev.Organizor.Api.Extensions](#)

Assembly: Code7Dev.Organizor.Api.dll

Registers API-layer services, including localization, controllers, and scheduled job infrastructure.

```
public static class ServiceCollectionExtensions
```

Inheritance

[object](#)  ← ServiceCollectionExtensions

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Methods

AddApiServices(IServiceCollection, IConfiguration)

Adds API services required by the web host.

```
public static IServiceCollection AddApiServices(this IServiceCollection  
services, IConfiguration config)
```

Parameters

services [IServiceCollection](#) 

The service collection to register services with.

config [IConfiguration](#) 

The application configuration used to read API service settings.

Returns

[IServiceCollection](#) 

The same service collection so additional registrations can be chained.

Namespace Code7Dev.Organizor.Api. Mappers

Classes

[TenantApiMapper](#)

[TenantOnboardingApiMapper](#)

Class TenantApiMapper

Namespace: [Code7Dev.Organizor.Api.Mappers](#)

Assembly: Code7Dev.Organizor.Api.dll

```
public static class TenantApiMapper
```

Inheritance

[object](#)  ← TenantApiMapper

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) ,
[object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Methods

ToCreateModel(TenantRequestDto)

```
public static TenantCreateModel ToCreateModel(this TenantRequestDto dto)
```

Parameters

dto [TenantRequestDto](#)

Returns

[TenantCreateModel](#)

ToResponse(TenantModel)

```
public static TenantResponseDto ToResponse(this TenantModel model)
```

Parameters

`model` [TenantModel](#)

Returns

[TenantResponseDto](#)

Class TenantOnboardingApiMapper

Namespace: [Code7Dev.Organizor.Api.Mappers](#)

Assembly: Code7Dev.Organizor.Api.dll

```
public static class TenantOnboardingApiMapper
```

Inheritance

[object](#)  ← TenantOnboardingApiMapper

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Methods

ToRequest(TenantOnboardingRequestDto)

```
public static TenantOnboardingRequest ToRequest(this TenantOnboardingRequestDto  
dto)
```

Parameters

dto [TenantOnboardingRequestDto](#)

Returns

[TenantOnboardingRequest](#)

ToResponse(TenantOnboardingResult)

```
public static TenantOnboardingResponseDto ToResponse(this
```

```
TenantOnboardingResult result)
```

Parameters

`result` [TenantOnboardingResult](#)

Returns

[TenantOnboardingResponseDto](#)

Namespace Code7Dev.Organizor.Api.Mappers.DTO

Classes

TenantOnboardingRequestDto

API request body for internal tenant onboarding.

TenantOnboardingResponseDto

API response returned after tenant onboarding.

TenantRequestDto

Request body for creating a tenant catalog record.

TenantResponseDto

Public tenant catalog response.

TenantSoftDeleteRequest

Request body for soft-deleting a tenant.

Class TenantOnboardingRequestDto

Namespace: [Code7Dev.Organizor.Api.Mappers.DTO](#)

Assembly: Code7Dev.Organizor.Api.dll

API request body for internal tenant onboarding.

```
public class TenantOnboardingRequestDto
```

Inheritance

[object](#)  ← TenantOnboardingRequestDto

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) ,
[object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Extension Methods

[TenantOnboardingApiMapper.ToRequest\(TenantOnboardingRequestDto\)](#)

Properties

Name

Human-readable tenant name.

```
public required string Name { get; set; }
```

Property Value

[string](#) 

Slug

Stable tenant slug used to derive the tenant database name.

```
public required string Slug { get; set; }
```

Property Value

string [↗](#)

Class

TenantOnboardingResponseDto

Namespace: [Code7Dev.Organizor.Api.Mappers.DTO](#)

Assembly: Code7Dev.Organizor.Api.dll

API response returned after tenant onboarding.

```
public class TenantOnboardingResponseDto
```

Inheritance

[object](#)  ← TenantOnboardingResponseDto

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Properties

DatabaseName

PostgreSQL database created for the tenant.

```
public required string DatabaseName { get; set; }
```

Property Value

[string](#) 

Id

Unique tenant identifier.

```
public Guid Id { get; set; }
```

Property Value

[Guid](#)

Name

Human-readable tenant name.

```
public required string Name { get; set; }
```

Property Value

[string](#)

Slug

Stable tenant slug.

```
public required string Slug { get; set; }
```

Property Value

[string](#)

Class TenantRequestDto

Namespace: [Code7Dev.Organizor.Api.Mappers.DTO](#)

Assembly: Code7Dev.Organizor.Api.dll

Request body for creating a tenant catalog record.

```
public class TenantRequestDto
```

Inheritance

[object](#)  ← TenantRequestDto

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Extension Methods

[TenantApiMapper.CreateModel\(TenantRequestDto\)](#)

Properties

Culture

Optional culture metadata supplied by the client.

```
public string? Culture { get; set; }
```

Property Value

[string](#) 

Name

Human-readable tenant name.

```
public required string Name { get; set; }
```

Property Value

[string](#)[↗]

Slug

Stable tenant slug used for lookup and tenant database naming.

```
public required string Slug { get; set; }
```

Property Value

[string](#)[↗]

Class TenantResponseDto

Namespace: [Code7Dev.Organizor.Api.Mappers.DTO](#)

Assembly: Code7Dev.Organizor.Api.dll

Public tenant catalog response.

```
public class TenantResponseDto
```

Inheritance

[object](#)  ← TenantResponseDto

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Properties

CreatedAt

UTC timestamp when the tenant catalog record was created.

```
public required DateTime CreatedAt { get; set; }
```

Property Value

[DateTime](#) 

DatabaseName

PostgreSQL database assigned to this tenant.

```
public required string DatabaseName { get; set; }
```

Property Value

[string](#)

Id

Unique tenant identifier.

```
public Guid Id { get; set; }
```

Property Value

[Guid](#)

Name

Human-readable tenant name.

```
public required string Name { get; set; }
```

Property Value

[string](#)

Slug

Stable tenant slug used for lookup and request routing.

```
public required string Slug { get; set; }
```

Property Value

[string](#)

Class TenantSoftDeleteRequest

Namespace: [Code7Dev.Organizor.Api.Mappers.DTO](#)

Assembly: Code7Dev.Organizor.Api.dll

Request body for soft-deleting a tenant.

```
public class TenantSoftDeleteRequest
```

Inheritance

[object](#)  ← TenantSoftDeleteRequest

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Properties

Reason

Operator-provided reason stored with the tenant deletion metadata.

```
public string Reason { get; set; }
```

Property Value

[string](#) 

Namespace Code7Dev.Organizor.Api. Middleware

Classes

[CorrelationIdMiddleware](#)

[ExceptionHandlingMiddleware](#)

Global Exception Middleware: RFC 7807 standard for api error responses.

[TenantResolutionMiddleware](#)

Class CorrelationIdMiddleware

Namespace: [Code7Dev.Organizor.Api.Middleware](#)

Assembly: Code7Dev.Organizor.Api.dll

```
public class CorrelationIdMiddleware
```

Inheritance

[object](#)  ← CorrelationIdMiddleware

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Constructors

CorrelationIdMiddleware(RequestDelegate)

```
public CorrelationIdMiddleware(RequestDelegate next)
```

Parameters

next [RequestDelegate](#) 

Methods

Invoke(HttpContext)

```
public Task Invoke(HttpContext context)
```

Parameters

context [HttpContext](#)

Returns

[Task](#)

Class ExceptionHandlingMiddleware

Namespace: [Code7Dev.Organizor.Api.Middleware](#)

Assembly: Code7Dev.Organizor.Api.dll

Global Exception Middleware: RFC 7807 standard for api error responses.

```
public class ExceptionHandlingMiddleware
```

Inheritance

[object](#)  ← ExceptionHandlingMiddleware

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Constructors

ExceptionHandlingMiddleware(RequestDelegate,
ILogger<ExceptionHandlingMiddleware>,
IStringLocalizer<Shared>)

```
public ExceptionHandlingMiddleware(RequestDelegate next,  
    ILogger<ExceptionHandlingMiddleware> logger, IStringLocalizer<Shared>  
    localizer)
```

Parameters

next [RequestDelegate](#) 

logger [ILogger](#)  <[ExceptionHandlingMiddleware](#)>

localizer [IStringLocalizer](#)  <[Shared](#)>

Methods

Invoke(HttpContext)

```
public Task Invoke(HttpContext context)
```

Parameters

context [HttpContext](#)↗

Returns

[Task](#)↗

Class TenantResolutionMiddleware

Namespace: [Code7Dev.Organizor.Api.Middleware](#)

Assembly: Code7Dev.Organizor.Api.dll

```
public class TenantResolutionMiddleware
```

Inheritance

[object](#)  ← TenantResolutionMiddleware

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) ,
[object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Constructors

TenantResolutionMiddleware(RequestDelegate, ILogger<TenantResolutionMiddleware>)

```
public TenantResolutionMiddleware(RequestDelegate next,  
    ILogger<TenantResolutionMiddleware> logger)
```

Parameters

next [RequestDelegate](#) 

logger [ILogger](#)  <[TenantResolutionMiddleware](#)>

Methods

InvokeAsync(HttpContext, ITenantRepository, ITenantContext)

```
public Task InvokeAsync(HttpContext httpContext, ITenantRepository tenantRepo,  
ITenantContext tenantContext)
```

Parameters

httpContext [HttpContext](#) 

tenantRepo [ITenantRepository](#)

tenantContext [ITenantContext](#)

Returns

[Task](#) 

Namespace Code7Dev.Organizor.Api. Resources

Classes

Shared

A strongly-typed resource class, for looking up localized strings, etc.

Class Shared

Namespace: [Code7Dev.Organizor.Api.Resources](#)

Assembly: Code7Dev.Organizor.Api.dll

A strongly-typed resource class, for looking up localized strings, etc.

```
public class Shared
```

Inheritance

[object](#) ↗ ← Shared

Inherited Members

[object.Equals\(object\)](#) ↗ , [object.Equals\(object, object\)](#) ↗ , [object.GetHashCode\(\)](#) ↗ ,
[object.GetType\(\)](#) ↗ , [object.MemberwiseClone\(\)](#) ↗ ,
[object.ReferenceEquals\(object, object\)](#) ↗ , [object.ToString\(\)](#) ↗

Properties

Culture

Overrides the current thread's CurrentUICulture property for all resource lookups using this strongly typed resource class.

```
public static CultureInfo Culture { get; set; }
```

Property Value

[CultureInfo](#) ↗

ResourceManager

Returns the cached ResourceManager instance used by this class.


```
public static ResourceManager ResourceManager { get; }
```

Property Value

[ResourceManager](#)

TENANT_ALREADY_EXISTS

Looks up a localized string similar to .

```
public static string TENANT_ALREADY_EXISTS { get; }
```

Property Value

[string](#)

TENANT_INVALID_SLUG

Looks up a localized string similar to .

```
public static string TENANT_INVALID_SLUG { get; }
```

Property Value

[string](#)

TENANT_MIGRATION_FAILED

Looks up a localized string similar to .

```
public static string TENANT_MIGRATION_FAILED { get; }
```

Property Value

[string](#)

TENANT_MUST_BE_SOFT_DELETED_FIRST

Looks up a localized string similar to .

```
public static string TENANT_MUST_BE_SOFT_DELETED_FIRST { get; }
```

Property Value

[string](#)

TENANT_NOT_FOUND

Looks up a localized string similar to .

```
public static string TENANT_NOT_FOUND { get; }
```

Property Value

[string](#)

TENANT_PROVISIONING_FAILED

Looks up a localized string similar to .

```
public static string TENANT_PROVISIONING_FAILED { get; }
```

Property Value

[string](#)

UNEXPECTED_ERROR

Looks up a localized string similar to .

```
public static string UNEXPECTED_ERROR { get; }
```

Property Value

[string](#) 

Namespace Code7Dev.Organizer. Application.Common

Classes

[ApiException](#)

[ErrorCodes](#)

[ErrorCodes.General](#)

[ErrorCodes.Tenant](#)

[Result](#)

Represents the outcome of an operation without a return value. Used for both success and failure flows in the application layer.

[Result<T>](#)

Represents the outcome of an operation that returns a value. Provides both success and failure flows while carrying a typed payload.

Class ApiException

Namespace: [Code7Dev.Organizor.Application.Common](#)

Assembly: Code7Dev.Organizor.Application.dll

```
public class ApiException : Exception, ISerializable
```

Inheritance

[object](#)  ← [Exception](#)  ← ApiException

Implements

[ISerializable](#) 

Inherited Members

[Exception.GetBaseException\(\)](#)  , [Exception.GetType\(\)](#)  , [Exception.ToString\(\)](#)  ,
[Exception.Data](#)  , [Exception.HelpLink](#)  , [Exception.HResult](#)  ,
[Exception.InnerException](#)  , [Exception.Message](#)  , [Exception.Source](#)  ,
[Exception.StackTrace](#)  , [Exception.TargetSite](#)  , [Exception.SerializeObjectState](#)  ,
[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.MemberwiseClone\(\)](#)  , [object.ReferenceEquals\(object, object\)](#) 

Constructors

ApiException(string)

```
public ApiException(string errorCode)
```

Parameters

errorCode [string](#) 

Properties

ErrorCode

```
public string ErrorCode { get; }
```

Property Value

string[↗](#)

Class ErrorCodes

Namespace: [Code7Dev.Organizor.Application.Common](#)

Assembly: Code7Dev.Organizor.Application.dll

```
public static class ErrorCodes
```

Inheritance

[object](#) ↗ ← ErrorCodes

Inherited Members

[object.Equals\(object\)](#) ↗ , [object.Equals\(object, object\)](#) ↗ , [object.GetHashCode\(\)](#) ↗ ,
[object.GetType\(\)](#) ↗ , [object.MemberwiseClone\(\)](#) ↗ ,
[object.ReferenceEquals\(object, object\)](#) ↗ , [object.ToString\(\)](#) ↗

Class ErrorCodes.General

Namespace: [Code7Dev.Organizor.Application.Common](#)

Assembly: Code7Dev.Organizor.Application.dll

```
public static class ErrorCodes.General
```

Inheritance

[object](#)  ← ErrorCodes.General

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Fields

Unexpected

```
public const string Unexpected = "UNEXPECTED_ERROR"
```

Field Value

[string](#) 

Class ErrorCodes.Tenant

Namespace: [Code7Dev.Organizor.Application.Common](#)

Assembly: Code7Dev.Organizor.Application.dll

```
public static class ErrorCodes.Tenant
```

Inheritance

[object](#)  ← ErrorCodes.Tenant

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Fields

AlreadyExists

```
public const string AlreadyExists = "TENANT_ALREADY_EXISTS"
```

Field Value

[string](#) 

InvalidSlug

```
public const string InvalidSlug = "TENANT_INVALID_SLUG"
```

Field Value

[string](#) 

MigrationFailed

```
public const string MigrationFailed = "TENANT_MIGRATION_FAILED"
```

Field Value

[string](#) 

MustBeSoftDeletedFirst

```
public const string MustBeSoftDeletedFirst =  
"TENANT_MUST_BE_SOFT_DELETED_FIRST"
```

Field Value

[string](#) 

NotFound

```
public const string NotFound = "TENANT_NOT_FOUND"
```

Field Value

[string](#) 

ProvisioningFailed

```
public const string ProvisioningFailed = "TENANT_PROVISIONING_FAILED"
```

Field Value

[string](#) 

Class Result

Namespace: [Code7Dev.Organizor.Application.Common](#)

Assembly: Code7Dev.Organizor.Application.dll

Represents the outcome of an operation without a return value. Used for both success and failure flows in the application layer.

```
public class Result
```

Inheritance

[object](#)  ← Result

Derived

[Result<T>](#)

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Constructors

Result(bool, string)

```
protected Result(bool success, string errorCode)
```

Parameters

success [bool](#) 

errorCode [string](#) 

Properties

ErrorCode

```
public string ErrorCode { get; }
```

Property Value

[string](#)

IsSuccess

```
public bool IsSuccess { get; }
```

Property Value

[bool](#)

Methods

Fail(string)

```
public static Result Fail(string errorCode)
```

Parameters

errorCode [string](#)

Returns

[Result](#)

Success()

```
public static Result Success()
```

Returns

Result

ThrowIfFailed()

```
public void ThrowIfFailed()
```

Class Result<T>

Namespace: [Code7Dev.Organizor.Application.Common](#)

Assembly: Code7Dev.Organizor.Application.dll

Represents the outcome of an operation that returns a value. Provides both success and failure flows while carrying a typed payload.

```
public class Result<T> : Result
```

Type Parameters

T

The type of the returned value.

Inheritance

[object](#)  < [Result](#) < [Result<T>](#)

Inherited Members

[Result.IsSuccess](#) , [Result.ErrorCode](#) , [Result.Success\(\)](#) , [Result.ThrowIfFailed\(\)](#) ,
[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Properties

Value

```
public T Value { get; }
```

Property Value

T

Methods

Fail(string)

```
public static Result<T> Fail(string errorCode)
```

Parameters

errorCode [string](#) 

Returns

[Result](#)<T>

Success(T)

```
public static Result<T> Success(T value)
```

Parameters

value T

Returns

[Result](#)<T>

Namespace Code7Dev.Organizer. Application.Extensions

Classes

[DependencyInjection](#)

Class DependencyInjection

Namespace: [Code7Dev.Organizor.Application.Extensions](#)

Assembly: Code7Dev.Organizor.Application.dll

```
public static class DependencyInjection
```

Inheritance

[object](#)  ← DependencyInjection

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) ,
[object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Methods

AddApplication(IServiceCollection)

```
public static IServiceCollection AddApplication(this  
IServiceCollection services)
```

Parameters

services [IServiceCollection](#) 

Returns

[IServiceCollection](#) 

Namespace Code7Dev.Organizer. Application.Jobs

Classes

[TestEmailJob](#)

Quartz job that writes a test email execution message to the application log.

Class TestEmailJob

Namespace: [Code7Dev.Organizor.Application.Jobs](#)

Assembly: Code7Dev.Organizor.Application.dll

Quartz job that writes a test email execution message to the application log.

```
public class TestEmailJob : IJob
```

Inheritance

[object](#)  ← TestEmailJob

Implements

IJob

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Constructors

TestEmailJob(ILogger<TestEmailJob>)

Initializes a new instance of the [TestEmailJob](#) class.

```
public TestEmailJob(ILogger<TestEmailJob> logger)
```

Parameters

logger [ILogger](#)  <[TestEmailJob](#)>

The logger used to record job executions.

Methods

Execute(IJobExecutionContext)

Executes the test job and logs the current UTC timestamp.

```
public Task Execute(IJobExecutionContext context)
```

Parameters

`context` IJobExecutionContext

Quartz execution context for the current job run.

Returns

[Task](#) 

A completed task when the log entry has been written.

Namespace Code7Dev.Organizer. Application.Tenants.Interfaces

Interfaces

[IConnectionStringBuilder](#)

Builds PostgreSQL connection strings for catalog, admin, and tenant database operations.

[ITenantDatabaseManager](#)

Creates and drops physical tenant databases.

[ITenantLifecycleService](#)

Handles tenant deletion lifecycle operations.

[ITenantMigrator](#)

Applies EF Core migrations to a tenant database.

[ITenantOnboardingService](#)

Coordinates tenant onboarding from catalog creation through database provisioning.

[ITenantProvisioningWorkflow](#)

Provisions tenant infrastructure after the tenant catalog record has been created.

[ITenantRepository](#)

Persists and queries tenant catalog records.

[ITenantService](#)

Provides public tenant catalog use cases.

[ITenantUpgradeService](#)

Handles tenant database upgrade operations.

Interface IConnectionStringBuilder

Namespace: [Code7Dev.Organizor.Application.Tenants.Interfaces](#)

Assembly: Code7Dev.Organizor.Application.dll

Builds PostgreSQL connection strings for catalog, admin, and tenant database operations.

```
public interface IConnectionStringBuilder
```

Methods

BuildAdminConnectionString()

Builds an administrative PostgreSQL connection string used for database creation and deletion.

```
string BuildAdminConnectionString()
```

Returns

[string](#) 

A PostgreSQL connection string targeting the admin database.

BuildConnectionString(string)

Builds a connection string for a specific PostgreSQL database.

```
string BuildConnectionString(string databaseName)
```

Parameters

databaseName [string](#)

Database name to connect to.

Returns

[string](#)

A PostgreSQL connection string.

ExtractDatabaseName(string)

Extracts the database name from a PostgreSQL connection string.

```
string ExtractDatabaseName(string connectionString)
```

Parameters

connectionString [string](#)

Connection string to inspect.

Returns

[string](#)

The database name from the connection string.

Interface ITenantDatabaseManager

Namespace: [Code7Dev.Organizor.Application.Tenants.Interfaces](#)

Assembly: Code7Dev.Organizor.Application.dll

Creates and drops physical tenant databases.

```
public interface ITenantDatabaseManager
```

Methods

CreateDatabaseAsync(string, CancellationToken)

Creates a tenant database when it does not already exist.

```
Task CreateDatabaseAsync(string databaseName, CancellationToken ct = default)
```

Parameters

databaseName [string](#) 

Tenant database name to create.

ct [CancellationToken](#) 

Cancellation token.

Returns

[Task](#) 

DropDatabaseAsync(string, CancellationToken)

Drops a tenant database.


```
Task DropDatabaseAsync(string databaseName, CancellationToken ct = default)
```

Parameters

`databaseName` [string](#) 

Tenant database name to drop.

`ct` [CancellationToken](#) 

Cancellation token.

Returns

[Task](#) 

Interface ITenantLifecycleService

Namespace: [Code7Dev.Organizor.Application.Tenants.Interfaces](#)

Assembly: Code7Dev.Organizor.Application.dll

Handles tenant deletion lifecycle operations.

```
public interface ITenantLifecycleService
```

Methods

HardDeleteAsync(Guid, CancellationToken)

Permanently removes a soft-deleted tenant and drops its tenant database.

```
Task<Result> HardDeleteAsync(Guid tenantId, CancellationToken ct = default)
```

Parameters

tenantId [Guid](#)

Tenant catalog identifier.

ct [CancellationToken](#)

Cancellation token.

Returns

[Task](#) <[Result](#)>

A [Result](#) indicating success, or a failure result when the tenant does not exist or has not been soft-deleted yet.

SoftDeleteAsync(Guid, string?, CancellationToken)

Marks a tenant as deleted without dropping the tenant database.

```
Task<Result> SoftDeleteAsync(Guid tenantId, string? reason = null,  
CancellationToken ct = default)
```

Parameters

tenantId [Guid](#) 

Tenant catalog identifier.

reason [string](#) 

Optional operator-provided deletion reason.

ct [CancellationToken](#) 

Cancellation token.

Returns

[Task](#)  [Result](#) 

A [Result](#) indicating success, or a failure result when the tenant does not exist or cannot be soft-deleted.

Interface ITenantMigrator

Namespace: [Code7Dev.Organizor.Application.Tenants.Interfaces](#)

Assembly: Code7Dev.Organizor.Application.dll

Applies EF Core migrations to a tenant database.

```
public interface ITenantMigrator
```

Methods

MigrateAsync(string, CancellationToken)

Applies pending migrations to the tenant database.

```
Task<TenantMigrationResult> MigrateAsync(string tenantDbName, CancellationToken  
ct = default)
```

Parameters

tenantDbName [string](#) 

Tenant database name.

ct [CancellationToken](#) 

Cancellation token.

Returns

[Task](#)  [<TenantMigrationResult>](#)

Migration result with success state, duration, and error details.

Interface ITenantOnboardingService

Namespace: [Code7Dev.Organizor.Application.Tenants.Interfaces](#)

Assembly: Code7Dev.Organizor.Application.dll

Coordinates tenant onboarding from catalog creation through database provisioning.

```
public interface ITenantOnboardingService
```

Methods

OnboardAsync(TenantOnboardingRequest, CancellationToken)

Creates the tenant catalog record and provisions the tenant database.

```
Task<Result<TenantOnboardingResult>> OnboardAsync(TenantOnboardingRequest request, Cancellation_token cancellationToken = default)
```

Parameters

request [TenantOnboardingRequest](#)

Tenant onboarding input.

cancellationToken [CancellationToken](#) 

Cancellation token.

Returns

[Task](#)  [Result](#) [TenantOnboardingResult](#) >>

A Result<T> containing the onboarded tenant metadata when successful, or a failure result with an appropriate error code.

Interface

ITenantProvisioningWorkflow

Namespace: [Code7Dev.Organizor.Application.Tenants.Interfaces](#)

Assembly: Code7Dev.Organizor.Application.dll

Provisions tenant infrastructure after the tenant catalog record has been created.

```
public interface ITenantProvisioningWorkflow
```

Methods

ExecuteAsync(Tenant, CancellationToken)

Creates the tenant database and applies tenant migrations.

```
Task<ProvisioningResult> ExecuteAsync(Tenant tenant, CancellationToken ct)
```

Parameters

tenant [Tenant](#)

Tenant catalog record to provision.

ct [CancellationToken](#)

Cancellation token.

Returns

[Task](#) [<ProvisioningResult>](#)

Provisioning result.

Interface ITenantRepository

Namespace: [Code7Dev.Organizor.Application.Tenants.Interfaces](#)

Assembly: Code7Dev.Organizor.Application.dll

Persists and queries tenant catalog records.

```
public interface ITenantRepository
```

Methods

AddAsync(Tenant)

Adds a tenant catalog record.

```
Task AddAsync(Tenant tenant)
```

Parameters

tenant [Tenant](#)

Tenant to add.

Returns

[Task](#) 

DeleteAsync(Guid)

Removes a tenant catalog record.

```
Task DeleteAsync(Guid id)
```


Parameters

`id` [Guid](#)

Tenant catalog identifier.

Returns

[Task](#)

GetAllAsync(bool)

Lists tenants from the catalog.

```
Task<List<Tenant>> GetAllAsync(bool includeSoftDeleted = false)
```

Parameters

`includeSoftDeleted` [bool](#)

Whether soft-deleted tenants should be included.

Returns

[Task](#) <[List](#) <[Tenant](#)>>

Tenant catalog records.

GetByIdAsync(Guid, bool)

Gets a tenant by catalog identifier.

```
Task<Tenant?> GetByIdAsync(Guid id, bool includeSoftDeleted = false)
```

Parameters

`id` [Guid](#)

Tenant catalog identifier.

`includeSoftDeleted` [bool](#)

Whether soft-deleted tenants should be included.

Returns

[Task](#) [<Tenant>](#)

The tenant when found; otherwise, null.

GetBySlugAsync(string, bool)

Gets a tenant by slug.

```
Task<Tenant?> GetBySlugAsync(string slug, bool includeSoftDeleted = false)
```

Parameters

`slug` [string](#)

Tenant slug.

`includeSoftDeleted` [bool](#)

Whether soft-deleted tenants should be included.

Returns

[Task](#) [<Tenant>](#)

The tenant when found; otherwise, null.

UpdateAsync(Tenant)

Updates an existing tenant catalog record.

```
Task UpdateAsync(Tenant tenant)
```

Parameters

tenant [Tenant](#)

Tenant to update.

Returns

[Task](#) 

Interface ITenantService

Namespace: [Code7Dev.Organizor.Application.Tenants.Interfaces](#)

Assembly: Code7Dev.Organizor.Application.dll

Provides public tenant catalog use cases.

```
public interface ITenantService
```

Methods

CreateAsync(TenantCreateModel)

Creates a tenant catalog record without provisioning a database.

```
Task<Result<TenantModel>> CreateAsync(TenantCreateModel model)
```

Parameters

model [TenantCreateModel](#)

Tenant creation input.

Returns

[Task](#) [Result](#) [TenantModel](#)

A [Result<T>](#) containing the created tenant metadata, or a failure result with an appropriate error code.

GetAllAsync()

Lists non-deleted tenants.

```
Task<Result<List<TenantModel>>> GetAllAsync()
```

Returns

[Task](#) <[Result](#) <[List](#) <[TenantModel](#)>>>

A [Result<T>](#) containing all visible tenant metadata.

GetBySlugAsync(string)

Gets a non-deleted tenant by slug.

```
Task<Result<TenantModel>> GetBySlugAsync(string slug)
```

Parameters

slug [string](#)

Tenant slug.

Returns

[Task](#) <[Result](#) <[TenantModel](#)>>

A [Result<T>](#) containing the tenant metadata when found, or a failure result when not found.

Interface ITenantUpgradeService

Namespace: [Code7Dev.Organizor.Application.Tenants.Interfaces](#)

Assembly: Code7Dev.Organizor.Application.dll

Handles tenant database upgrade operations.

```
public interface ITenantUpgradeService
```

Methods

UpgradeAsync(Guid, CancellationToken)

Applies pending migrations to the tenant database for a catalog tenant.

```
Task<Result<TenantMigrationResult>> UpgradeAsync(Guid tenantId,  
CancellationToken ct = default)
```

Parameters

tenantId [Guid](#) 

Tenant catalog identifier.

ct [CancellationToken](#) 

Cancellation token.

Returns

[Task](#)  [Result](#)  [TenantMigrationResult](#)  >>

Migration result.

Namespace Code7Dev.Organizer. Application.Tenants.Models

Classes

ProvisioningResult

Result of the tenant database provisioning workflow.

TenantCreateModel

Application model used to create a tenant catalog record.

TenantMigrationResult

Result of applying migrations to a tenant database.

TenantModel

Application-facing tenant catalog projection.

TenantOnboardingRequest

Application request for tenant onboarding.

TenantOnboardingResult

Result returned after tenant onboarding completes.

Class ProvisioningResult

Namespace: [Code7Dev.Organizor.Application.Tenants.Models](#)

Assembly: Code7Dev.Organizor.Application.dll

Result of the tenant database provisioning workflow.

```
public sealed class ProvisioningResult
```

Inheritance

[object](#)  ← ProvisioningResult

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  , [object.GetType\(\)](#)  , [object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Properties

Error

Error message when provisioning fails.

```
public string? Error { get; set; }
```

Property Value

[string](#) 

Success

Indicates whether the tenant database was created and migrated successfully.

```
public required bool Success { get; set; }
```


Property Value

[bool](#)

Class TenantCreateModel

Namespace: [Code7Dev.Organizor.Application.Tenants.Models](#)

Assembly: Code7Dev.Organizor.Application.dll

Application model used to create a tenant catalog record.

```
public class TenantCreateModel
```

Inheritance

[object](#)  ← TenantCreateModel

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) ,
[object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Properties

Name

Human-readable tenant name.

```
public required string Name { get; set; }
```

Property Value

[string](#) 

Slug

Stable tenant slug used for lookup and database naming.

```
public required string Slug { get; set; }
```

Property Value

string 

Class TenantMigrationResult

Namespace: [Code7Dev.Organizor.Application.Tenants.Models](#)

Assembly: Code7Dev.Organizor.Application.dll

Result of applying migrations to a tenant database.

```
public sealed class TenantMigrationResult
```

Inheritance

[object](#)  ← TenantMigrationResult

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  , [object.GetType\(\)](#)  , [object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Properties

AppliedMigrations

Number of pending migrations detected before execution.

```
public required int AppliedMigrations { get; set; }
```

Property Value

[int](#) 

Database

Tenant database targeted by the migration.

```
public required string Database { get; set; }
```

Property Value

[string](#)

Duration

Total migration execution duration.

```
public required TimeSpan Duration { get; set; }
```

Property Value

[TimeSpan](#)

Error

Error message when migration fails.

```
public string? Error { get; set; }
```

Property Value

[string](#)

Success

Indicates whether migration execution completed successfully.

```
public required bool Success { get; set; }
```

Property Value

[bool](#)

Class TenantModel

Namespace: [Code7Dev.Organizor.Application.Tenants.Models](#)

Assembly: Code7Dev.Organizor.Application.dll

Application-facing tenant catalog projection.

```
public class TenantModel
```

Inheritance

[object](#)  ← TenantModel

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) ,
[object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Properties

CreatedAt

UTC timestamp when the tenant catalog record was created.

```
public required DateTime CreatedAt { get; set; }
```

Property Value

[DateTime](#) 

DatabaseName

PostgreSQL database assigned to the tenant.

```
public required string DatabaseName { get; set; }
```

Property Value

[string](#)

Id

Unique tenant identifier.

```
public required Guid Id { get; set; }
```

Property Value

[Guid](#)

Name

Human-readable tenant name.

```
public required string Name { get; set; }
```

Property Value

[string](#)

Slug

Stable tenant slug.

```
public required string Slug { get; set; }
```

Property Value

[string](#)

Class TenantOnboardingRequest

Namespace: [Code7Dev.Organizor.Application.Tenants.Models](#)

Assembly: Code7Dev.Organizor.Application.dll

Application request for tenant onboarding.

```
public class TenantOnboardingRequest
```

Inheritance

[object](#)  ← TenantOnboardingRequest

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Properties

Name

Human-readable tenant name.

```
public required string Name { get; set; }
```

Property Value

[string](#) 

Slug

Stable tenant slug used to derive the tenant database name.

```
public required string Slug { get; set; }
```


Property Value

string 

Class TenantOnboardingResult

Namespace: [Code7Dev.Organizor.Application.Tenants.Models](#)

Assembly: Code7Dev.Organizor.Application.dll

Result returned after tenant onboarding completes.

```
public class TenantOnboardingResult
```

Inheritance

[object](#)  ← TenantOnboardingResult

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Properties

DatabaseName

PostgreSQL database created for the tenant.

```
public required string DatabaseName { get; set; }
```

Property Value

[string](#) 

Id

Unique tenant identifier.

```
public required Guid Id { get; set; }
```

Property Value

[Guid](#)

Name

Human-readable tenant name.

```
public required string Name { get; set; }
```

Property Value

[string](#)

Slug

Stable tenant slug.

```
public required string Slug { get; set; }
```

Property Value

[string](#)

Namespace Code7Dev.Organizor. Application.Tenants.Services

Classes

[TenantLifecycleService](#)

[TenantOnboardingService](#)

[TenantUpgradeService](#)

Class TenantLifecycleService

Namespace: [Code7Dev.Organizor.Application.Tenants.Services](#)

Assembly: Code7Dev.Organizor.Application.dll

```
public sealed class TenantLifecycleService : ITenantLifecycleService
```

Inheritance

[object](#)  ← TenantLifecycleService

Implements

[ITenantLifecycleService](#)

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Constructors

TenantLifecycleService(ITenantRepository,
ITenantDatabaseManager,
ILogger<TenantLifecycleService>)

```
public TenantLifecycleService(ITenantRepository repo, ITenantDatabaseManager  
dbManager, ILogger<TenantLifecycleService> logger)
```

Parameters

repo [ITenantRepository](#)

dbManager [ITenantDatabaseManager](#)

logger [ILogger](#)  <[TenantLifecycleService](#)>

Methods

HardDeleteAsync(Guid, CancellationToken)

Permanently removes a soft-deleted tenant and drops its tenant database.

```
public Task<Result> HardDeleteAsync(Guid tenantId, CancellationToken ct  
= default)
```

Parameters

tenantId [Guid](#)

Tenant catalog identifier.

ct [CancellationToken](#)

Cancellation token.

Returns

[Task](#) <[Result](#)>

A [Result](#) indicating success, or a failure result when the tenant does not exist or has not been soft-deleted yet.

SoftDeleteAsync(Guid, string?, CancellationToken)

Marks a tenant as deleted without dropping the tenant database.

```
public Task<Result> SoftDeleteAsync(Guid tenantId, string? reason = null,  
CancellationToken ct = default)
```

Parameters

tenantId [Guid](#)

Tenant catalog identifier.

reason [string](#)

Optional operator-provided deletion reason.

ct [CancellationToken](#)

Cancellation token.

Returns

[Task](#) [Result](#)

A [Result](#) indicating success, or a failure result when the tenant does not exist or cannot be soft-deleted.

Class TenantOnboardingService

Namespace: [Code7Dev.Organizor.Application.Tenants.Services](#)

Assembly: Code7Dev.Organizor.Application.dll

```
public sealed class TenantOnboardingService : ITenantOnboardingService
```

Inheritance

[object](#)  ← TenantOnboardingService

Implements

[ITenantOnboardingService](#)

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Constructors

TenantOnboardingService(ITenantRepository,
ITenantProvisioningWorkflow)

```
public TenantOnboardingService(ITenantRepository repo,  
ITenantProvisioningWorkflow workflow)
```

Parameters

repo [ITenantRepository](#)

workflow [ITenantProvisioningWorkflow](#)

Methods

OnboardAsync(TenantOnboardingRequest, CancellationToken)

Creates the tenant catalog record and provisions the tenant database.

```
public Task<Result<TenantOnboardingResult>>  
OnboardAsync(TenantOnboardingRequest request, CancellationToken ct = default)
```

Parameters

`request` [TenantOnboardingRequest](#)

Tenant onboarding input.

`ct` [CancellationToken](#)

Returns

[Task](#) [<Result<TenantOnboardingResult>>](#)

A [Result<T>](#) containing the onboarded tenant metadata when successful, or a failure result with an appropriate error code.

Class TenantUpgradeService

Namespace: [Code7Dev.Organizor.Application.Tenants.Services](#)

Assembly: Code7Dev.Organizor.Application.dll

```
public sealed class TenantUpgradeService : ITenantUpgradeService
```

Inheritance

[object](#)  ← TenantUpgradeService

Implements

[ITenantUpgradeService](#)

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Constructors

TenantUpgradeService(ITenantRepository,
ITenantMigrator, ILogger<TenantUpgradeService>)

```
public TenantUpgradeService(ITenantRepository repo, ITenantMigrator migrator,  
    ILogger<TenantUpgradeService> logger)
```

Parameters

repo [ITenantRepository](#)

migrator [ITenantMigrator](#)

logger [ILogger](#)  <[TenantUpgradeService](#)>

Methods

UpgradeAsync(Guid, CancellationToken)

Applies pending migrations to the tenant database for a catalog tenant.

```
public Task<Result<TenantMigrationResult>> UpgradeAsync(Guid tenantId,  
CancellationToken ct = default)
```

Parameters

tenantId [Guid](#) 

Tenant catalog identifier.

ct [CancellationToken](#) 

Cancellation token.

Returns

[Task](#)  [Result](#) [TenantMigrationResult](#)

Migration result.

Namespace Code7Dev.Organizer. Domain.Tenants

Classes

Tenant

Catalog record for a tenant managed by Organizer.

Enums

TenantStatus

Lifecycle status for a tenant catalog record.

Class Tenant

Namespace: [Code7Dev.Organizor.Domain.Tenants](#)

Assembly: Code7Dev.Organizor.Domain.dll

Catalog record for a tenant managed by Organizor.

```
public class Tenant
```

Inheritance

[object](#) ↗ ← Tenant

Inherited Members

[object.Equals\(object\)](#) ↗ , [object.Equals\(object, object\)](#) ↗ , [object.GetHashCode\(\)](#) ↗ ,
[object.GetType\(\)](#) ↗ , [object.MemberwiseClone\(\)](#) ↗ ,
[object.ReferenceEquals\(object, object\)](#) ↗ , [object.ToString\(\)](#) ↗

Remarks

The catalog record stores lifecycle metadata and the PostgreSQL database name used for tenant-scoped data.

Properties

CreatedAt

UTC timestamp when the tenant catalog record was created.

```
public DateTime CreatedAt { get; set; }
```

Property Value

[DateTime](#) ↗

DatabaseName

PostgreSQL database name assigned to the tenant.

```
public string DatabaseName { get; set; }
```

Property Value

[string](#) 

DeletedAt

UTC timestamp when the tenant was soft-deleted.

```
public DateTime? DeletedAt { get; set; }
```

Property Value

[DateTime](#) ?

DeletionReason

Operator-provided deletion reason.

```
public string? DeletionReason { get; set; }
```

Property Value

[string](#) 

FailureReason

Machine-readable reason captured when provisioning or lifecycle work fails.

```
public string? FailureReason { get; set; }
```

Property Value

[string](#)

Id

Unique tenant identifier.

```
public Guid Id { get; set; }
```

Property Value

[Guid](#)

IsDeleted

Indicates whether the tenant has been soft-deleted.

```
public bool IsDeleted { get; set; }
```

Property Value

[bool](#)

Name

Human-readable tenant name.

```
public string Name { get; set; }
```

Property Value

[string](#) 

Slug

Stable tenant slug used for lookup and request tenant resolution.

```
public string Slug { get; set; }
```

Property Value

[string](#) 

Status

Current tenant lifecycle status.

```
public TenantStatus Status { get; set; }
```

Property Value

[TenantStatus](#)

Enum TenantStatus

Namespace: [Code7Dev.Organizor.Domain.Tenants](#)

Assembly: Code7Dev.Organizor.Domain.dll

Lifecycle status for a tenant catalog record.

```
public enum TenantStatus
```

Fields

Active = 1

Tenant database provisioning completed successfully.

Deleted = 4

Tenant has been soft-deleted.

Failed = 3

Tenant provisioning or lifecycle operation failed.

Pending = 0

Tenant exists in the catalog, but provisioning has not completed.

Upgrading = 2

Tenant database upgrade is in progress.

Namespace Code7Dev.Organizor. Infrastructure.Extensions

Classes

[DbExtensions](#)

[DependencyInjection](#)

Class DbExtensions

Namespace: [Code7Dev.Organizor.Infrastructure.Extensions](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

```
public static class DbExtensions
```

Inheritance

[object](#)  ← DbExtensions

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) ,
[object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Methods

AddCatalogDb(IServiceCollection, IConfiguration)

```
public static IServiceCollection AddCatalogDb(this IServiceCollection services,  
IConfiguration configuration)
```

Parameters

services [IServiceCollection](#) 

configuration [IConfiguration](#) 

Returns

[IServiceCollection](#) 

AddOrganizorDb(IServiceCollection, IConfiguration)

```
public static IServiceCollection AddOrganizorDb(this IServiceCollection
services, IConfiguration configuration)
```

Parameters

services [IServiceCollection](#)

configuration [IConfiguration](#)

Returns

[IServiceCollection](#)

SeedCatalogDbAsync(IServiceProvider)

```
public static Task SeedCatalogDbAsync(this IServiceProvider services)
```

Parameters

services [IServiceProvider](#)

Returns

[Task](#)

Class DependencyInjection

Namespace: [Code7Dev.Organizor.Infrastructure.Extensions](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

```
public static class DependencyInjection
```

Inheritance

[object](#)  ← DependencyInjection

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Methods

AddInfrastructure(IServiceCollection)

```
public static IServiceCollection AddInfrastructure(this  
IServiceCollection services)
```

Parameters

services [IServiceCollection](#) 

Returns

[IServiceCollection](#) 

Namespace Code7Dev.Organizer. Infrastructure.Migrations

Classes

AddQuartzSchema

A base class inherited by each EF Core migration.

Class AddQuartzSchema

Namespace: [Code7Dev.Organizor.Infrastructure.Migrations](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

A base class inherited by each EF Core migration.

```
[DbContext(typeof(CatalogDbContext))]  
[Migration("20260519204238_AddQuartzSchema")]  
public class AddQuartzSchema : Migration
```

Inheritance

[object](#)  ← [Migration](#)  ← AddQuartzSchema

Inherited Members

[Migration.InitialDatabase](#) , [Migration.TargetModel](#) , [Migration.UpOperations](#) , [Migration.DownOperations](#) , [Migration.ActiveProvider](#) , [object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) , [object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) , [object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Remarks

See [Database migrations](#)  for more information and examples.

Methods

BuildTargetModel(ModelBuilder)

Implemented to build the [TargetModel](#) .

```
protected override void BuildTargetModel(ModelBuilder modelBuilder)
```

Parameters

modelBuilder [ModelBuilder](#)

The [ModelBuilder](#) to use to build the model.

Remarks

See [Database migrations](#) for more information and examples.

Down(MigrationBuilder)

Builds the operations that will migrate the database 'down'.

```
protected override void Down(MigrationBuilder migrationBuilder)
```

Parameters

migrationBuilder [MigrationBuilder](#)

The [MigrationBuilder](#) that will build the operations.

Remarks

That is, builds the operations that will take the database from the state left in by this migration so that it returns to the state that it was in before this migration was applied.

This method must be overridden in each class that inherits from [Migration](#) if both 'up' and 'down' migrations are to be supported. If it is not overridden, then calling it will throw and it will not be possible to migrate in the 'down' direction.

See [Database migrations](#) for more information and examples.

Up(MigrationBuilder)

Builds the operations that will migrate the database 'up'.

```
protected override void Up(MigrationBuilder migrationBuilder)
```


Parameters

`migrationBuilder` [MigrationBuilder](#)

The [MigrationBuilder](#) that will build the operations.

Remarks

That is, builds the operations that will take the database from the state left in by the previous migration so that it is up-to-date with regard to this migration.

This method must be overridden in each class that inherits from [Migration](#).

See [Database migrations](#) for more information and examples.

Namespace Code7Dev.Organizer. Infrastructure.Persistence.Catalog

Classes

[CatalogDbContext](#)

Class CatalogDbContext

Namespace: [Code7Dev.Organizor.Infrastructure.Persistence.Catalog](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

```
public class CatalogDbContext : DbContext, IInfrastructure<IServiceProvider>,
    IDbContextDependencies, IDbSetCache, IDbContextPoolable, IResettableService,
    IDisposable, IAsyncDisposable
```

Inheritance

[object](#)  ← [DbContext](#)  ← CatalogDbContext

Implements

[IInfrastructure](#)  <[IServiceProvider](#)  >, [IDbContextDependencies](#) , [IDbSetCache](#) ,
[IDbContextPoolable](#) , [IResettableService](#) , [IDisposable](#) , [IAsyncDisposable](#) 

Inherited Members

[DbContext.Set<TEntity>\(\)](#) , [DbContext.Set<TEntity>\(string\)](#) ,
[DbContext.OnConfiguring\(DbContextOptionsBuilder\)](#) ,
[DbContext.ConfigureConventions\(ModelConfigurationBuilder\)](#) ,
[DbContext.SaveChanges\(\)](#) , [DbContext.SaveChanges\(bool\)](#) ,
[DbContext.SaveChangesAsync\(CancellationToken\)](#) ,
[DbContext.SaveChangesAsync\(bool, CancellationToken\)](#) , [DbContext.Dispose\(\)](#) ,
[DbContext.DisposeAsync\(\)](#) , [DbContext.Entry<TEntity>\(TEntity\)](#) ,
[DbContext.Entry\(object\)](#) , [DbContext.Add<TEntity>\(TEntity\)](#) ,
[DbContext.AddAsync<TEntity>\(TEntity, CancellationToken\)](#) ,
[DbContext.Attach<TEntity>\(TEntity\)](#) , [DbContext.Update<TEntity>\(TEntity\)](#) ,
[DbContext.Remove<TEntity>\(TEntity\)](#) , [DbContext.Add\(object\)](#) ,
[DbContext.AddAsync\(object, CancellationToken\)](#) , [DbContext.Attach\(object\)](#) ,
[DbContext.Update\(object\)](#) , [DbContext.Remove\(object\)](#) ,
[DbContext.AddRange\(params object\[\]\)](#) ,
[DbContext.AddRangeAsync\(params object\[\]\)](#) ,
[DbContext.AttachRange\(params object\[\]\)](#) ,
[DbContext.UpdateRange\(params object\[\]\)](#) ,
[DbContext.RemoveRange\(params object\[\]\)](#) ,
[DbContext.AddRange\(IEnumerable<object>\)](#) ,
[DbContext.AddRangeAsync\(IEnumerable<object>, CancellationToken\)](#) ,
[DbContext.AttachRange\(IEnumerable<object>\)](#) ,

[DbContext.UpdateRange\(IEnumerable<object>\)](#)  ,
[DbContext.RemoveRange\(IEnumerable<object>\)](#)  ,
[DbContext.Find\(Type, params object\[\]\)](#)  ,
[DbContext.FindAsync\(Type, params object\[\]\)](#)  ,
[DbContext.FindAsync\(Type, object\[\], CancellationToken\)](#)  ,
[DbContext.Find<TEntity>\(params object\[\]\)](#)  ,
[DbContext.FindAsync<TEntity>\(params object\[\]\)](#)  ,
[DbContext.FindAsync<TEntity>\(object\[\], CancellationToken\)](#)  ,
[DbContext.FromExpression<TResult>\(Expression<Func<IQueryable<TResult>>>\)](#)  ,
[DbContext.Database](#)  , [DbContext.ChangeTracker](#)  , [DbContext.Model](#)  ,
[DbContext.ContextId](#)  , [DbContext.SavingChanges](#)  , [DbContext.SavedChanges](#)  ,
[DbContext.SaveChangesFailed](#)  , [object.Equals\(object\)](#)  ,
[object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  , [object.GetType\(\)](#)  ,
[object.MemberwiseClone\(\)](#)  , [object.ReferenceEquals\(object, object\)](#)  ,
[object.ToString\(\)](#) 

Constructors

CatalogDbContext(DbContextOptions<CatalogDbContext> context>)

```
public CatalogDbContext(DbContextOptions<CatalogDbContext> options)
```

Parameters

options [DbContextOptions](#)  <[CatalogDbContext](#)>

Properties

Tenants

```
public DbSet<Tenant> Tenants { get; }
```

Property Value

[DbSet](#)  <[Tenant](#)>

Methods

OnModelCreating(ModelBuilder)

Override this method to further configure the model that was discovered by convention from the entity types exposed in [DbSet<TEntity>](#) properties on your derived context. The resulting model may be cached and re-used for subsequent instances of your derived context.

```
protected override void OnModelCreating(ModelBuilder modelBuilder)
```

Parameters

`modelBuilder` [ModelBuilder](#)

The builder being used to construct the model for this context. Databases (and other extensions) typically define extension methods on this object that allow you to configure aspects of the model that are specific to a given database.

Remarks

If a model is explicitly set on the options for this context (via [UseModel\(IModel\)](#)) then this method will not be run. However, it will still run when creating a compiled model.

See [Modeling entity types and relationships](#) for more information and examples.

Namespace Code7Dev.Organizer. Infrastructure.Persistence.Catalog. Migrations

Classes

Init

A base class inherited by each EF Core migration.

Class Init

Namespace: [Code7Dev.Organizor.Infrastructure.Persistence.Catalog.Migrations](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

A base class inherited by each EF Core migration.

```
[DbContext(typeof(CatalogDbContext))]  
[Migration("20260512175319_Init")]  
public class Init : Migration
```

Inheritance

[object](#)  ← [Migration](#)  ← Init

Inherited Members

[Migration.InitialDatabase](#) , [Migration.TargetModel](#) , [Migration.UpOperations](#) , [Migration.DownOperations](#) , [Migration.ActiveProvider](#) , [object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) , [object.GetType\(\)](#) , [object.MemberwiseClone\(\)](#) , [object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Remarks

See [Database migrations](#)  for more information and examples.

Methods

BuildTargetModel(ModelBuilder)

Implemented to build the [TargetModel](#) .

```
protected override void BuildTargetModel(ModelBuilder modelBuilder)
```

Parameters

modelBuilder [ModelBuilder](#)

The [ModelBuilder](#) to use to build the model.

Remarks

See [Database migrations](#) for more information and examples.

Down(MigrationBuilder)

Builds the operations that will migrate the database 'down'.

```
protected override void Down(MigrationBuilder migrationBuilder)
```

Parameters

migrationBuilder [MigrationBuilder](#)

The [MigrationBuilder](#) that will build the operations.

Remarks

That is, builds the operations that will take the database from the state left in by this migration so that it returns to the state that it was in before this migration was applied.

This method must be overridden in each class that inherits from [Migration](#) if both 'up' and 'down' migrations are to be supported. If it is not overridden, then calling it will throw and it will not be possible to migrate in the 'down' direction.

See [Database migrations](#) for more information and examples.

Up(MigrationBuilder)

Builds the operations that will migrate the database 'up'.

```
protected override void Up(MigrationBuilder migrationBuilder)
```


Parameters

`migrationBuilder` [MigrationBuilder](#)

The [MigrationBuilder](#) that will build the operations.

Remarks

That is, builds the operations that will take the database from the state left in by the previous migration so that it is up-to-date with regard to this migration.

This method must be overridden in each class that inherits from [Migration](#).

See [Database migrations](#) for more information and examples.

Namespace Code7Dev.Organizor. Infrastructure.Persistence.Organizor

Classes

[OrganizorDbContext](#)

Class OrganizerDbContext

Namespace: [Code7Dev.Organizer.Infrastructure.Persistence.Organizer](#)

Assembly: Code7Dev.Organizer.Infrastructure.dll

```
public class OrganizerDbContext : DbContext, IInfrastructure<IServiceProvider>,
    IDbContextDependencies, IDbSetCache, IDbContextPoolable, IResettableService,
    IDisposable, IAsyncDisposable
```

Inheritance

[object](#)  ← [DbContext](#)  ← OrganizerDbContext

Implements

[IInfrastructure](#)  <[IServiceProvider](#)  >, [IDbContextDependencies](#) , [IDbSetCache](#) ,
[IDbContextPoolable](#) , [IResettableService](#) , [IDisposable](#) , [IAsyncDisposable](#) 

Inherited Members

[DbContext.Set<TEntity>\(\)](#) , [DbContext.Set<TEntity>\(string\)](#) ,
[DbContext.OnConfiguring\(DbContextOptionsBuilder\)](#) ,
[DbContext.ConfigureConventions\(ModelConfigurationBuilder\)](#) ,
[DbContext.SaveChanges\(\)](#) , [DbContext.SaveChanges\(bool\)](#) ,
[DbContext.SaveChangesAsync\(CancellationToken\)](#) ,
[DbContext.SaveChangesAsync\(bool, CancellationToken\)](#) , [DbContext.Dispose\(\)](#) ,
[DbContext.DisposeAsync\(\)](#) , [DbContext.Entry<TEntity>\(TEntity\)](#) ,
[DbContext.Entry\(object\)](#) , [DbContext.Add<TEntity>\(TEntity\)](#) ,
[DbContext.AddAsync<TEntity>\(TEntity, CancellationToken\)](#) ,
[DbContext.Attach<TEntity>\(TEntity\)](#) , [DbContext.Update<TEntity>\(TEntity\)](#) ,
[DbContext.Remove<TEntity>\(TEntity\)](#) , [DbContext.Add\(object\)](#) ,
[DbContext.AddAsync\(object, CancellationToken\)](#) , [DbContext.Attach\(object\)](#) ,
[DbContext.Update\(object\)](#) , [DbContext.Remove\(object\)](#) ,
[DbContext.AddRange\(params object\[\]\)](#) ,
[DbContext.AddRangeAsync\(params object\[\]\)](#) ,
[DbContext.AttachRange\(params object\[\]\)](#) ,
[DbContext.UpdateRange\(params object\[\]\)](#) ,
[DbContext.RemoveRange\(params object\[\]\)](#) ,
[DbContext.AddRange\(IEnumerable<object>\)](#) ,
[DbContext.AddRangeAsync\(IEnumerable<object>, CancellationToken\)](#) ,
[DbContext.AttachRange\(IEnumerable<object>\)](#) ,

[DbContext.UpdateRange\(IEnumerable<object>\)](#) ,
[DbContext.RemoveRange\(IEnumerable<object>\)](#) ,
[DbContext.Find\(Type, params object\[\]\)](#) ,
[DbContext.FindAsync\(Type, params object\[\]\)](#) ,
[DbContext.FindAsync\(Type, object\[\], CancellationToken\)](#) ,
[DbContext.Find<TEntity>\(params object\[\]\)](#) ,
[DbContext.FindAsync<TEntity>\(params object\[\]\)](#) ,
[DbContext.FindAsync<TEntity>\(object\[\], CancellationToken\)](#) ,
[DbContext.FromExpression<TResult>\(Expression<Func<IQueryable<TResult>>>\)](#) ,
[DbContext.Database](#) , [DbContext.ChangeTracker](#) , [DbContext.Model](#) ,
[DbContext.ContextId](#) , [DbContext.SavingChanges](#) , [DbContext.SavedChanges](#) ,
[DbContext.SaveChangesFailed](#) , [object.Equals\(object\)](#) ,
[object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) , [object.GetType\(\)](#) ,
[object.MemberwiseClone\(\)](#) , [object.ReferenceEquals\(object, object\)](#) ,
[object.ToString\(\)](#)

Constructors

OrganizorDbContext(DbContextOptions<OrganizorDbContext> options)

```
public OrganizorDbContext(DbContextOptions<OrganizorDbContext> options)
```

Parameters

options [DbContextOptions](#) <[OrganizorDbContext](#)>

Methods

OnModelCreating(ModelBuilder)

Override this method to further configure the model that was discovered by convention from the entity types exposed in [DbSet<TEntity>](#) properties on your derived context. The resulting model may be cached and re-used for subsequent instances of your derived context.

```
protected override void OnModelCreating(ModelBuilder modelBuilder)
```

Parameters

`modelBuilder` [ModelBuilder](#)↗

The builder being used to construct the model for this context. Databases (and other extensions) typically define extension methods on this object that allow you to configure aspects of the model that are specific to a given database.

Remarks

If a model is explicitly set on the options for this context (via [UseModel\(IModel\)](#)↗) then this method will not be run. However, it will still run when creating a compiled model.

See [Modeling entity types and relationships](#)↗ for more information and examples.

Namespace Code7Dev.Organizer. Infrastructure.Quartz

Classes

[TenantAwareJobFactory](#)

Creates Quartz job instances from the application's dependency injection container.

[TenantJobScheduler](#)

Schedules recurring Quartz jobs for tenants stored in the catalog database.

Class TenantAwareJobFactory

Namespace: [Code7Dev.Organizor.Infrastructure.Quartz](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

Creates Quartz job instances from the application's dependency injection container.

```
public sealed class TenantAwareJobFactory : IJobFactory
```

Inheritance

[object](#)  ← TenantAwareJobFactory

Implements

IJobFactory

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  , [object.GetType\(\)](#)  , [object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Constructors

TenantAwareJobFactory(IServiceScopeFactory)

Initializes a new instance of the [TenantAwareJobFactory](#) class.

```
public TenantAwareJobFactory(IServiceScopeFactory scopeFactory)
```

Parameters

scopeFactory [IServiceScopeFactory](#) 

The factory used to create a scoped service provider for each job execution.

Methods

NewJob(TriggerFiredBundle, IScheduler)

Resolves the Quartz job type for a fired trigger from a new dependency injection scope.

```
public IJob NewJob(TriggerFiredBundle bundle, IScheduler scheduler)
```

Parameters

`bundle` TriggerFiredBundle

The Quartz trigger bundle that identifies the job to create.

`scheduler` IScheduler

The scheduler requesting the job instance.

Returns

IJob

The resolved Quartz job instance.

ReturnJob(IJob)

Returns a job instance to the factory after execution.

```
public void ReturnJob(IJob job)
```

Parameters

`job` IJob

The job instance that has completed execution.

Class TenantJobScheduler

Namespace: [Code7Dev.Organizor.Infrastructure.Quartz](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

Schedules recurring Quartz jobs for tenants stored in the catalog database.

```
public class TenantJobScheduler
```

Inheritance

[object](#)  ← TenantJobScheduler

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Constructors

TenantJobScheduler(CatalogDbContext, ISchedulerFactory)

Initializes a new instance of the [TenantJobScheduler](#) class.

```
public TenantJobScheduler(CatalogDbContext catalog,  
    ISchedulerFactory schedulerFactory)
```

Parameters

`catalog` [CatalogDbContext](#)

The catalog database context used to load tenants.

`schedulerFactory` [ISchedulerFactory](#)

The Quartz scheduler factory used to access the scheduler.

Methods

ScheduleAllTenantsAsync()

DUMMY METHOD FOR TESTING.

```
public Task ScheduleAllTenantsAsync()
```

Returns

[Task](#) 

A task that completes when all tenant jobs have been scheduled.

Namespace Code7Dev.Organizer. Infrastructure.Quartz.Jobs

Classes

[SyncTenantJob](#)

Quartz job that runs tenant-scoped synchronization work.

Class SyncTenantJob

Namespace: [Code7Dev.Organizor.Infrastructure.Quartz.Jobs](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

Quartz job that runs tenant-scoped synchronization work.

```
public class SyncTenantJob : IJob
```

Inheritance

[object](#)  ← SyncTenantJob

Implements

IJob

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Constructors

SyncTenantJob(ITenantContext, OrganizerDbContext, ILogger<SyncTenantJob>)

Initializes a new instance of the [SyncTenantJob](#) class.

```
public SyncTenantJob(ITenantContext tenantContext, OrganizerDbContext tenantDb,  
    ILogger<SyncTenantJob> logger)
```

Parameters

tenantContext [ITenantContext](#)

The tenant context populated before tenant database work runs.

tenantDb [OrganizorDbContext](#)

The tenant database context resolved for the current tenant.

logger [ILogger](#) <[SyncTenantJob](#)>

The logger used to record job execution details.

Methods

Execute(IJobExecutionContext)

Reads tenant identity from Quartz job data, sets the tenant context, and runs synchronization work.

```
public Task Execute(IJobExecutionContext context)
```

Parameters

context [IJobExecutionContext](#)

Quartz execution context containing the tenant job data.

Returns

[Task](#)

A task that completes when the tenant synchronization work has finished.

Namespace Code7Dev.Organizor. Infrastructure.Tenancy.Helpers

Classes

[TenantDbNaming](#)

Class TenantDbNaming

Namespace: [Code7Dev.Organizor.Infrastructure.Tenancy.Helpers](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

```
public static class TenantDbNaming
```

Inheritance

[object](#)  ← TenantDbNaming

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.MemberwiseClone\(\)](#)  ,
[object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Methods

ToDbName(string)

```
public static string ToDbName(string slug)
```

Parameters

slug [string](#) 

Returns

[string](#) 

Namespace Code7Dev.Organizor. Infrastructure.Tenancy.Interfaces

Interfaces

[ITenantContext](#)

[ITenantDatabaseResolver](#)

Interface ITenantContext

Namespace: [Code7Dev.Organizor.Infrastructure.Tenancy.Interfaces](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

```
public interface ITenantContext
```

Properties

Current

```
TenantInfo? Current { get; }
```

Property Value

[TenantInfo](#)

IsResolved

```
bool IsResolved { get; }
```

Property Value

[bool](#)

Methods

Clear()

```
void Clear()
```

SetTenant(TenantInfo)

```
void SetTenant(TenantInfo info)
```

Parameters

info [TenantInfo](#)

Interface ITenantDatabaseResolver

Namespace: [Code7Dev.Organizor.Infrastructure.Tenancy.Interfaces](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

```
public interface ITenantDatabaseResolver
```

Methods

GetConnectionString(TenantInfo)

```
string GetConnectionString(TenantInfo tenant)
```

Parameters

tenant [TenantInfo](#)

Returns

[string](#) 

Namespace Code7Dev.Organizor. Infrastructure.Tenancy.Models

Classes

[TenantInfo](#)

Class TenantInfo

Namespace: [Code7Dev.Organizor.Infrastructure.Tenancy.Models](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

```
public sealed record TenantInfo : IEquatable<TenantInfo>
```

Inheritance

[object](#)  ← TenantInfo

Implements

[IEquatable](#)  <[TenantInfo](#)>

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Constructors

TenantInfo(Guid, string)

```
public TenantInfo(Guid Id, string Slug)
```

Parameters

Id [Guid](#) 

Slug [string](#) 

Properties

Id

```
public Guid Id { get; init; }
```

Property Value

[Guid](#)[↗]

Slug

```
public string Slug { get; init; }
```

Property Value

[string](#)[↗]

Namespace Code7Dev.Organizor. Infrastructure.Tenancy.Services

Classes

[ConnectionStringBuilder](#)

[TenantDatabaseManager](#)

[TenantMigrator](#)

[TenantProvisioningWorkflow](#)

Class ConnectionStringBuilder

Namespace: [Code7Dev.Organizor.Infrastructure.Tenancy.Services](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

```
public sealed class ConnectionStringBuilder : IConnectionStringBuilder
```

Inheritance

[object](#)  ← ConnectionStringBuilder

Implements

[IConnectionStringBuilder](#)

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Constructors

ConnectionStringBuilder(IConfiguration)

```
public ConnectionStringBuilder(IConfiguration config)
```

Parameters

config [IConfiguration](#) 

Methods

BuildAdminConnectionString()

Builds an administrative PostgreSQL connection string used for database creation and deletion.


```
public string BuildAdminConnectionString()
```

Returns

[string](#) 

A PostgreSQL connection string targeting the admin database.

BuildConnectionString(string)

Builds a connection string for a specific PostgreSQL database.

```
public string BuildConnectionString(string databaseName)
```

Parameters

databaseName [string](#) 

Database name to connect to.

Returns

[string](#) 

A PostgreSQL connection string.

ExtractDatabaseName(string)

Extracts the database name from a PostgreSQL connection string.

```
public string ExtractDatabaseName(string connectionString)
```

Parameters

connectionString [string](#) 

Connection string to inspect.

Returns

[string](#) 

The database name from the connection string.

Class TenantDatabaseManager

Namespace: [Code7Dev.Organizor.Infrastructure.Tenancy.Services](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

```
public sealed class TenantDatabaseManager : ITenantDatabaseManager
```

Inheritance

[object](#)  ← TenantDatabaseManager

Implements

[ITenantDatabaseManager](#)

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Constructors

TenantDatabaseManager(ILogger<TenantDatabaseManager>, IConnectionStringBuilder)

```
public TenantDatabaseManager(ILogger<TenantDatabaseManager> logger,  
IConnectionStringBuilder csBuilder)
```

Parameters

logger [ILogger](#)  <[TenantDatabaseManager](#)>

csBuilder [IConnectionStringBuilder](#)

Methods

CreateDatabaseAsync(string, CancellationToken)

Creates a tenant database when it does not already exist.

```
public Task CreateDatabaseAsync(string databaseName, CancellationToken ct
= default)
```

Parameters

databaseName [string](#)

Tenant database name to create.

ct [CancellationToken](#)

Cancellation token.

Returns

[Task](#)

DropDatabaseAsync(string, CancellationToken)

Drops a tenant database.

```
public Task DropDatabaseAsync(string databaseName, CancellationToken ct
= default)
```

Parameters

databaseName [string](#)


Tenant database name to drop.

ct [CancellationToken](#)

Cancellation token.

Returns

[Task](#)

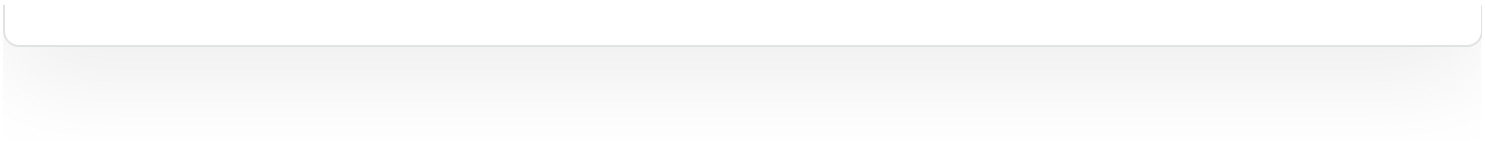

Class TenantMigrator

Namespace: [Code7Dev.Organizor.Infrastructure.Tenancy.Services](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

```
public sealed class TenantMigrator : ITenantMigrator
```

Inheritance

[object](#)  ← TenantMigrator

Implements

[ITenantMigrator](#)

Inherited Members

[object.Equals\(object\)](#) , [object.Equals\(object, object\)](#) , [object.GetHashCode\(\)](#) ,
[object.GetType\(\)](#) , [object.ReferenceEquals\(object, object\)](#) , [object.ToString\(\)](#) 

Constructors

TenantMigrator(IConnectionStringBuilder,
ILogger<TenantMigrator>)

```
public TenantMigrator(IConnectionStringBuilder csBuilder,  
    ILogger<TenantMigrator> logger)
```

Parameters

csBuilder [IConnectionStringBuilder](#)

logger [ILogger](#)  <[TenantMigrator](#)>

Methods

MigrateAsync(string, CancellationToken)

Applies pending migrations to the tenant database.

```
public Task<TenantMigrationResult> MigrateAsync(string tenantDbName,  
Cancellation token ct = default)
```

Parameters

tenantDbName [string](#) 

Tenant database name.

ct [CancellationToken](#) 

Cancellation token.

Returns

[Task](#)  [<TenantMigrationResult>](#)

Migration result with success state, duration, and error details.

Class TenantProvisioningWorkflow

Namespace: [Code7Dev.Organizor.Infrastructure.Tenancy.Services](#)

Assembly: Code7Dev.Organizor.Infrastructure.dll

```
public sealed class TenantProvisioningWorkflow : ITenantProvisioningWorkflow
```

Inheritance

[object](#)  ← TenantProvisioningWorkflow

Implements

[ITenantProvisioningWorkflow](#)

Inherited Members

[object.Equals\(object\)](#)  , [object.Equals\(object, object\)](#)  , [object.GetHashCode\(\)](#)  ,
[object.GetType\(\)](#)  , [object.ReferenceEquals\(object, object\)](#)  , [object.ToString\(\)](#) 

Constructors

TenantProvisioningWorkflow(ITenantDatabaseManager, ITenantMigrator)

```
public TenantProvisioningWorkflow(ITenantDatabaseManager dbManager,  
ITenantMigrator migrator)
```

Parameters

dbManager [ITenantDatabaseManager](#)

migrator [ITenantMigrator](#)

Methods

ExecuteAsync(Tenant, CancellationToken)

Creates the tenant database and applies tenant migrations.

```
public Task<ProvisioningResult> ExecuteAsync(Tenant tenant,  
Cancellation token ct)
```

Parameters

tenant [Tenant](#)

Tenant catalog record to provision.

ct [CancellationToken](#) 

Cancellation token.

Returns

[Task](#)  [ProvisioningResult](#)

Provisioning result.