

# Software Engineering Project

**DispatchNet:**

Alessio Zanon

Leonardo Tonetta

Luca Fiorini

*User Flow & Implementation Analysis*

# Contents

|                                       |          |
|---------------------------------------|----------|
| Purpose . . . . .                     | 3        |
| <b>1 TODO CLEAN CLASS DIAGRAM</b>     | <b>4</b> |
| <b>2 D3</b>                           | <b>5</b> |
| RE: Objectives . . . . .              | 5        |
| Ticketing system . . . . .            | 5        |
| Route-finding . . . . .               | 6        |
| Virtual board . . . . .               | 6        |
| Rail system modeling . . . . .        | 6        |
| RE: Stakeholders . . . . .            | 7        |
| Internal . . . . .                    | 7        |
| Human . . . . .                       | 7        |
| Human . . . . .                       | 7        |
| External . . . . .                    | 7        |
| Human . . . . .                       | 7        |
| Non-human . . . . .                   | 7        |
| 2.1 Class Diagram . . . . .           | 8        |
| 2.2 Project Structure . . . . .       | 10       |
| 2.3 Architecture . . . . .            | 11       |
| 2.4 Implementation Language . . . . . | 12       |
| 2.5 Documentation . . . . .           | 12       |
| 2.6 Project Dependencies . . . . .    | 12       |
| 2.7 Database . . . . .                | 12       |
| 2.8 User Flows . . . . .              | 15       |
| 2.8.1 User Management . . . . .       | 15       |
| 2.8.2 Ticketing . . . . .             | 17       |
| 2.8.3 Passenger . . . . .             | 18       |
| 2.8.4 Train Company . . . . .         | 19       |

|       |                           |    |
|-------|---------------------------|----|
| 2.8.5 | Network Manager . . . . . | 20 |
| 2.9   | APIs . . . . .            | 21 |
| 2.10  | GitHub repo . . . . .     | 21 |
| 2.11  | Code Preview . . . . .    | 21 |
| 2.12  | Team roles . . . . .      | 21 |

## Readability notes

**Bold** words are system-important constructs.

Underlined nouns are actors of the system.

*Italic* words are special keywords to denote important limits of the project.

[Hyperlinks](#) in reference to sections and subsections will be blue.

[Hyperlinks](#) to external web content will be in magenta.

## Purpose

This document describes all the relevant information regarding the development of Project "TRE", which implements a rail transport management system.

It focuses on our current mock implementation and provides considerations towards it's current architecture and how it relates to a ideal final product.

Specifically, we outline:

- User flows related to the actions performed by all users.
- The Class Diagram of our current implementation.
- The ideal properties of the final implementation's API.
- Internal Interfaces that aim to mimic the behavior real-world external APIs.
- The documentation of the implemented processes.
- Important implementation decisions taken.

# Chapter 1

## TODO CLEAN CLASS DIAGRAM

Original, up-to-date files of D1 and D2 available at our [Github here](#) and [Github here](#) respectively

# Chapter 2

## D3

### RE: Objectives

A major European rail infrastructure manager received an idea for a unified rail service scheduling and ticketing system, and has chosen us to prototype a trial run, over multiple regions in their network.

Thus, the project provides a platform that covers the needs of both passengers and train companies, as well as an underlying management system of any regional-sized rail network, which supports network managers in its administration.

It provides a set of functionalities which support the planning of train travel. The system lets passengers discover paths, view scheduling and manage tickets. On the other side, it lets train companies introduce train services and network managers administer the network.

The project coordinates the functionalities for each stakeholder into a solution that has been identified in an application accessible for the aforesaid users.

The main objectives of the project are:

#### **Ticketing system**

Subsystem which deals with tickets, from the search to the possible actions after the purchase. It includes basic operations that the passenger can perform, such as:

- Viewing tickets details.
- Purchase.
- Accessing tickets history.
- Cancellation.

## Route-finding

The system shall let passengers select a starting station, a destination station, and either a departure time or arrival time.

It computes and ranks possible **routes** that best fit the user's request and permissions (for example, not permitting cargo trains to passengers).

The user must be able to compare the options based on:

- Departure and arrival times.
- Number of transfers.
- Possible transfer locations.

## Virtual board

The system provides passengers access to departure and arrival boards for any station. It also shows intermediate stations and scheduled times for each individual train service.

## Rail system modeling

The system provides a data-driven approach to rail network modelling, supporting an efficient administration of the infrastructure.

It shall support:

- Management of the network by the network manager.
- Management of rolling stock by the network manager.
- Submission of a new service request by train companies.
- Review of a service request by the network manager.

## RE: Stakeholders

### Internal

#### Human

Network managers:, the product owner. They manage the rail network combining the availability of train companies with passengers' needs.

They are the primary stakeholders for making functional decisions.

#### Non-Human

Database, where all the information used by the application are stored.

### External

#### Human

Passengers, the main end users. They want to streamline their interactions with the train transport system, including:

- Searching for routes and schedules.
- Analyzing departure/arrival boards as well as train information.
- Purchasing tickets.

Train companies, who provide the rolling stock. They request the introduction of services. They are also expected to provide information of trains they ask to be managed.

Anonymous users, who have not yet authenticated. They are considered as passengers with restricted access to functionalities that require authentication.


#### Non-human

Payment gateway, which provides the underlying payment methods.



## 2.1 Class Diagram

In the following image, the updated class diagram, changed in order to take advantage of the Java language and to accommodate the implementation.

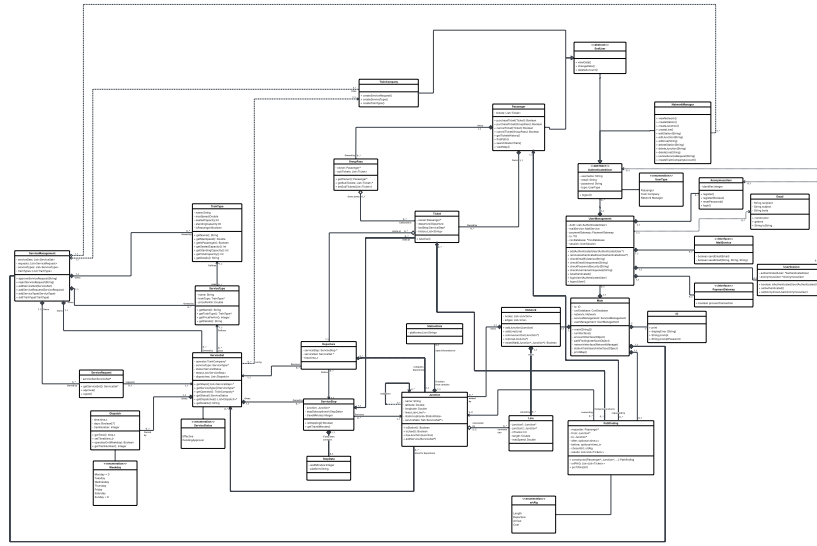

Original image can be found on our [Github here](#)

We introduced the following classes:


- Email: used by the UserManagement class to send an Email through a MailService;
- MailService: interface defining the necessary methods for a real MailService, such as the MockMailService implemented in the code;
- PaymentGateway: interface defining the necessary methods for a real PaymentGateway, such as the MockPaymentGateway implemented in the code;
- UserSession: for simplicity we changed to focus of the application on one user at a time. This class is used to keep track of the current user that is using the program;
- IO: class used to group function to interact with the user;
- CsvDatabase: not shown because ideally it is implemented with an external SQL server.

We added attributes concerning the classes that have been introduced in UserManagement, removed getter and setter for better readability.

The updated descriptions of the classes can be found on the [Documentation](#). TODO add link to section

## 2.2 Project Structure

In the following is shown the structure of the project.

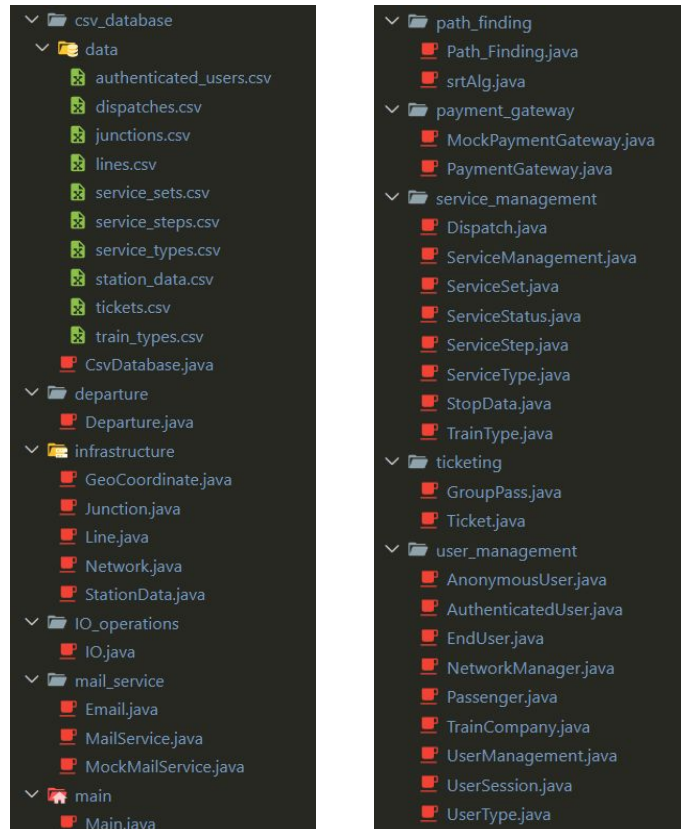

Original image can be found on our [Github here](#)

It is composed of:

- the main modules:
  - departure: a specific service departing from a junction at a given time.;
  - infrastructure: the network and its management;
  - main: contains the runnable class, which implement the interface;
  - path\_finding: the algorithm to find a path between stations;
  - service\_management: the management of services;

- ticketing: managemet of tickets information;
- user\_management: the management of users and their authentication.
- secondary tools:
  - csv\_database: the actual database and its management;
  - IO\_operations: input/output operation to interact with the user from terminal;
  - mail\_service: integration with a possible mail service, as well as a temporary mock one;
  - payment\_gateway: integration with a possible payment service, as well as a temporary mock one.

## 2.3 Architecture

The project is intended, in its platonic ideal, as a Client-server structure, where the client shoulders only the user interface and requests to the server, who instead is responsible for the actualy interfacing with the database and computing the responses.

Thanks to our chosen [Implementation Language](#), the Client may be nearly any device capable of general computing, and thus we want to minimize the client-side device requirements to fully exploit our great portability.

Thus, the client is expected to perform only to the relatively light work of displaying responses and forming requests with user input to send the central server.

Not beholden to such limitations, the central server must then receive requests and perform the computatonally expensive operations, chief among them the weighted-graph-traversal over the train network, but also loading and handling the information from the database.

Due to both skill and time limitations, the project is implemented as a temporary measure in a monolithic form, while still taking care to expect and enforce the necessary separation and operations for a hypothetical future division and upgrade to a client-server system ready for deployment.

## 2.4 Implementation Language

We chose **Java** for the operational part.

Our motivation for **Java** was the extreme portability and the very module-friendly structure, allowing us to experiment and tinker with different implementations of the same expected behaviour in a plug-and-play fashion. As described in the [Team roles](#) we splitted the work in modules from the beginning, so the modularity of **Java** came natural. The garbage collector feature of **Java** also ensures us to spend more time working of the functioning of our systems rather than the management of their lifetimes.

## 2.5 Documentation

**Doxygen** was chosen due to its in-built support for **Java** development and for its low overhead cost during code development, as the comment-tag system is very time efficient, while still being very sight-readable in the code files.

It is available at our github at the following [link](#).

## 2.6 Project Dependencies

- JDK v25.0.3 or above

## 2.7 Database

To save data between different session we used a database saved as several CSV files.

It will be loaded at startup, containing at least the account of the network manager, with default information. The data will be managed within the code and saved to the database only at the end of the program.

Therefore, the number of entries for each file is variable. Wherever a list was needed, we used the convention of separating with ";" the elements of the list, which is put within a single field.

The database contains one file for each set of data:

- authenticated users,

- dispatches,
- junctions,
- lines,
- service\_sets,
- service\_types,
- station data,
- tickets,
- train\_types.

The following files can be found for better readability in [GitHub](#)

The authenticated user contains data used for authentication and functionality selection based on the type of user. It contains the following fields:

```
id,username,email,password,userType
0e3c90bc-0861-4019-8e82-8b56c0275106,Admin,admin@dispatchnet.it,VerySecurePassword1234,NetworkManager
```

Original image can be found on our [Github here](#)

The dispatch contains information to identify services and schedule it within a week .

The field runningDays is a list. It moreover contains the following fields:

```
serviceSetId,trainNumber,dispatchTime,runningDays
75a4546d-6b6b-41c3-b823-ae25be53637e,1001,05:04,WEDNESDAY;TUESDAY;FRIDAY;THURSDAY;MONDAY;SATURDAY
```

Original image can be found on our [Github here](#)

The junction contains data of the physical junction or station (considered as junction).

The field StationDataId is optional. It contains the following fields:

```
id,name,latitude,longitude,stationDataId
bbf88b8f-97cf-4c84-b43b-198cccf5a9fb,Trento,46.072194035019535,11.118837720509594,699e0587-7686-473c-9e72-70f1de3361a1
```

Original image can be found on our [Github here](#)

The line contains data used to know the length and service consistency checks. It contains the following fields:

```
id,junction1Id,junction2Id,lengthMeters,maxSpeedKph,nTracks
84a99b0c-fc4b-4338-9af1-5568cb80b8cf,bbf88b8f-97cf-4c84-b43b-198cccf5a9fb,1ef67fd5-9fb3-4315-9125-5394ef91a750,3100,50,1
```

Original image can be found on our [Github here](#)

The service set contains information related to its status. It contains the following fields:

```
id,companyId,serviceTypeId,status,isRequest  
7504546d-6b6b-41c3-b823-ae25be53037e,beb82c42-5ee6-41dd-8888-a2744364d45a,a156105f-e0f1-41db-8386-35cfb147cb7a,Effective,false
```

Original image can be found on our [Github here](#)

The service step contains data related to one step of the service. The field platform is a list. It contains the following fields:

```
id,serviceSetId,stepIndex,junctionId,travelMinutes,platform,waitMinutes  
0a1c4f16-c96b-42ce-83cb-9651a9581703,7504546d-6b6b-41c3-b823-ae25be53037e,0,bbf88b8f-97cf-4c84-b43b-198cccf5a9fb,0,1 Tronco Sud,1
```

Original image can be found on our [Github here](#)

The service type contains the following fields:

```
id,commercialName,trainTypeIdentifier,centsPerKm  
a156105f-e0f1-41db-8386-35cfb147cb7a,REG,Minuetto,50
```


Original image can be found on our [Github here](#)

The station data contains details of a station. The field platform is a list. It contains the following fields:

```
id,junctionId,platforms  
6fdf3c23-cd1d-46ce-8363-6d9104a8dd9f,1ef67fd5-9fb3-4315-9125-5394ef91a75e,1
```

Original image can be found on our [Github here](#)

The ticket contains the following fields:

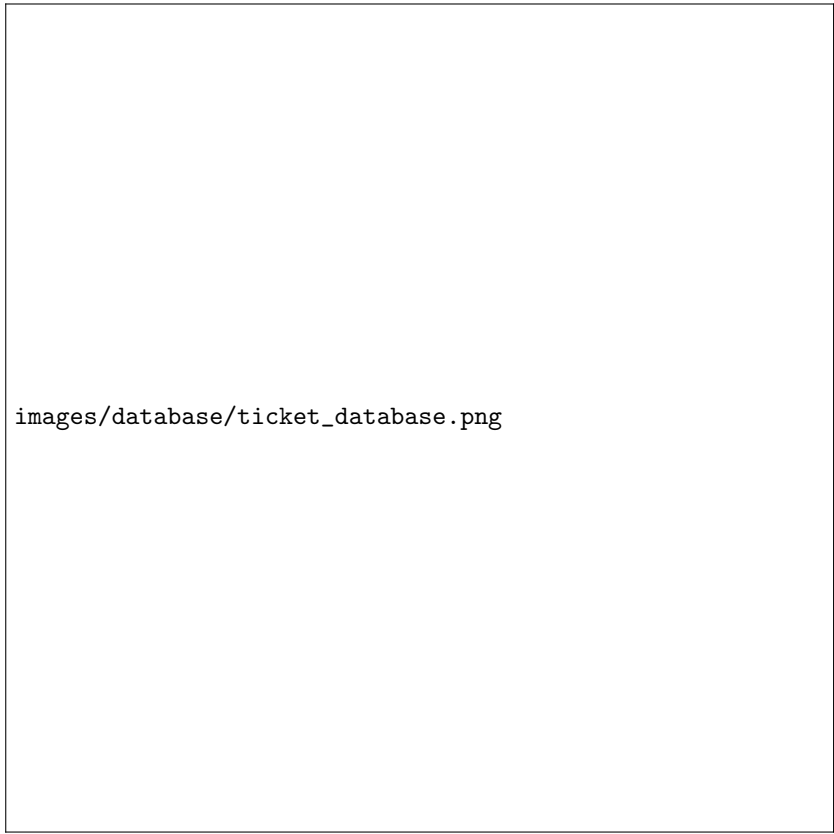

images/database/ticket\_database.png

Original image can be found on our [Github here](#)

TODO add ticket row

The train type contains information related to the physical train. It contains the following fields:

```
identifier,seatedCapacity,standingCapacity,isPassenger  
Minuetto,120,50,true
```

Original image can be found on our [Github here](#)

## 2.8 User Flows


### 2.8.1 User Management

The following user diagram describes the actions related to the user management and user authentication, common to all the users.



It provides different pages depending on the type of user. An authenticated user (I.E. passenger or train company, not network manager) can delete, view data (Account Page), change data or logout (also the network manager).


An anonymous user can register, reset its password or login.

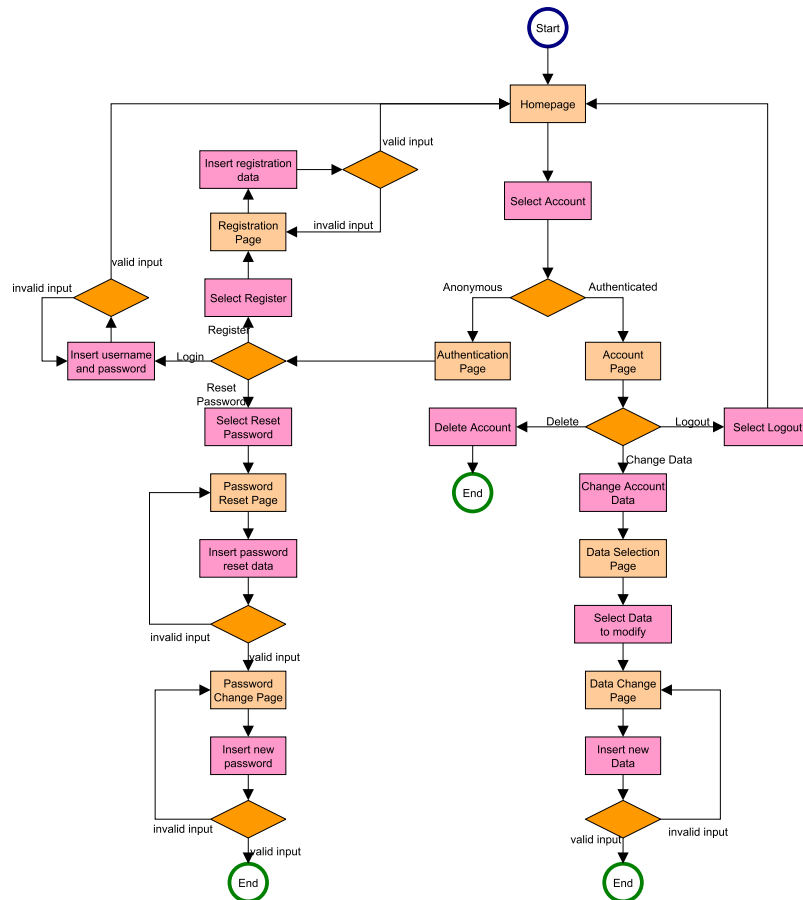

Original image can be found on our [Github here](#)

## 2.8.2 Ticketing

The following user diagram describes the flow of the ticketing component, started from the [Passenger](#)'s diagram.

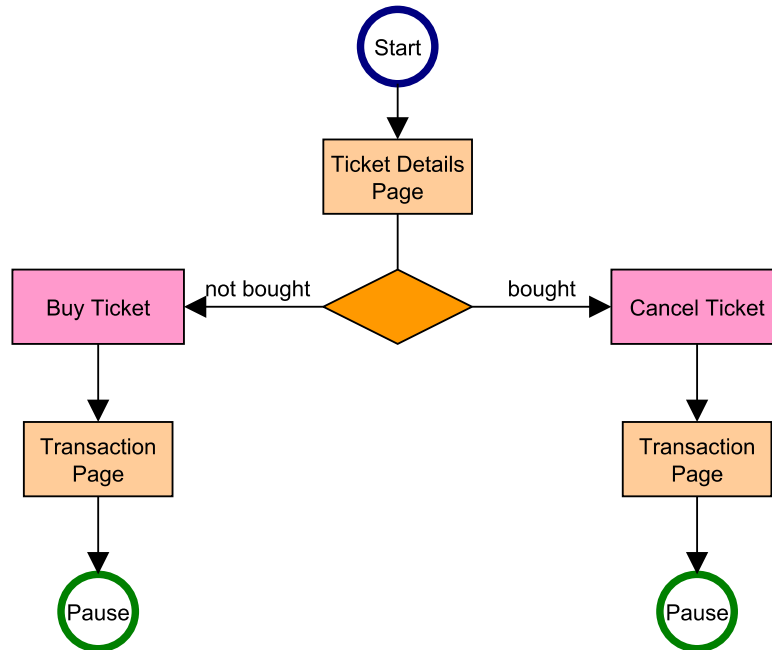


Original image can be found on our [Github here](#)



## 2.8.4 Train Company


The following user diagram describes the actions the train company can take. It can go to [User Management](#) or to the service management.

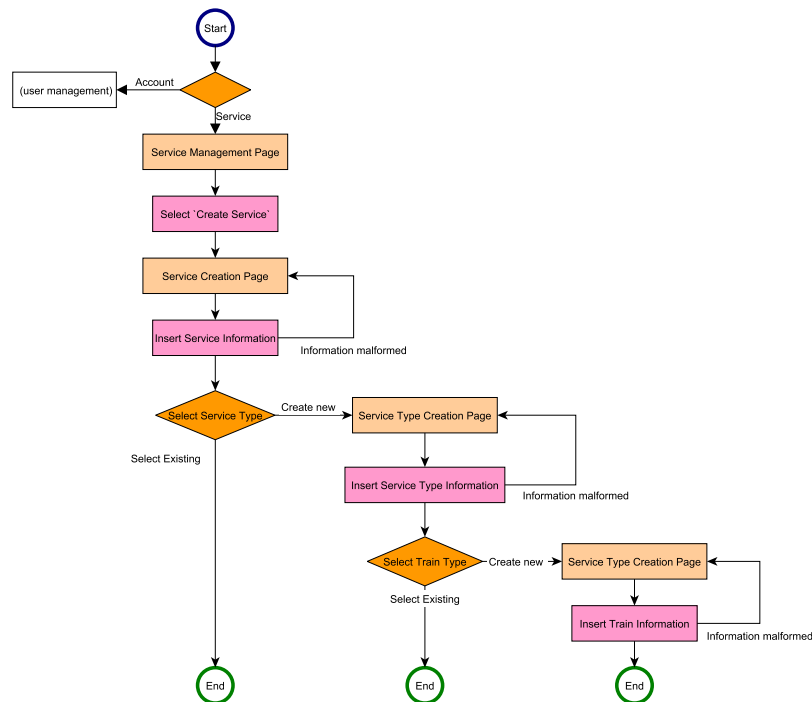

Original image can be found on our [Github here](#)

## 2.8.5 Network Manager

The following user diagram describes the actions the network manager can take: managing the network and its elements ore creating a new account for a train company.

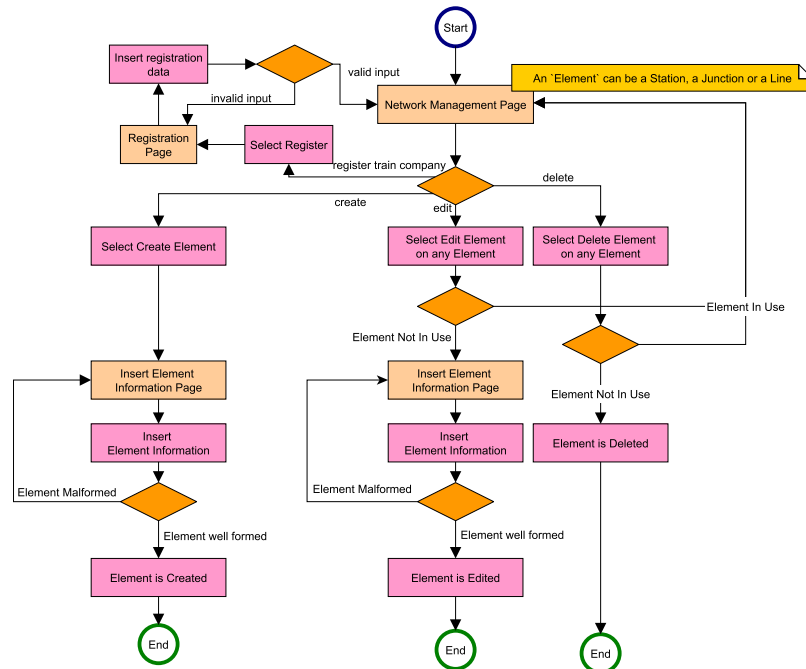

Original image can be found on our [Github here](#)

## 2.9 APIs

As this is a mock implementation, no real API has been implemented. Instead, we opted to build fake endpoints in the form of methods, so we could test the validity of our underlying data model. All client-facing operations are found within the **UserManagement** package, in the form of class methods grouped by their relevant user. The final implementation is planned to be a REST API and will adhere to the OpenAPI standard.

External APIs have been modeled as interfaces with mock implementations. The interface paradigm allows us to use valid invocations towards a fake implementation that can easily be swapped at a later date by a real implementation. Specifically, we have implemented the following fake external APIs

- **mail\_service**: The mail service
  - Interface: **MailService**
  - Mock implementation: **MockMailService**
- **payment\_gateway**: The payment gateway
  - Interface: **PaymentGateway**
  - Mock implementation: **MockPaymentGateway**

The mock implementation of payment gateway also has non-deterministic behavior allowing us to test adequate handling of real-world failure conditions.

## 2.10 GitHub repo

All the codes, images and documentation can be found at our [GitHub](#)

## 2.11 Code Preview

## 2.12 Team roles

We divided the project into 3 natural modules, so that everyone worked on every aspect of software engineering flow. Following, specific Roles and

## Activities

Table 2.1: Roles and Activities

| <b>Team member</b> | <b>modules</b>                                | <b>Roles and Activities</b>                                                    |
|--------------------|-----------------------------------------------|--------------------------------------------------------------------------------|
| Alessio Zanon      | Path finding, Info view, Ticketing            | Latex expert                                                                   |
| Leonardo Tonetta   | User authentication and management, Ticketing | Team leader: monitoring deadlines, submitting deliverables, scheduling meeting |
| Luca Fiorini       | Network and Service management                | Railway expert                                                                 |

Table 2.2: Workload and distribution

| <b>Team member</b> | <b>D1</b> | <b>D2</b> | <b>D3</b> |
|--------------------|-----------|-----------|-----------|
| Alessio Zanon      | 34        | 33        | 33        |
| Leonardo Tonetta   | 33        | 34        | 33        |
| Luca Fiorini       | 33        | 33        | 34        |