

## REST - Get all countries

Code:

### CountryController.java – Controller Package

```
package com.cognizant.spring_learn.controller;

import com.cognizant.spring_learn.model.Country;
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.context.ApplicationContext;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.RequestMapping;
import org.springframework.web.bind.annotation.RestController;

import java.util.ArrayList;
import java.util.List;

@RestController
public class CountryController {

    @Autowired
    private ApplicationContext context;

    @RequestMapping("/country")
    public Country getCountryIndia() {

        return (Country) context.getBean("india");
    }

    @GetMapping("/countries")
    public List<Country> getAllCountries() {

        List<Country> countryList = new ArrayList<>();

        countryList.add((Country) context.getBean("india"));
        countryList.add((Country) context.getBean("usa"));
        countryList.add((Country) context.getBean("japan"));
        countryList.add((Country) context.getBean("germany"));

        return countryList;
    }
}
```

## country.xml

```
<?xml version="1.0" encoding="UTF-8"?>

<beans xmlns="http://www.springframework.org/schema/beans"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="
    http://www.springframework.org/schema/beans
    https://www.springframework.org/schema/beans/spring-beans.xsd">

  <!-- India -->
  <bean id="india" class="com.cognizant.spring_learn.model.Country">
    <property name="code" value="IN"/>
    <property name="name" value="India"/>
  </bean>

  <!-- United States -->
  <bean id="usa" class="com.cognizant.spring_learn.model.Country">
    <property name="code" value="US"/>
    <property name="name" value="United States"/>
  </bean>


  <!-- Japan -->
  <bean id="japan" class="com.cognizant.spring_learn.model.Country">
    <property name="code" value="JP"/>
    <property name="name" value="Japan"/>
  </bean>

  <!-- Germany -->
  <bean id="germany" class="com.cognizant.spring_learn.model.Country">
    <property name="code" value="DE"/>
    <property name="name" value="Germany"/>
  </bean>

</beans>
```

Output:

Postman Testing:

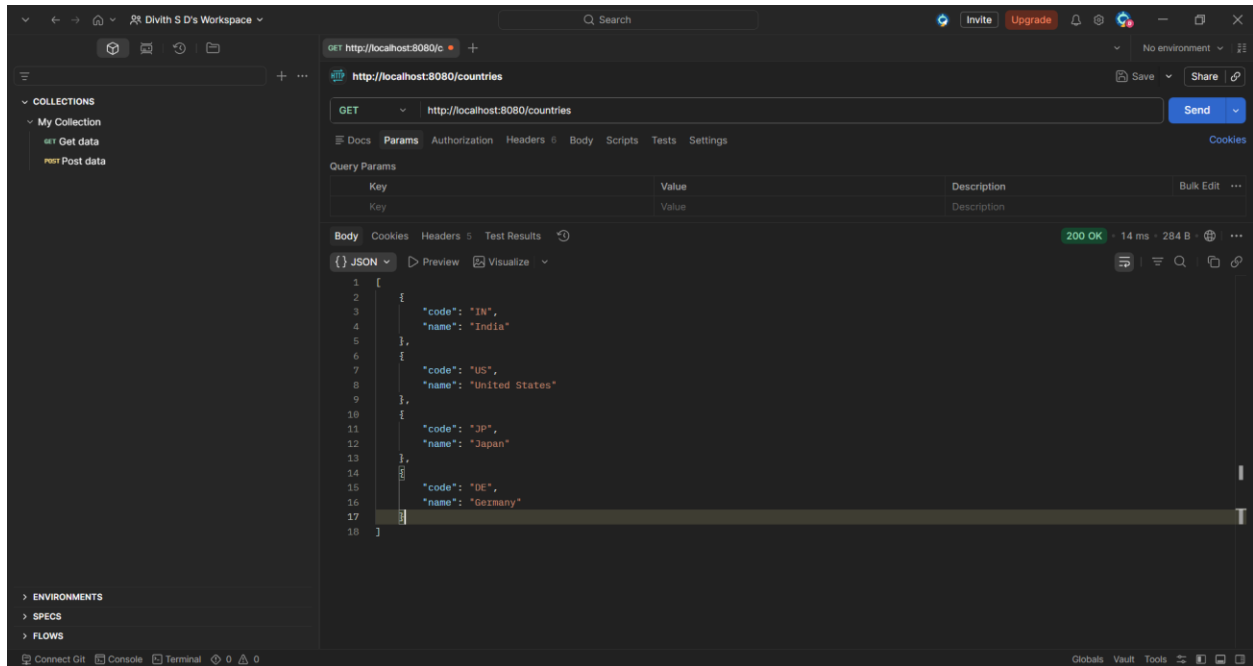

Web Browser:

