

Hibernate Annotation Config implementation

Code:

Employee.java

```
package com.cognizant.hibernate;

import jakarta.persistence.Column;
import jakarta.persistence.Entity;
import jakarta.persistence.GeneratedValue;
import jakarta.persistence.GenerationType;
import jakarta.persistence.Id;
import jakarta.persistence.Table;

@Entity
@Table(name="employee")
public class Employee {

    @Id
    @GeneratedValue(strategy = GenerationType.IDENTITY)
    private int id;

    @Column(name="name")
    private String name;

    @Column(name="salary")
    private double salary;

    public int getId() {
        return id;
    }

    public void setId(int id) {
        this.id = id;
    }

    public String getName() {
        return name;
    }
}
```

```

    public void setName(String name) {
        this.name = name;
    }

    public double getSalary() {
        return salary;
    }

    public void setSalary(double salary) {
        this.salary = salary;
    }

    @Override
    public String toString(){

        return "Employee{" +
            "id=" + id +
            ", name='" + name + '\'' +
            ", salary=" + salary +
            '}';

    }

}

```

HibernateTest.java

```

package com.cognizant.hibernate;

import java.util.List;

import org.hibernate.Session;
import org.hibernate.SessionFactory;
import org.hibernate.Transaction;
import org.hibernate.cfg.Configuration;

public class HibernateTest {

    public static void main(String[] args) {

```

```
// Step 1: Load Hibernate Configuration

Configuration configuration =
    new Configuration();

configuration.configure("hibernate.cfg.xml");


// Step 2: Create SessionFactory

SessionFactory factory =
    configuration.buildSessionFactory();


// Step 3: Open Session

Session session =
    factory.openSession();


try {

    // CREATE

    saveEmployee(session);


    // READ ONE

    getEmployee(session, 1);


    // READ ALL

    getAllEmployees(session);


    // DELETE

    deleteEmployee(session, 1);

}

catch (Exception e) {
```

```
        e.printStackTrace();

    }

    finally {

        session.close();

        factory.close();

    }

}

/*
 * CREATE OPERATION
 * session.save()
 */

private static void saveEmployee(Session session){

    Transaction transaction =
        session.beginTransaction();

    Employee employee =
        new Employee();

    employee.setName("Alex");

    employee.setSalary(70000);

    session.save(employee);

    transaction.commit();

    System.out.println(
        "Employee saved successfully"
    );
}
```

```
}

/*
 * READ SINGLE RECORD
 * session.get()
 */

private static void getEmployee(
    Session session,
    int id){

    Employee employee =
        session.get(
            Employee.class,
            id
        );

    if(employee != null){

        System.out.println(employee);

    }
    else{

        System.out.println(
            "Employee not found"
        );

    }

}

/*
 * READ ALL RECORDS
 * session.createQuery().list()
 */
```

```
private static void getAllEmployees(
    Session session){

    List<Employee> employees =
        session.createQuery(
            "from Employee",
            Employee.class
        ).list();

    System.out.println(
        "All Employees"
    );

    for(Employee employee: employees){

        System.out.println(employee);

    }

}
```

```
/*
 * DELETE OPERATION
 * session.delete()
 */
```

```
private static void deleteEmployee(
    Session session,
    int id){

    Transaction transaction =
        session.beginTransaction();

    Employee employee =
        session.get(
            Employee.class,
            id
```

```
        );

        if(employee != null){

            session.delete(employee);

            System.out.println(
                "Employee deleted"
            );

        }
        else{

            System.out.println(
                "Employee not found"
            );


        }

        transaction.commit();

    }

}
```

Output:

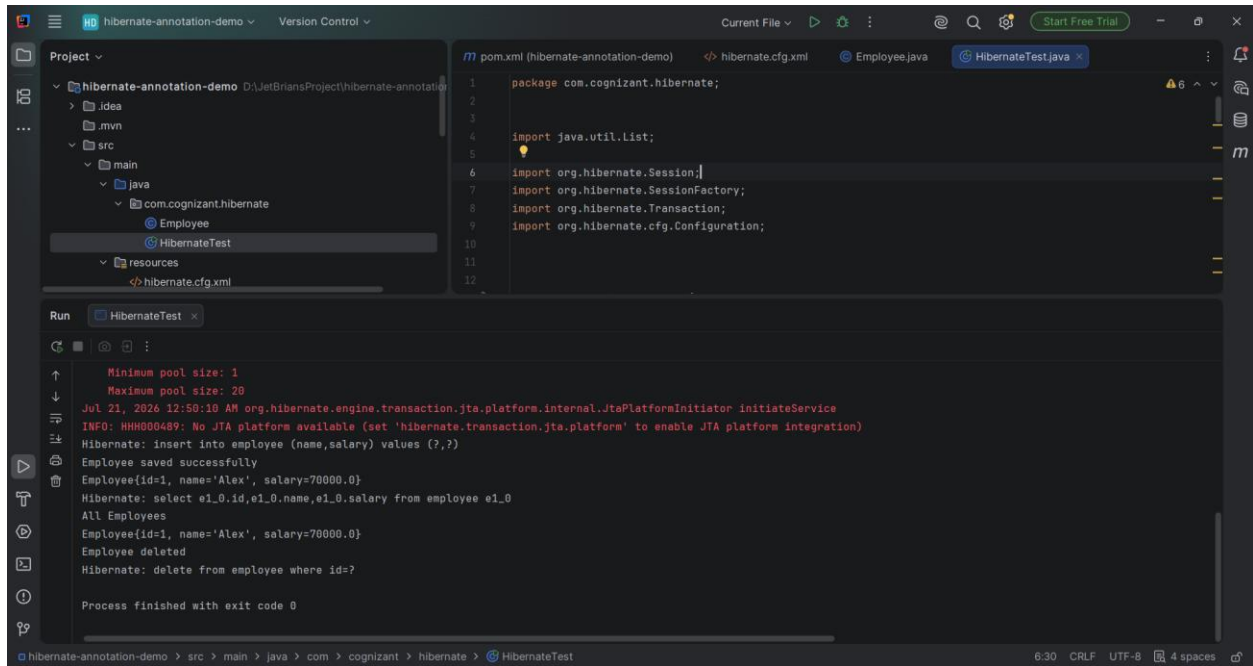

```
hibernate-annotation-demo  Version Control  Current File  Start Free Trial
```

```
Project ▾
  ▾ hibernate-annotation-demo D:\JetBrainsProject\hibernate-annotation
    ▾ .idea
    ▾ .mvn
    ▾ src
      ▾ main
        ▾ java
          ▾ com.cognizant.hibernate
            Employee
            HibernateTest
          ▾ resources
            hibernate.cfg.xml
```

```
m pom.xml (hibernate-annotation-demo)  hibernate.cfg.xml  Employee.java  HibernateTest.java
1  package com.cognizant.hibernate;
2
3
4  import java.util.List;
5
6  import org.hibernate.Session;
7  import org.hibernate.SessionFactory;
8  import org.hibernate.Transaction;
9  import org.hibernate.cfg.Configuration;
10
11
12
```

```
Run  HibernateTest x
```

```

  Minimum pool size: 1
  Maximum pool size: 20
Jul 21, 2026 12:50:10 AM org.hibernate.engine.transaction.jta.platform.internal.JtaPlatformInitiator initiateService
INFO: HHH0000489: No JTA platform available (set 'hibernate.transaction.jta.platform' to enable JTA platform integration)
Hibernate: insert into employee (name,salary) values (?,?)
Employee saved successfully
Employee{id=1, name='Alex', salary=70000.0}
Hibernate: select e1_0.id,e1_0.name,e1_0.salary from employee e1_0
All Employees
Employee{id=1, name='Alex', salary=70000.0}
Employee deleted
Hibernate: delete from employee where id=?

Process finished with exit code 0
```

```
hibernate-annotation-demo > src > main > java > com > cognizant > hibernate > HibernateTest 6:30 CRLF UTF-8 4 spaces
```