

Practical:10

AIM- Create an application to create JSON URL for Contact which have field(id, Name (First Name, Last Name), Phone No, Address) and should be minimum five contact details & display received contact data in RecyclerView. Add Google Map Activity which displays location which is received in JSON Data in google Maps activity and set the zoom level to 10.

To Generate JSON Data, Refer: <https://app.json-generator.com/>

1. Create MainActivity according to below UI design.
2. Use link generated from website for JSON Data
3. Create MapActivity by using this [instructions](#).
4. Create Class Person with member Variables like id, Name, Phone No, Email Id, Address, Latitude, Longitude. This class should be inherited from Serializable class.
5. Generate JSON data format according to below image.
6. Use RecyclerView or ListView Adapter
7. Add Internet Permission in Manifest file
8. Create Class HttpRequest for communicating with Web URL

Submitted By :- Divy Patel
Enrollment number :- 21012011072

Activity_main.xml :-

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MainActivity">

    <TextView
        android:id="@+id/textView1"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_margin="20dp"
        android:text="@string/app_name"
        android:textSize="20sp"
        android:textAppearance="?attr/textAppearanceHeadline6"
        app:layout_constraintStart_toStartOf="parent"
        app:layout_constraintTop_toTopOf="parent" />

    <ListView
        android:id="@+id/listview_main"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        app:layout_constraintTop_toBottomOf="@+id/textView1"
        app:layout_constraintEnd_toEndOf="parent">

    </ListView>

    <com.google.android.material.floatingactionbutton.FloatingActionButton
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:id="@+id/autorenew_btn"
        android:src="@drawable/baseline_autorenew_24"
        app:layout_constraintBottom_toBottomOf="parent"
        app:layout_constraintEnd_toEndOf="parent"
        android:layout_marginBottom="20dp"
        android:layout_marginEnd="20dp"/>
</androidx.constraintlayout.widget.ConstraintLayout>
```

MainActivity.kt :-

```
package com.example.mad_practical_10_21012011072

import androidx.appcompat.app.AppCompatActivity
import android.os.Bundle
import android.widget.ListView
import com.google.android.material.floatingactionbutton.FloatingActionButton
import kotlinx.coroutines.CoroutineScope
import kotlinx.coroutines.Dispatchers
import kotlinx.coroutines.launch
import kotlinx.coroutines.withContext
import org.json.JSONArray
import org.json.JSONException
import org.json.JSONObject

class MainActivity : AppCompatActivity() {
    private lateinit var personListView : ListView
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        setContentView(R.layout.activity_main)
        val btn= findViewById<FloatingActionButton>(R.id.autorenew_btn)
        btn.setOnClickListener(){
            CoroutineScope(Dispatchers.IO).launch {
                try {
                    val data = HttpRequest().makeServiceCall(
                        "https://api.json-generator.com/templates/qjeKFdjKXCdK/data",
                        "rbn0rerl1k0d3mcwgw7dva2xuwk780z1hxvyvrbl")
                    withContext(Dispatchers.Main) {
                        try {
                            if(data != null)
                                runOnUiThread{getPersonDetailsFromJson(data)}
                        } catch (e: Exception) {
                            e.printStackTrace()
                        }
                    }
                } catch (e: Exception) {
                    e.printStackTrace()
                }
            }
        }
    }

    private fun getPersonDetailsFromJson(sJson: String) {
        val personList = ArrayList<Person>()
        try {
```

```
val jsonArray = JSONArray(sJson)
for (i in 0 until jsonArray.length()) {
    val jsonObject = jsonArray[i] as JSONObject
    val person = Person(jsonObject)
    personList.add(person)
}
val personListView=findViewById<ListView>(R.id.listview_main)
personListView.adapter = PersonAdapter(this, personList)
} catch (ee: JSONException) {
    ee.printStackTrace()
}
}
```

activity_maps.xml :-

```
<?xml version="1.0" encoding="utf-8"?>
<fragment xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:tools="http://schemas.android.com/tools"
    android:id="@+id/map"
    android:name="com.google.android.gms.maps.SupportMapFragment"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    tools:context=".MapsActivity"
    tools:ignore="MissingClass" />
```

MapsActivity.kt :-

```
package com.example.mad_practical_10_21012011072

import androidx.appcompat.app.AppCompatActivity
import android.os.Bundle
import android.util.Log
import com.example.mad_practical_10_21012011072.databinding.ActivityMapsBinding
import com.google.android.gms.maps.CameraUpdateFactory
import com.google.android.gms.maps.GoogleMap
import com.google.android.gms.maps.OnMapReadyCallback
import com.google.android.gms.maps.SupportMapFragment
import com.google.android.gms.maps.model.BitmapDescriptorFactory
import com.google.android.gms.maps.model.LatLng
import com.google.android.gms.maps.model.MarkerOptions
```

Practical:10

```
class MapsActivity : AppCompatActivity(), OnMapReadyCallback {

    private lateinit var mMap: GoogleMap
    private lateinit var binding: ActivityMapsBinding
    private var lat:Double = 0.0
    private var log:Double = 0.0
    private var title = ""
    private val TAG = "MapsActivity"

    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)

        binding = ActivityMapsBinding.inflate(layoutInflater)
        setContentView(binding.root)
        val obj = intent.getSerializableExtra("Object") as Person
        Log.i(TAG, "onCreate: Object: $obj")
        lat = obj.latitude
        log = obj.longitude
        title = obj.name
        val mapFragment = supportFragmentManager
            .findFragmentById(R.id.map) as SupportMapFragment
        mapFragment.getMapAsync(this)
    }

    override fun onMapReady(googleMap: GoogleMap) {
        mMap = googleMap
        mMap.mapType = GoogleMap.MAP_TYPE_SATELLITE
        val sydney = LatLng(lat, log )
        mMap.addMarker(
            MarkerOptions().position(sydney)
                .title(title)
                .snippet(title)
                .icon(BitmapDescriptorFactory.fromResource(R.drawable.img))
        )
        mMap.moveCamera(CameraUpdateFactory.newLatLngZoom(sydney,16.0f))
    }
}
```

contact item.xml :-

```
<?xml version="1.0" encoding="utf-8"?>
<androidx.constraintlayout.widget.ConstraintLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
```

```
android:layout_width="match_parent"
android:layout_height="match_parent">
<com.google.android.material.card.MaterialCardView
    android:id="@+id/materialCardView"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    app:cardCornerRadius="20dp"
    app:cardElevation="20dp"
    app:layout_constraintEnd_toEndOf="parent"
    app:layout_constraintStart_toStartOf="parent"
    app:layout_constraintTop_toTopOf="parent">
    <androidx.constraintlayout.widget.ConstraintLayout
        android:layout_width="match_parent"
        android:layout_height="match_parent"
        android:padding="20dp">

        <com.google.android.material.button.MaterialButton
            android:id="@+id/person_btn"
            android:layout_width="60dp"
            android:layout_height="60dp"
            android:layout_marginStart="15dp"
            android:backgroundTint="@color/cardview_dark_background"
            android:drawableTint="@color/white"
            app:icon="@drawable/baseline_person_24"
            app:iconGravity="textStart"
            app:iconSize="30dp"
            app:layout_constraintBottom_toBottomOf="parent"
            app:layout_constraintStart_toStartOf="parent"
            app:layout_constraintTop_toTopOf="parent" />

        <LinearLayout
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:orientation="vertical"
            app:layout_constraintBottom_toBottomOf="parent"
            app:layout_constraintEnd_toStartOf="@+id/location_btn"
            app:layout_constraintStart_toEndOf="@id/person_btn"
            app:layout_constraintTop_toTopOf="parent">

            <TextView
                android:id="@+id/name_textView"
                android:layout_width="200dp"
                android:layout_height="wrap_content"
                android:layout_marginStart="10dp"
                android:text="John Gill"
                android:textSize="20dp"
                android:textStyle="bold"
```

```
app:layout_constraintBottom_toTopOf="@+id/number_textView"
app:layout_constraintStart_toEndOf="@+id/person_btn"
app:layout_constraintTop_toTopOf="parent" />

<TextView
    android:id="@+id/number_textView"
    android:layout_width="200dp"
    android:layout_height="wrap_content"
    android:layout_marginStart="10dp"
    android:text="+91 7983356739"
    app:layout_constraintBottom_toTopOf="@+id/email_textView"
    app:layout_constraintStart_toStartOf="@+id/name_textView"
    app:layout_constraintTop_toBottomOf="@+id/name_textView" />

<TextView
    android:id="@+id/email_textView"
    android:layout_width="200dp"
    android:layout_height="wrap_content"
    android:layout_marginStart="10dp"
    android:text="john123@gmail.com"
    app:layout_constraintBottom_toTopOf="@+id/address_textView"
    app:layout_constraintStart_toStartOf="@+id/name_textView"
    app:layout_constraintTop_toBottomOf="@+id/number_textView" />

<TextView
    android:id="@+id/address_textView"
    android:layout_width="200dp"
    android:layout_height="wrap_content"
    android:layout_marginStart="10dp"
    android:text="S-2, Someshwar Banglows, \nAhemdabad"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintStart_toStartOf="@+id/number_textView"
    app:layout_constraintTop_toBottomOf="@+id/email_textView" />

</LinearLayout>

<com.google.android.material.button.MaterialButton
    android:id="@+id/location_btn"
    android:layout_width="60dp"
    android:layout_height="60dp"
    android:layout_marginEnd="4dp"
    android:backgroundTint="#0000ff"
    android:drawableTint="@color/white"
    app:icon="@drawable/baseline_location_on_24"
    app:iconGravity="textStart"
    app:iconSize="30dp"
    app:layout_constraintBottom_toBottomOf="parent"
    app:layout_constraintEnd_toEndOf="parent"
```

```
        app:layout_constraintTop_toTopOf="parent" />

        </androidx.constraintlayout.widget.ConstraintLayout>
    </com.google.android.material.card.MaterialCardView>
    <com.google.android.material.divider.MaterialDivider
        android:layout_width="wrap_content"
        android:layout_height="10dp"
        app:layout_constraintTop_toBottomOf="@+id/materialCardView"
        app:layout_constraintStart_toStartOf="parent"
        app:dividerColor="@color/white">
    </com.google.android.material.divider.MaterialDivider>
</androidx.constraintlayout.widget.ConstraintLayout>
```

Person.kt :-

```
package com.example.mad_practical_10_21012011072

import org.json.JSONObject
import java.io.Serializable

class Person (var id: String,
              var name: String,
              var emailId: String,
              var phoneNo: String,
              var address: String,
              var latitude: Double,
              var longitude: Double):Serializable{
    constructor(jsonObject: JSONObject):this("", "", "", "", "", 0.0, 0.0) {
        id = jsonObject.getString("id")
        emailId = jsonObject.getString("email")
        phoneNo = jsonObject.getString("phone")
        val profileJson = jsonObject.getJSONObject("profile")
        name = profileJson.getString("name")
        address = profileJson.getString("address")
        val locationJson = profileJson.getJSONObject("location")
        latitude = locationJson.getDouble("lat")
        longitude = locationJson.getDouble("long")
    }
}
```

PersonAdapter.kt :-

Practical:10

```
package com.example.mad_practical_10_21012011072

import android.annotation.SuppressLint
import android.content.Context
import android.content.Intent
import android.view.LayoutInflater
import android.view.View
import android.view.ViewGroup
import android.widget.AdapterView
import android.widget.TextView
import com.google.android.material.button.MaterialButton
import java.util.ArrayList

class PersonAdapter(context:Context, val Personarray : ArrayList<Person>):
    ArrayAdapter<Person>(context,0,Personarray) {
    @SuppressLint("ViewHolder")
    override fun getView(position: Int, convertView: View?, parent: ViewGroup): View {
        val view=LayoutInflater.from(context).inflate(R.layout.contact_item, parent, false)
        view.findViewById<TextView>(R.id.name_textView).text = Personarray[position].name
        view.findViewById<TextView>(R.id.number_textView).text= Personarray[position].phoneNo
        view.findViewById<TextView>(R.id.email_textView).text= Personarray[position].emailId
        view.findViewById<TextView>(R.id.address_textView).text= Personarray[position].address
        view.findViewById<MaterialButton>(R.id.location_btn).setOnClickListener {
            Intent(context, MapsActivity::class.java).putExtra("Object",Personarray[position]).apply {
                context.startActivity(this) }
        }
        return view
    }
}
```

HttpRequest.kt :-

```
package com.example.mad_practical_10_21012011072

import android.util.Log
import java.io.*
import java.net.HttpURLConnection
import java.net.MalformedURLException
import java.net.ProtocolException
import java.net.URL

class HttpRequest {
    private val TAG = "HttpRequest"
    fun makeServiceCall(reqUrl: String?,token:String?=null): String? {
        var response: String? = null
```

```
try {
    val url = URL(reqUrl)
    val conn = url.openConnection() as HttpURLConnection
    if(token != null){
        conn.setRequestProperty("Authorization","Bearer $token");
        conn.setRequestProperty("Content-Type","application/json");
    }
    conn.requestMethod = "GET"
    response = convertStreamToString(BufferedInputStream(conn.inputStream))
} catch (e: MalformedURLException) {
    Log.e(TAG, "MalformedURLException: " + e.message)
} catch (e: ProtocolException) {
    Log.e(TAG, "ProtocolException: " + e.message)
} catch (e: IOException) {
    Log.e(TAG, "IOException: " + e.message)
} catch (e: Exception) {
    Log.e(TAG, "Exception: " + e.message)
}
return response
}



private fun convertStreamToString(`is`: InputStream): String {
    val reader = BufferedReader(InputStreamReader(`is`))
    val sb = StringBuilder()
    var line: String?
    try {
        while (reader.readLine().also { line = it } != null) {
            sb.append(line).append('\n')
        }
    } catch (e: IOException) {
        e.printStackTrace()
    } finally {
        try {
            `is`.close()
        } catch (e: IOException) {
            e.printStackTrace()
        }
    }
    return sb.toString()
}
}
```

Practical:10

AndroidManifest.xml :-



```
<meta-data
    android:name="com.google.android.geo.API_KEY"
    android:value="AIzaSyBVgO1713xHQ9FVaLQiV1Pp0AiA3ndOckw" />
```

Output :-

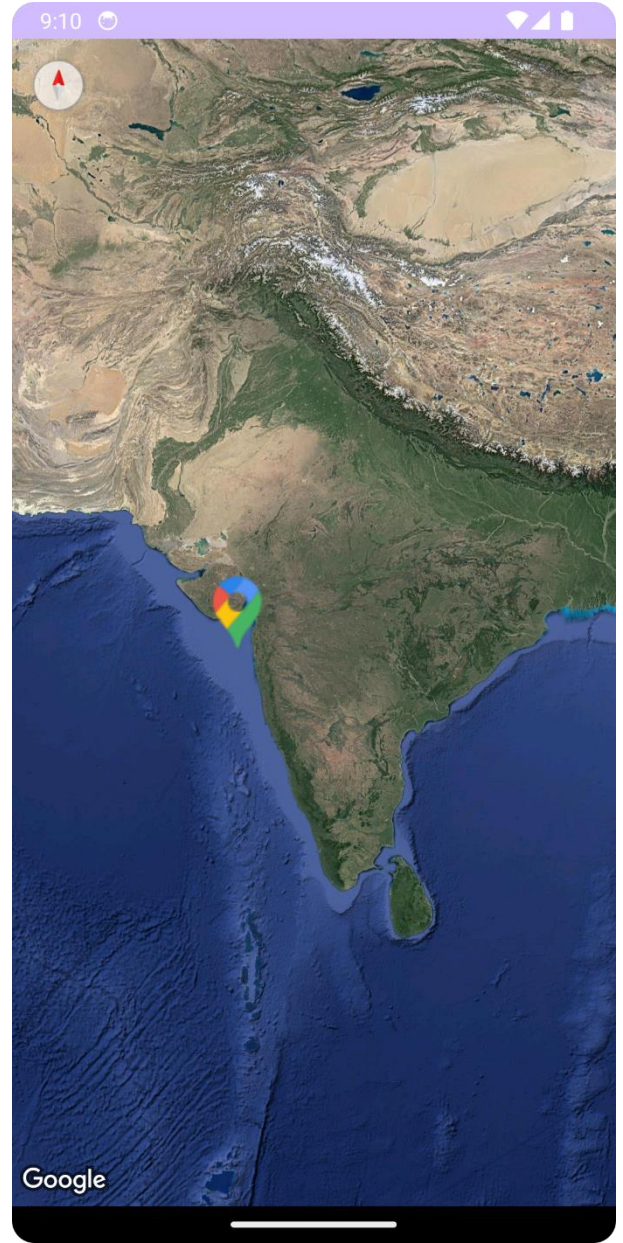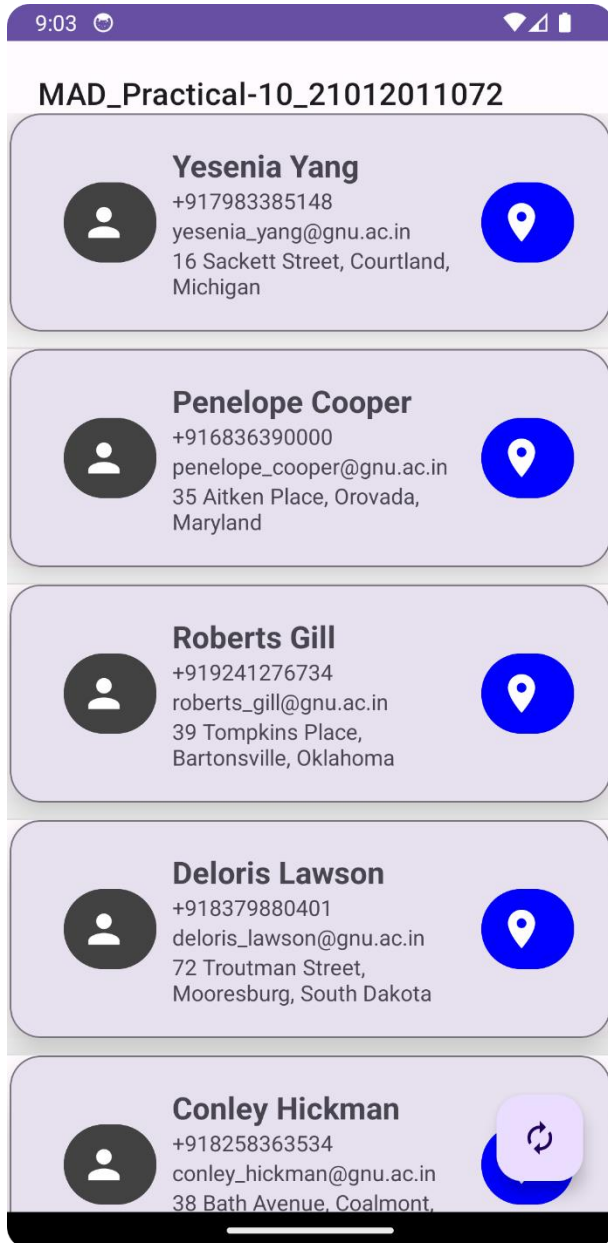

LIGHT THEME

Practical:10

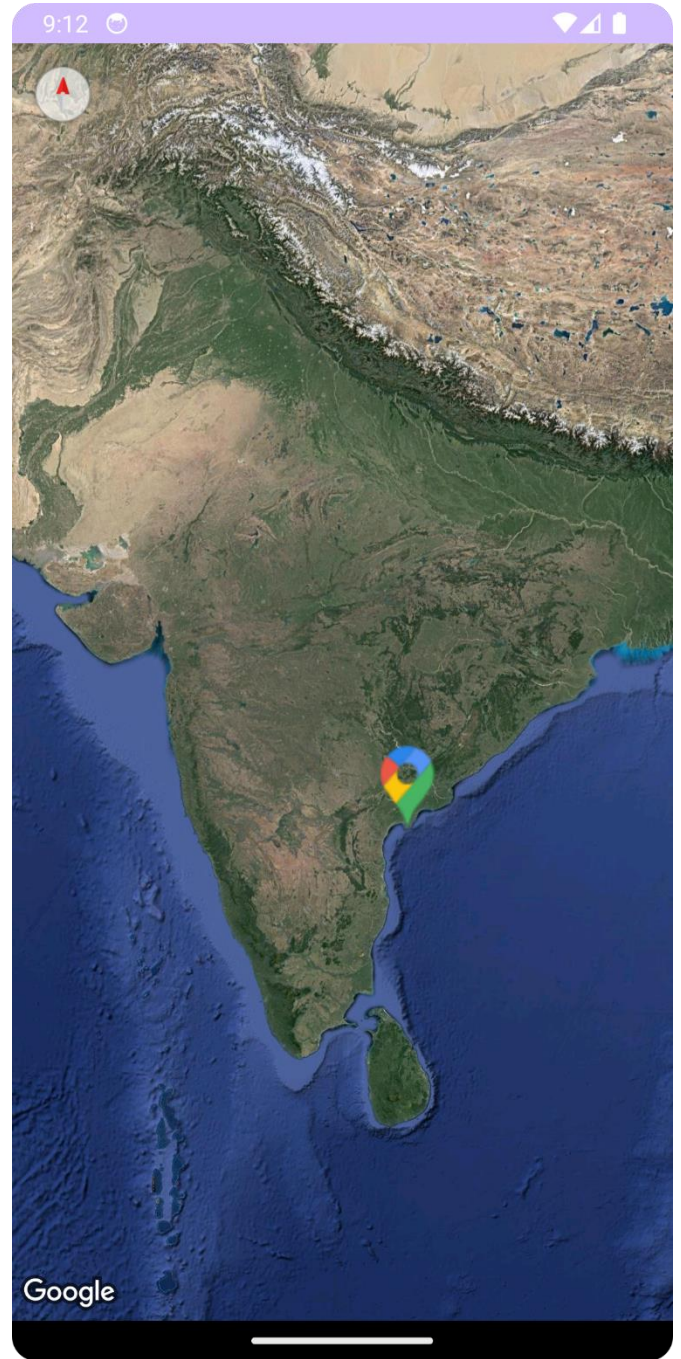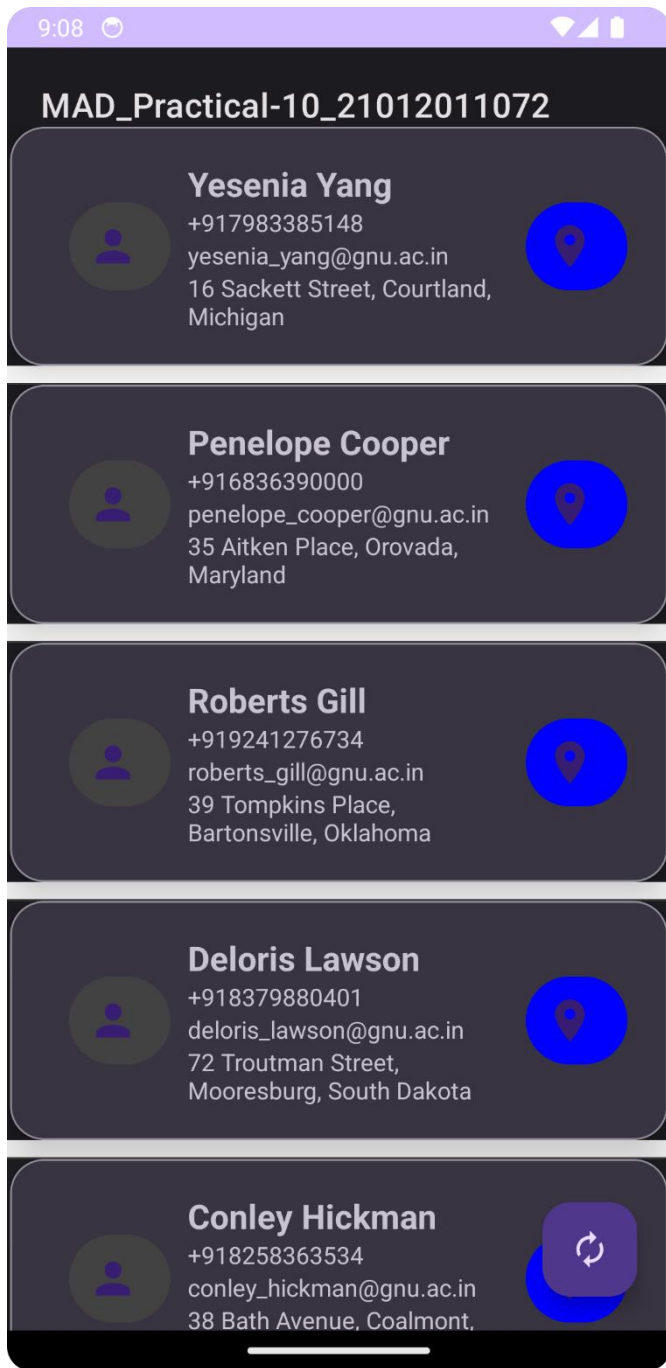

DARK THEME