

Create a Spring Web Project using Maven


```
Run LearnSpringApplication x
```

```
"C:\Program Files\Java\jdk-23\bin\java.exe" ...  
20:58:35.432 [main] INFO com.example.learnSpring.LearnSpringApplication -- Starting LearnSpringApplication...  
20:58:35.754 [restartetdMain] INFO com.example.learnSpring.LearnSpringApplication -- Starting LearnSpringApplication...  
  
      _   _          _         _       _   _  
     / \   \__/\___(_____/    \_/_/_/  
    ( C ) ___ | ' | ' | | ' V ' | | ___ |  
    W  __|_| | |_| | | | | | | | ) ) )  
    '  | ____|_|_|_|_|_|_|_|_|_|_|_|_|_|  
=====|_|=====||_|_|_|_|_|_|_|_|_|_|  
  
:: Spring Boot ::                (v4.1.0)  
  
2026-07-05T20:58:36.415+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] c.e.learnSpring.LearnSpringApplication : Starting LearnSpringApplication using Java 23 with PID  
2026-07-05T20:58:36.422+05:30 DEBUG 13464 --- [learnSpring] [ restartetdMain] c.e.learnSpring.LearnSpringApplication : Running with Spring Boot v4.1.0, Spring v7.0.8  
2026-07-05T20:58:36.423+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] c.e.learnSpring.LearnSpringApplication : No active profile set, falling back to 1 default profile  
2026-07-05T20:58:36.542+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] .e.DevToolsPropertyDefaultsPostProcessor : Devtools property defaults active! Set 'spring.devtool  
2026-07-05T20:58:36.542+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] .e.DevToolsPropertyDefaultsPostProcessor : For additional web related logging consider setting th  
2026-07-05T20:58:37.719+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] o.s.boot.tomcat.TomcatWebServer : Tomcat initialized with port 8083 (http)   
2026-07-05T20:58:37.731+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] o.apache.catalina.core.StandardService : Starting service [Tomcat]  
2026-07-05T20:58:37.731+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] o.apache.catalina.core.StandardEngine : Starting Servlet engine: [Apache Tomcat/11.0.22]  
2026-07-05T20:58:37.766+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] b.w.c.s.WebApplicationContextInitializer : Root WebApplicationContext: initialization completed  
2026-07-05T20:58:38.056+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] c.e.learnSpring.security.SecurityConfig : Creating PasswordEncoder bean.  
2026-07-05T20:58:38.058+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] c.e.learnSpring.security.SecurityConfig : Creating in-memory users: admin, user  
2026-07-05T20:58:38.195+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] r$InitializeUserDetailsManagerConfigurer : Global AuthenticationManager configured with UserDetail  
2026-07-05T20:58:38.286+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] c.e.learnSpring.security.SecurityConfig : Configuring SecurityFilterChain.  
2026-07-05T20:58:38.728+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] o.s.boot.tomcat.TomcatWebServer : Tomcat started on port 8083 (http) with context path =  
2026-07-05T20:58:38.734+05:30 INFO 13464 --- [learnSpring] [ restartetdMain] c.e.learnSpring.LearnSpringApplication : Started LearnSpringApplication in 2.973 seconds (proc
```


Spring Core – Load Country from Spring Configuration XML

[illegible]

Hello World RESTful Web Service

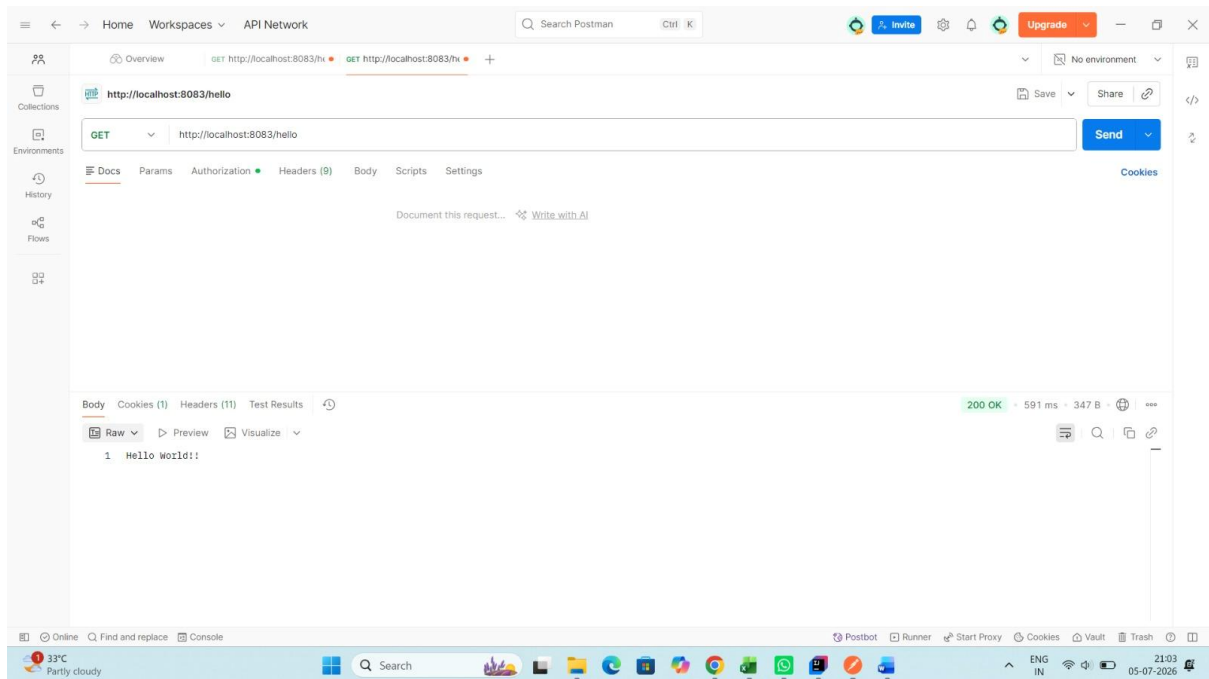

REST - Country Web Service

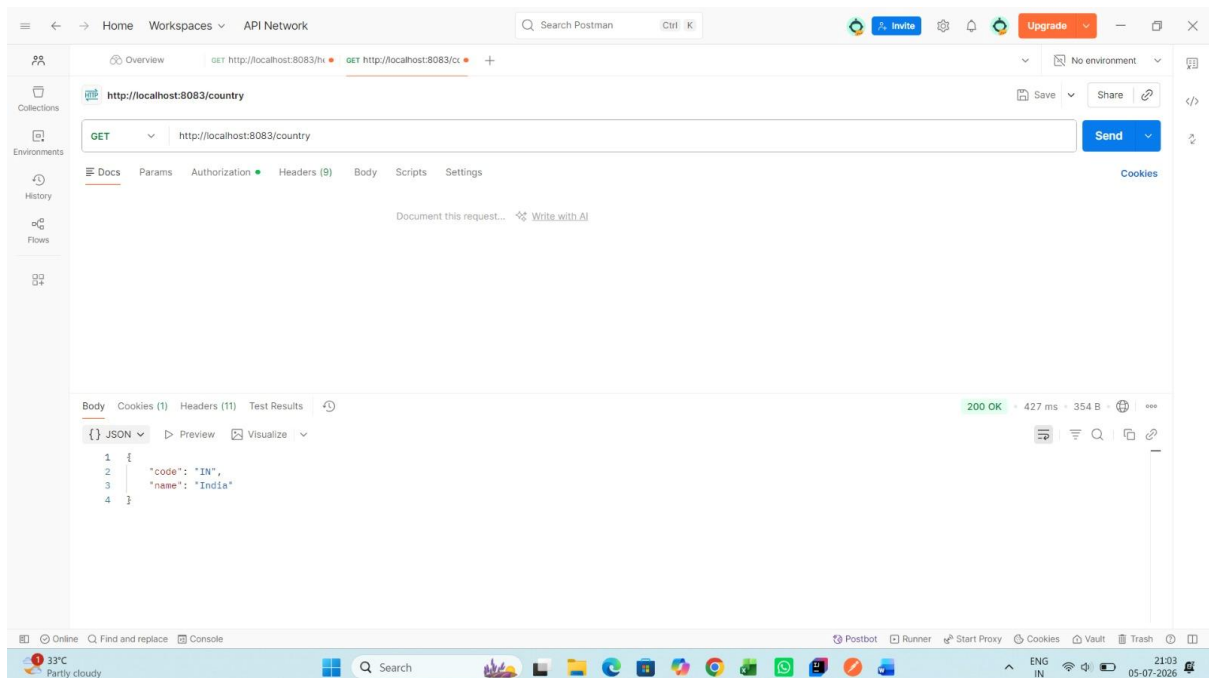

REST - Get country based on country code

This screenshot shows the Postman interface for a REST client. The request is a GET to `http://localhost:8083/country/in`. The response is a 200 OK status with a response time of 273 ms and a body size of 354 B. The response body is a JSON object representing India.

```
GET http://localhost:8083/country/in
```

200 OK • 273 ms • 354 B

```
{
  "code": "IN",
  "name": "India"
}
```

This screenshot shows the Postman interface for a REST client. The request is a GET to `http://localhost:8083/country/US`. The response is a 200 OK status with a response time of 235 ms and a body size of 362 B. The response body is a JSON object representing the United States.

```
GET http://localhost:8083/country/US
```

200 OK • 235 ms • 362 B

```
{
  "code": "US",
  "name": "United States"
}
```

Create authentication service that returns JWT

