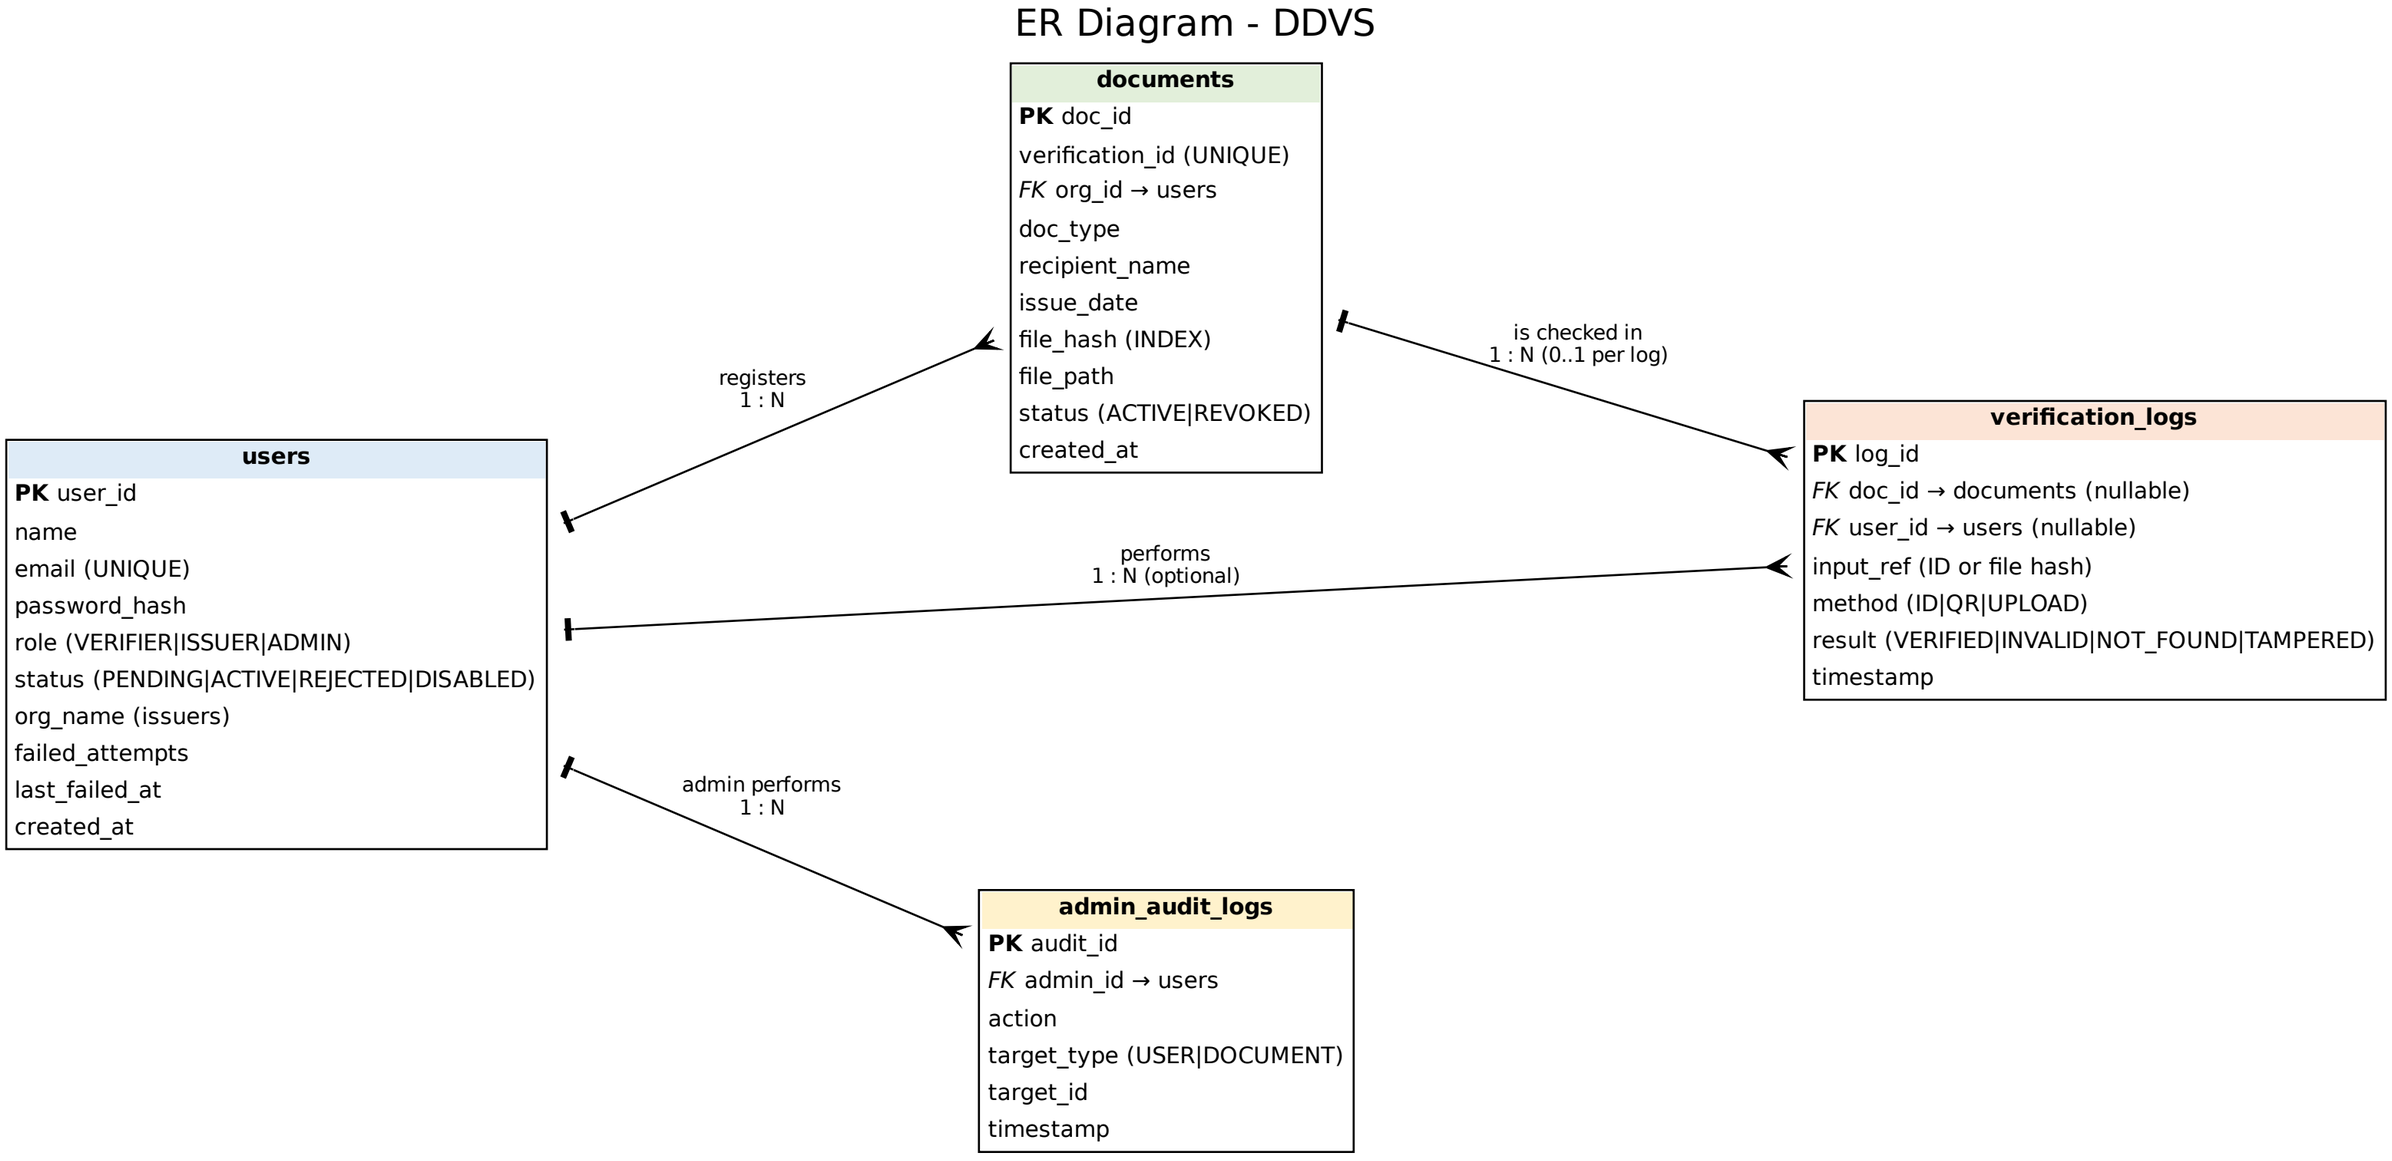
ER Diagram - DDVS
documents
PK doc_id
verification_id (UNIQUE)
FK org_id → users
doc_type
recipient_name
issue_date
file_hash (INDEX)
file_path
status (ACTIVE|REVOKED)
created_at
users
PK user_id
name
email (UNIQUE)
password_hash
role (VERIFIER|ISSUER|ADMIN)
status (PENDING|ACTIVE|REJECTED|DISABLED)
org_name (issuers)
failed_attempts
last_failed_at
created_at
verification_logs
PK log_id
FK doc_id → documents (nullable)
FK user_id → users (nullable)
input_ref (ID or file hash)
method (ID|QR|UPLOAD)
result (VERIFIED|INVALID|NOT_FOUND|TAMPERED)
timestamp
admin_audit_logs
PK audit_id
FK admin_id → users
action
target_type (USER|DOCUMENT)
target_id
timestamp
registers
1 : N
is checked in
1 : N (0..1 per log)
performs
1 : N (optional)
admin performs
1 : N