

```
In [63]: import pandas as pd
```

```
In [64]: data=pd.read_csv("/home/placement/Desktop/divyasri/flat500.csv")
```

```
In [65]: data.describe()
```

Out[65]:

	ID	engine_power	age_in_days	km	previous_owners	lat	lon	price
count	1538.000000	1538.000000	1538.000000	1538.000000	1538.000000	1538.000000	1538.000000	1538.000000
mean	769.500000	51.904421	1650.980494	53396.011704	1.123537	43.541361	11.563428	8576.003901
std	444.126671	3.988023	1289.522278	40046.830723	0.416423	2.133518	2.328190	1939.958641
min	1.000000	51.000000	366.000000	1232.000000	1.000000	36.855839	7.245400	2500.000000
25%	385.250000	51.000000	670.000000	20006.250000	1.000000	41.802990	9.505090	7122.500000
50%	769.500000	51.000000	1035.000000	39031.000000	1.000000	44.394096	11.869260	9000.000000
75%	1153.750000	51.000000	2616.000000	79667.750000	1.000000	45.467960	12.769040	10000.000000
max	1538.000000	77.000000	4658.000000	235000.000000	4.000000	46.795612	18.365520	11100.000000

In [66]: data.info()

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 1538 entries, 0 to 1537
Data columns (total 9 columns):
#   Column                Non-Null Count  Dtype
---  -
0   ID                    1538 non-null   int64
1   model                 1538 non-null   object
2   engine_power          1538 non-null   int64
3   age_in_days           1538 non-null   int64
4   km                    1538 non-null   int64
5   previous_owners       1538 non-null   int64
6   lat                   1538 non-null   float64
7   lon                   1538 non-null   float64
8   price                 1538 non-null   int64
dtypes: float64(2), int64(6), object(1)
memory usage: 108.3+ KB
```

In [67]: data1=data.loc[(data.previous_owners==1)]

In [68]: data1

Out[68]:

	ID	model	engine_power	age_in_days	km	previous_owners	lat	lon	price
0	1	lounge	51	882	25000	1	44.907242	8.611560	8900
1	2	pop	51	1186	32500	1	45.666359	12.241890	8800
2	3	sport	74	4658	142228	1	45.503300	11.417840	4200
3	4	lounge	51	2739	160000	1	40.633171	17.634609	6000
4	5	pop	73	3074	106880	1	41.903221	12.495650	5700
...
1533	1534	sport	51	3712	115280	1	45.069679	7.704920	5200
1534	1535	lounge	74	3835	112000	1	45.845692	8.666870	4600
1535	1536	pop	51	2223	60457	1	45.481541	9.413480	7500
1536	1537	lounge	51	2557	80750	1	45.000702	7.682270	5990
1537	1538	pop	51	1766	54276	1	40.323410	17.568270	7900

1389 rows × 9 columns

In [69]: data2=data1.drop(['ID','lat','lon'],axis=1)

```
In [70]: data2
```

```
Out[70]:
```

	model	engine_power	age_in_days	km	previous_owners	price
0	lounge	51	882	25000	1	8900
1	pop	51	1186	32500	1	8800
2	sport	74	4658	142228	1	4200
3	lounge	51	2739	160000	1	6000
4	pop	73	3074	106880	1	5700
...
1533	sport	51	3712	115280	1	5200
1534	lounge	74	3835	112000	1	4600
1535	pop	51	2223	60457	1	7500
1536	lounge	51	2557	80750	1	5990
1537	pop	51	1766	54276	1	7900

1389 rows × 6 columns

```
In [71]: data2=pd.get_dummies(data2)
```

```
In [72]: data2
```

```
Out[72]:
```

	engine_power	age_in_days	km	previous_owners	price	model_lounge	model_pop	model_sport
0	51	882	25000	1	8900	1	0	0
1	51	1186	32500	1	8800	0	1	0
2	74	4658	142228	1	4200	0	0	1
3	51	2739	160000	1	6000	1	0	0
4	73	3074	106880	1	5700	0	1	0
...
1533	51	3712	115280	1	5200	0	0	1
1534	74	3835	112000	1	4600	1	0	0
1535	51	2223	60457	1	7500	0	1	0
1536	51	2557	80750	1	5990	1	0	0
1537	51	1766	54276	1	7900	0	1	0

1389 rows × 8 columns

```
In [73]: y=data2['price']
```

```
In [74]: x=data2.drop(['price'],axis=1)
```

In [75]:

x

Out[75]:

	engine_power	age_in_days	km	previous_owners	model_lounge	model_pop	model_sport
0	51	882	25000	1	1	0	0
1	51	1186	32500	1	0	1	0
2	74	4658	142228	1	0	0	1
3	51	2739	160000	1	1	0	0
4	73	3074	106880	1	0	1	0
...
1533	51	3712	115280	1	0	0	1
1534	74	3835	112000	1	1	0	0
1535	51	2223	60457	1	0	1	0
1536	51	2557	80750	1	1	0	0
1537	51	1766	54276	1	0	1	0

1389 rows × 7 columns

```
In [76]: from sklearn.model_selection import train_test_split
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.33,random_state=42)
```

```
In [77]: x_test.head(5)
```

```
Out[77]:
```

	engine_power	age_in_days	km	previous_owners	model_lounge	model_pop	model_sport
625	51	3347	148000	1	1	0	0
187	51	4322	117000	1	1	0	0
279	51	4322	120000	1	0	1	0
734	51	974	12500	1	0	1	0
315	51	1096	37000	1	1	0	0

```
In [78]: x_train.head(5)
```

```
Out[78]:
```

	engine_power	age_in_days	km	previous_owners	model_lounge	model_pop	model_sport
915	51	397	17081	1	1	0	0
12	51	456	18450	1	1	0	0
638	51	397	21276	1	1	0	0
190	51	821	19000	1	1	0	0
701	51	701	27100	1	1	0	0

```
In [79]: y_test.head(5)
```

```
Out[79]: 625    5400
187    5399
279    4900
734   10500
315    9300
Name: price, dtype: int64
```


```
In [80]: y_train.head(5)
```

```
Out[80]: 915    10900  
        12      9700  
        638    10850  
        190     9990  
        701    10300  
        Name: price, dtype: int64
```

```
In [81]: import warnings #for ignoring warnings  
        warnings.filterwarnings("ignore")
```

```
In [82]: from sklearn.model_selection import GridSearchCV  
        from sklearn.linear_model import ElasticNet #for elastic net model  
        elastic = ElasticNet()  
        parameters = {'alpha': [1e-15, 1e-10, 1e-8, 1e-4, 1e-3, 1e-2, 1, 5, 10, 20]}  
        elastic_regressor = GridSearchCV(elastic, parameters)  
        elastic_regressor.fit(x_train, y_train)
```

```
Out[82]:
```

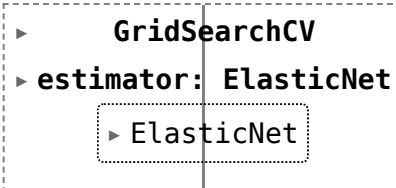

```
  ▶ GridSearchCV  
  ▶ estimator: ElasticNet  
    ▶ ElasticNet
```

```
In [83]: elastic_regressor.best_params_ #alpha value
```

```
Out[83]: {'alpha': 0.01}
```

```
In [84]: elastic=ElasticNet(alpha=0.01)  
        elastic.fit(x_train,y_train)  
        y_pred_elastic=elastic.predict(x_test) #predicted value
```



```
In [85]: from sklearn.metrics import mean_squared_error #rmse value
ElasticNet_Error=mean_squared_error(y_pred_elastic,y_test)
ElasticNet_Error
```

Out[85]: 515349.9787871871

```
In [86]: from sklearn.metrics import r2_score
r2_score(y_test,y_pred_elastic) #efficiency
```

Out[86]: 0.8602162350730707


```
In [87]: Results=pd.DataFrame(columns=['Actual','Predicted'])
Results['Actual']=y_test
Results['Predicted']=y_pred_elastic
Results=Results.reset_index()
Results['ID']=Results.index #replaces id with index number
Results.head(10)
```

Out[87]:

	index	Actual	Predicted	ID
0	625	5400	5482.171479	0
1	187	5399	5127.531740	1
2	279	4900	4803.203231	2
3	734	10500	9662.825235	3
4	315	9300	9408.645424	4
5	652	10850	10350.952605	5
6	1472	9500	9806.127960	6
7	619	7999	8341.142824	7
8	992	6300	5913.786719	8
9	1154	10000	10149.093829	9

```
In [91]: import seaborn as sns
import matplotlib.pyplot as plt
sns.lineplot(x='ID',y='Actual',data=Results.head(50)) #red is actual
sns.lineplot(x='ID',y='Predicted',data=Results.head(50)) #blue is predicted
```

Out[91]: <Axes: xlabel='ID', ylabel='Actual'>

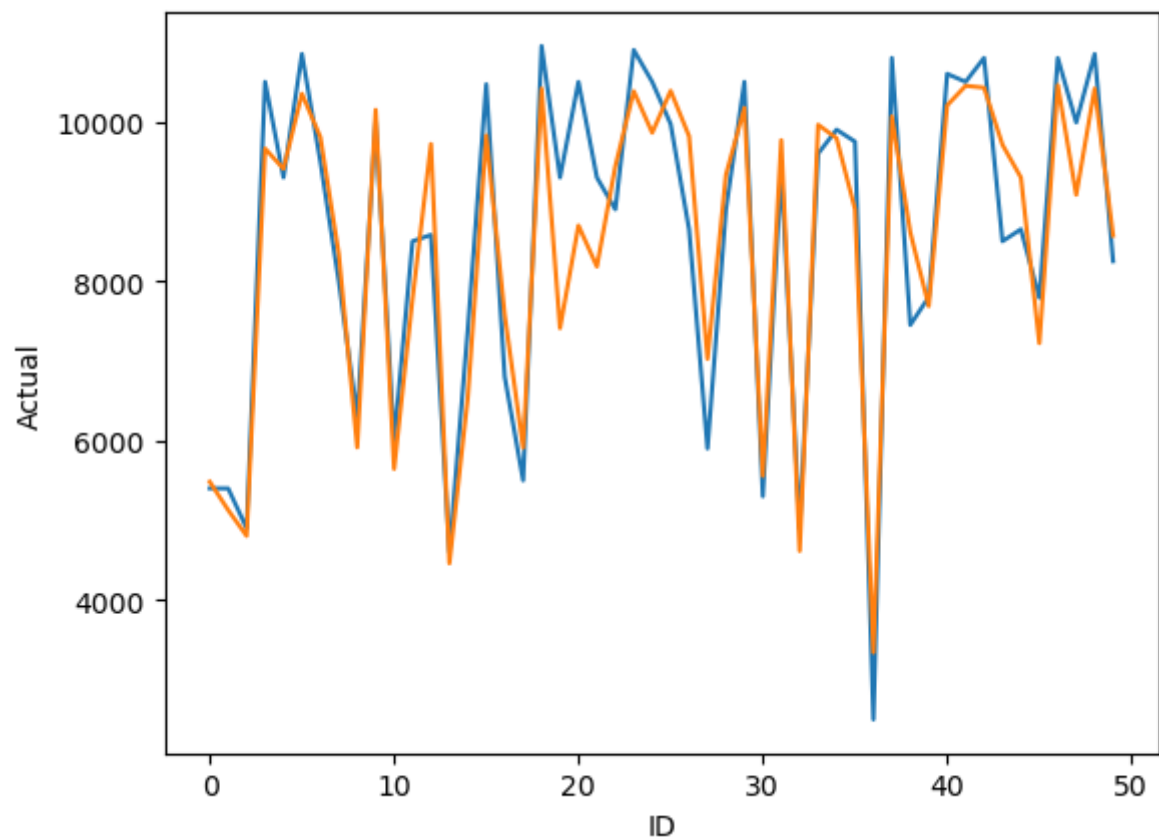

In []:

