


The near-duplicate pair the released split keeps together

Shot one second apart, five identical components. Under the published split both sit in train.

An image-level allocator moved the left panel to test, creating a test↔train near-duplicate. The released burst-aware split ($\tau=15$ s) moves whole bursts, so both stay in train.



IMG_20240220_115315.jpg
captured 2024-02-20 11:53:15 | split: TRAIN | 640×640 px

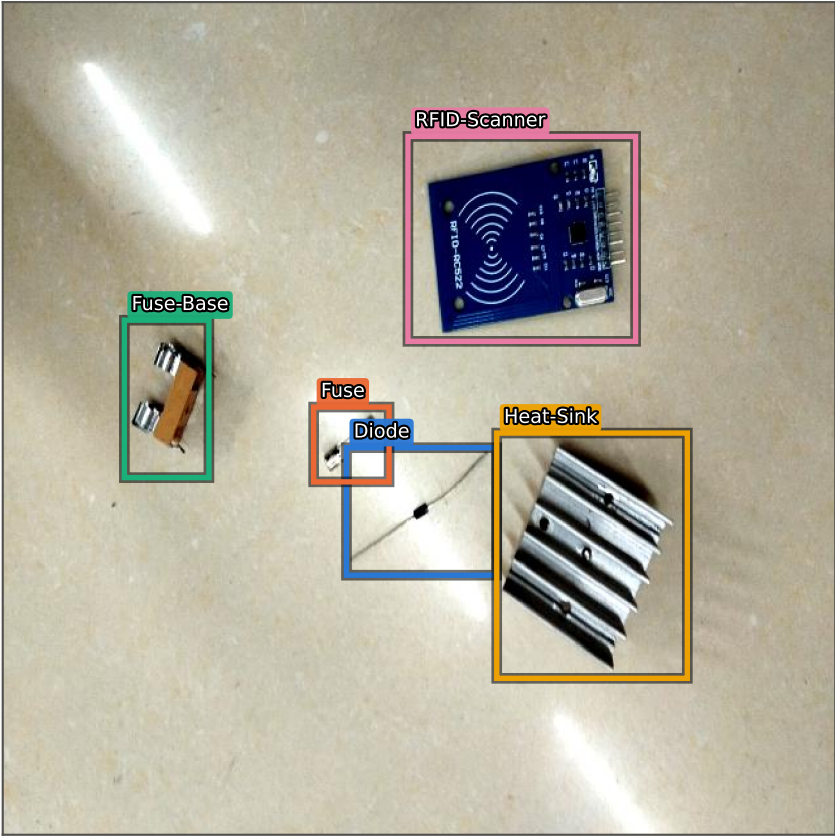

IMG_20240220_115316.jpg
captured 2024-02-20 11:53:16 | split: TRAIN | 640×640 px

per-box centre shift, this panel → 115316:

Diode	Δx	+4.5	Δy	-2.0	$ \Delta $	4.9 px
Fuse	Δx	+4.0	Δy	-4.5	$ \Delta $	6.0 px
Fuse-Base	Δx	+1.0	Δy	-2.5	$ \Delta $	2.7 px
Heat-Sink	Δx	+5.0	Δy	-7.5	$ \Delta $	9.0 px
RFID-Scanner	Δx	-2.0	Δy	-5.0	$ \Delta $	5.4 px

per-box centre shift, this panel → 115315:

Diode	Δx	-4.5	Δy	+2.0	$ \Delta $	4.9 px
Fuse	Δx	-4.0	Δy	+4.5	$ \Delta $	6.0 px
Fuse-Base	Δx	-1.0	Δy	+2.5	$ \Delta $	2.7 px
Heat-Sink	Δx	-5.0	Δy	+7.5	$ \Delta $	9.0 px
RFID-Scanner	Δx	+2.0	Δy	+5.0	$ \Delta $	5.4 px

Both panels contain the same five classes — one instance each of Diode, Fuse, Fuse-Base, Heat-Sink and RFID-Scanner.

Largest per-box centre shift: 9.0 px of 640 (1.4%). Boxes are the dataset's own YOLO annotations, unmodified. The released split carries zero test↔train near-duplicate pairs at every epsilon.