


# MongoDB Lab Assignment -1

Rollno: 210950320034, Name: Deepankar jadhav

4. Find all the unique cities from the collection.

Sol:

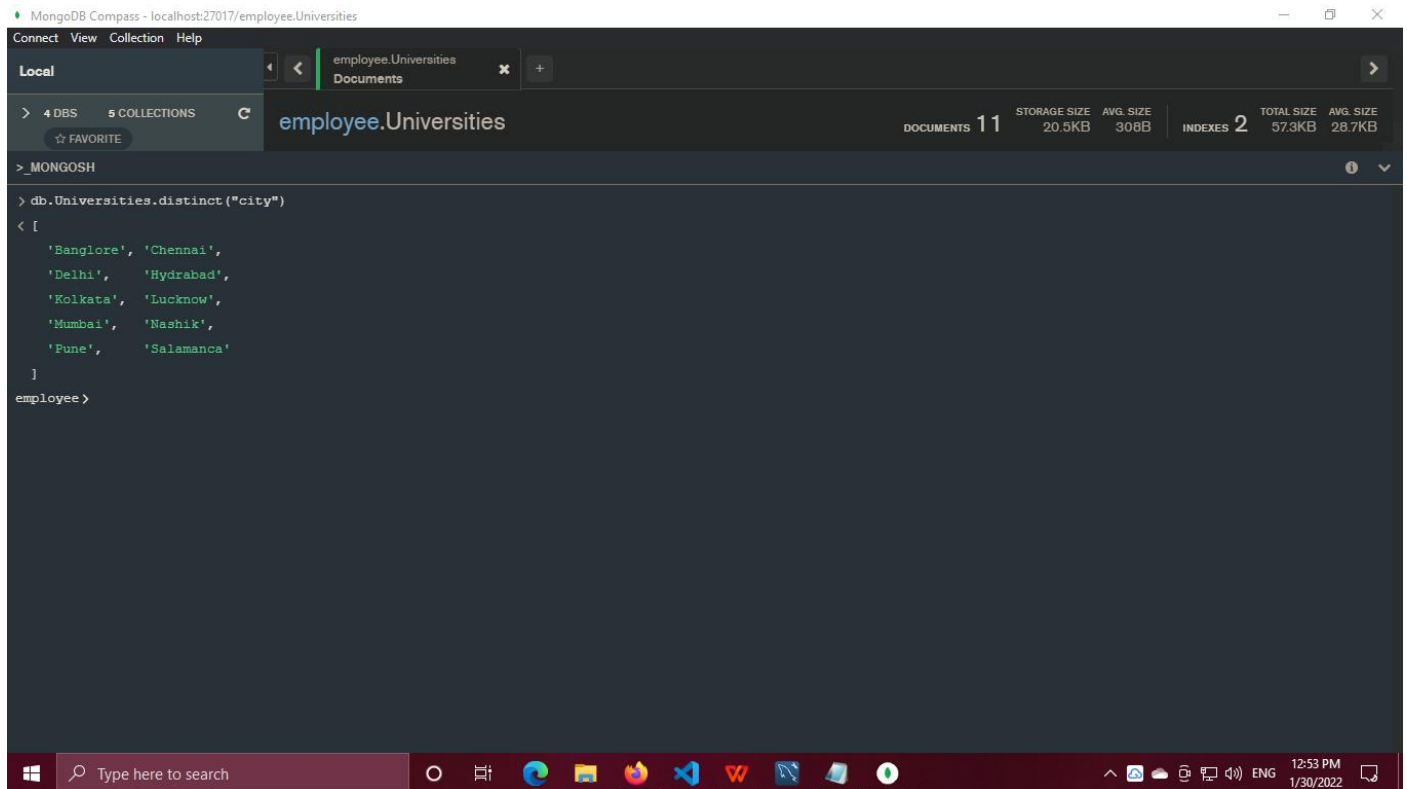

The screenshot shows the MongoDB Compass interface. The top bar indicates the connection to 'localhost:27017/employee.Universities'. The left sidebar shows the database structure with 'employee.Universities' selected. The main panel displays the command `db.Universities.distinct("city")` and its result, which is an array of unique city names: `['Bangalore', 'Chennai', 'Delhi', 'Hydrabad', 'Kolkata', 'Lucknow', 'Mumbai', 'Nashik', 'Pune', 'Salamanca']`. The bottom status bar shows the system time as 12:53 PM on 1/30/2022.

```
> db.Universities.distinct("city")
< [
  'Bangalore', 'Chennai',
  'Delhi', 'Hydrabad',
  'Kolkata', 'Lucknow',
  'Mumbai', 'Nashik',
  'Pune', 'Salamanca'
]
```