

01 - Logistic Regression (incl. Regularization)

In this exercise, you will implement logistic regression and apply it to two different datasets.

Outline

- 1 - Packages
- 2 - Logistic Regression
 - 2.1 Problem Statement
 - 2.2 Loading and visualizing the data
 - 2.3 Sigmoid function
 - 2.4 Cost function for logistic regression
 - 2.5 Gradient for logistic regression
 - 2.6 Learning parameters using gradient descent
 - 2.7 Plotting the decision boundary
 - 2.8 Evaluating logistic regression
- 3 - Regularized Logistic Regression
 - 3.1 Problem Statement
 - 3.2 Loading and visualizing the data
 - 3.3 Feature mapping
 - 3.4 Cost function for regularized logistic regression
 - 3.5 Gradient for regularized logistic regression
 - 3.6 Learning parameters using gradient descent
 - 3.7 Plotting the decision boundary
 - 3.8 Evaluating regularized logistic regression model

1 - Packages

First, let's run the cell below to import all the packages that you will need during this assignment.

- `numpy` is the fundamental package for scientific computing with Python.
- `matplotlib` is a famous library to plot graphs in Python.
- `utils.py` contains helper functions for this assignment. You do not need to modify code in this file.

```
import numpy as np
import matplotlib.pyplot as plt
from utils import *
import copy
import math
```

```
%matplotlib inline
```

2 - Logistic Regression

In this part of the exercise, you will build a logistic regression model to predict whether a student gets admitted into a university.

2.1 Problem Statement

Suppose that you are the administrator of a university department and you want to determine each applicant's chance of admission based on their results on two exams.

- You have historical data from previous applicants that you can use as a training set for logistic regression.
- For each training example, you have the applicant's scores on two exams and the admissions decision.
- Your task is to build a classification model that estimates an applicant's probability of admission based on the scores from those two exams.

2.2 Loading and visualizing the data

You will start by loading the dataset for this task.

- The `load_dataset()` function shown below loads the data into variables `X_train` and `y_train`
 - `X_train` contains exam scores on two exams for a student
 - `y_train` is the admission decision
 - `y_train = 1` if the student was admitted
 - `y_train = 0` if the student was not admitted
 - Both `X_train` and `y_train` are numpy arrays.

```
# load dataset
X_train, y_train = load_data("data/ex2data1.txt")

[[34.62365962 78.02469282]
 [30.28671077 43.89499752]
 [35.84740877 72.90219803]
 [60.18259939 86.3085521 ]
 [79.03273605 75.34437644]
 [45.08327748 56.31637178]
 [61.10666454 96.51142588]
 [75.02474557 46.55401354]]
```

[76.0987867 87.42056972]
[84.43281996 43.53339331]
[95.86155507 38.22527806]
[75.01365839 30.60326323]
[82.30705337 76.4819633]
[69.36458876 97.71869196]
[39.53833914 76.03681085]
[53.97105215 89.20735014]
[69.07014406 52.74046973]
[67.94685548 46.67857411]
[70.66150955 92.92713789]
[76.97878373 47.57596365]
[67.37202755 42.83843832]
[89.67677575 65.79936593]
[50.53478829 48.85581153]
[34.21206098 44.2095286]
[77.92409145 68.97235999]
[62.27101367 69.95445795]
[80.19018075 44.82162893]
[93.1143888 38.80067034]
[61.83020602 50.25610789]
[38.7858038 64.99568096]
[61.37928945 72.80788731]
[85.40451939 57.05198398]
[52.10797973 63.12762377]
[52.04540477 69.43286012]
[40.23689374 71.16774802]
[54.63510555 52.21388588]
[33.91550011 98.86943574]
[64.17698887 80.90806059]
[74.78925296 41.57341523]
[34.18364003 75.23772034]
[83.90239366 56.30804622]
[51.54772027 46.85629026]
[94.44336777 65.56892161]
[82.36875376 40.61825516]
[51.04775177 45.82270146]
[62.22267576 52.06099195]
[77.19303493 70.4582]
[97.77159928 86.72782233]
[62.0730638 96.76882412]
[91.5649745 88.69629255]
[79.94481794 74.16311935]
[99.27252693 60.999031]
[90.54671411 43.39060181]
[34.52451385 60.39634246]
[50.28649612 49.80453881]
[49.58667722 59.80895099]
[97.64563396 68.86157272]

```
[32.57720017 95.59854761]
[74.24869137 69.82457123]
[71.79646206 78.45356225]
[75.39561147 85.75993667]
[35.28611282 47.02051395]
[56.2538175 39.26147251]
[30.05882245 49.59297387]
[44.66826172 66.45008615]
[66.56089447 41.09209808]
[40.45755098 97.53518549]
[49.07256322 51.88321182]
[80.27957401 92.11606081]
[66.74671857 60.99139403]
[32.72283304 43.30717306]
[64.03932042 78.03168802]
[72.34649423 96.22759297]
[60.45788574 73.0949981 ]
[58.84095622 75.85844831]
[99.8278578 72.36925193]
[47.26426911 88.475865 ]
[50.4581598 75.80985953]
[60.45555629 42.50840944]
[82.22666158 42.71987854]
[88.91389642 69.8037889 ]
[94.83450672 45.6943068 ]
[67.31925747 66.58935318]
[57.23870632 59.51428198]
[80.366756 90.9601479 ]
[68.46852179 85.5943071 ]
[42.07545454 78.844786 ]
[75.47770201 90.424539 ]
[78.63542435 96.64742717]
[52.34800399 60.76950526]
[94.09433113 77.15910509]
[90.44855097 87.50879176]
[55.48216114 35.57070347]
[74.49269242 84.84513685]
[89.84580671 45.35828361]
[83.48916274 48.3802858 ]
[42.26170081 87.10385094]
[99.31500881 68.77540947]
[55.34001756 64.93193801]
[74.775893 89.5298129 ]]
```

View the variables

Let's get more familiar with your dataset.

- A good place to start is to just print out each variable and see what it contains.

The code below prints the first five values of `X_train` and the type of the variable.

```
print("First five elements in X_train are:\n", X_train[:5])
print("Type of X_train:", type(X_train))
```

```
First five elements in X_train are:
[[34.62365962 78.02469282]
 [30.28671077 43.89499752]
 [35.84740877 72.90219803]
 [60.18259939 86.3085521 ]
 [79.03273605 75.34437644]]
Type of X_train: <class 'numpy.ndarray'>
```

Now print the first five values of `y_train`

```
print("First five elements in y_train are:\n", y_train[:5])
print("Type of y_train:", type(y_train))
```

```
First five elements in y_train are:
[0. 0. 0. 1. 1.]
Type of y_train: <class 'numpy.ndarray'>
```

Check the dimensions of your variables

Another useful way to get familiar with your data is to view its dimensions. Let's print the shape of `X_train` and `y_train` and see how many training examples we have in our dataset.

```
print ('The shape of X_train is: ' + str(X_train.shape))
print ('The shape of y_train is: ' + str(y_train.shape))
print ('We have m = %d training examples' % (len(y_train)))
```

```
The shape of X_train is: (100, 2)
The shape of y_train is: (100,)
We have m = 100 training examples
```


Visualize your data

Before starting to implement any learning algorithm, it is always good to visualize the data if possible.

- The code below displays the data on a 2D plot (as shown below), where the axes are the two exam scores, and the positive and negative examples are shown with different markers.
- We use a helper function in the `utils.py` file to generate this plot.

```
# Plot examples
plot_data(X_train, y_train[:,], pos_label="Admitted", neg_label="Not
admitted")
```

```
# Set the y-axis label
plt.ylabel('Exam 2 score')
# Set the x-axis label
plt.xlabel('Exam 1 score')
plt.legend(loc="upper right")
plt.show()
```

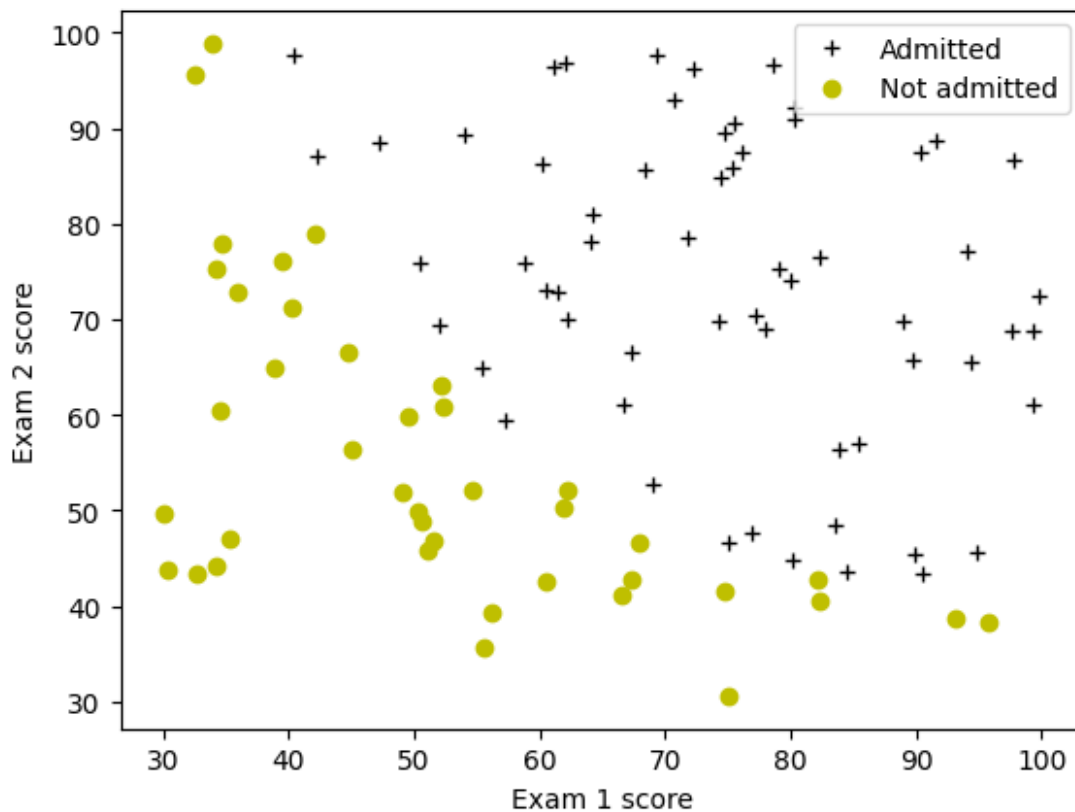

Your goal is to build a logistic regression model to fit this data.

- With this model, you can then predict if a new student will be admitted based on their scores on the two exams.

2.3 Sigmoid function

Recall that for logistic regression, the model is represented as

$$f_{w,b}(x) = g(w \cdot x + b)$$

where function g is the sigmoid function. The sigmoid function is defined as:

$$g(z) = \frac{1}{1 + e^{-z}}$$

Let's implement the sigmoid function first, so it can be used by the rest of this assignment.

Exercise 1: Sigmoid function

Complete the `sigmoid` function to calculate

$$g(z) = \frac{1}{1 + e^{-z}}$$

Note that

- `z` is not always a single number, but can also be an array of numbers.
- If the input is an array of numbers, we'd like to apply the sigmoid function to each value in the input array.

```
# GRADED FUNCTION: sigmoid

def sigmoid(z):
    """
    Compute the sigmoid of z

    Args:
        z (ndarray): A scalar, numpy array of any size.

    Returns:
        g (ndarray): sigmoid(z), with the same shape as z

    """

    ### START CODE HERE ###

    g = 1 / (1 + np.exp(-z))

    ### END SOLUTION ###

    return g
```

When you are finished, try testing a few values by calling `sigmoid(x)` in the cell below.

- For large positive values of `x`, the sigmoid should be close to 1, while for large negative values, the sigmoid should be close to 0.
- Evaluating `sigmoid(0)` should give you exactly 0.5.

```
# Note: You can edit this value
value = 0
```

```
print (f"sigmoid({value}) = {sigmoid(value)}")
sigmoid(0) = 0.5
```

Expected Output: sigmoid(0) 0.5

- As mentioned before, your code should also work with vectors and matrices. For a matrix, your function should perform the sigmoid function on every element.

```
print ("sigmoid([ -1, 0, 1, 2]) = " + str(sigmoid(np.array([ -1, 0, 1, 2]))))
```

UNIT TESTS

```
from public_tests import *
sigmoid_test(sigmoid)
```

```
sigmoid([ -1, 0, 1, 2]) = [0.26894142 0.5          0.73105858
0.88079708]
All tests passed!
```

Expected Output: sigmoid([-1, 0, 1, 2]) [0.26894142 0.5 0.73105858 0.88079708]

2.4 Cost function for logistic regression

In this section, you will implement the cost function for logistic regression.

Exercise 2: Compute_cost function

Complete the `compute_cost` function using the equations below.

Recall that for logistic regression, the cost function is of the form

$$J(w, b) = \frac{1}{m} \sum_{i=0}^{m-1} \left[\text{loss}(f_{w,b}(x^{(i)}), y^{(i)}) \right]$$

where

- m is the number of training examples in the dataset
- $\text{loss}(f_{w,b}(x^{(i)}), y^{(i)})$ is the cost for a single data point, which is -

$$\text{loss}(f_{w,b}(x^{(i)}), y^{(i)}) = \mathcal{L}$$

- $f_{w,b}(x^{(i)})$ is the model's prediction, while $y^{(i)}$, which is the actual label
- $f_{w,b}(x^{(i)}) = g(w \cdot x^{(i)} + b)$ where function g is the sigmoid function.

- It might be helpful to first calculate an intermediate variable $z_{w,b}(x^{(i)}) = w \cdot x^{(i)} + b = w_0 x_0^{(i)} + \dots + w_{n-1} x_{n-1}^{(i)} + b$ where n is the number of features, before calculating $f_{w,b}(x^{(i)}) = g(z_{w,b}(x^{(i)}))$

Note:

- As you are doing this, remember that the variables `X_train` and `y_train` are not scalar values but matrices of shape (m, n) and $(m, 1)$ respectively, where n is the number of features and m is the number of training examples.
- You can use the sigmoid function that you implemented above for this part.

```
# GRADED FUNCTION: compute_cost
def compute_cost(X, y, w, b, lambda_ = 1):
    """
    Computes the cost over all examples
    Args:
        X : (ndarray Shape (m,n)) data, m examples by n features
        y : (array_like Shape (m,)) target value
        w : (array_like Shape (n,)) Values of parameters of the model

        b : scalar Values of bias parameter of the model
        lambda_ : unused placeholder
    Returns:
        total_cost: (scalar) cost
    """

    m, n = X.shape

    ### START CODE HERE ###

    y_hat = np.dot(X, w) + b

    total_cost = (1 / (2 * m)) * np.sum((y_hat - y) ** 2)

    ### END CODE HERE ###

    return total_cost
```

Run the cells below to check your implementation of the `compute_cost` function with two different initializations of the parameters `w`

```
m, n = X_train.shape

# Compute and display cost with w initialized to zeroes
initial_w = np.zeros(n)
initial_b = 0.
```

```
cost = compute_cost(X_train, y_train, initial_w, initial_b)
print('Cost at initial w (zeros): {:.3f}'.format(cost))

Cost at initial w (zeros): 0.300
```

Expected Output: Cost at initial w (zeros) 0.693

```
# Compute and display cost with non-zero w
test_w = np.array([0.2, 0.2])
test_b = -24.
cost = compute_cost(X_train, y_train, test_w, test_b)

print('Cost at test w,b: {:.3f}'.format(cost))
```

UNIT TESTS

```
compute_cost_test(compute_cost)
```

```
Cost at test w,b: 13.670
```

```
-----
-----
AssertionError                                Traceback (most recent call
last)
Cell In[21], line 10
      6 print('Cost at test w,b: {:.3f}'.format(cost))
      9 # UNIT TESTS
--> 10 compute_cost_test(compute_cost)

File ~/Bureau/UCONN/CSE4705 Artificial
Intelligence/aa_logistic_regression_regularization_decision_trees/
Code/01 Logistic Regression/public_tests.py:26, in
compute_cost_test(target)
     24 b = 0
     25 result = target(X, y, w, b)
--> 26 assert np.isclose(result, 2.15510667), f"Wrong output.
Expected: {2.15510667} got: {result}"
     28 X = np.random.randn(4, 3)
     29 y = np.array([1, 1, 0, 0])

AssertionError: Wrong output. Expected: 2.15510667 got:
3.7330779459011425
```

Expected Output: Cost at test w,b 0.218

2.5 Gradient for logistic regression

In this section, you will implement the gradient for logistic regression.

Recall that the gradient descent algorithm is:

```

\begin{align*}
&\text{repeat until convergence:} \\
&\quad b := b - \alpha \frac{\partial J(\mathbf{w}, b)}{\partial b} \\
&\quad w_j := w_j - \alpha \frac{\partial J(\mathbf{w}, b)}{\partial w_j} \quad \text{for } j := 0..n-1
\end{align*}

```

where, parameters b, w_j are all updated simultaneously

Exercise 3: Compute_gradient function

Complete the `compute_gradient` function to compute $\frac{\partial J(w, b)}{\partial w}$, $\frac{\partial J(w, b)}{\partial b}$ from equations (2) and (3) below.

$$\frac{\partial J(w, b)}{\partial b} = \frac{1}{m} \sum_{i=0}^{m-1} (f_{w,b}(x^{(i)}) - y^{(i)})$$

$$\frac{\partial J(w, b)}{\partial w_j} = \frac{1}{m} \sum_{i=0}^{m-1} (f_{w,b}(x^{(i)}) - y^{(i)}) x_j^{(i)}$$

- m is the number of training examples in the dataset
- $f_{w,b}(x^{(i)})$ is the model's prediction, while $y^{(i)}$ is the actual label
- Note:** While this gradient looks identical to the linear regression gradient, the formula is actually different because linear and logistic regression have different definitions of $f_{w,b}(x)$.

As before, you can use the sigmoid function that you implemented above.

```

# GRADED FUNCTION: compute_gradient
def compute_gradient(X, y, w, b, lambda_=None):
    """
    Computes the gradient for logistic regression

    Args:
        X : (ndarray Shape (m,n)) variable such as house size
        y : (array_like Shape (m,1)) actual value
        w : (array_like Shape (n,1)) values of parameters of the model

        b : (scalar) value of parameter of the model
        lambda_: unused placeholder.
    Returns
        dj_dw: (array_like Shape (n,1)) The gradient of the cost w.r.t.
        the parameters w.
        dj_db: (scalar) The gradient of the cost w.r.t.
        the parameter b.
    """

```

```

m, n = X.shape
dj_dw = np.zeros(w.shape)
dj_db = 0.

### START CODE HERE ###

z = np.dot(X, w) + b
f_wb = 1 / (1 + np.exp(-z)) # Apply sigmoid

error = f_wb - y
dj_dw = (1 / m) * np.dot(X.T, error)
dj_db = (1 / m) * np.sum(error)

### END CODE HERE ###

return dj_db, dj_dw

```

Run the cells below to check your implementation of the `compute_gradient` function with two different initializations of the parameters `w`

```

# Compute and display gradient with w initialized to zeroes
initial_w = np.zeros(n)
initial_b = 0.

dj_db, dj_dw = compute_gradient(X_train, y_train, initial_w,
                                initial_b)
print(f'dj_db at initial w (zeros):{dj_db}' )
print(f'dj_dw at initial w (zeros):{dj_dw.tolist()}' )

dj_db at initial w (zeros):-0.1
dj_dw at initial w (zeros):[-12.009216589291153, -11.262842205513593]

```

Expected Output: `dj_db at initial w (zeros) -0.1` `ddj_dw at initial w (zeros): [-12.00921658929115, -11.262842205513591]`

```

# Compute and display cost and gradient with non-zero w
test_w = np.array([ 0.2, -0.5])
test_b = -24
dj_db, dj_dw = compute_gradient(X_train, y_train, test_w, test_b)

print('dj_db at test_w:', dj_db)
print('dj_dw at test_w:', dj_dw.tolist())

```

```
# UNIT TESTS
compute_gradient_test(compute_gradient)

dj_db at test_w: -0.5999999999991071
dj_dw at test_w: [-44.831353617873795, -44.373841249539794]
All tests passed!
```

Expected Output: dj_db at initial w (zeros) -0.5999999999991071 ddj_dw at initial w (zeros): [-44.8313536178737957, -44.37384124953978]

2.6 Learning parameters using gradient descent

Similar to the previous assignment, you will now find the optimal parameters of a logistic regression model by using gradient descent.

- You don't need to implement anything for this part. Simply run the cells below.
- A good way to verify that gradient descent is working correctly is to look at the value of $J(w, b)$ and check that it is decreasing with each step.
- Assuming you have implemented the gradient and computed the cost correctly, your value of $J(w, b)$ should never increase, and should converge to a steady value by the end of the algorithm.

```
def gradient_descent(X, y, w_in, b_in, cost_function,
                    gradient_function, alpha, num_iters, lambda_):
    """
    Performs batch gradient descent to learn theta. Updates theta by
    taking
    num_iters gradient steps with learning rate alpha

    Args:
        X : (array_like Shape (m, n)
        y : (array_like Shape (m,))
        w_in : (array_like Shape (n,)) Initial values of parameters of
the model
        b_in : (scalar) Initial value of parameter of
the model
        cost_function: function to compute cost
        alpha : (float) Learning rate
        num_iters : (int) number of iterations to run
gradient descent
        lambda_ (scalar, float) regularization constant

    Returns:
        w : (array_like Shape (n,)) Updated values of parameters of the
model after
```

```

        running gradient descent
    b : (scalar)                Updated value of parameter of the
model after
        running gradient descent
    """

    # number of training examples
    m = len(X)

    # An array to store cost J and w's at each iteration primarily for
graphing later
    J_history = []
    w_history = []

    for i in range(num_iters):

        # Calculate the gradient and update the parameters
        dj_db, dj_dw = gradient_function(X, y, w_in, b_in, lambda_)

        # Update Parameters using w, b, alpha and gradient
        w_in = w_in - alpha * dj_dw
        b_in = b_in - alpha * dj_db

        # Save cost J at each iteration
        if i < 100000:          # prevent resource exhaustion
            cost = cost_function(X, y, w_in, b_in, lambda_)
            J_history.append(cost)

        # Print cost every at intervals 10 times or as many iterations
    if i < 10
        if i % math.ceil(num_iters/10) == 0 or i == (num_iters-1):
            w_history.append(w_in)
            print(f"Iteration {i:4}: Cost {float(J_history[-1]):8.2f}")
    ")

    return w_in, b_in, J_history, w_history #return w and J,w history
for graphing

```

Now let's run the gradient descent algorithm above to learn the parameters for our dataset.

Note

The code block below takes a couple of minutes to run, especially with a non-vectorized version. You can reduce the `iterations` to test your implementation and iterate faster. If you have time later, try running 100,000 iterations for better results.

```

np.random.seed(1)
initial_w = 0.01 * (np.random.rand(2).reshape(-1,1) - 0.5)
initial_b = -8

```

```

# Some gradient descent settings
iterations = 10000
alpha = 0.001

w,b, J_history,_ = gradient_descent(X_train ,y_train, initial_w,
initial_b,
                                compute_cost, compute_gradient,
alpha, iterations, 0)

Iteration    0: Cost    4.07
Iteration 1000: Cost    1.03
Iteration 2000: Cost    1.03
Iteration 3000: Cost    1.04
Iteration 4000: Cost    1.04
Iteration 5000: Cost    1.05
Iteration 6000: Cost    1.06
Iteration 7000: Cost    1.06
Iteration 8000: Cost    1.07
Iteration 9000: Cost    1.07
Iteration 9999: Cost    1.08

# With the following settings
np.random.seed(1)
initial_w = 0.01 * (np.random.rand(2).reshape(-1,1) - 0.5)
initial_b = -8
iterations = 10000
alpha = 0.001
#

Iteration    0: Cost    1.01
Iteration 1000: Cost    0.31
Iteration 2000: Cost    0.30
Iteration 3000: Cost    0.30
Iteration 4000: Cost    0.30
Iteration 5000: Cost    0.30
Iteration 6000: Cost    0.30
Iteration 7000: Cost    0.30
Iteration 8000: Cost    0.30
Iteration 9000: Cost    0.30
Iteration 9999: Cost    0.30


```

2.7 Plotting the decision boundary

We will now use the final parameters from gradient descent to plot the linear fit. If you implemented the previous parts correctly, you should see the following plot:

We will use a helper function in the `utils.py` file to create this plot.

```
plot_decision_boundary(w, b, X_train, y_train)
```

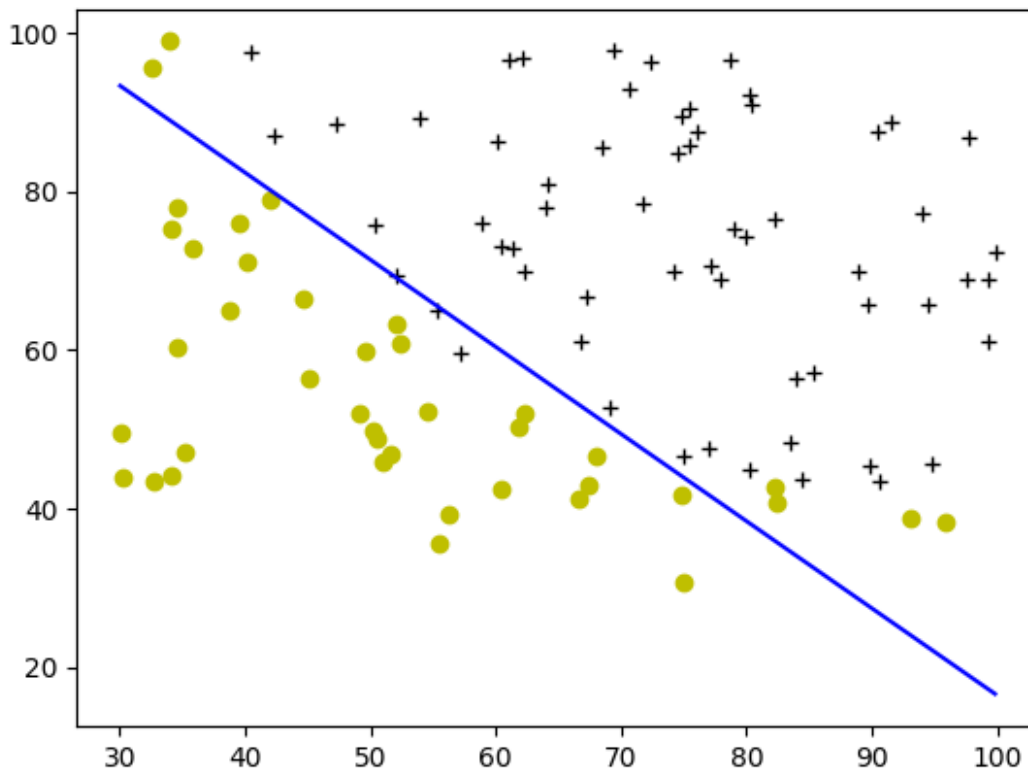

2.8 Evaluating logistic regression

We can evaluate the quality of the parameters we have found by seeing how well the learned model predicts on our training set.

You will implement the `predict` function below to do this.

Exercise 4

Please complete the `predict` function to produce `1` or `0` predictions given a dataset and a learned parameter vector w and b .

- First you need to compute the prediction from the model $f(x^{(i)}) = g(w \cdot x^{(i)} + b)$ for every example
 - You've implemented this before in the parts above
- We interpret the output of the model ($f(x^{(i)})$) as the probability that $y^{(i)} = 1$ given $x^{(i)}$ and parameterized by w .

- Therefore, to get a final prediction ($y^{(i)}=0$ or $y^{(i)}=1$) from the logistic regression model, you can use the following heuristic -

if $f(x^{(i)}) > 0.5$, predict $y^{(i)}=1$

if $f(x^{(i)}) < 0.5$, predict $y^{(i)}=0$

```
# GRADED FUNCTION: predict

def predict(X, w, b):
    """
    Predict whether the label is 0 or 1 using learned logistic
    regression parameters w

    Args:
    X : (ndarray Shape (m, n))
    w : (array_like Shape (n,))    Parameters of the model
    b : (scalar, float)            Parameter of the model

    Returns:
    p: (ndarray (m,1))
        The predictions for X using a threshold at 0.5
    """
    # number of training examples
    m, n = X.shape

    ### START CODE HERE ###

    z = np.dot(X, w) + b
    f_wb = 1 / (1 + np.exp(-z)) # Apply sigmoid

    p = (f_wb >= 0.5).astype(int)

    ### END CODE HERE ###
    return p
```

Once you have completed the function `predict`, let's run the code below to report the training accuracy of your classifier by computing the percentage of examples it got correct.

```
# Test your predict code
np.random.seed(1)
tmp_w = np.random.randn(2)
tmp_b = 0.3
tmp_X = np.random.randn(4, 2) - 0.5

tmp_p = predict(tmp_X, tmp_w, tmp_b)
```

```
print(f'Output of predict: shape {tmp_p.shape}, value {tmp_p}')
```

```
# UNIT TESTS
```

```
predict_test(predict)
```

```
Output of predict: shape (4,), value [0 1 1 1]
```

```
All tests passed!
```

Expected output

Now let's use this to compute the accuracy on the training set

```
#Compute accuracy on our training set
```

```
p = predict(X_train, w,b)
```

```
print('Train Accuracy: %f'%(np.mean(p == y_train) * 100))
```

```
Train Accuracy: 92.000000
```

3 - Regularized Logistic Regression

In this part of the exercise, you will implement regularized logistic regression to predict whether microchips from a fabrication plant passes quality assurance (QA). During QA, each microchip goes through various tests to ensure it is functioning correctly.

3.1 Problem Statement

Suppose you are the product manager of the factory and you have the test results for some microchips on two different tests.

- From these two tests, you would like to determine whether the microchips should be accepted or rejected.
- To help you make the decision, you have a dataset of test results on past microchips, from which you can build a logistic regression model.

3.2 Loading and visualizing the data

Similar to previous parts of this exercise, let's start by loading the dataset for this task and visualizing it.

- The `load_dataset()` function shown below loads the data into variables `X_train` and `y_train`
 - `X_train` contains the test results for the microchips from two tests
 - `y_train` contains the results of the QA
 - `y_train = 1` if the microchip was accepted

- `y_train = 0` if the microchip was rejected
- Both `X_train` and `y_train` are numpy arrays.

```
# load dataset
X_train, y_train = load_data("data/ex2data2.txt")
```

View the variables

The code below prints the first five values of `X_train` and `y_train` and the type of the variables.

```
# print X_train
print("X_train:", X_train[:5])
print("Type of X_train:", type(X_train))

# print y_train
print("y_train:", y_train[:5])
print("Type of y_train:", type(y_train))

X_train: [[ 0.051267  0.69956 ]
 [-0.092742  0.68494 ]
 [-0.21371   0.69225 ]
 [-0.375     0.50219 ]
 [-0.51325   0.46564 ]]
Type of X_train: <class 'numpy.ndarray'>
y_train: [1. 1. 1. 1. 1.]
Type of y_train: <class 'numpy.ndarray'>
```

Check the dimensions of your variables

Another useful way to get familiar with your data is to view its dimensions. Let's print the shape of `X_train` and `y_train` and see how many training examples we have in our dataset.

```
print ('The shape of X_train is: ' + str(X_train.shape))
print ('The shape of y_train is: ' + str(y_train.shape))
print ('We have m = %d training examples' % (len(y_train)))

The shape of X_train is: (118, 2)
The shape of y_train is: (118,)
We have m = 118 training examples
```

Visualize your data

The helper function `plot_data` (from `utils.py`) is used to generate a figure like Figure 3, where the axes are the two test scores, and the positive ($y = 1$, accepted) and negative ($y = 0$, rejected) examples are shown with different markers.

```
# Plot examples
plot_data(X_train, y_train[:,], pos_label="Accepted",
neg_label="Rejected")

# Set the y-axis label
plt.ylabel('Microchip Test 2')
# Set the x-axis label
plt.xlabel('Microchip Test 1')
plt.legend(loc="upper right")
plt.show()
```

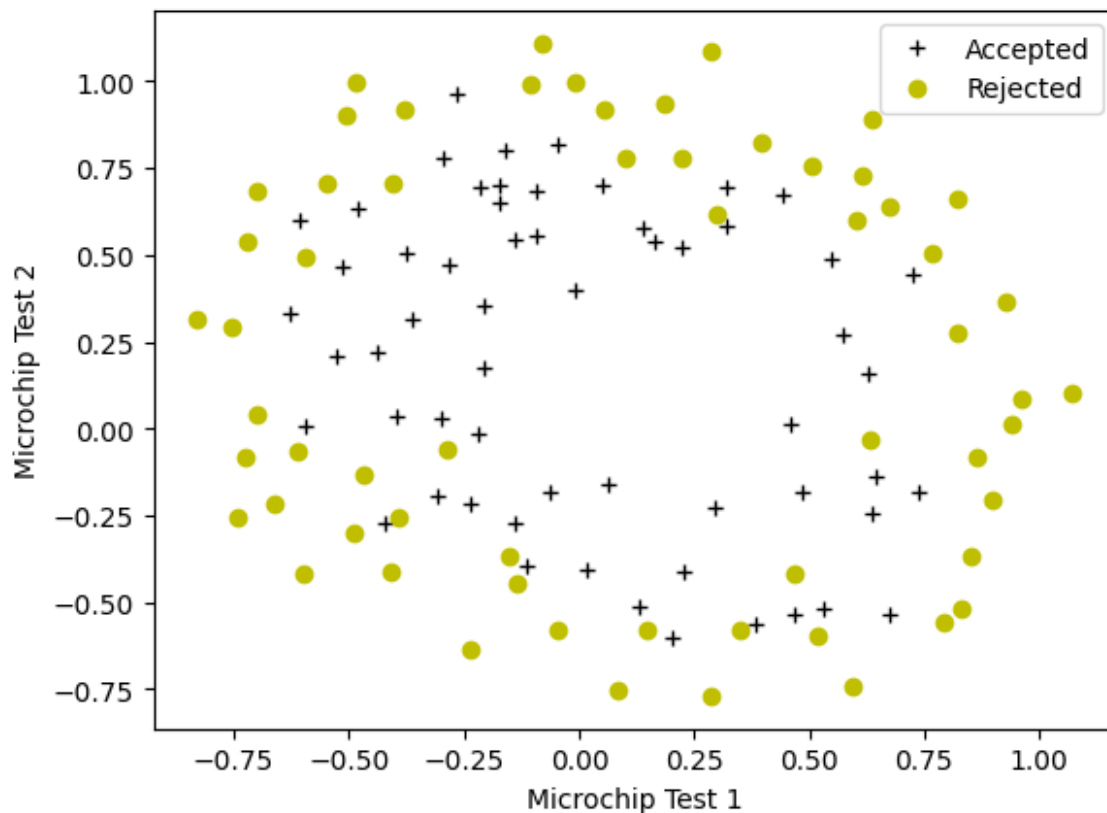


Figure 3 shows that our dataset cannot be separated into positive and negative examples by a straight-line through the plot. Therefore, a straight forward application of logistic regression will not perform well on this dataset since logistic regression will only be able to find a linear decision boundary.

3.3 Feature mapping

One way to fit the data better is to create more features from each data point. In the provided function `map_feature`, we will map the features into all polynomial terms of x_1 and x_2 up to the sixth power.

$$\text{map_feature}(x) = \begin{bmatrix} x_1 \\ x_2 \\ x_1^2 \\ x_1 x_2 \\ x_2^2 \\ x_1^3 \\ \vdots \\ x_1^5 x_2^5 \\ x_2^6 \end{bmatrix}$$

As a result of this mapping, our vector of two features (the scores on two QA tests) has been transformed into a 27-dimensional vector.

- A logistic regression classifier trained on this higher-dimension feature vector will have a more complex decision boundary and will be nonlinear when drawn in our 2-dimensional plot.
- The `map_feature` function is provided for you in `utils.py`.

```
print("Original shape of data:", X_train.shape)

mapped_X = map_feature(X_train[:, 0], X_train[:, 1])
print("Shape after feature mapping:", mapped_X.shape)

Original shape of data: (118, 2)
Shape after feature mapping: (118, 27)
```

Let's also print the first elements of `X_train` and `mapped_X` to see the transformation.

```
print("X_train[0]:", X_train[0])
print("mapped X_train[0]:", mapped_X[0])

X_train[0]: [0.051267 0.69956 ]
mapped X_train[0]: [5.12670000e-02 6.99560000e-01 2.62830529e-03
3.58643425e-02
4.89384194e-01 1.34745327e-04 1.83865725e-03 2.50892595e-02
3.42353606e-01 6.90798869e-06 9.42624411e-05 1.28625106e-03
1.75514423e-02 2.39496889e-01 3.54151856e-07 4.83255257e-06
6.59422333e-05 8.99809795e-04 1.22782870e-02 1.67542444e-01
1.81563032e-08 2.47750473e-07 3.38066048e-06 4.61305487e-05
6.29470940e-04 8.58939846e-03 1.17205992e-01]
```

While the feature mapping allows us to build a more expressive classifier, it is also more susceptible to overfitting. In the next parts of the exercise, you will implement regularized logistic regression to fit the data and also see for yourself how regularization can help combat the overfitting problem.

3.4 Cost function for regularized logistic regression

In this part, you will implement the cost function for regularized logistic regression.

Recall that for regularized logistic regression, the cost function is of the form

$$J(w, b) = \frac{1}{m} \sum_{i=0}^{m-1} \left[-y^{(i)} \log(f_{w,b}(x^{(i)})) - (1 - y^{(i)}) \log(1 - f_{w,b}(x^{(i)})) \right] + \frac{\lambda}{2m} \sum_{j=0}^{n-1} w_j^2$$

Compare this to the cost function without regularization (which you implemented above), which is of the form

$$J(w, b) = \frac{1}{m} \sum_{i=0}^{m-1} \text{??}$$

The difference is the regularization term, which is

$$\frac{\lambda}{2m} \sum_{j=0}^{n-1} w_j^2$$

Note that the b parameter is not regularized.

Exercise 5: Compute_cost_reg function

Please complete the `compute_cost_reg` function below to calculate the following term for each element in w

$$\frac{\lambda}{2m} \sum_{j=0}^{n-1} w_j^2$$

The starter code then adds this to the cost without regularization (which you computed above in `compute_cost`) to calculate the cost with regularization.

```
# GRADED FUNCTION: compute_cost_reg
def compute_cost_reg(X, y, w, b, lambda_ = 1):
    """
    Computes the cost over all examples
    Args:
        X : (array_like Shape (m,n)) data, m examples by n features
        y : (array_like Shape (m,)) target value
        w : (array_like Shape (n,)) Values of parameters of the model

        b : (array_like Shape (n,)) Values of bias parameter of the model
    Returns:
        total_cost: (scalar) cost
    """
```

```

m, n = X.shape

# Calls the compute_cost function that you implemented above
cost_without_reg = compute_cost(X, y, w, b)

# You need to calculate this value
reg_cost = 0.

### START CODE HERE ###

reg_cost = np.sum(w ** 2)

### END CODE HERE ###

# Add the regularization cost to get the total cost
total_cost = cost_without_reg + (lambda_/(2 * m)) * reg_cost

return total_cost

```

Run the cell below to check your implementation of the `compute_cost_reg` function.

```

X_mapped = map_feature(X_train[:, 0], X_train[:, 1])
np.random.seed(1)
initial_w = np.random.rand(X_mapped.shape[1]) - 0.5
initial_b = 0.5
lambda_ = 0.5
cost = compute_cost_reg(X_mapped, y_train, initial_w, initial_b,
lambda_)

```

```

print("Regularized cost :", cost)

```

```

# UNIT TEST

```

```

compute_cost_reg_test(compute_cost_reg)

```

```

Regularized cost : 0.15064189100226913

```

```

-----
-----
AssertionError                                Traceback (most recent call
last)
Cell In[38], line 11
      8 print("Regularized cost :", cost)
     10 # UNIT TEST
--> 11 compute_cost_reg_test(compute_cost_reg)

File ~/Bureau/UConn/CSE4705 Artificial
Intelligence/aa_logistic_regression_regularization_decision_trees/
Code/01 Logistic Regression/public_tests.py:93, in
compute_cost_reg_test(target)

```

```

90 lambda_ = 0.1
91 expected_output = target(X, y, w, b, lambda_)
--> 93 assert np.isclose(expected_output, 0.5469746792761936),
f"Wrong output. Expected: {0.5469746792761936} got:{expected_output}"
95 w = np.random.randn(5)
96 b = -0.6

```

AssertionError: Wrong output. Expected: 0.5469746792761936
got:0.9551189378973625

Expected Output: Regularized cost : 0.6618252552483948

3.5 Gradient for regularized logistic regression

In this section, you will implement the gradient for regularized logistic regression.

The gradient of the regularized cost function has two components. The first, $\frac{\partial J(w, b)}{\partial b}$ is a scalar, the other is a vector with the same shape as the parameters w , where the j^{th} element is defined as follows:

$$\frac{\partial J(w, b)}{\partial b} = \frac{1}{m} \sum_{i=0}^{m-1} (f_{w, b}(x^{(i)}) - y^{(i)})$$

$$\frac{\partial J(w, b)}{\partial w_j} = \left(\frac{1}{m} \sum_{i=0}^{m-1} (f_{w, b}(x^{(i)}) - y^{(i)}) x_j^{(i)} \right) + \frac{\lambda}{m} w_j \text{ for } j=0 \dots (n-1)$$

Compare this to the gradient of the cost function without regularization (which you implemented above), which is of the form

$$\frac{\partial J(w, b)}{\partial b} = \frac{1}{m} \sum_{i=0}^{m-1} (f_{w, b}(x^{(i)}) - y^{(i)})$$

$$\frac{\partial J(w, b)}{\partial w_j} = \frac{1}{m} \sum_{i=0}^{m-1} (f_{w, b}(x^{(i)}) - y^{(i)}) x_j^{(i)}$$

As you can see, $\frac{\partial J(w, b)}{\partial b}$ is the same, the difference is the following term in $\frac{\partial J(w, b)}{\partial w}$, which is

$$\frac{\lambda}{m} w_j \text{ for } j=0 \dots (n-1)$$

Exercise 6: Compute_gradient_reg function

Please complete the `compute_gradient_reg` function below to modify the code below to calculate the following term

$$\frac{\lambda}{m} w_j \text{ for } j=0 \dots (n-1)$$

The starter code will add this term to the $\frac{\partial J(w, b)}{\partial w}$ returned from `compute_gradient` above to get the gradient for the regularized cost function.

```
# GRADED FUNCTION: compute_gradient_reg
def compute_gradient_reg(X, y, w, b, lambda_ = 1):
    """
    Computes the gradient for linear regression

    Args:
        X : (ndarray Shape (m,n))    variable such as house size
        y : (ndarray Shape (m,))      actual value
        w : (ndarray Shape (n,))      values of parameters of the model

        b : (scalar)                  value of parameter of the model
        lambda_ : (scalar, float)     regularization constant

    Returns
        dj_db: (scalar)               The gradient of the cost w.r.t. the
        parameter b.
        dj_dw: (ndarray Shape (n,))   The gradient of the cost w.r.t. the
        parameters w.

    """
    m, n = X.shape

    dj_db, dj_dw = compute_gradient(X, y, w, b)

    ### START CODE HERE ###

    dj_dw += (lambda_ / m) * w

    ### END CODE HERE ###

    return dj_db, dj_dw
```

Run the cell below to check your implementation of the `compute_gradient_reg` function.

```
X_mapped = map_feature(X_train[:, 0], X_train[:, 1])
np.random.seed(1)
```

```

initial_w = np.random.rand(X_mapped.shape[1]) - 0.5
initial_b = 0.5

lambda_ = 0.5
dj_db, dj_dw = compute_gradient_reg(X_mapped, y_train, initial_w,
initial_b, lambda_)

print(f"dj_db: {dj_db}", )
print(f"First few elements of regularized dj_dw:\n
{dj_dw[:4].tolist()}", )

# UNIT TESTS
compute_gradient_reg_test(compute_gradient_reg)

dj_db: 0.07138288792343654
First few elements of regularized dj_dw:
 [-0.010386028450548689, 0.011409852883280117, 0.0536273463274574,
0.003140278267313467]
All tests passed!

```

Expected Output: dj_db:0.07138288792343656 First few elements of regularized dj_dw: [[-0.010386028450548701], [0.01140985288328012], [0.0536273463274574], [0.003140278267313462]]

3.6 Learning parameters using gradient descent

Similar to the previous parts, you will use your gradient descent function implemented above to learn the optimal parameters w, b .

- If you have completed the cost and gradient for regularized logistic regression correctly, you should be able to step through the next cell to learn the parameters w .
- After training our parameters, we will use it to plot the decision boundary.

Note

The code block below takes quite a while to run, especially with a non-vectorized version. You can reduce the `iterations` to test your implementation and iterate faster. If you have time later, run for 100,000 iterations to see better results.

```

# Initialize fitting parameters
np.random.seed(1)
initial_w = np.random.rand(X_mapped.shape[1]) - 0.5
initial_b = 1.

# Set regularization parameter lambda_ (you can try varying this)
lambda_ = 0.01

# Some gradient descent settings

```

```

iterations = 10000
alpha = 0.01

w,b, J_history,_ = gradient_descent(X_mapped, y_train, initial_w,
initial_b,
                                compute_cost_reg,
                                compute_gradient_reg,
                                alpha, iterations, lambda_)

Iteration    0: Cost      0.15
Iteration 1000: Cost      0.31
Iteration 2000: Cost      0.35
Iteration 3000: Cost      0.38
Iteration 4000: Cost      0.43
Iteration 5000: Cost      0.48
Iteration 6000: Cost      0.54
Iteration 7000: Cost      0.60
Iteration 8000: Cost      0.66
Iteration 9000: Cost      0.72
Iteration 9999: Cost      0.78

# Using the following settings
#np.random.seed(1)
#initial_w = np.random.rand(X_mapped.shape[1])-0.5
#initial_b = 1.
#lambda_ = 0.01;
#iterations = 10000
#alpha = 0.01
Iteration    0: Cost      0.72
Iteration 1000: Cost      0.59
Iteration 2000: Cost      0.56
Iteration 3000: Cost      0.53
Iteration 4000: Cost      0.51
Iteration 5000: Cost      0.50
Iteration 6000: Cost      0.48
Iteration 7000: Cost      0.47
Iteration 8000: Cost      0.46
Iteration 9000: Cost      0.45
Iteration 9999: Cost      0.45


```

3.7 Plotting the decision boundary

To help you visualize the model learned by this classifier, we will use our `plot_decision_boundary` function which plots the (non-linear) decision boundary that separates the positive and negative examples.

- In the function, we plotted the non-linear decision boundary by computing the classifier's predictions on an evenly spaced grid and then drew a contour plot of where the predictions change from $y = 0$ to $y = 1$.
- After learning the parameters w, b , the next step is to plot a decision boundary similar to Figure 4.

```
plot_decision_boundary(w, b, X_mapped, y_train)
```

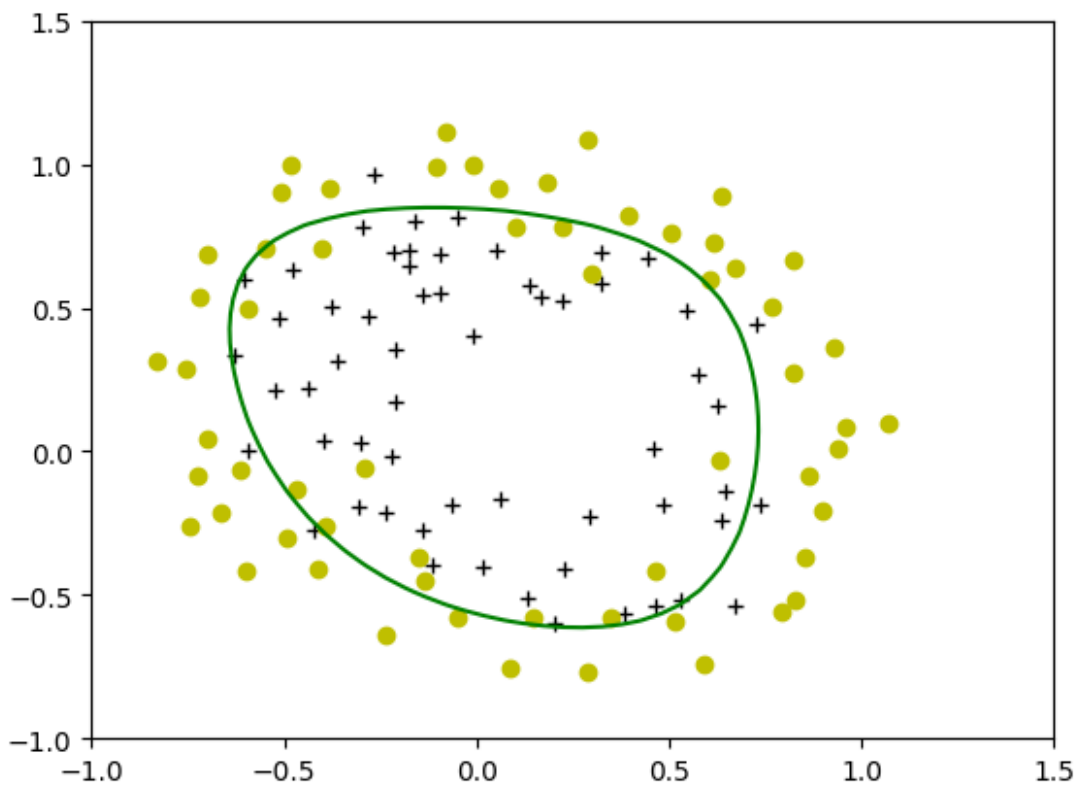

3.8 Evaluating regularized logistic regression model

You will use the `predict` function that you implemented above to calculate the accuracy of the regularized logistic regression model on the training set

```
#Compute accuracy on the training set
p = predict(X_mapped, w, b)
print('Train Accuracy: %f'%(np.mean(p == y_train) * 100))
Train Accuracy: 82.203390
```

Expected Output: Train Accuracy:~ 80%