

We have two credentials


Admin / Contributor implemented with JWT token

The screenshot shows the application dashboard at `localhost:5173`. The dashboard is titled "PHASE 2 · 11" and includes a "Logout" button. A green message bar indicates "Login successful. Dashboard data is loading...". The main content area is titled "PHASE 2 Overview, service health, and live analytics." and includes a "UI ONLY Improved layout" button. The dashboard displays several metrics: Service Status (Loading...), Documents (0), Chunks (0), Embeddings, Search Volume, and Retrieval Quality. The network log on the right shows a successful login request with a 200 ms response time and a payload containing the username "admin" and password "password123".


Health API is also working fine

The screenshot shows the application dashboard at `localhost:5173`. The dashboard is titled "PHASE 2 · 11" and includes a "Logout" button. A green message bar indicates "Login successful. Dashboard data is loading...". The main content area is titled "PHASE 2 Overview, service health, and live analytics." and includes a "UI ONLY Improved layout" button. The dashboard displays several metrics: Service Status (ok), Documents (10), Chunks (42), Embeddings, Search Volume, and Retrieval Quality. The network log on the right shows a successful health check request with a 200 OK status and a response time of 200 ms. The response headers include "Access-Control-Allow-Credentials: true".


Dashboard list

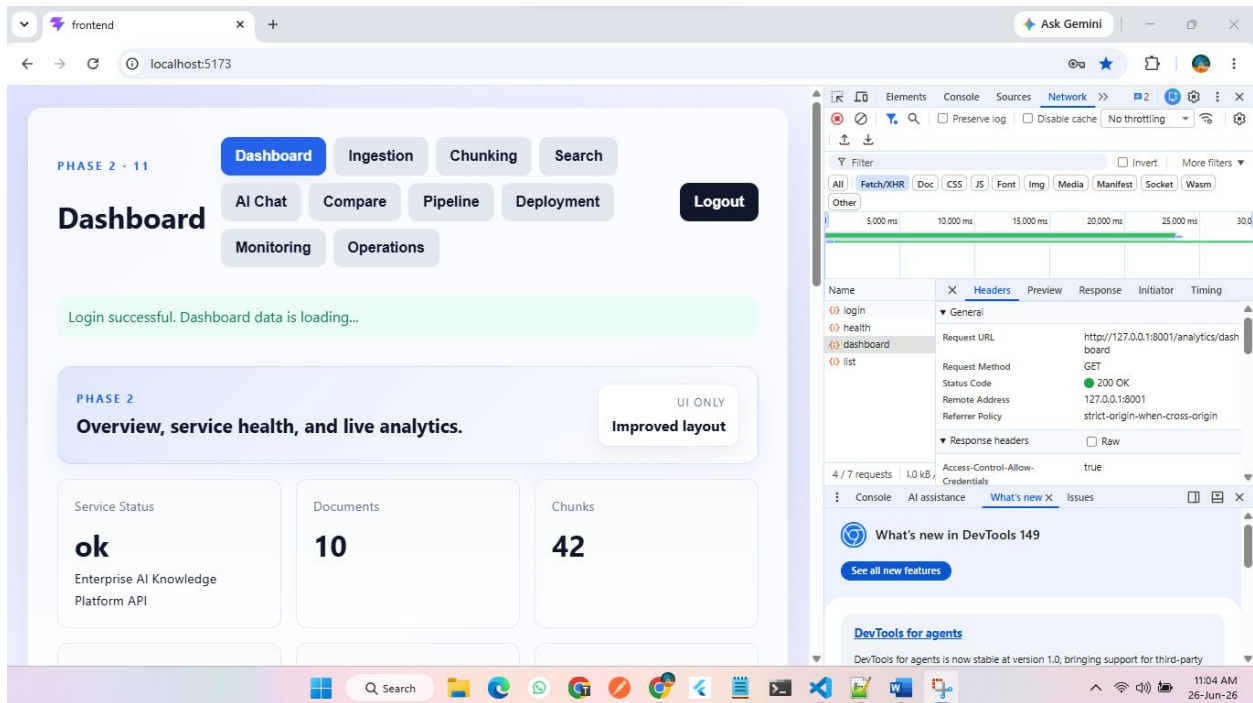


Implemented the document list API in the dashboard and its health is also fine

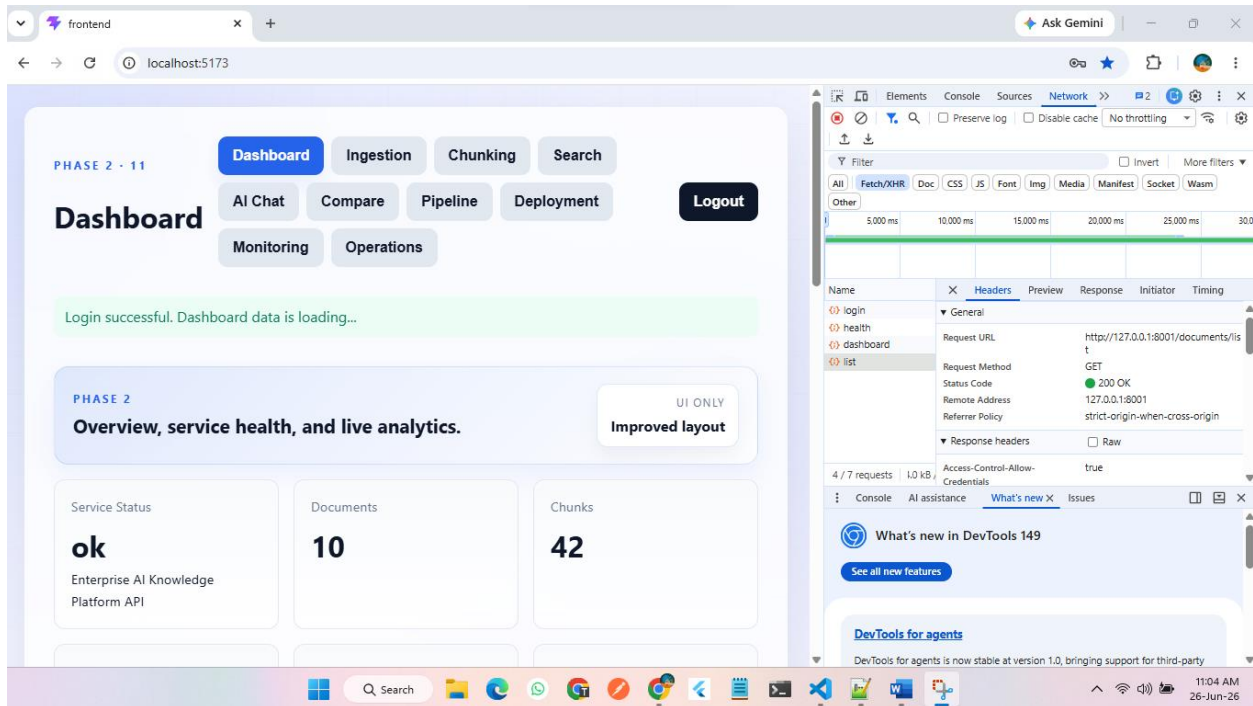

With chunking details and embeddings details added

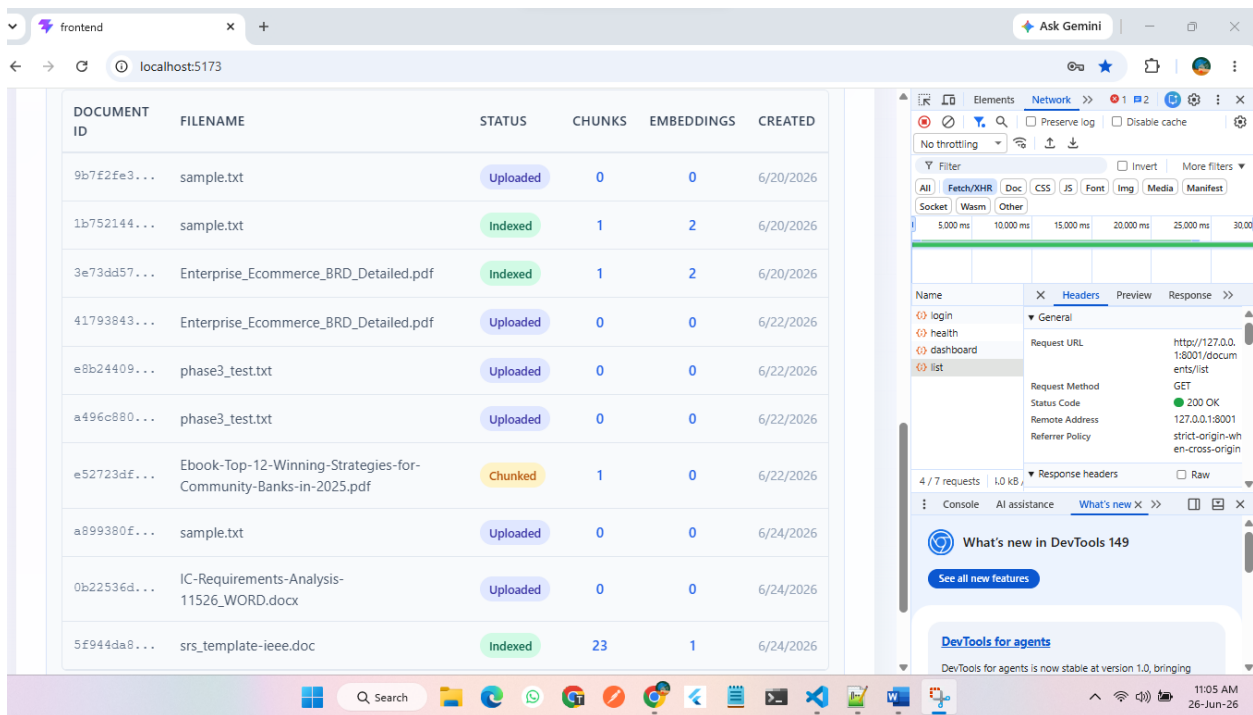

Mango DB is currently connected

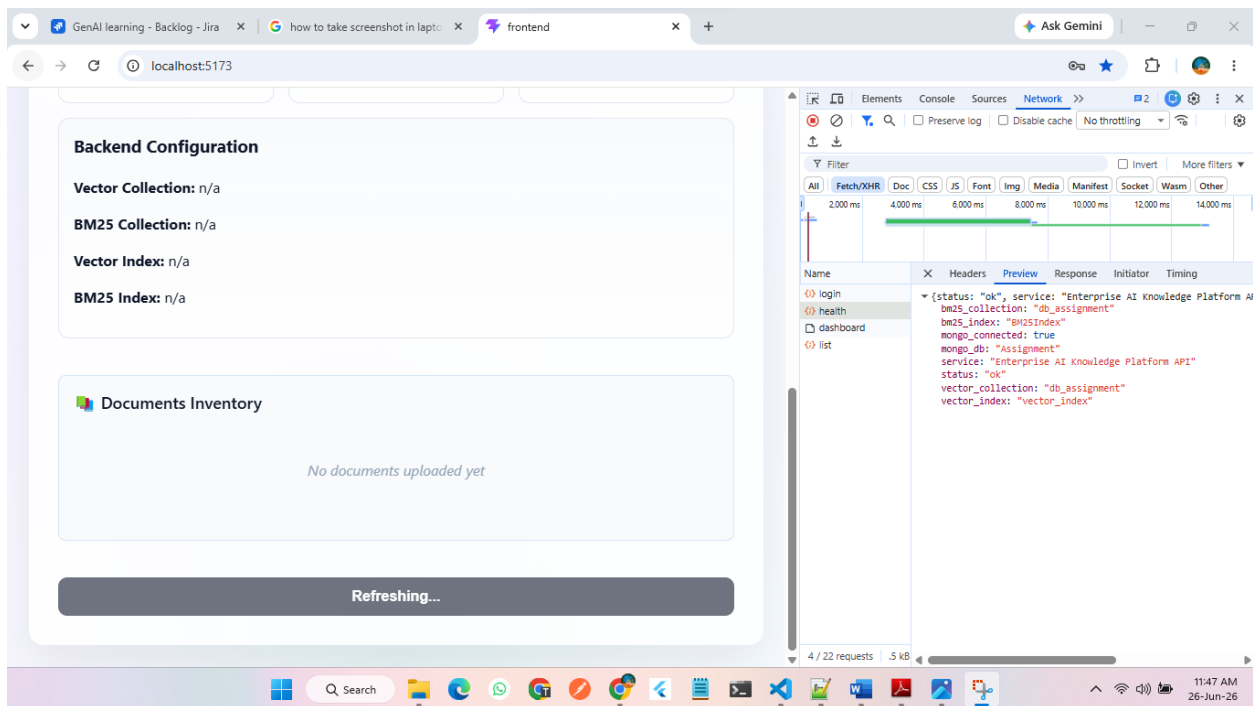

Ingestion uploading file

Before file upload

cloud.mongodb.com/v2/69f08ce6e4eb6167abba2cb6#/clusters/atlasSearch/Cluster0Dk

Search & Vector Search

Find a search index

VIEW COMPOUND QUERY EXAMPLE [+ CREATE SEARCH INDEX](#)

M0 free clusters have a limit of 3 search and vector indexes per cluster. Indexes Used: 2 of 3.

Database	Collection	Index Name	Status	Queryable	Type	Index Fields	Documents (Estimated)
Assignment	db_assignment	BM25Index	READY View status details	✓	search	[dynamic]	7 (100%) indexed of 7
Assignment	db_assignment	vector_index	READY View status details	✓	vectorSearch	"embedding"	7 (100%) indexed of 7

[Learn more about Atlas Search](#)
[Learn more about Atlas Vector Search](#)

Alert System Status: All Good
©2024 MongoDB, Inc. [Status](#) [Terms](#) [Privacy](#) [Atlas Blog](#) [Contact Sales](#)

After file uploaded

frontend Cluster0Dk Search | Cloud: Mo

cloud.mongodb.com/v2/69f08ce6e4eb6167abba2cb6#/clusters/atlasSearch/Cluster0Dk

Search & Vector Search

Find a search index

VIEW COMPOUND QUERY EXAMPLE [+ CREATE SEARCH INDEX](#)


M0 free clusters have a limit of 3 search and vector indexes per cluster. Indexes Used: 2 of 3.

Database	Collection	Index Name	Status	Queryable	Type	Index Fields	Documents (Estimated)	Size
Assignment	db_assignment	BM25Index	READY View status details	✓	search	[dynamic]	13 (100%) indexed of 13	25.1KB
Assignment	db_assignment	vector_index	READY View status details	✓	vectorSearch	"embedding"	13 (100%) indexed of 13	9.12KB


[Learn more about Atlas Search](#)
[Learn more about Atlas Vector Search](#)

Alert System Status: All Good
©2024 MongoDB, Inc. [Status](#) [Terms](#) [Privacy](#) [Atlas Blog](#) [Contact Sales](#)


File uploaded successfully

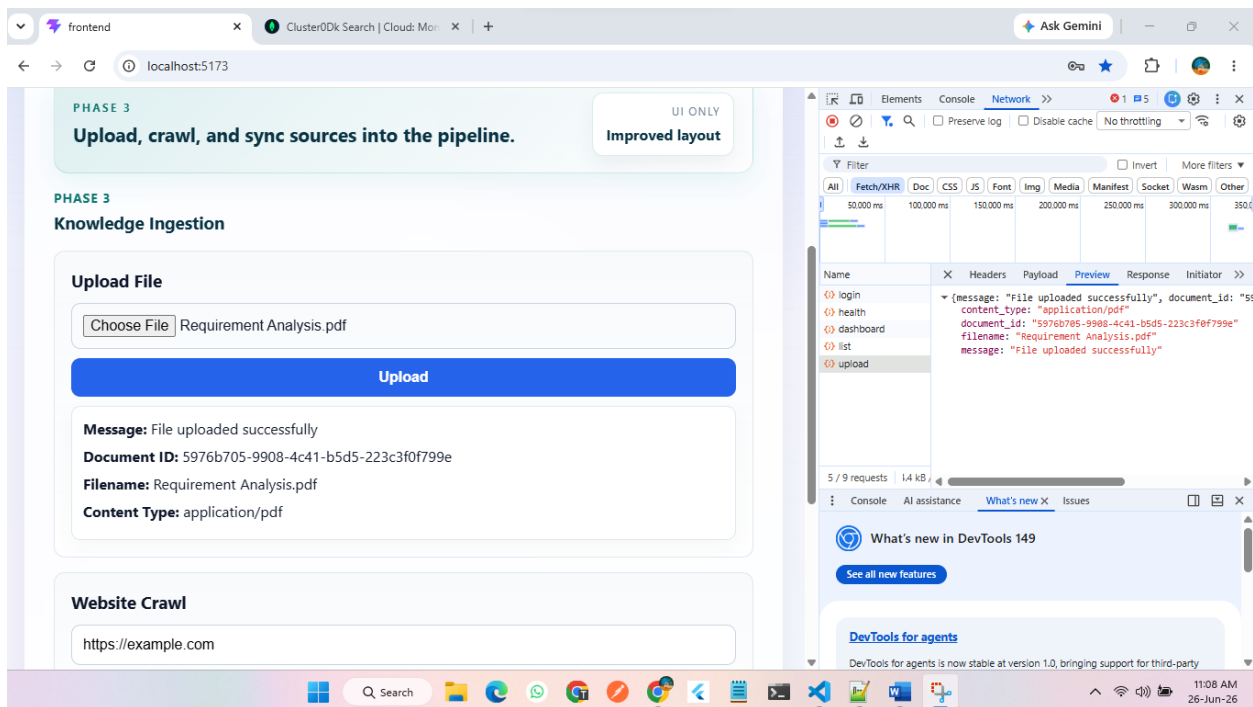


Confluence file is also sync

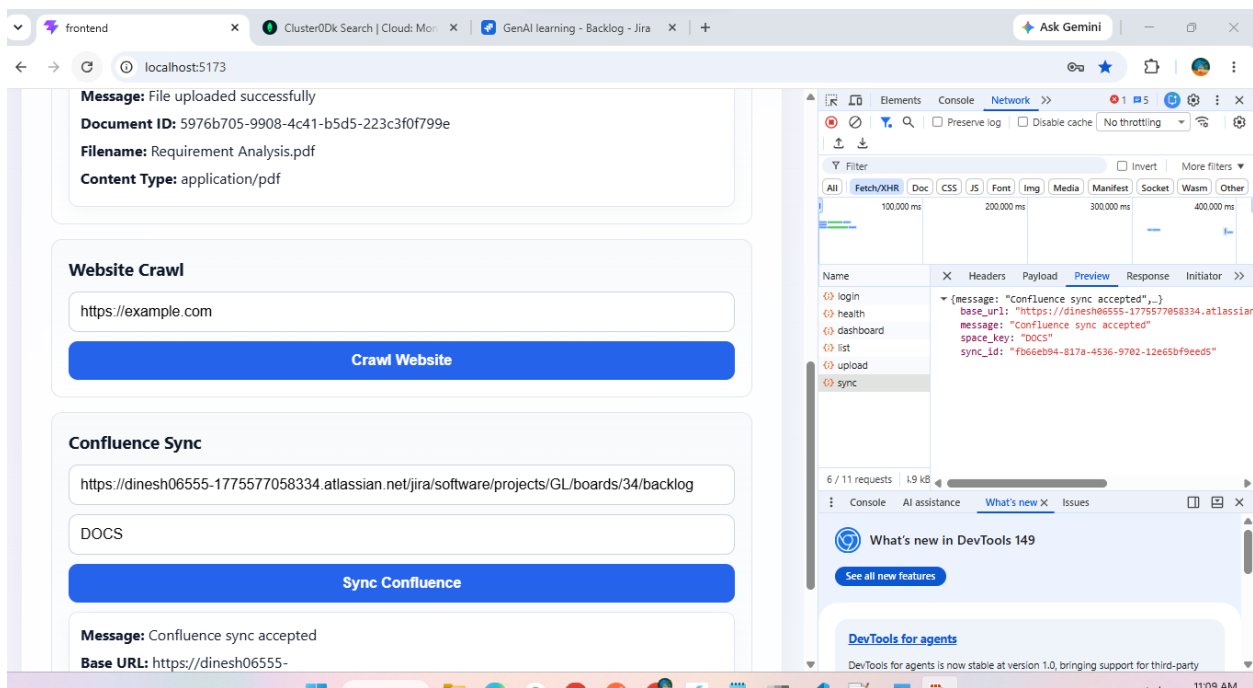



Uploade file is listed in the chunking

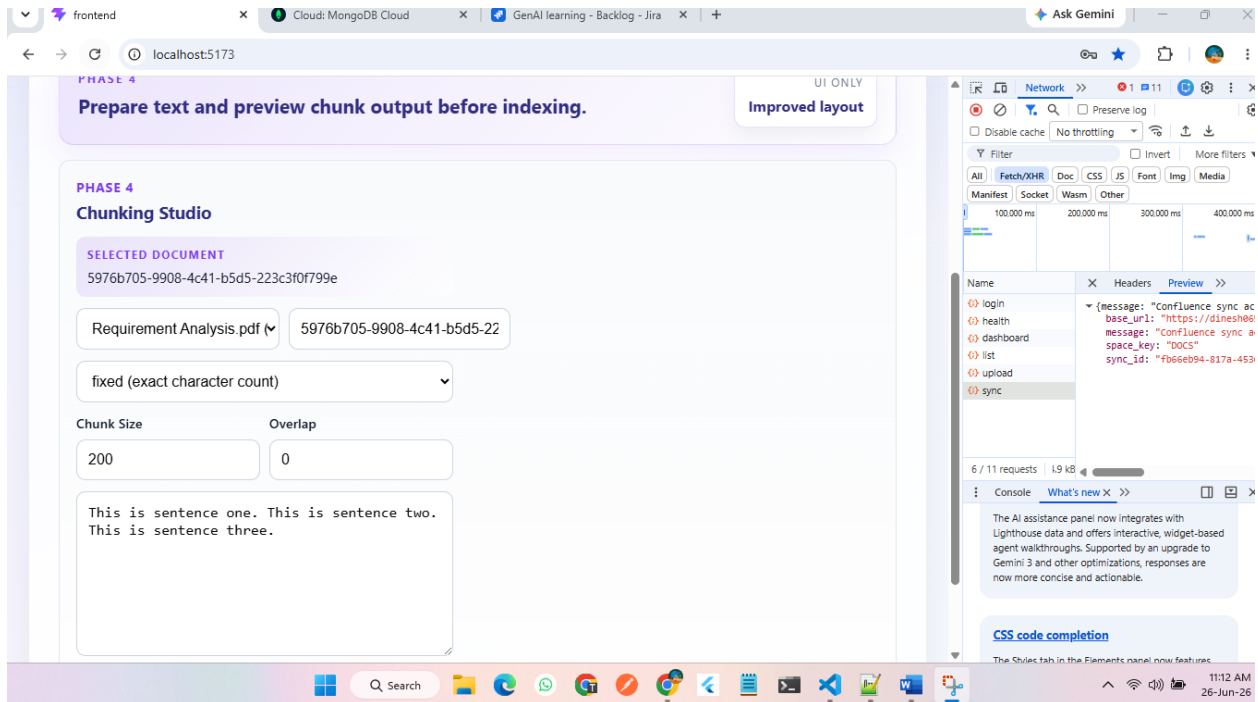


Chunking options

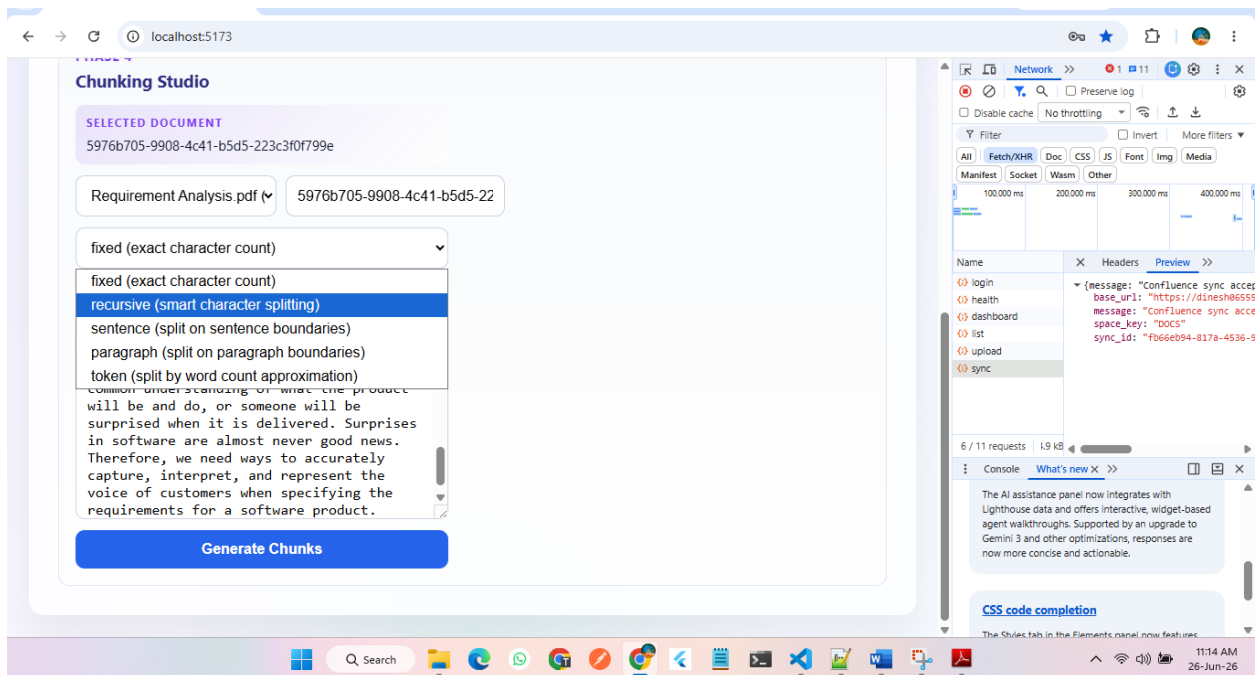

Since we selected the sentence

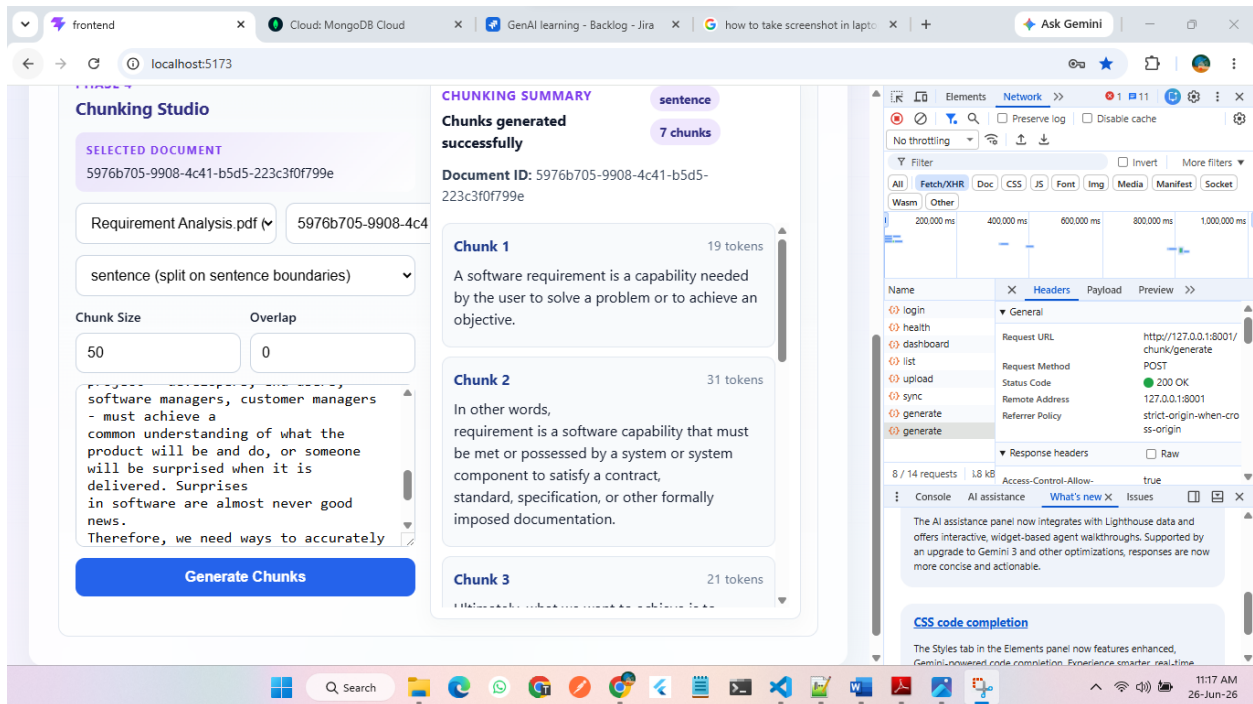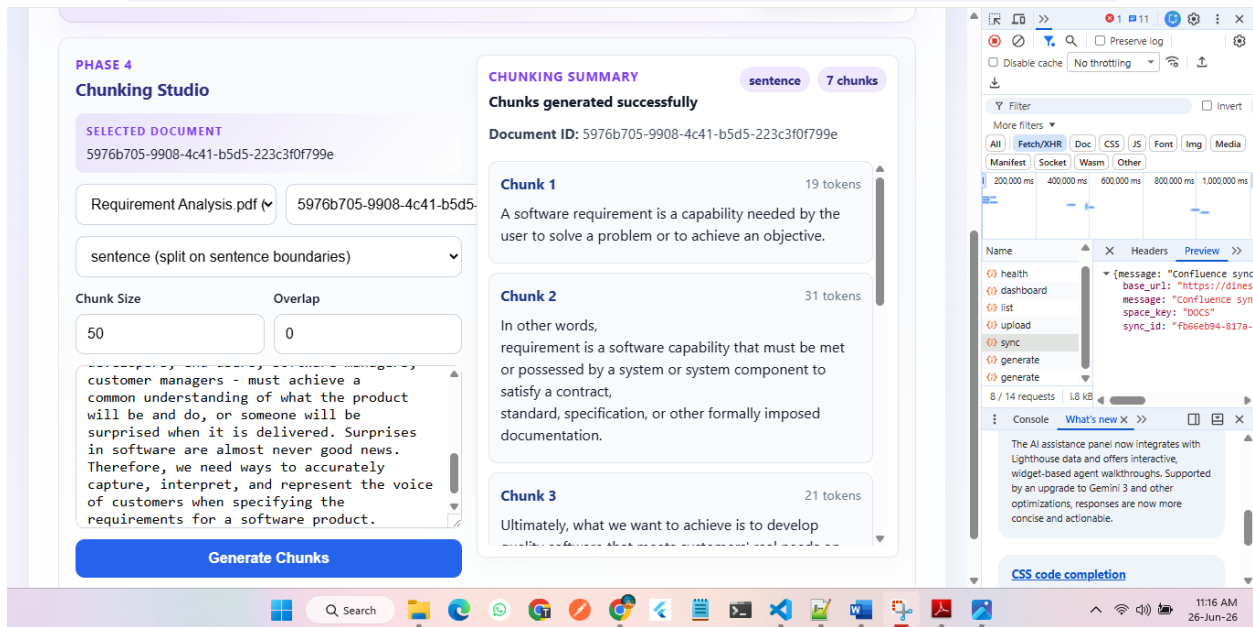

Semantic based search

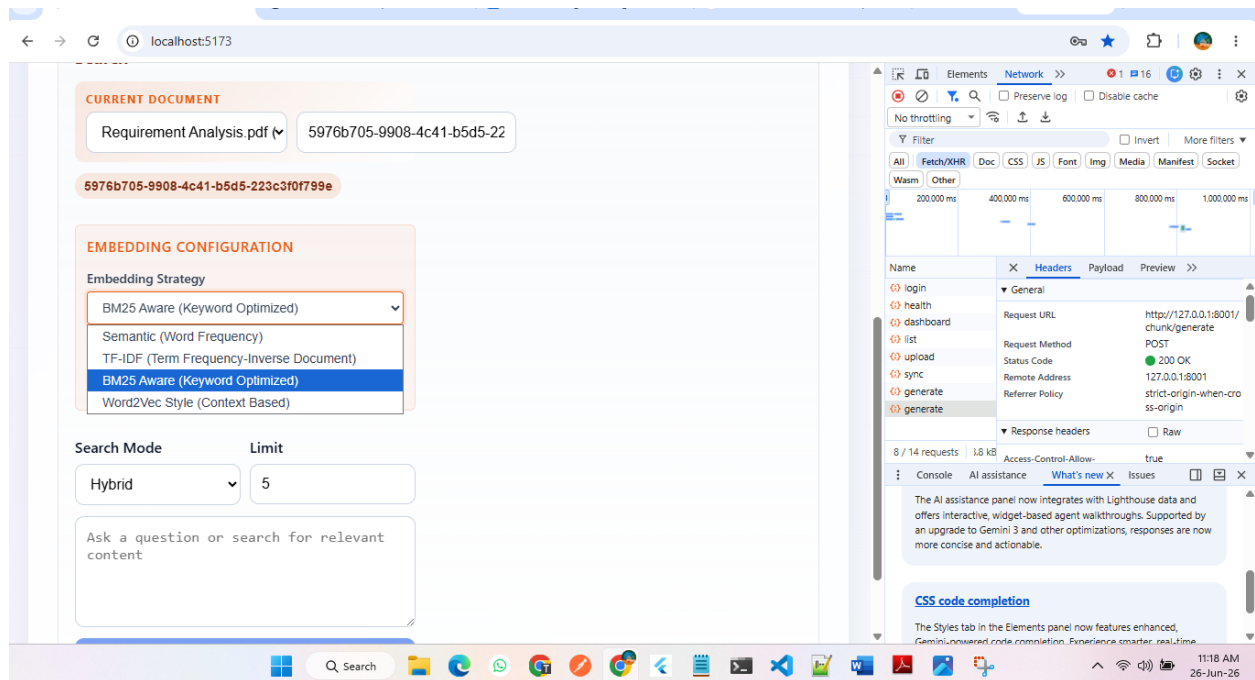

We have selected BM25

And the Embedding model as Default

