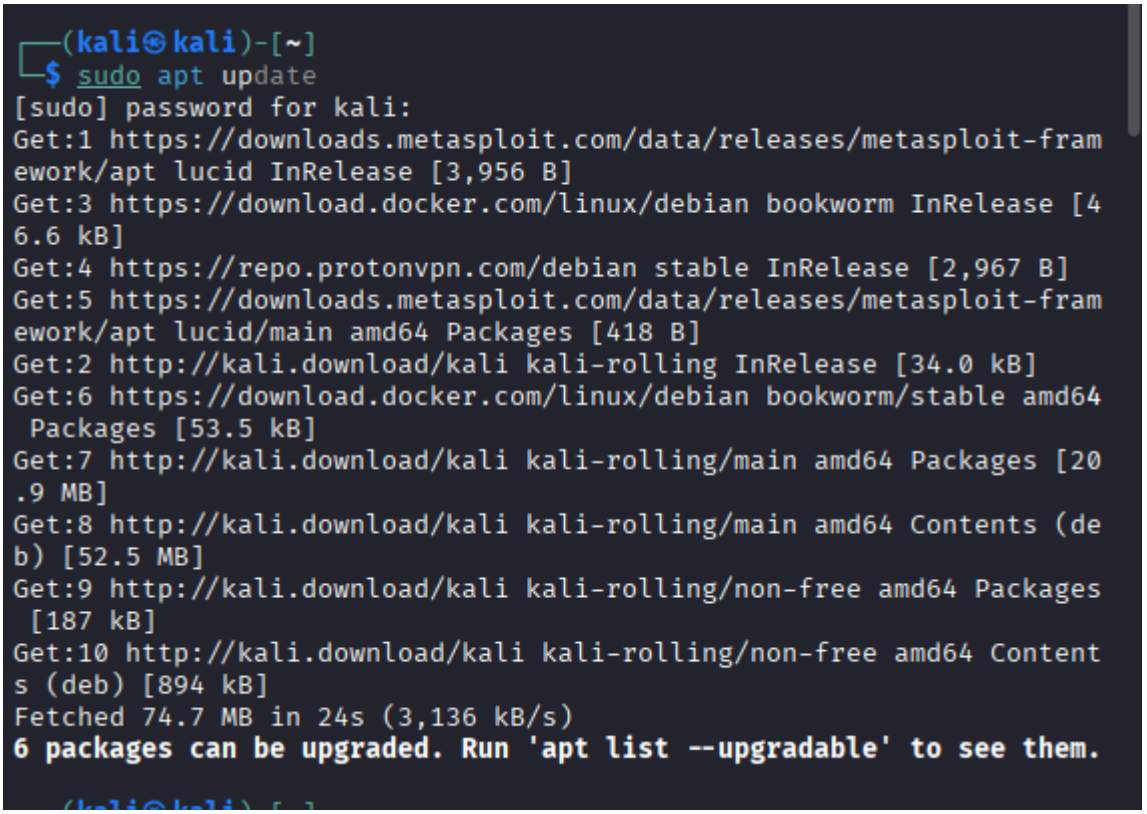
1º Ejercicio instalar en kali

- sudo apt install dconf-editor

Instalación de dconf-editor en kali



```
┌──(kali㉿kali)-[~]
└─$ sudo apt upgrade
The following packages were automatically installed and are no longe
r required:
  gir1.2-girepository-2.0  libwireshark18
  libdisplay-info2         libwiretap15
  libgeos3.14.0            libwsutil16
  libgirepository-1.0-1    python3-proton-vpn-lib
  libinstpatch-1.0-2       python3-xlutils
  libobjc-14-dev           python3-xlwt
Use 'sudo apt autoremove' to remove them.

Upgrading:
  docker-ce      docker-ce-rootless-extras  python3-numpy
  docker-ce-cli  metasploit-framework       python3-numpy-dev

Summary:
  Upgrading: 6, Installing: 0, Removing: 0, Not Upgrading: 0
  Download size: 444 MB
  Freed space: 643 kB

Continue? [Y/n] y
Get:1 https://download.docker.com/linux/debian bookworm/stable amd64
```

```
┌──(kali㉿kali)-[~]
└─$ dconf-editor
Command 'dconf-editor' not found, but can be installed with:
sudo apt install dconf-editor
Do you want to install it? (N/y)y
sudo apt install dconf-editor
[sudo] password for kali:
The following packages were automatically installed and are no longe
r required:
  gir1.2-girepository-2.0  libwireshark18
  libdisplay-info2         libwiretap15
  libgeos3.14.0            libwsutil16
  libgirepository-1.0-1    python3-proton-vpn-lib
  libinstpatch-1.0-2       python3-xlutils
  libobjc-14-dev           python3-xlwt
Use 'sudo apt autoremove' to remove them.

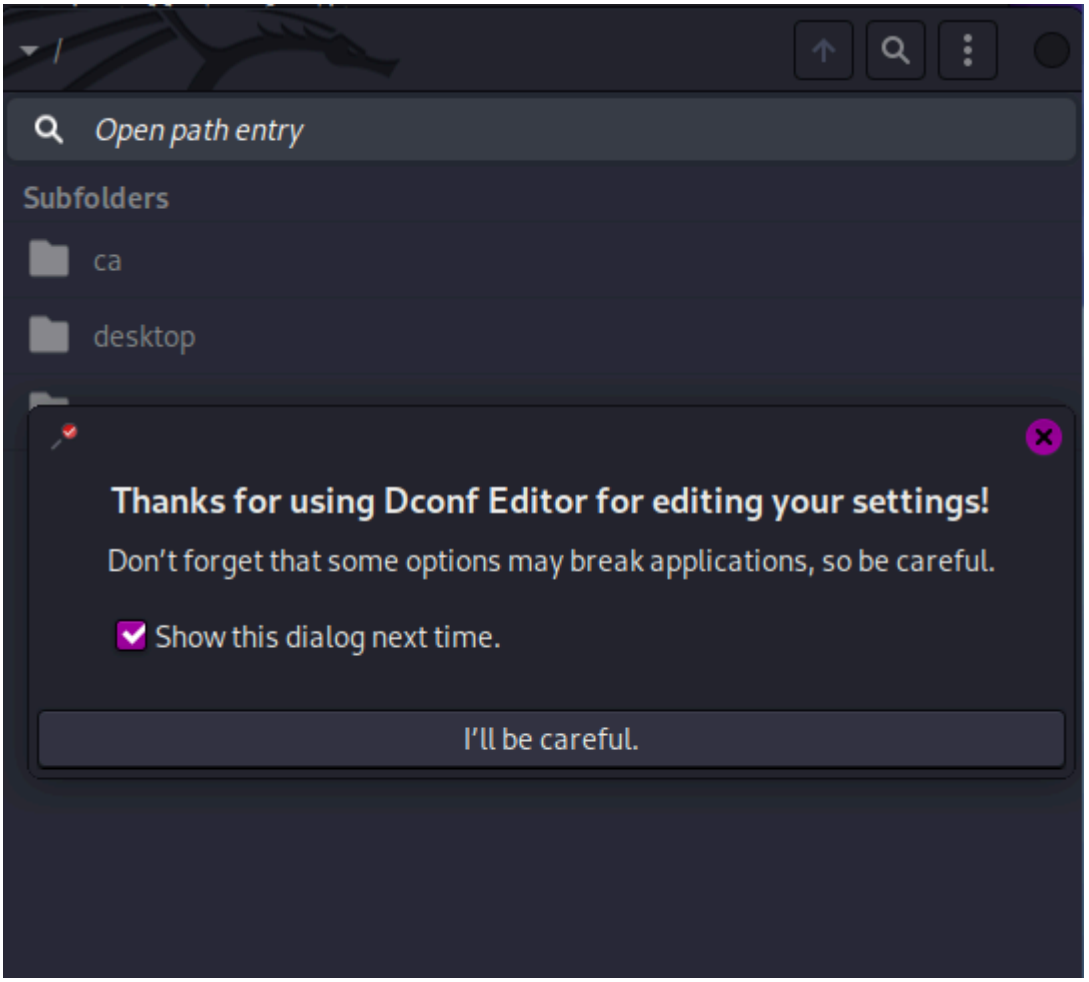
Installing:
  dconf-editor

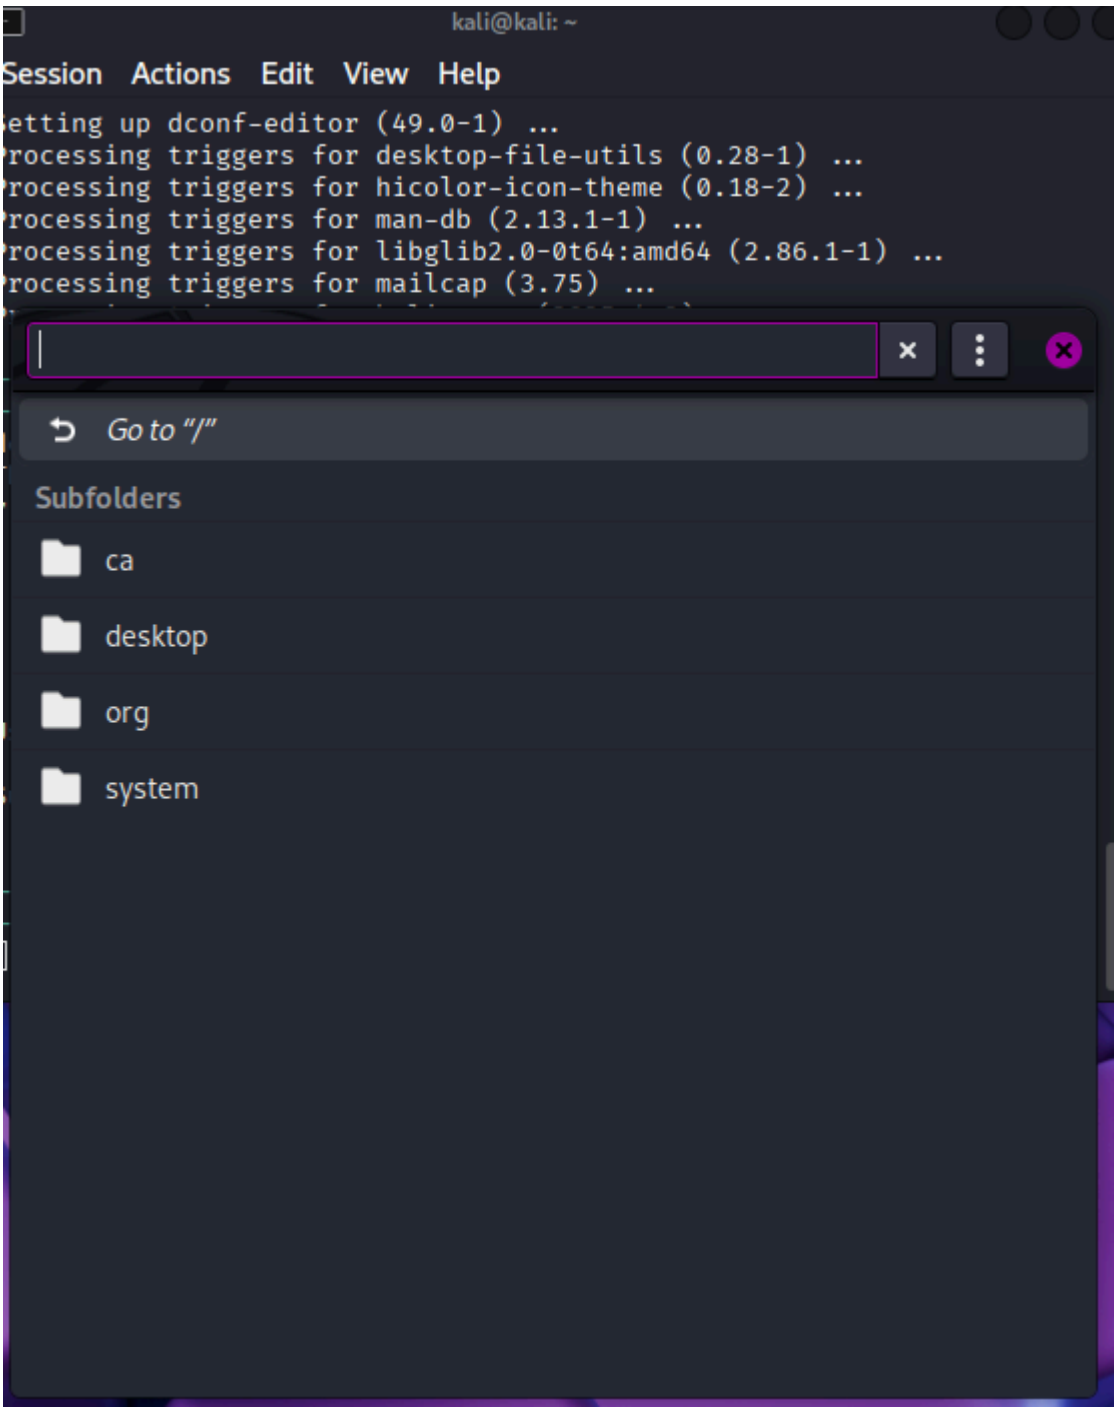
Summary:
  Upgrading: 0, Installing: 1, Removing: 0, Not Upgrading: 0
  Download size: 637 kB
  Space needed: 3,913 kB / 16.0 GB available
```

```
┌──(kali㉿kali)-[~]
└─$ sudo apt install dconf-editor
dconf-editor is already the newest version (49.0-1).
The following packages were automatically installed and are no longe
r required:
  gir1.2-girepository-2.0  libwireshark18
  libdisplay-info2         libwiretap15
  libgeos3.14.0            libwsutil16
  libgirepository-1.0-1    python3-proton-vpn-lib
  libinstpatch-1.0-2       python3-xlutils
  libobjc-14-dev           python3-xlwt
Use 'sudo apt autoremove' to remove them.

Summary:
  Upgrading: 0, Installing: 0, Removing: 0, Not Upgrading: 0
```

```
┌──(kali㉿kali)-[~]
└─$ dconf-editor
```




kali@kali: ~
Session Actions Edit View Help
etting up dconf-editor (49.0-1) ...
rocessing triggers for desktop-file-utils (0.28-1) ...
rocessing triggers for hicolor-icon-theme (0.18-2) ...
rocessing triggers for man-db (2.13.1-1) ...
rocessing triggers for libglib2.0-0t64:amd64 (2.86.1-1) ...
rocessing triggers for mailcap (3.75) ...
Go to "/"
Subfolders
ca
desktop
org
system

2º EJERCICIO INSTALAR KISMET WINDOWS EN LINUX
IDS DETECCION DE INSTRUSOS

```
┌──(kali㉿kali)-[~]
└─$ sudo apt update
Hit:1 https://downloads.metasploit.com/data/releases/metasploit-fram
ework/apt lucid InRelease
Hit:2 https://download.docker.com/linux/debian bookworm InRelease
Hit:3 https://repo.protonvpn.com/debian stable InRelease
Hit:4 http://http.kali.org/kali kali-rolling InRelease
All packages are up to date.

┌──(kali㉿kali)-[~]
└─$ sudo apt install kismet
kismet is already the newest version (2025.09.R1-0kali3).
The following packages were automatically installed and are no longe
r required:
  gir1.2-girepository-2.0  libwireshark18
  libdisplay-info2         libwiretap15
  libgeos3.14.0            libwsutil16
  libgirepository-1.0-1    python3-proton-vpn-lib
  libinstpatch-1.0-2       python3-xlutils
  libobjc-14-dev           python3-xlwt
Use 'sudo apt autoremove' to remove them.

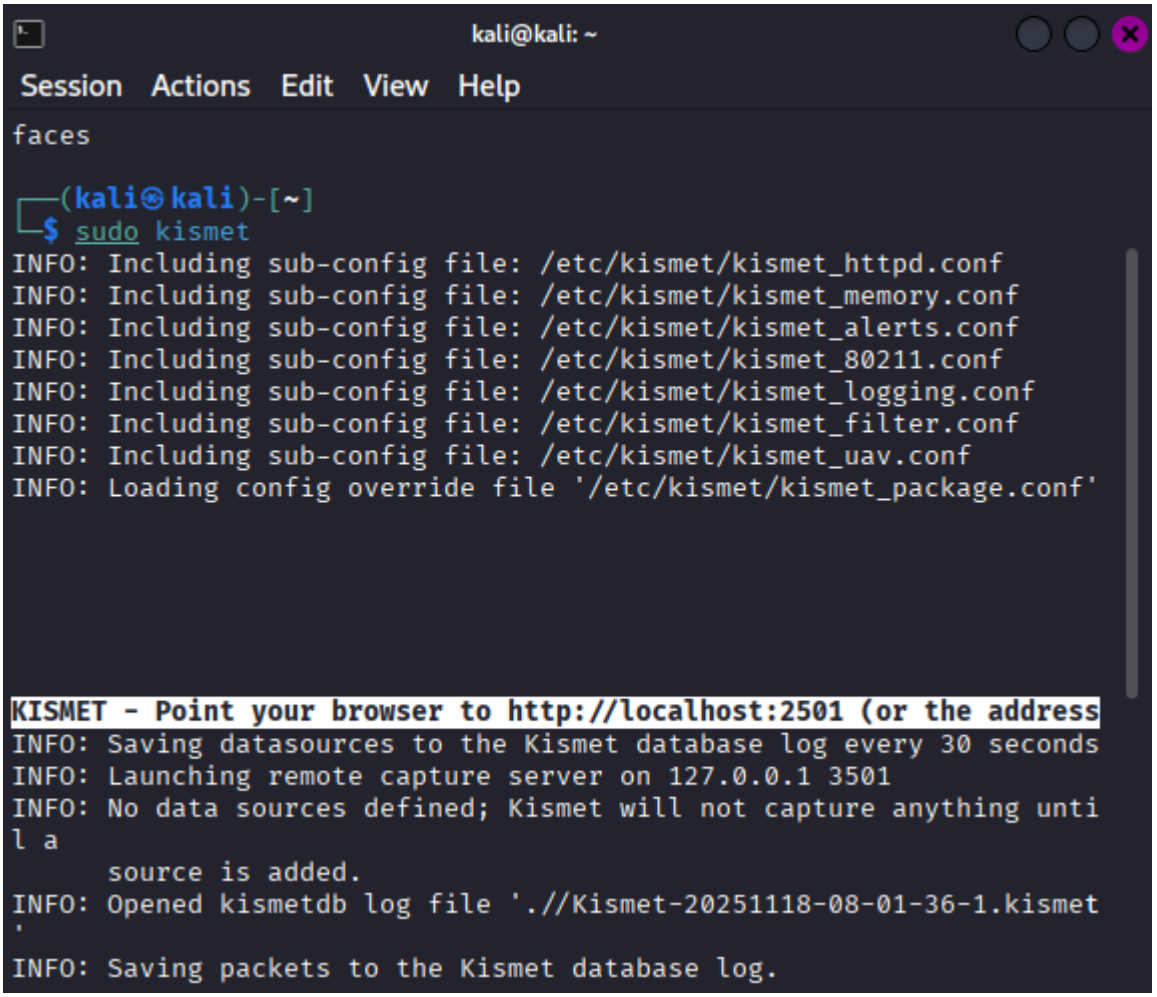
Summary:
  Upgrading: 0, Installing: 0, Removing: 0, Not Upgrading: 0

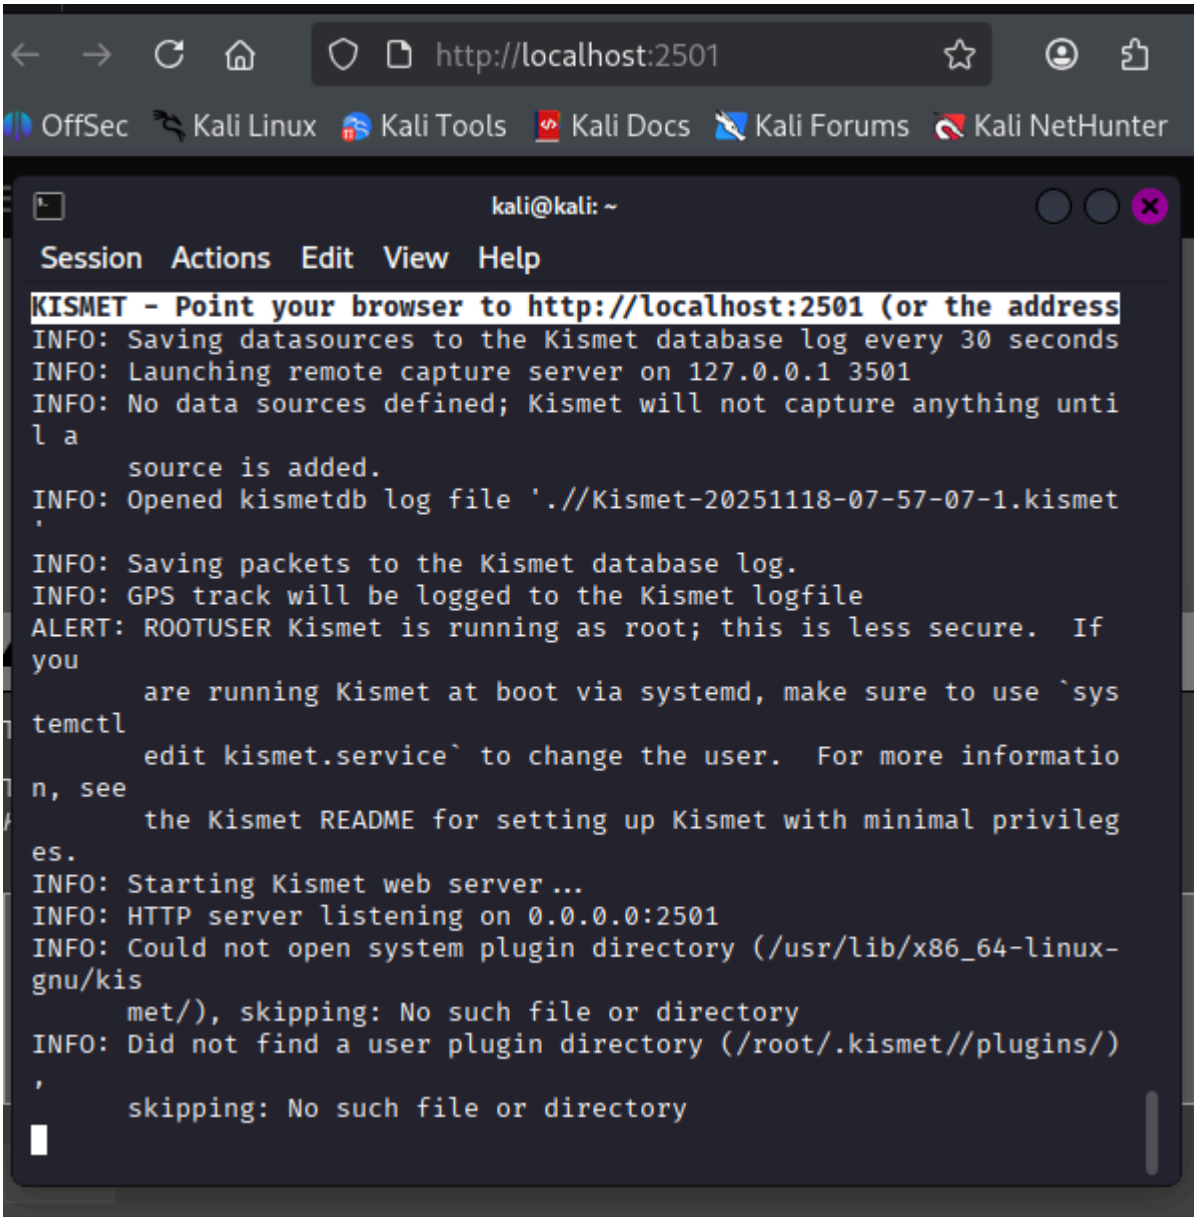
┌──(kali㉿kali)-[~]
└─$
```

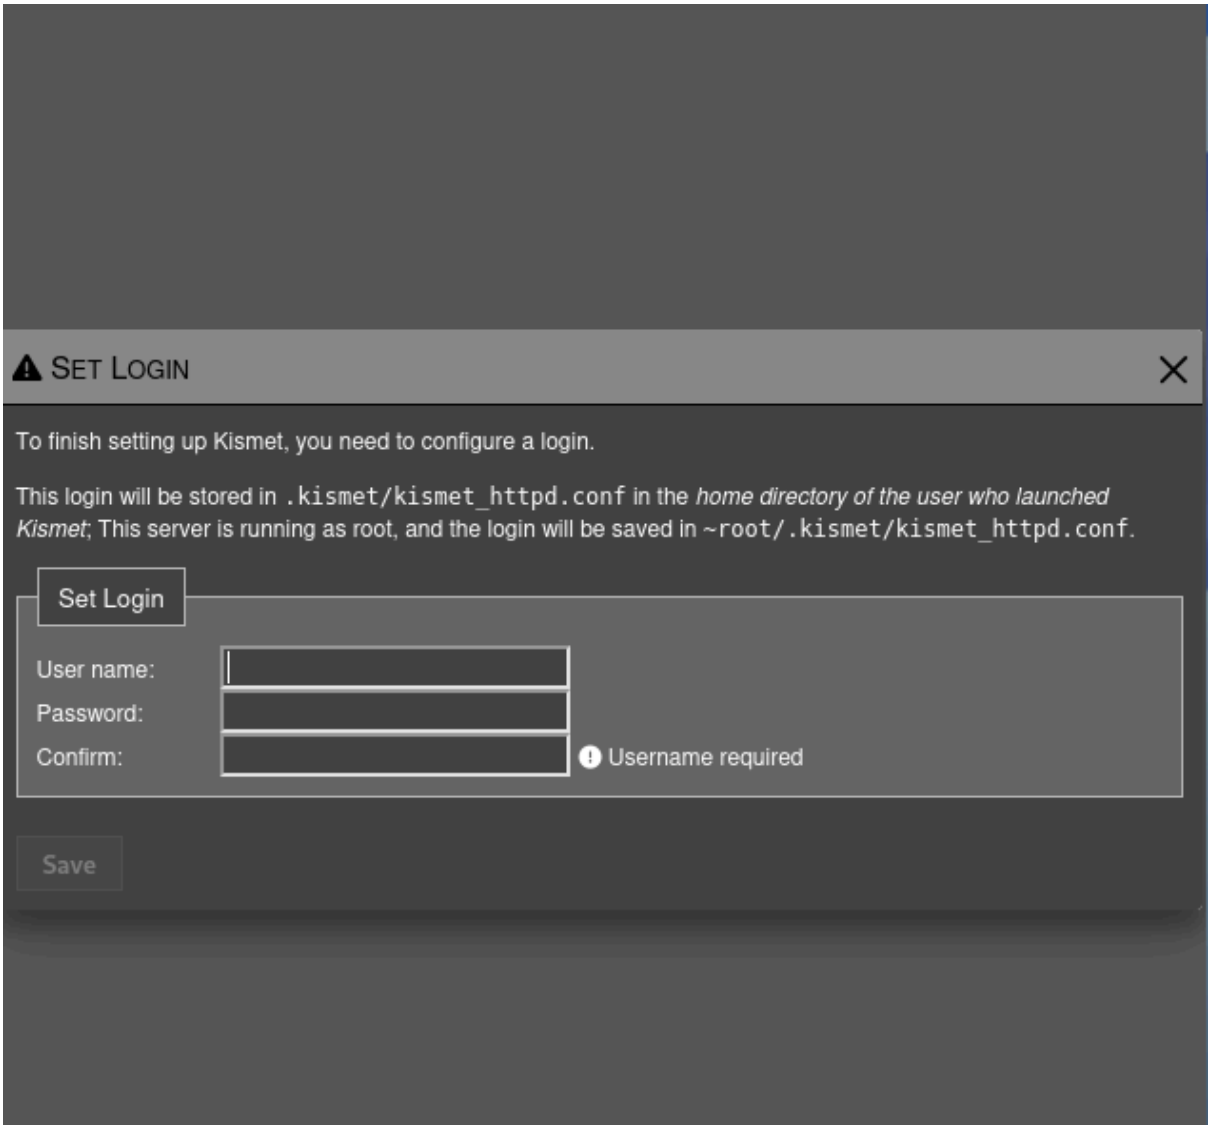
- sudo systemctl stop NetworkManager
- sudo systemctl stop wpa_supplicant
- sudo airmon-ng start wlan0 # Reemplaza 'wlan0' si tu interfaz tiene otro nombre

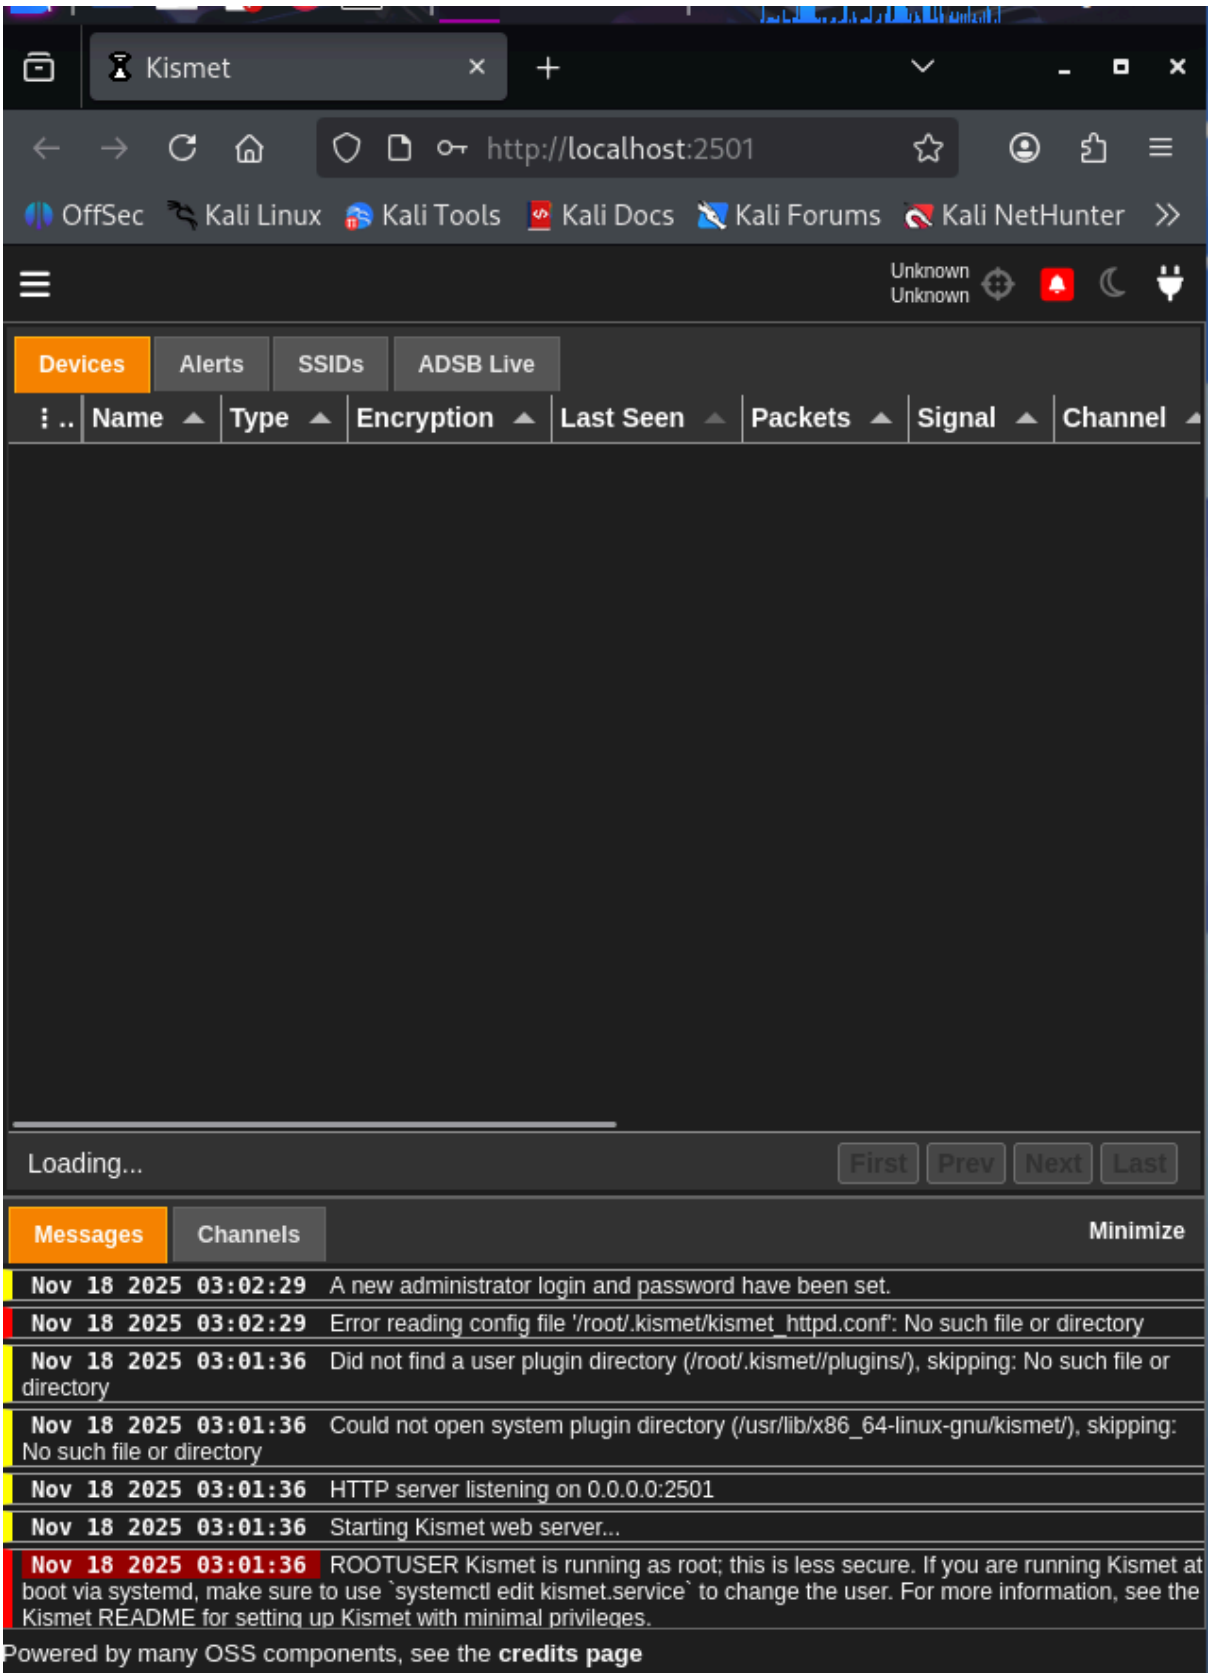
```
kali@kali: ~
Session  Actions  Edit  View  Help
┌──(kali㉿kali)-[~]
└─$ sudo airmon-ng start wlan0  # Reemplaza 'wlan0' si tu interfaz t
iene otro nombre
[sudo] password for kali:

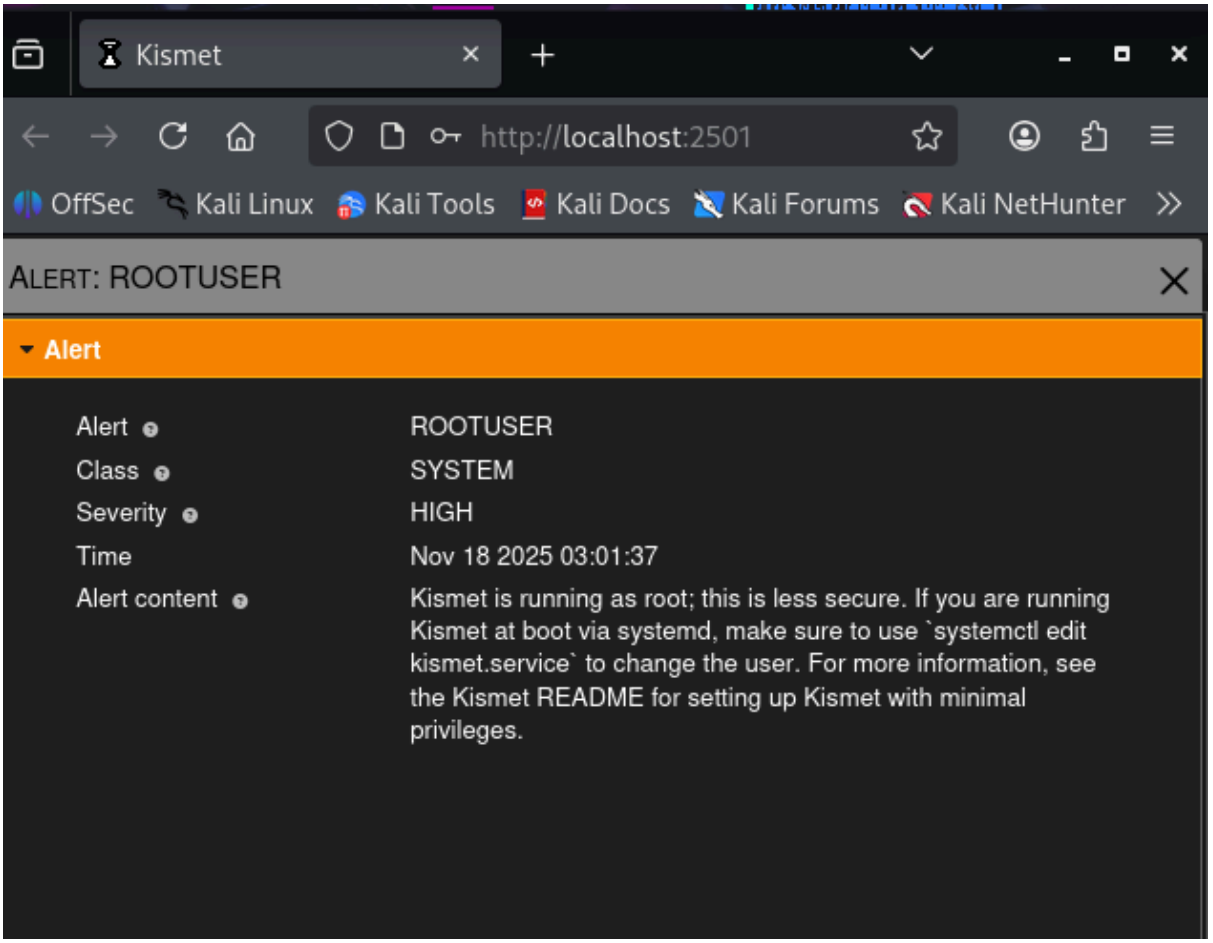

Requested device "wlan0" does not exist.
Run /usr/sbin/airmon-ng without any arguments to see available inter
faces
```


kali@kali: ~
Session Actions Edit View Help
faces
┌──(kali㉿kali)-[~]
└─$ sudo kismet
INFO: Including sub-config file: /etc/kismet/kismet_httpd.conf
INFO: Including sub-config file: /etc/kismet/kismet_memory.conf
INFO: Including sub-config file: /etc/kismet/kismet_alerts.conf
INFO: Including sub-config file: /etc/kismet/kismet_80211.conf
INFO: Including sub-config file: /etc/kismet/kismet_logging.conf
INFO: Including sub-config file: /etc/kismet/kismet_filter.conf
INFO: Including sub-config file: /etc/kismet/kismet_uav.conf
INFO: Loading config override file '/etc/kismet/kismet_package.conf'
KISMET - Point your browser to http://localhost:2501 (or the address
INFO: Saving datasources to the Kismet database log every 30 seconds
INFO: Launching remote capture server on 127.0.0.1 3501
INFO: No data sources defined; Kismet will not capture anything until a
source is added.
INFO: Opened kismetdb log file './/Kismet-20251118-08-01-36-1.kismet'
INFO: Saving packets to the Kismet database log.


http://localhost:2501
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
kali@kali: ~
Session Actions Edit View Help
KISMET - Point your browser to http://localhost:2501 (or the address
INFO: Saving datasources to the Kismet database log every 30 seconds
INFO: Launching remote capture server on 127.0.0.1 3501
INFO: No data sources defined; Kismet will not capture anything until a
source is added.
INFO: Opened kismetdb log file './/Kismet-20251118-07-57-07-1.kismet'
INFO: Saving packets to the Kismet database log.
INFO: GPS track will be logged to the Kismet logfile
ALERT: ROOTUSER Kismet is running as root; this is less secure. If you
are running Kismet at boot via systemd, make sure to use `systemctl
edit kismet.service` to change the user. For more information, see
the Kismet README for setting up Kismet with minimal privileges.
INFO: Starting Kismet web server...
INFO: HTTP server listening on 0.0.0.0:2501
INFO: Could not open system plugin directory (/usr/lib/x86_64-linux-gnu/kismet/), skipping: No such file or directory
INFO: Did not find a user plugin directory (/root/.kismet//plugins/), skipping: No such file or directory


SET LOGIN
To finish setting up Kismet, you need to configure a login.
This login will be stored in .kismet/kismet_httpd.conf in the home directory of the user who launched Kismet; This server is running as root, and the login will be saved in ~root/.kismet/kismet_httpd.conf.
Set Login
User name:
Password:
Confirm:
Username required
Save


Kismet
http://localhost:2501
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
Unknown
Unknown
Devices
Alerts
SSIDs
ADSB Live
Name
Type
Encryption
Last Seen
Packets
Signal
Channel
Loading...
First
Prev
Next
Last
Messages
Channels
Minimize
Nov 18 2025 03:02:29 A new administrator login and password have been set.
Nov 18 2025 03:02:29 Error reading config file '/root/.kismet/kismet_httpd.conf': No such file or directory
Nov 18 2025 03:01:36 Did not find a user plugin directory (/root/.kismet//plugins/), skipping: No such file or directory
Nov 18 2025 03:01:36 Could not open system plugin directory (/usr/lib/x86_64-linux-gnu/kismet/), skipping: No such file or directory
Nov 18 2025 03:01:36 HTTP server listening on 0.0.0.0:2501
Nov 18 2025 03:01:36 Starting Kismet web server...
Nov 18 2025 03:01:36 ROOTUSER Kismet is running as root; this is less secure. If you are running Kismet at boot via systemd, make sure to use `systemctl edit kismet.service` to change the user. For more information, see the Kismet README for setting up Kismet with minimal privileges.
Powered by many OSS components, see the credits page



Seguimos asegurando la red, al no tener adaptador wifi no se puede capturar

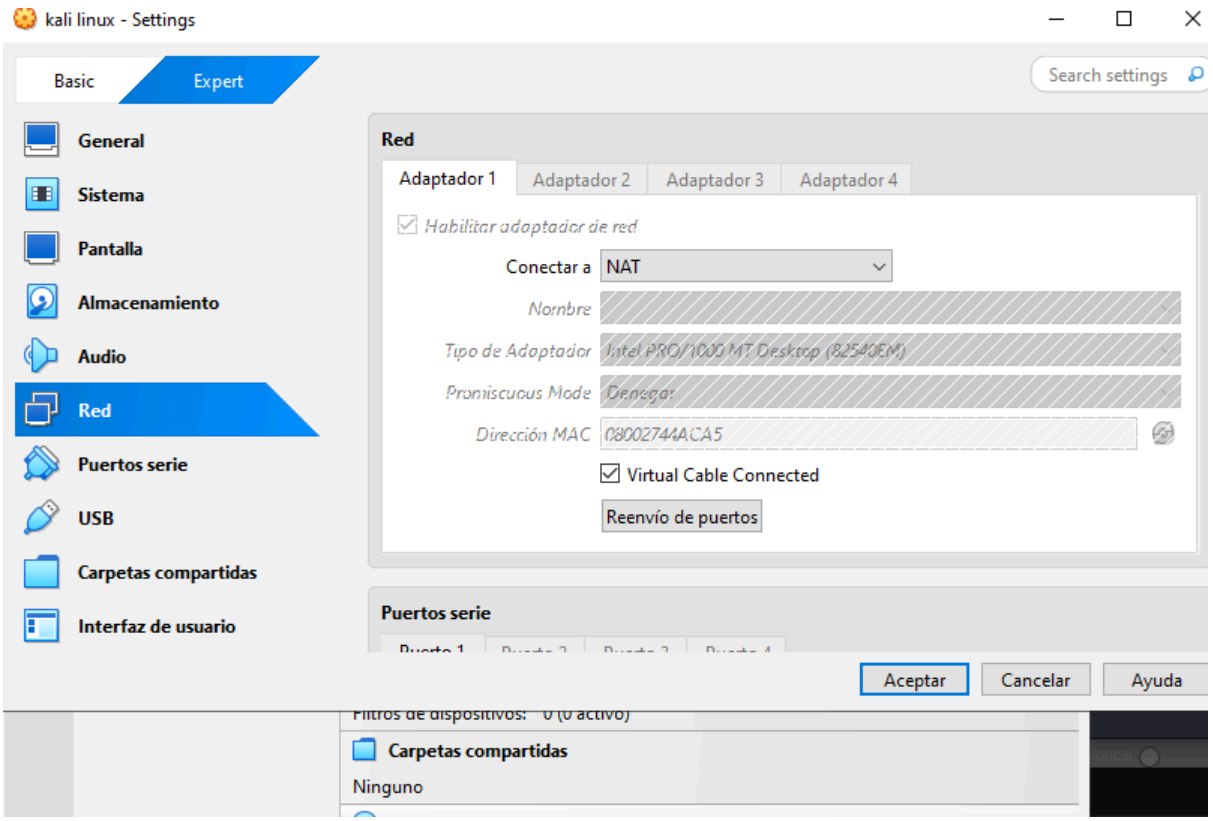
- iwconfig

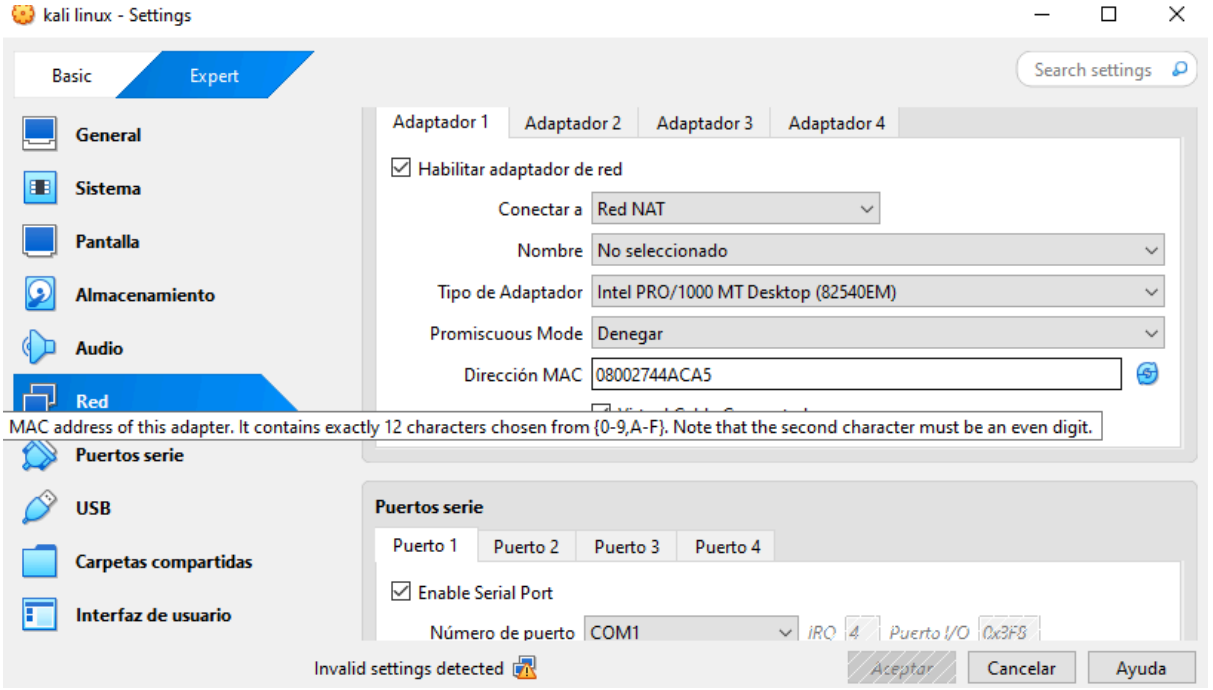
```
┌──(kali㉿kali)-[~]
└─$ iwconfig
lo        no wireless extensions.

eth0      no wireless extensions.

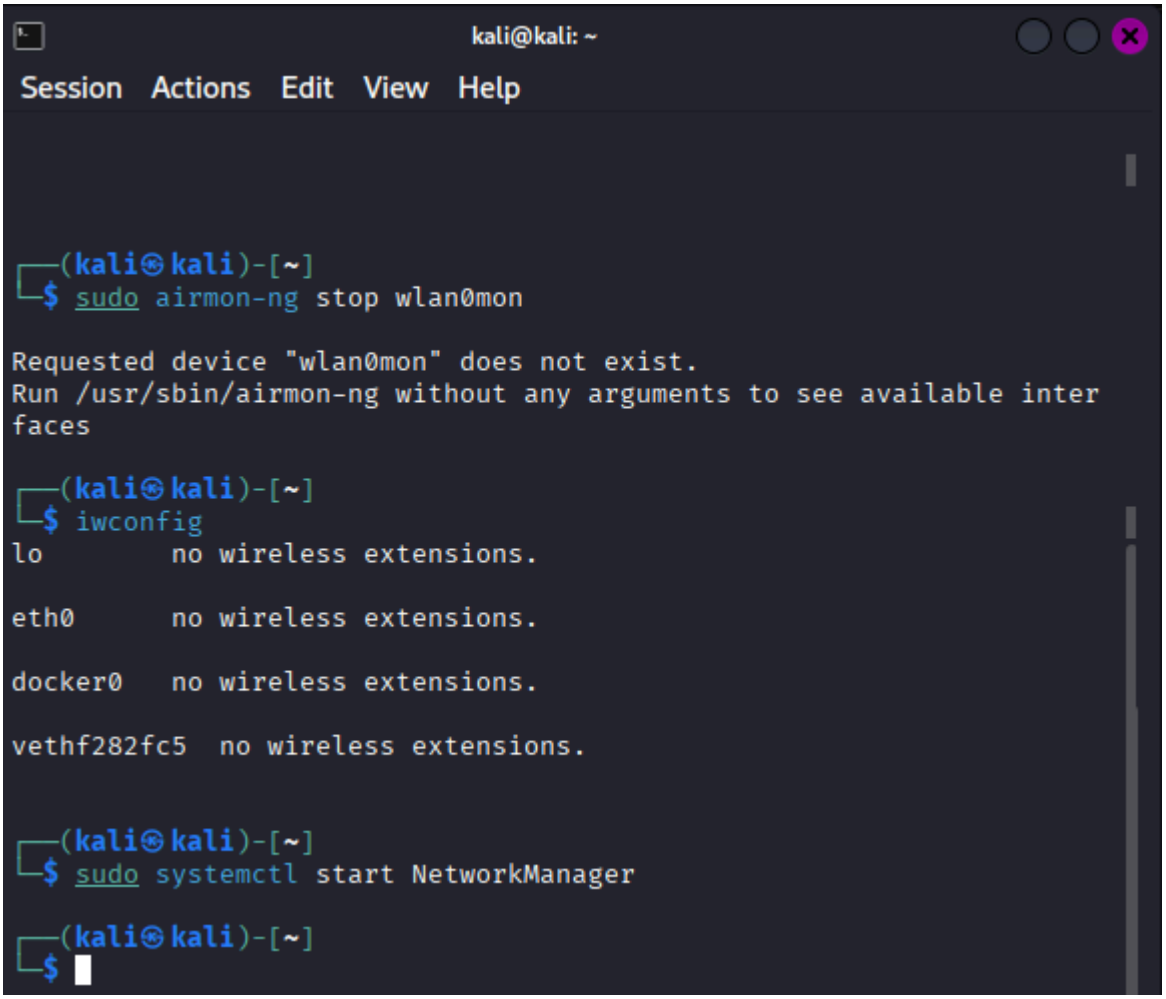
docker0   no wireless extensions.

vethf282fc5  no wireless extensions.
```



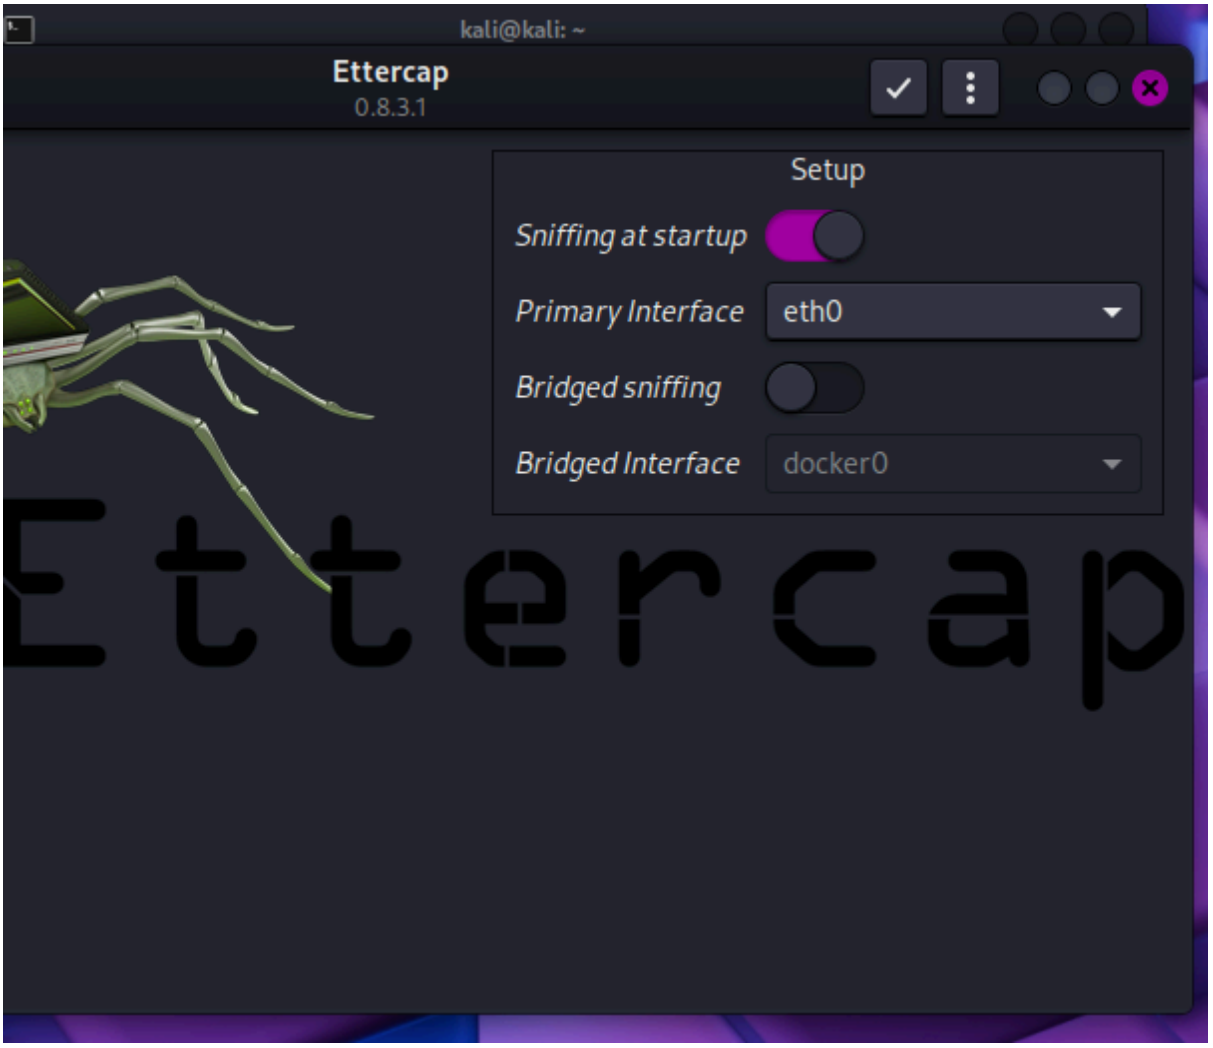


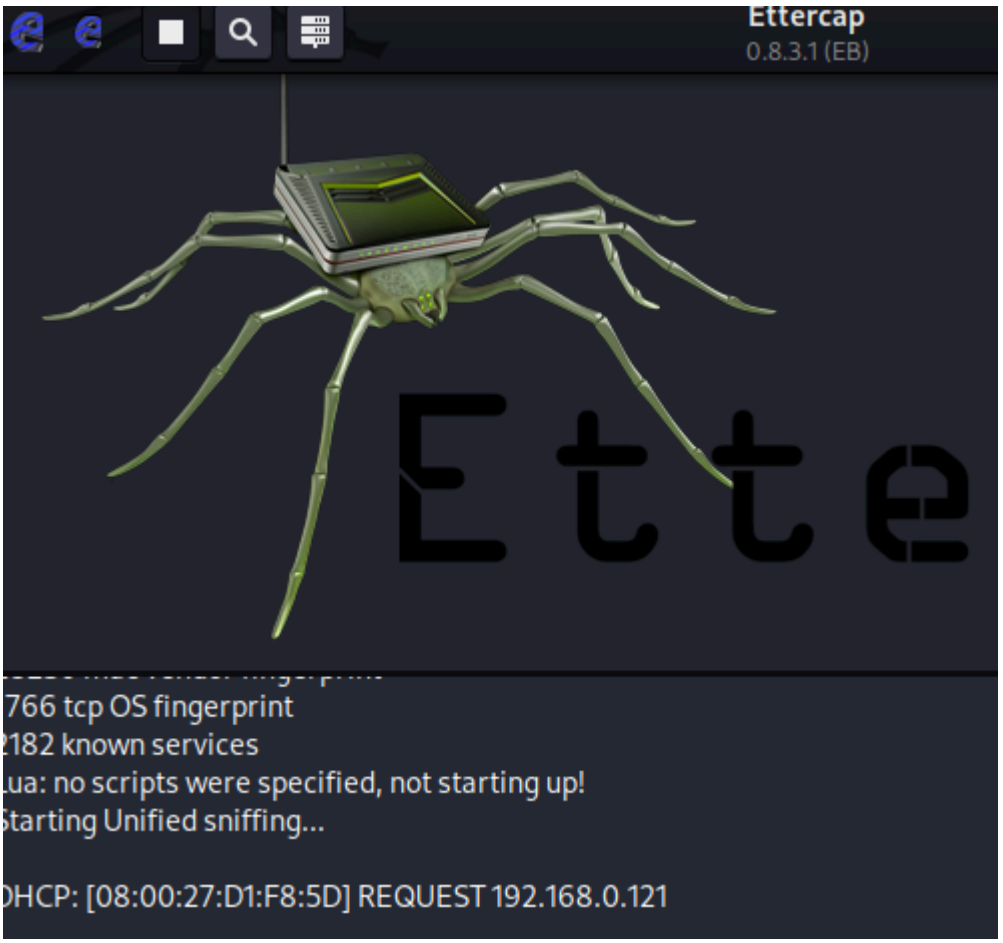
¡Paso Final! Limpiar

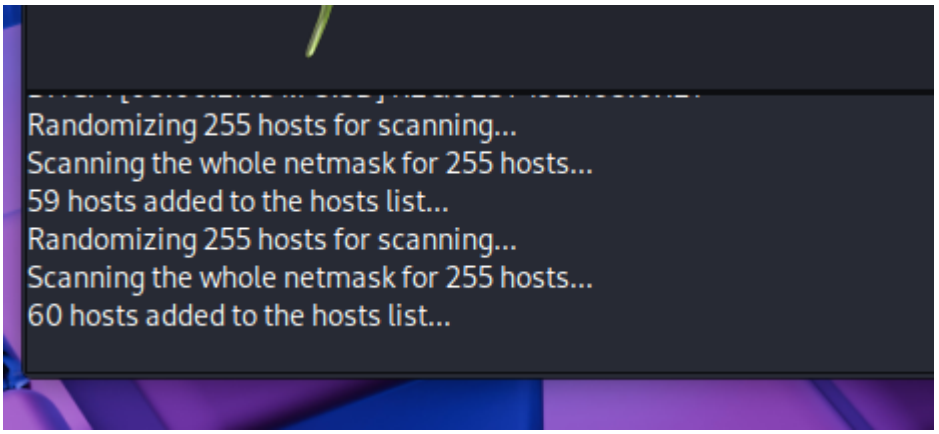


3º ETTERCAP LINUX WINDOWS


kali@kali: ~
Session Actions Edit View Help
(kali㉿kali)-[~]
$ sudo ettercap -G
[sudo] password for kali:
ettercap 0.8.3.1 copyright 2001-2020 Ettercap Development Team
Ettercap
0.8.3.1
Setup
Sniffing at startup
Primary Interface
eth0
Bridged sniffing
Bridged Interface
docker


kali@kali: ~
Ettercap
0.8.3.1
Setup
Sniffing at startup
Primary Interface
eth0
Bridged sniffing
Bridged Interface
docker0
Ettercap

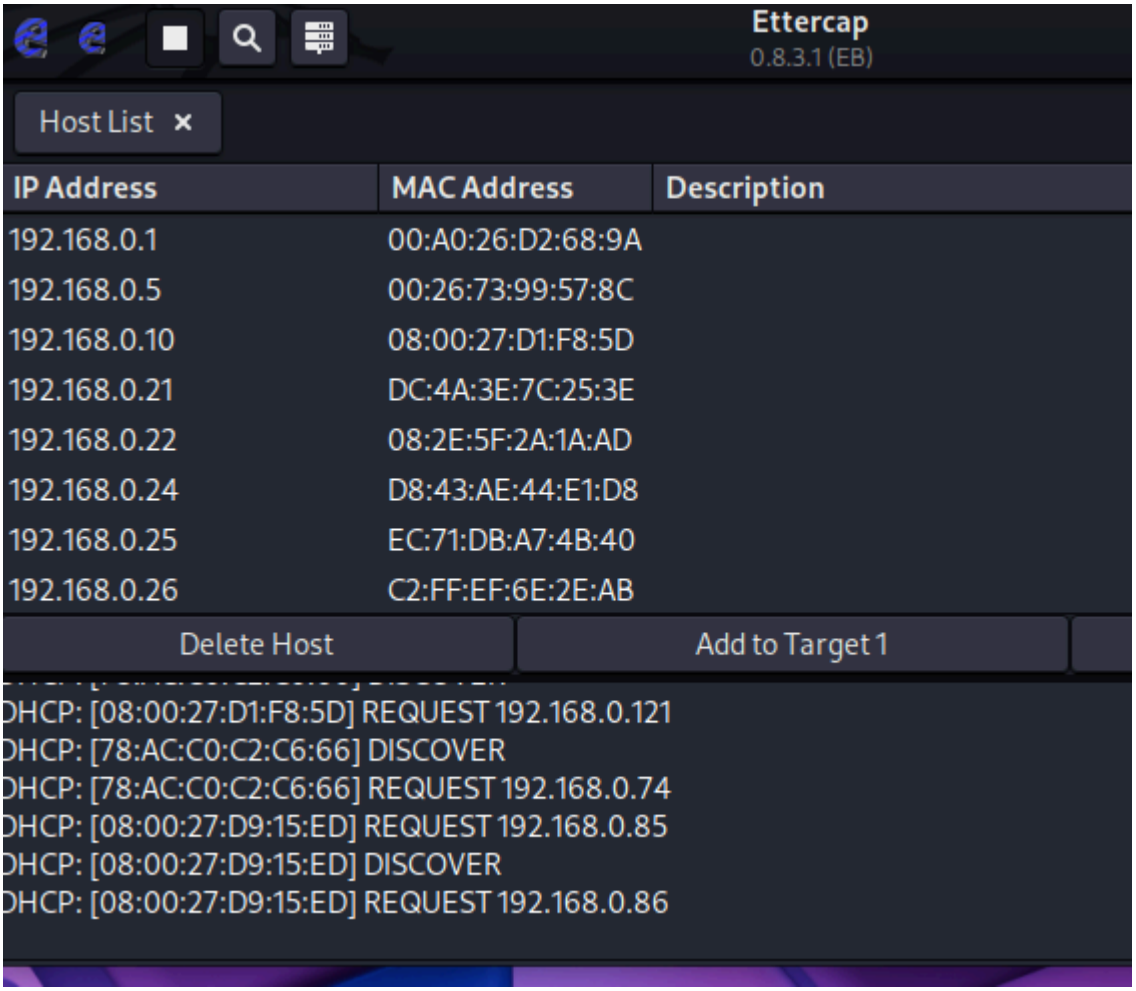




Los mensajes indican que Ettercap escaneó la red completa (probablemente una red de clase C con máscara $/24$, lo que da **255 posibles *hosts***) y ha identificado los dispositivos activos:

- **59 hosts added to the hosts list...**
- **60 hosts added to the hosts list...**

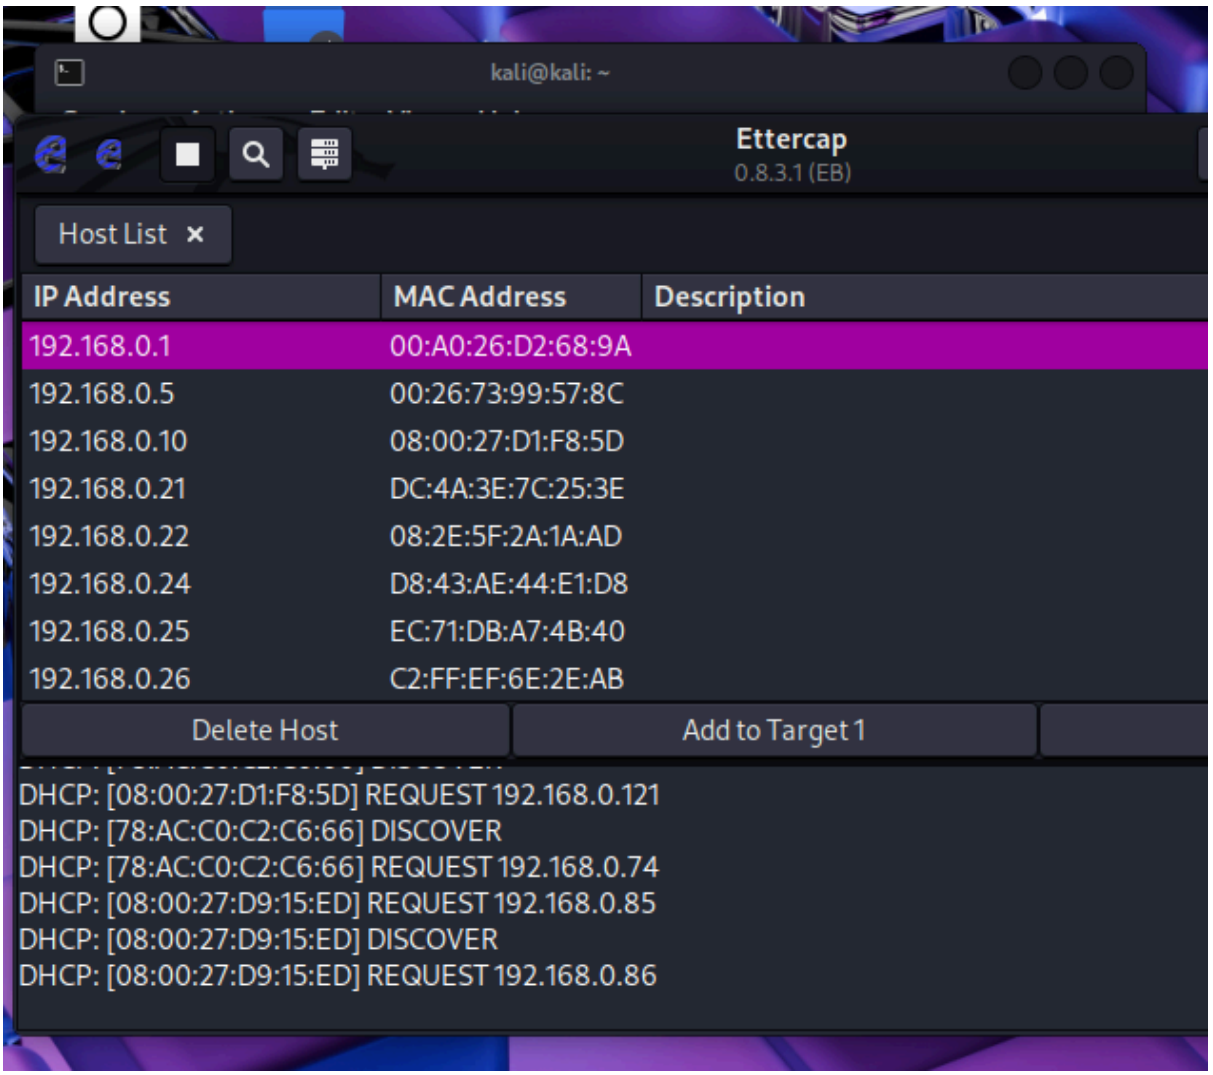
El escaneo se ejecutó dos veces, y en el segundo intento encontró **60 dispositivos** conectados a la red local. Este número incluye tu máquina Kali Linux y la Puerta de Enlace (*Gateway*).



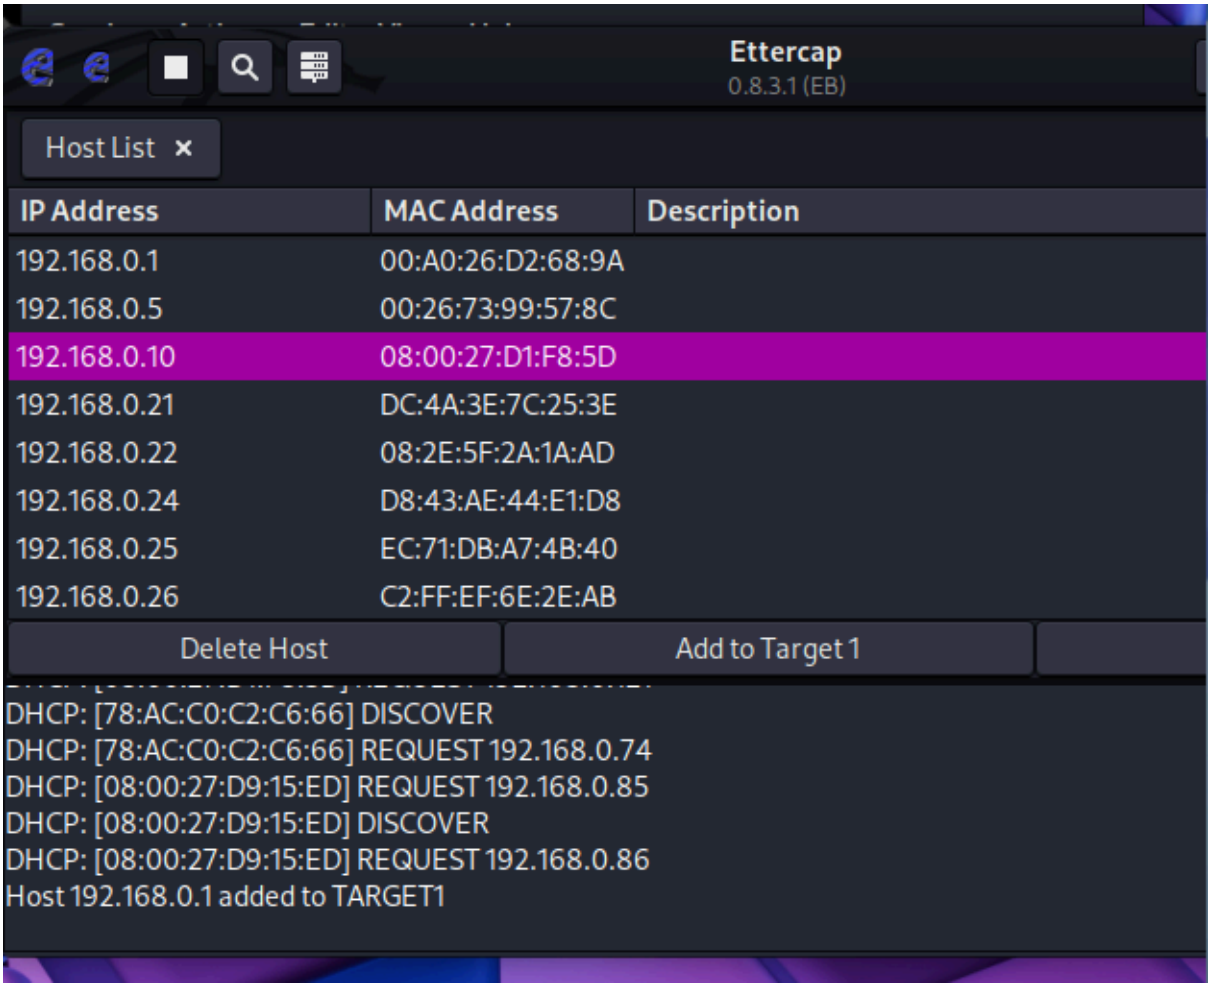
Próximo Paso: Configurar el Ataque MITM


Ahora que Ettercap tiene la lista de *hosts* de la red, puedes seleccionar tus objetivos para el ataque **Man-in-the-Middle (MITM) mediante ARP Spoofing.**

- **Abrir la Lista de Hosts:**
  - Haz clic en el icono de **Hosts** (el mismo icono que usaste para escanear).
- **Selecciona Hosts list.**
- **Identificar los Objetivos:**
  - **Target 1 (Gateway):** Busca la IP que suele terminar en `.1` (ej. `192.168.0.1` o `192.168.1.1`). Este es el router o puerta de enlace. Selecciónalo y haz clic en **Add to Target 1**.
  - **Target 2 (Víctima):** Busca la IP del dispositivo que deseas auditar. Selecciónalo y haz clic en **Add to Target 2**.

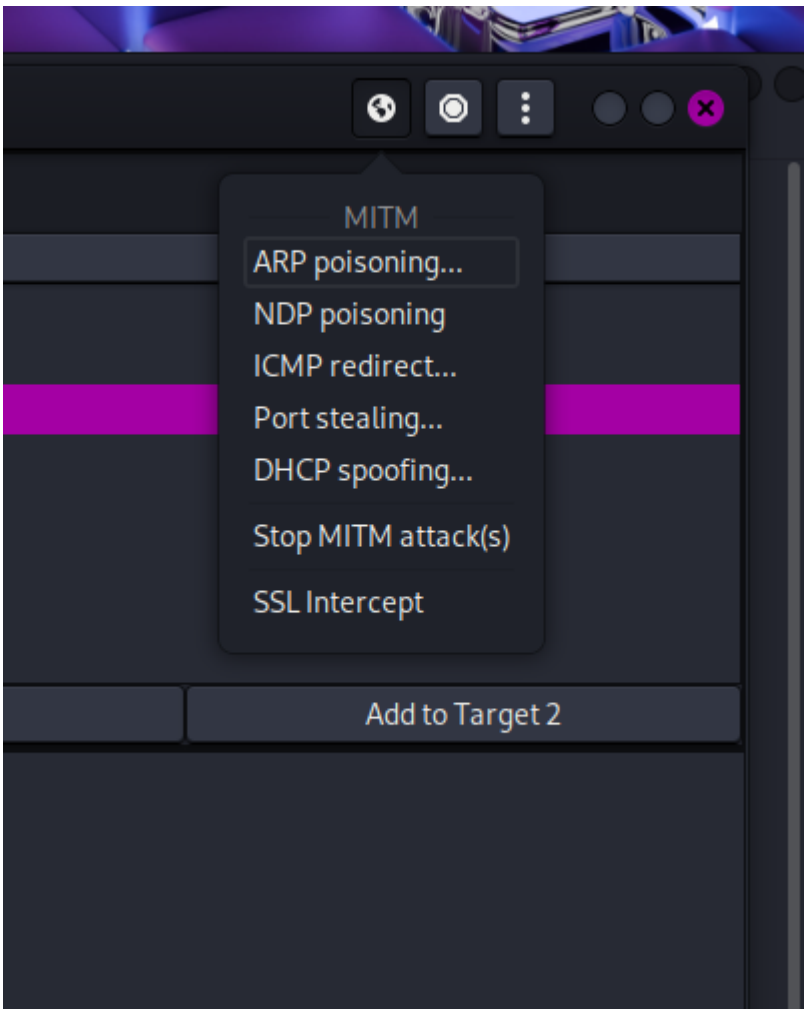

kali@kali: ~
Ettercap
0.8.3.1 (EB)
Host List
IP Address
MAC Address
Description
192.168.0.1 00:A0:26:D2:68:9A
192.168.0.5 00:26:73:99:57:8C
192.168.0.10 08:00:27:D1:F8:5D
192.168.0.21 DC:4A:3E:7C:25:3E
192.168.0.22 08:2E:5F:2A:1A:AD
192.168.0.24 D8:43:AE:44:E1:D8
192.168.0.25 EC:71:DB:A7:4B:40
192.168.0.26 C2:FF:EF:6E:2E:AB
Delete Host
Add to Target 1
DHCP: [08:00:27:D1:F8:5D] REQUEST 192.168.0.121
DHCP: [78:AC:C0:C2:C6:66] DISCOVER
DHCP: [78:AC:C0:C2:C6:66] REQUEST 192.168.0.74
DHCP: [08:00:27:D9:15:ED] REQUEST 192.168.0.85
DHCP: [08:00:27:D9:15:ED] DISCOVER
DHCP: [08:00:27:D9:15:ED] REQUEST 192.168.0.86

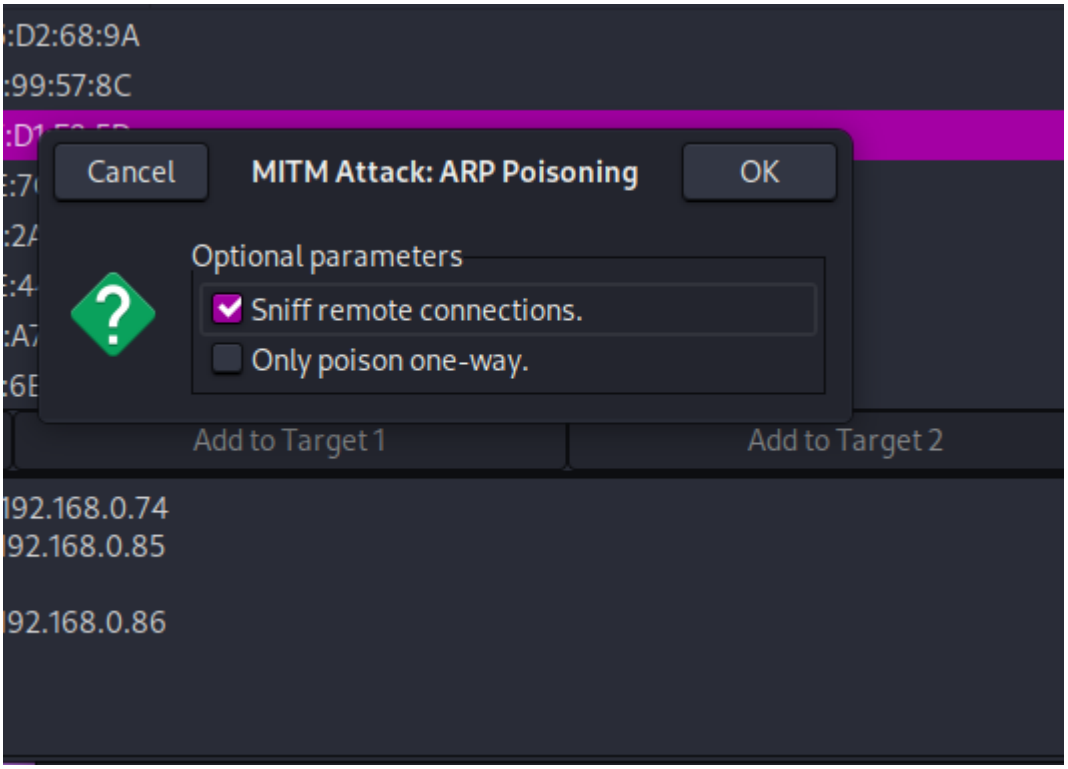
target 2

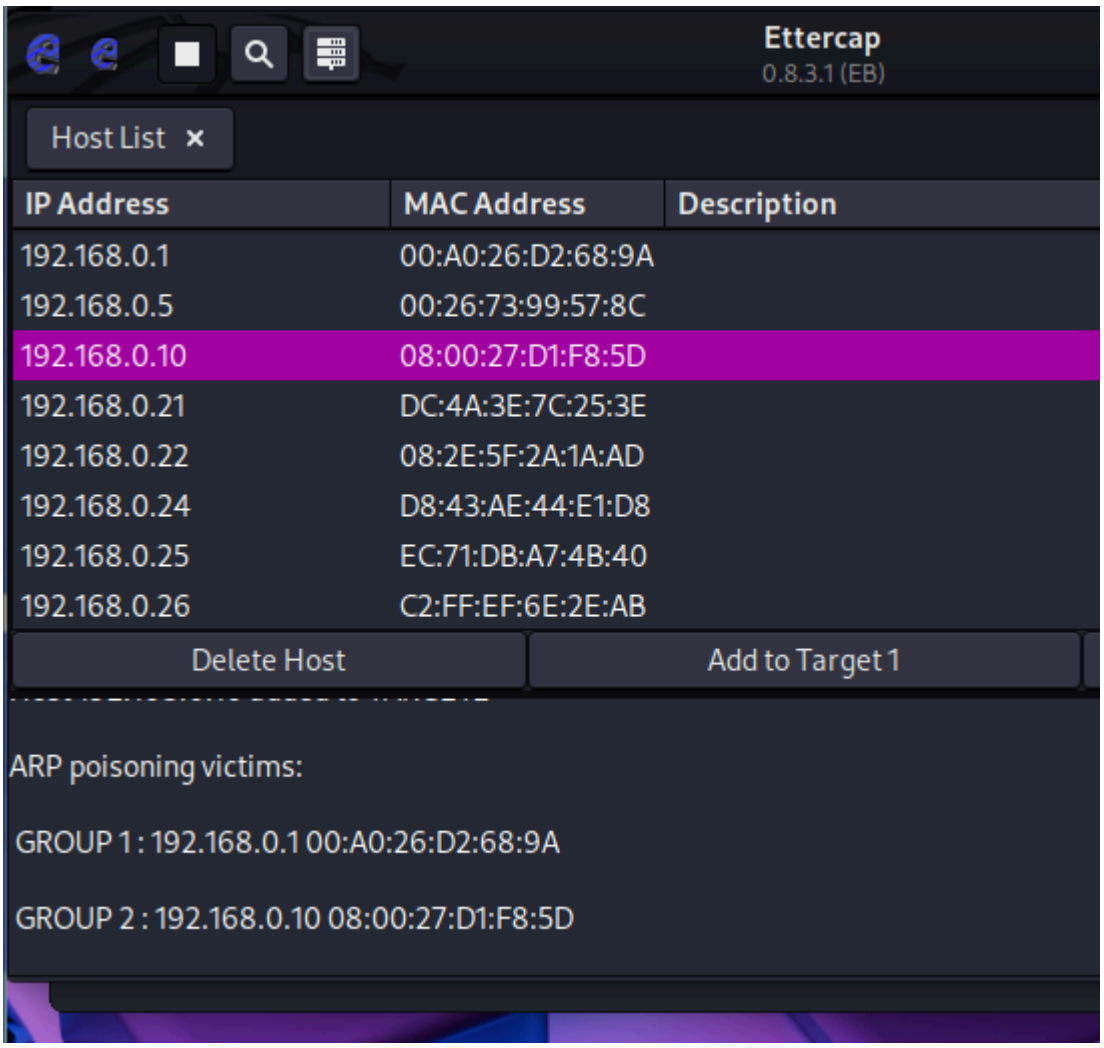




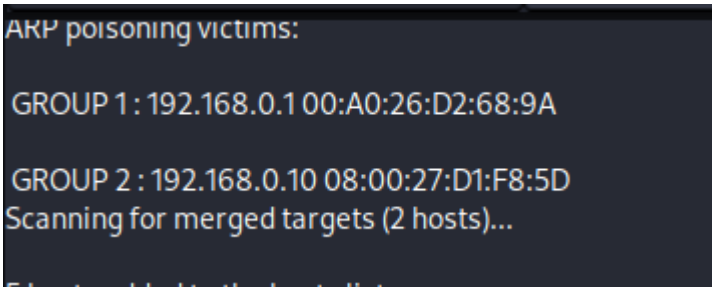
- **Iniciar el ARP Spoofing:**
  - Haz clic en el icono de **MITM** (la persona con flechas).
  - Selecciona **ARP poisoning...**
  - Asegúrate de marcar **Sniff remote connections** y haz clic en **OK**.


MITM
ARP poisoning...
NDP poisoning
ICMP redirect...
Port stealing...
DHCP spoofing...
Stop MITM attack(s)
SSL Intercept
Add to Target 2

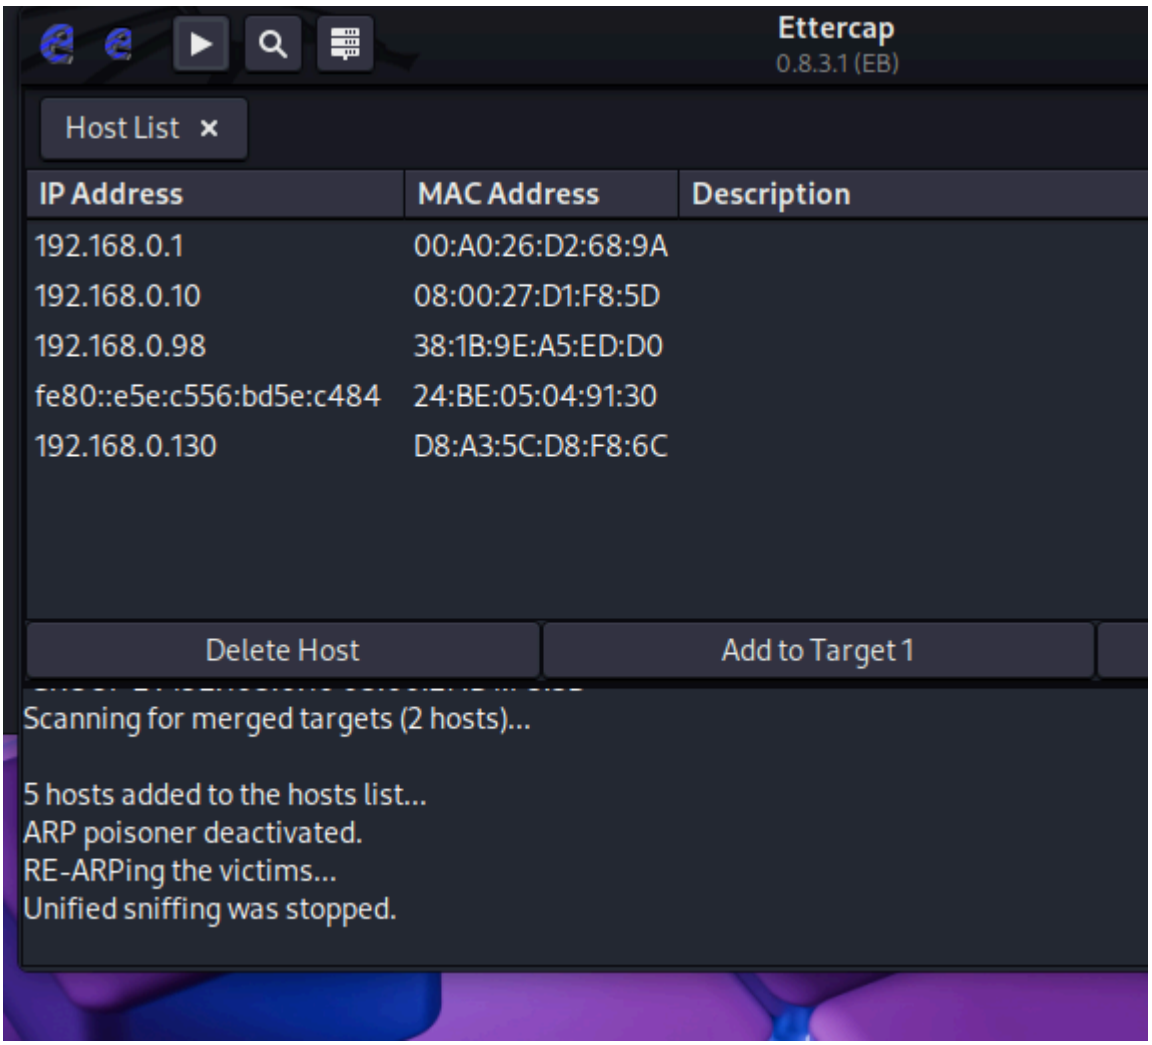

:D2:68:9A
:99:57:8C
Cancel
MITM Attack: ARP Poisoning
OK
Optional parameters
Sniff remote connections.
Only poison one-way.
Add to Target 1
Add to Target 2
192.168.0.74
92.168.0.85
92.168.0.86



Una vez hecho esto, el tráfico entre tu víctima y el *gateway* comenzará a fluir a través de Kali, y las contraseñas no cifradas aparecerán en la ventana principal de Ettercap



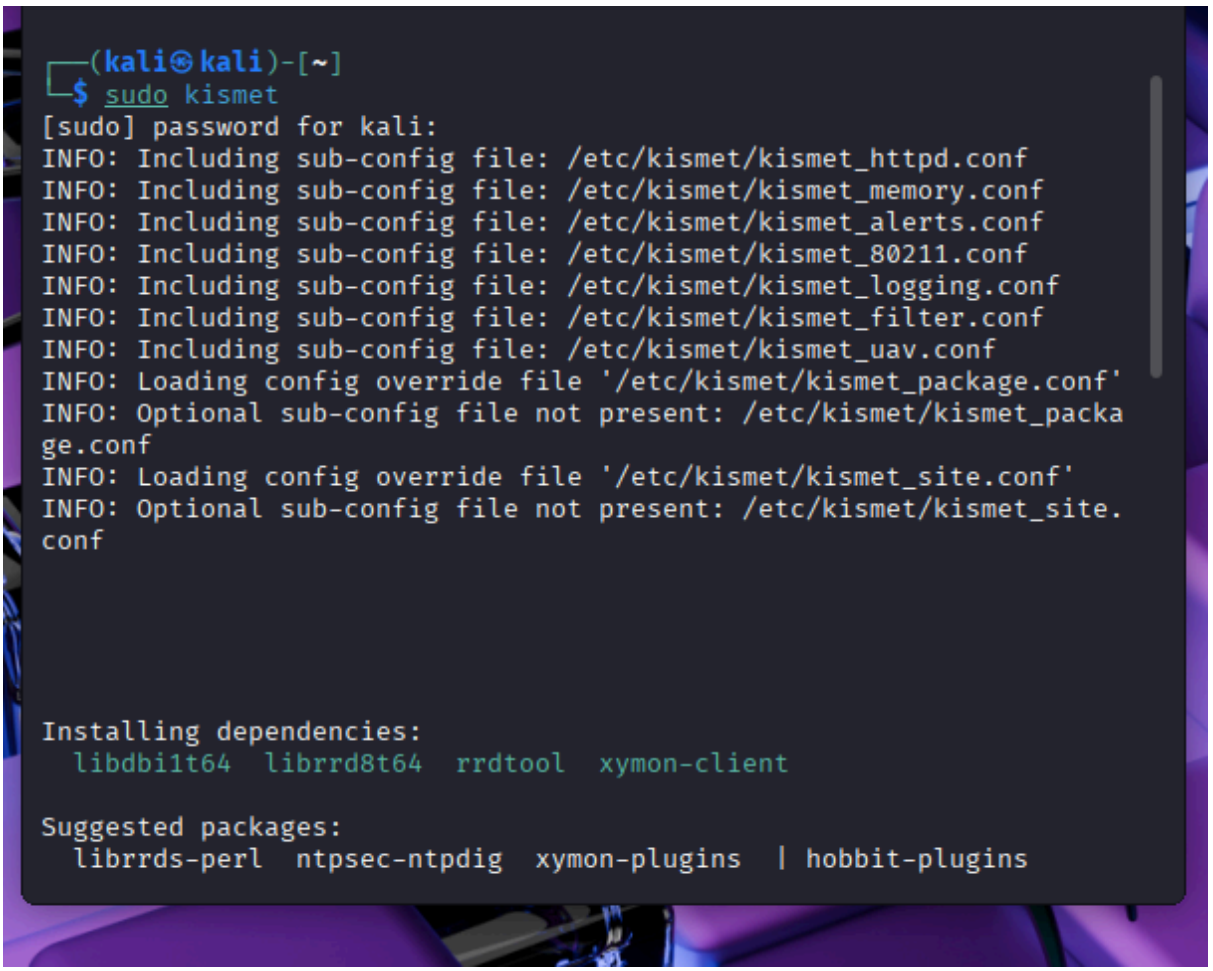
* Ejercicio: Detener y Restaurar la Red

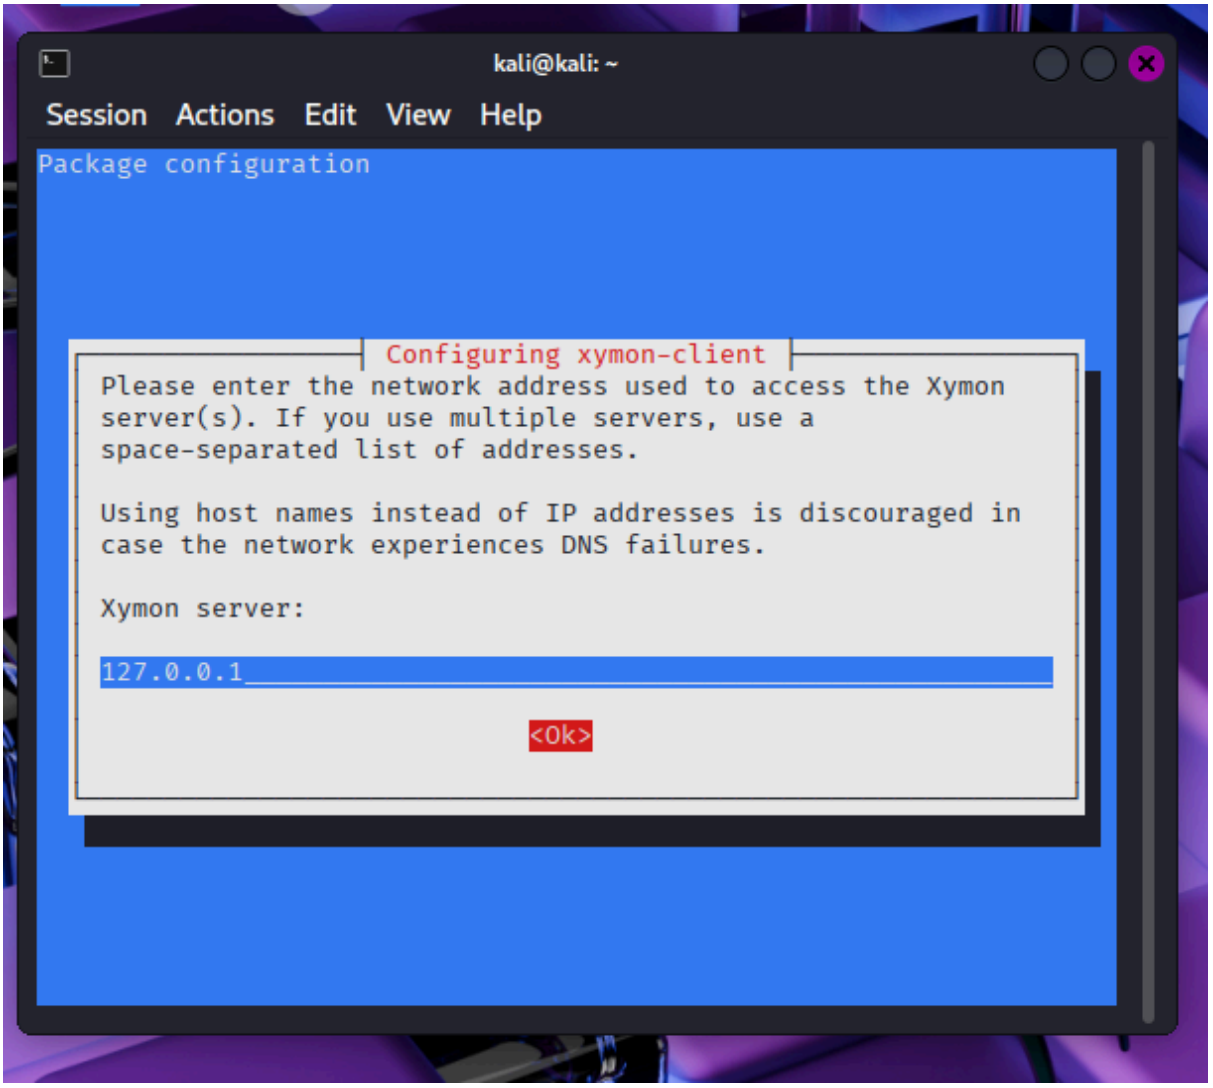


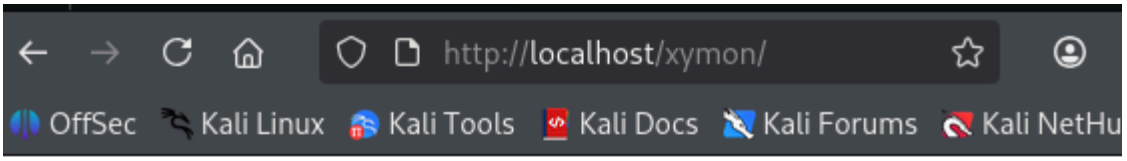
4º HOBBIT ESTÁ ANTICUADO, EL SUSTITUTO ES XYMON

MONITORIZACION SERVIDORES, SERVICIOS, HOST

- sudo apt update
- sudo apt install xymon


┌──(kali㉿kali)-[~]
└─$ sudo kismet
[sudo] password for kali:
INFO: Including sub-config file: /etc/kismet/kismet_httpd.conf
INFO: Including sub-config file: /etc/kismet/kismet_memory.conf
INFO: Including sub-config file: /etc/kismet/kismet_alerts.conf
INFO: Including sub-config file: /etc/kismet/kismet_80211.conf
INFO: Including sub-config file: /etc/kismet/kismet_logging.conf
INFO: Including sub-config file: /etc/kismet/kismet_filter.conf
INFO: Including sub-config file: /etc/kismet/kismet_uav.conf
INFO: Loading config override file '/etc/kismet/kismet_package.conf'
INFO: Optional sub-config file not present: /etc/kismet/kismet_packa
ge.conf
INFO: Loading config override file '/etc/kismet/kismet_site.conf'
INFO: Optional sub-config file not present: /etc/kismet/kismet_site.
conf
Installing dependencies:
libdbi1t64 librrd8t64 rrdtool xymon-client
Suggested packages:
librrds-perl ntpsec-ntpdig xymon-plugins | hobbit-plugins


kali@kali: ~
Session Actions Edit View Help
Package configuration
Configuring xymon-client
Please enter the network address used to access the Xymon server(s). If you use multiple servers, use a space-separated list of addresses.
Using host names instead of IP addresses is discouraged in case the network experiences DNS failures.
Xymon server:
127.0.0.1
<Ok>




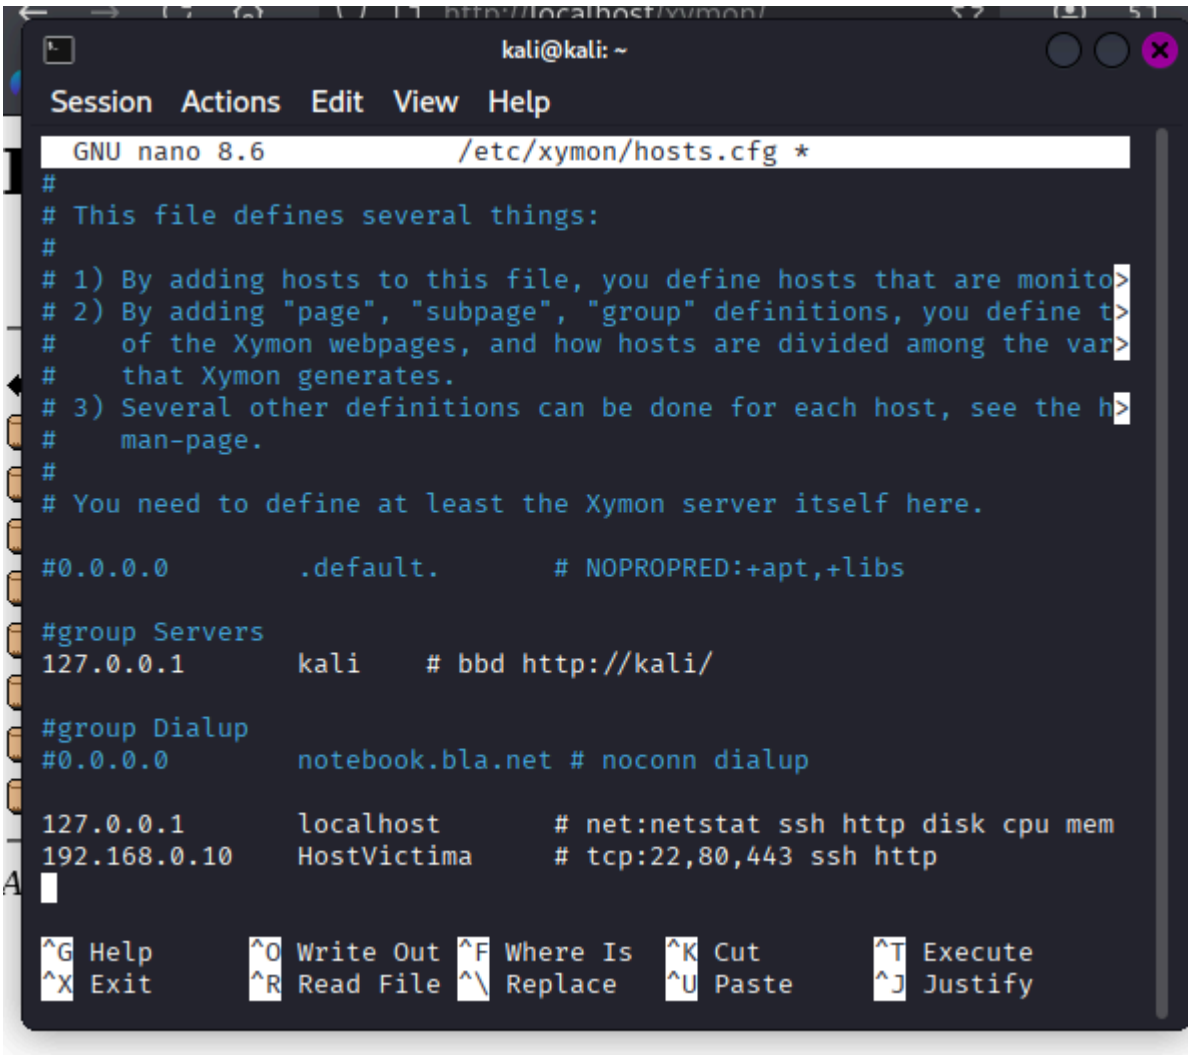
Index of /xymon

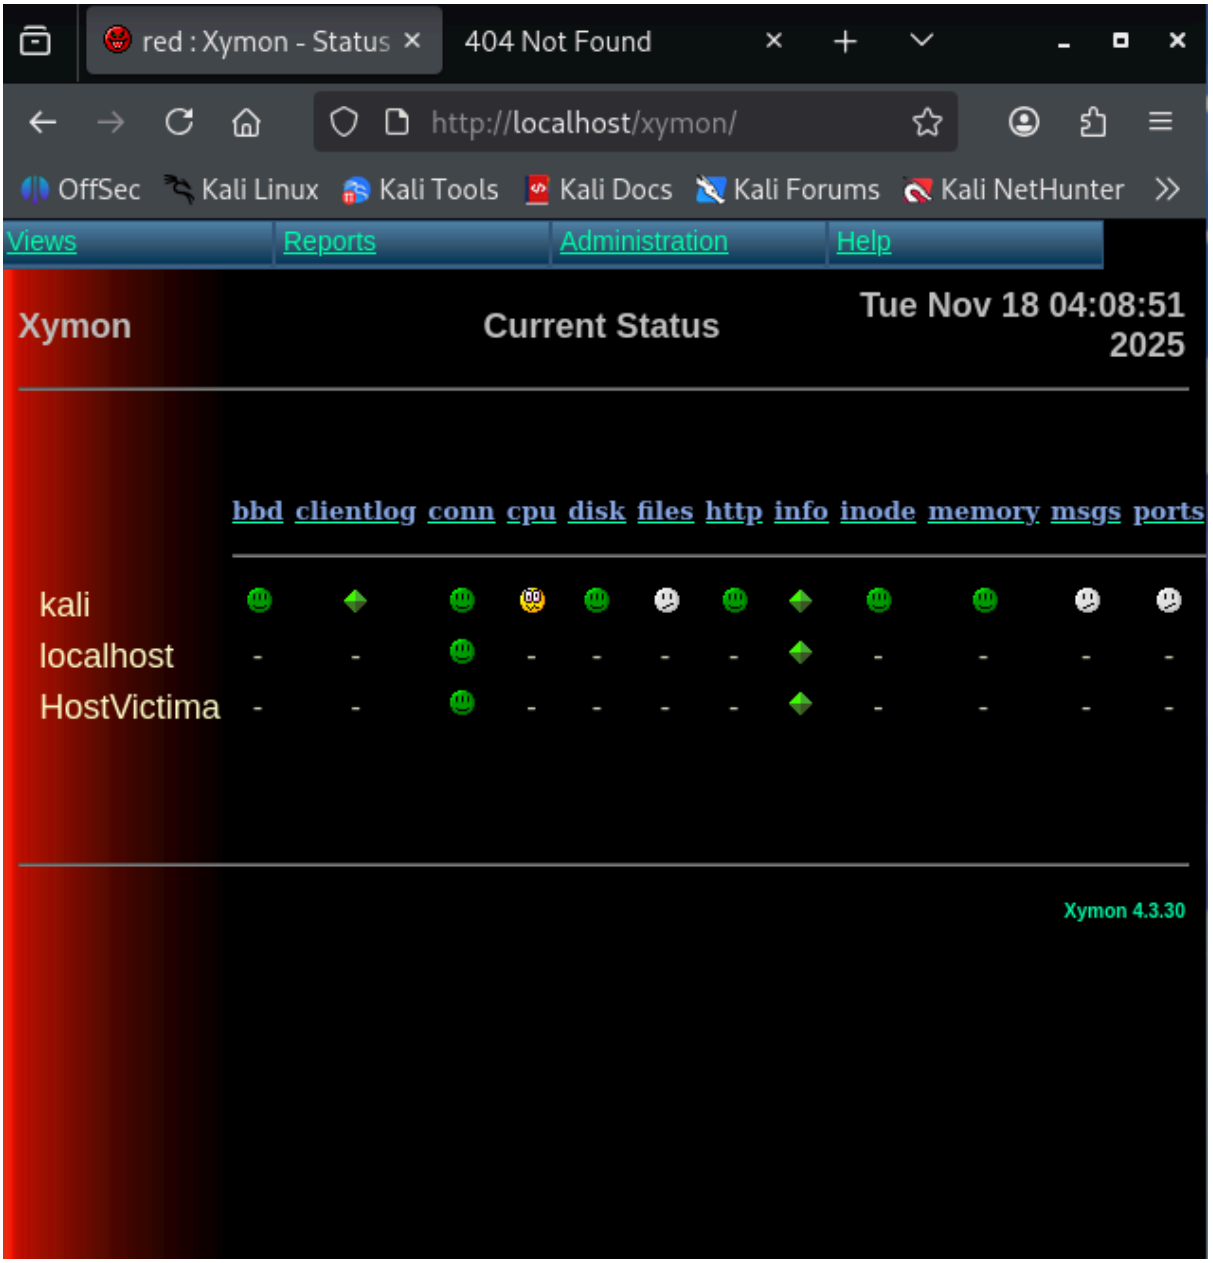
Name	Last modified	Size	Description
Parent Directory		-	
gifs/	2025-11-18 03:54	-	
help/	2025-11-18 03:54	-	
html/	2024-10-19 05:09	-	
menu/	2025-11-18 03:54	-	
notes/	2024-10-19 05:09	-	
rep/	2024-10-19 05:09	-	
snap/	2024-10-19 05:09	-	
wml/	2024-10-19 05:09	-	

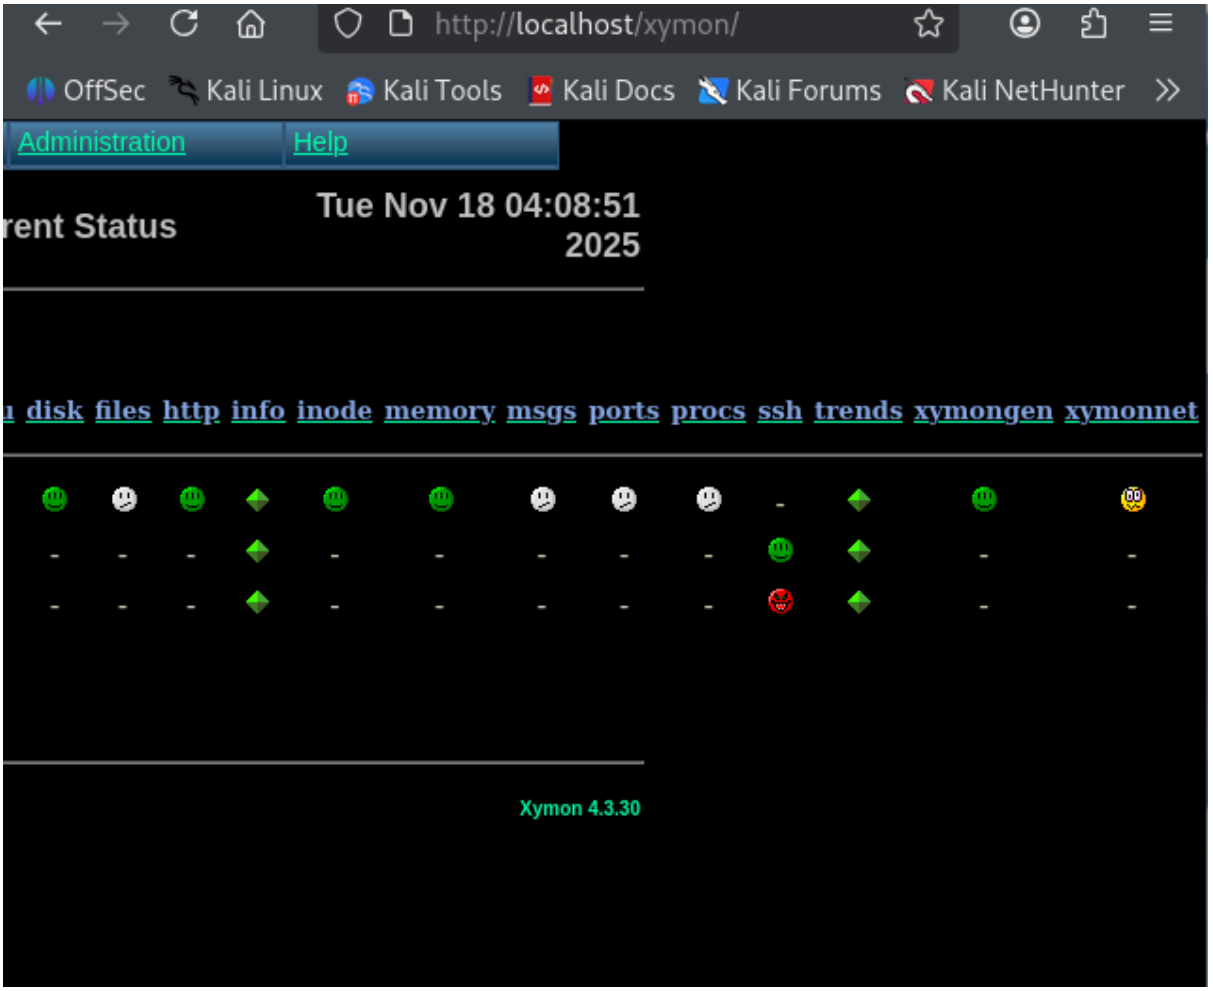
Apache/2.4.65 (Debian) Server at localhost Port 80

* configuración de máquinas

- 


kali@kali: ~
Session Actions Edit View Help
GNU nano 8.6 /etc/xymon/hosts.cfg *
#
This file defines several things:
#
1) By adding hosts to this file, you define hosts that are monito>
2) By adding "page", "subpage", "group" definitions, you define t>
of the Xymon webpages, and how hosts are divided among the var>
that Xymon generates.
3) Several other definitions can be done for each host, see the h>
man-page.
#
You need to define at least the Xymon server itself here.
#0.0.0.0 .default. # NOPROPRED:+apt,+libs
#group Servers
127.0.0.1 kali # bbd http://kali/
#group Dialup
#0.0.0.0 notebook.bla.net # noconn dialup
127.0.0.1 localhost # net:netstat ssh http disk cpu mem
192.168.0.10 HostVictima # tcp:22,80,443 ssh http
^G Help ^O Write Out ^F Where Is ^K Cut ^T Execute
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify

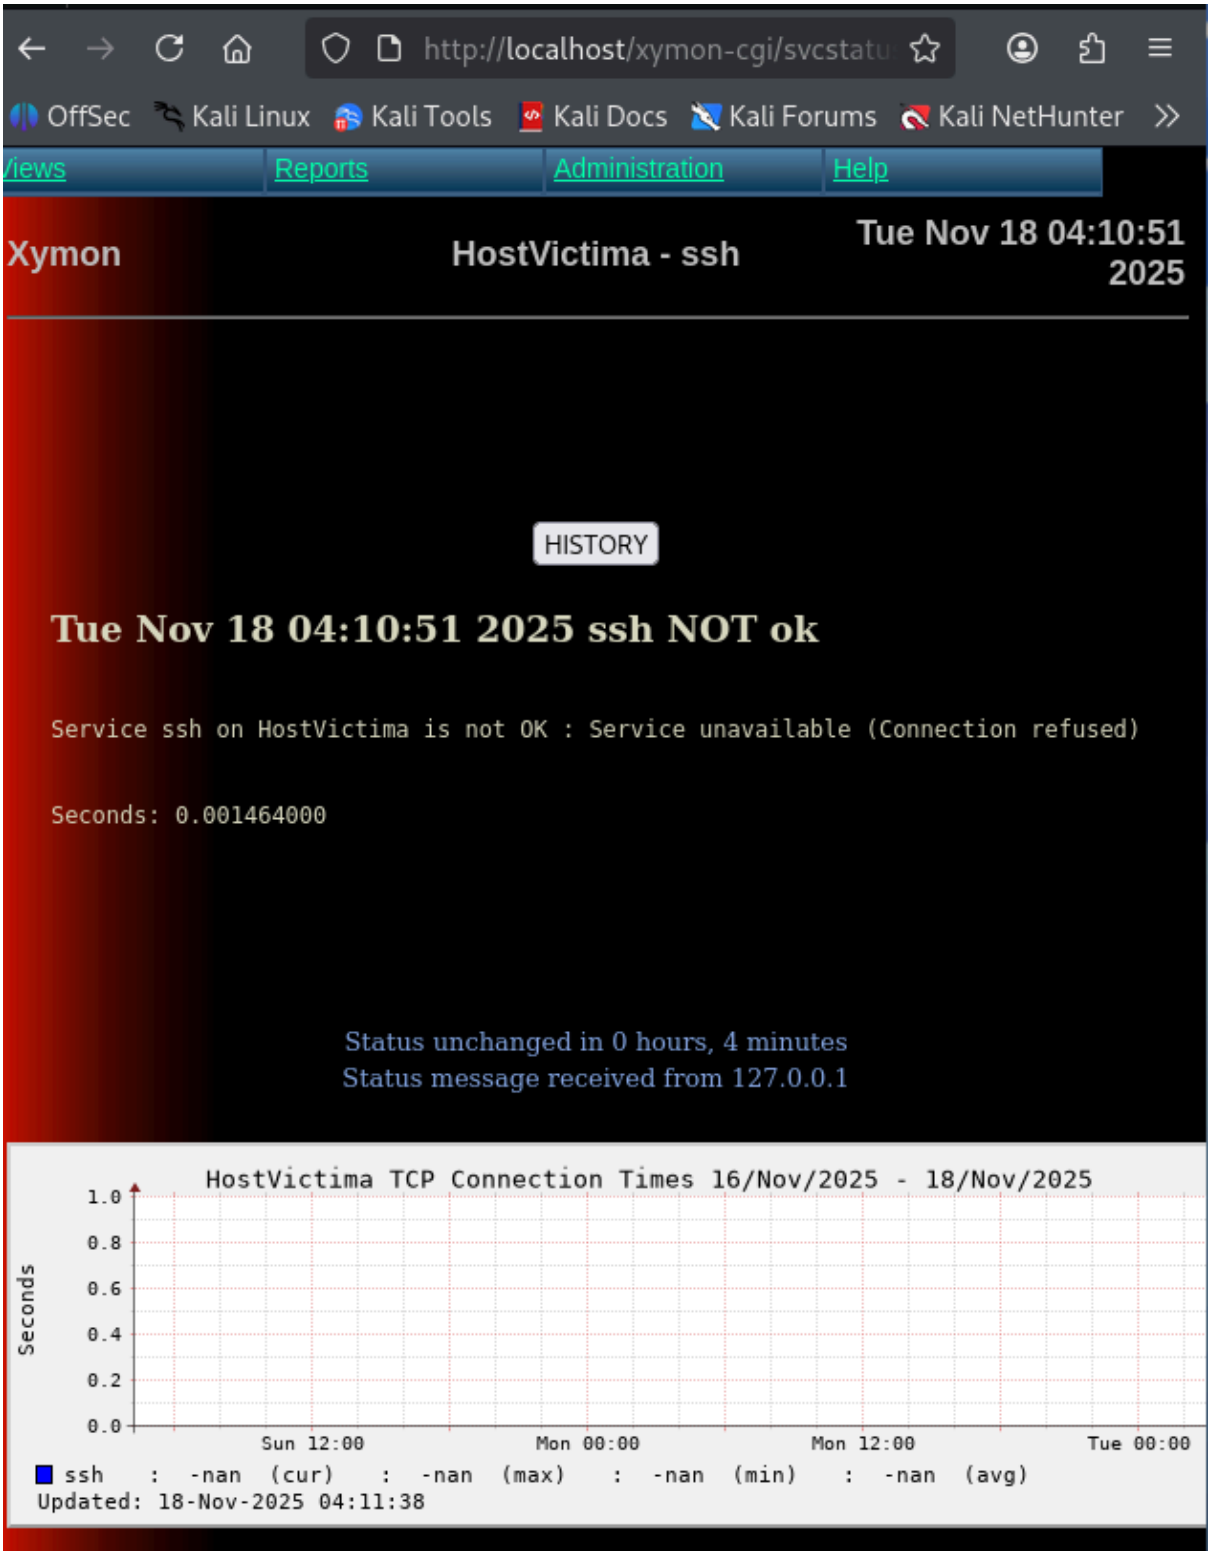

red : Xymon - Status
404 Not Found
http://localhost/xymon/
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
Views
Reports
Administration
Help
Xymon
Current Status
Tue Nov 18 04:08:51 2025
bbd clientlog conn cpu disk files http info inode memory msgs ports
kali
localhost
HostVictima
Xymon 4.3.30

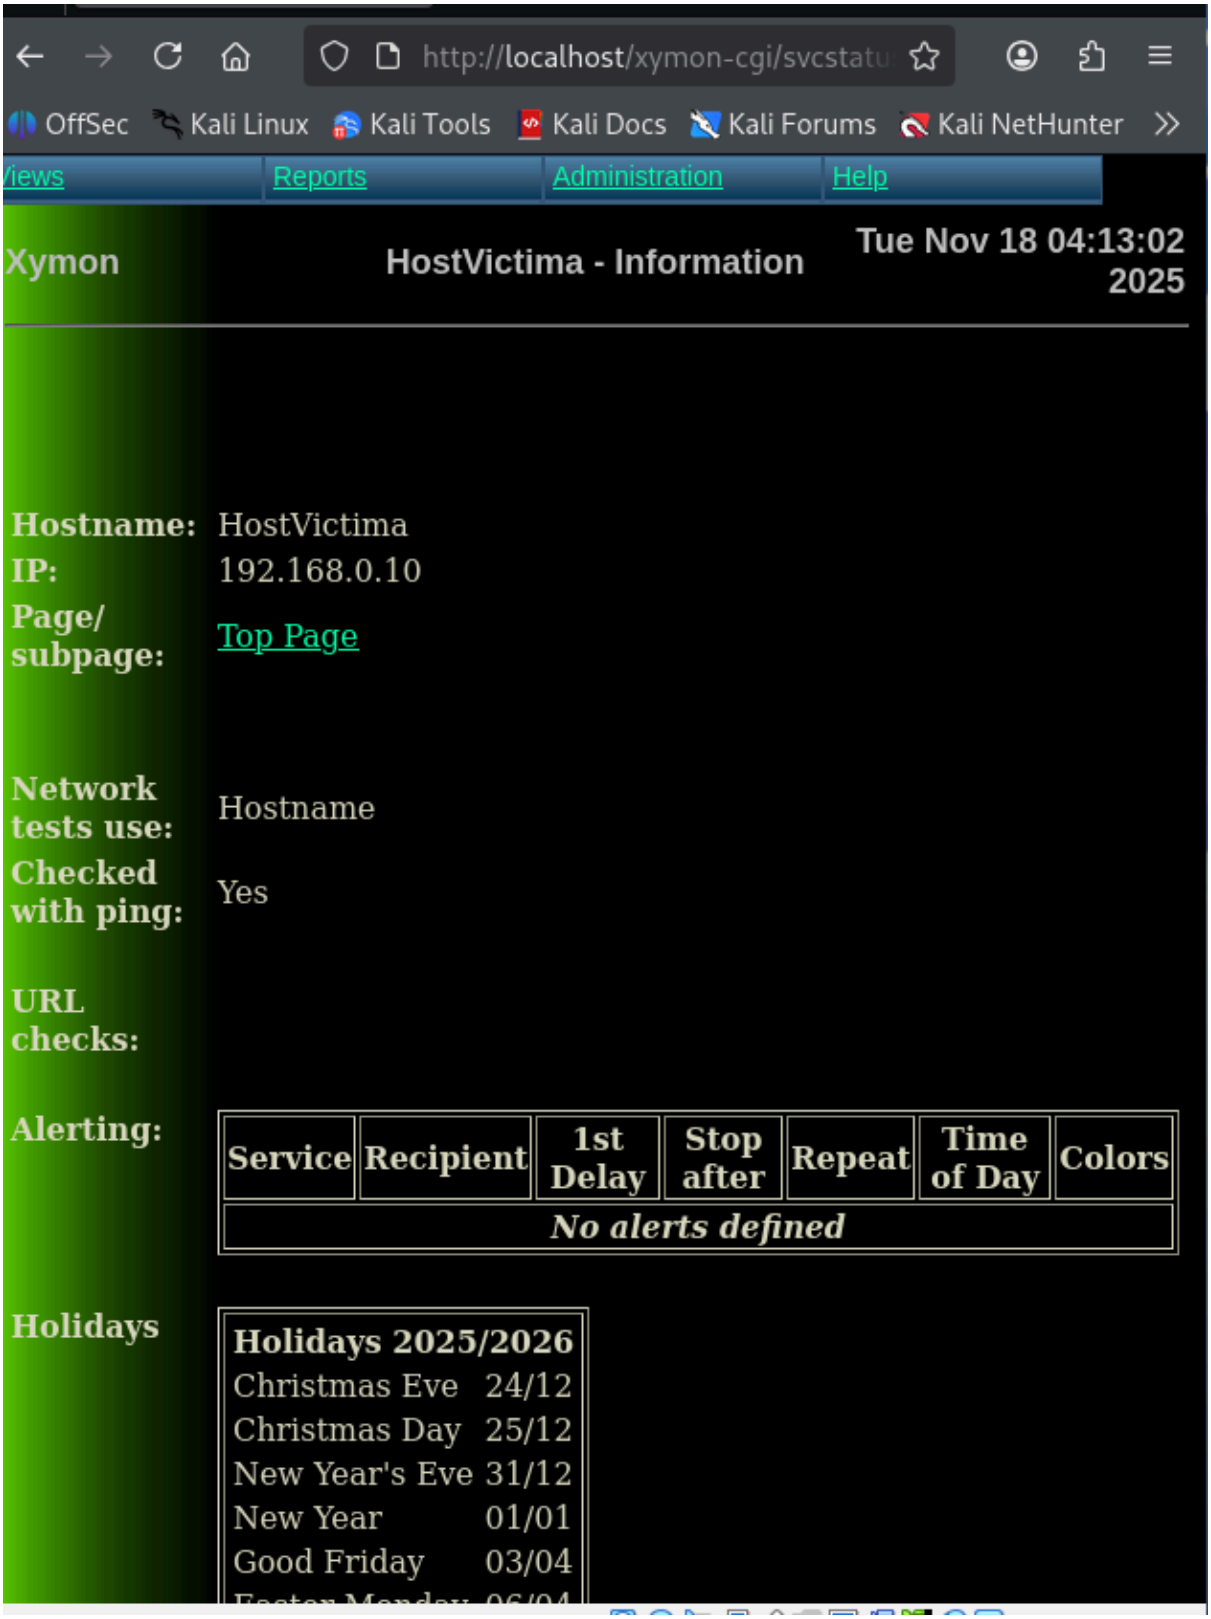


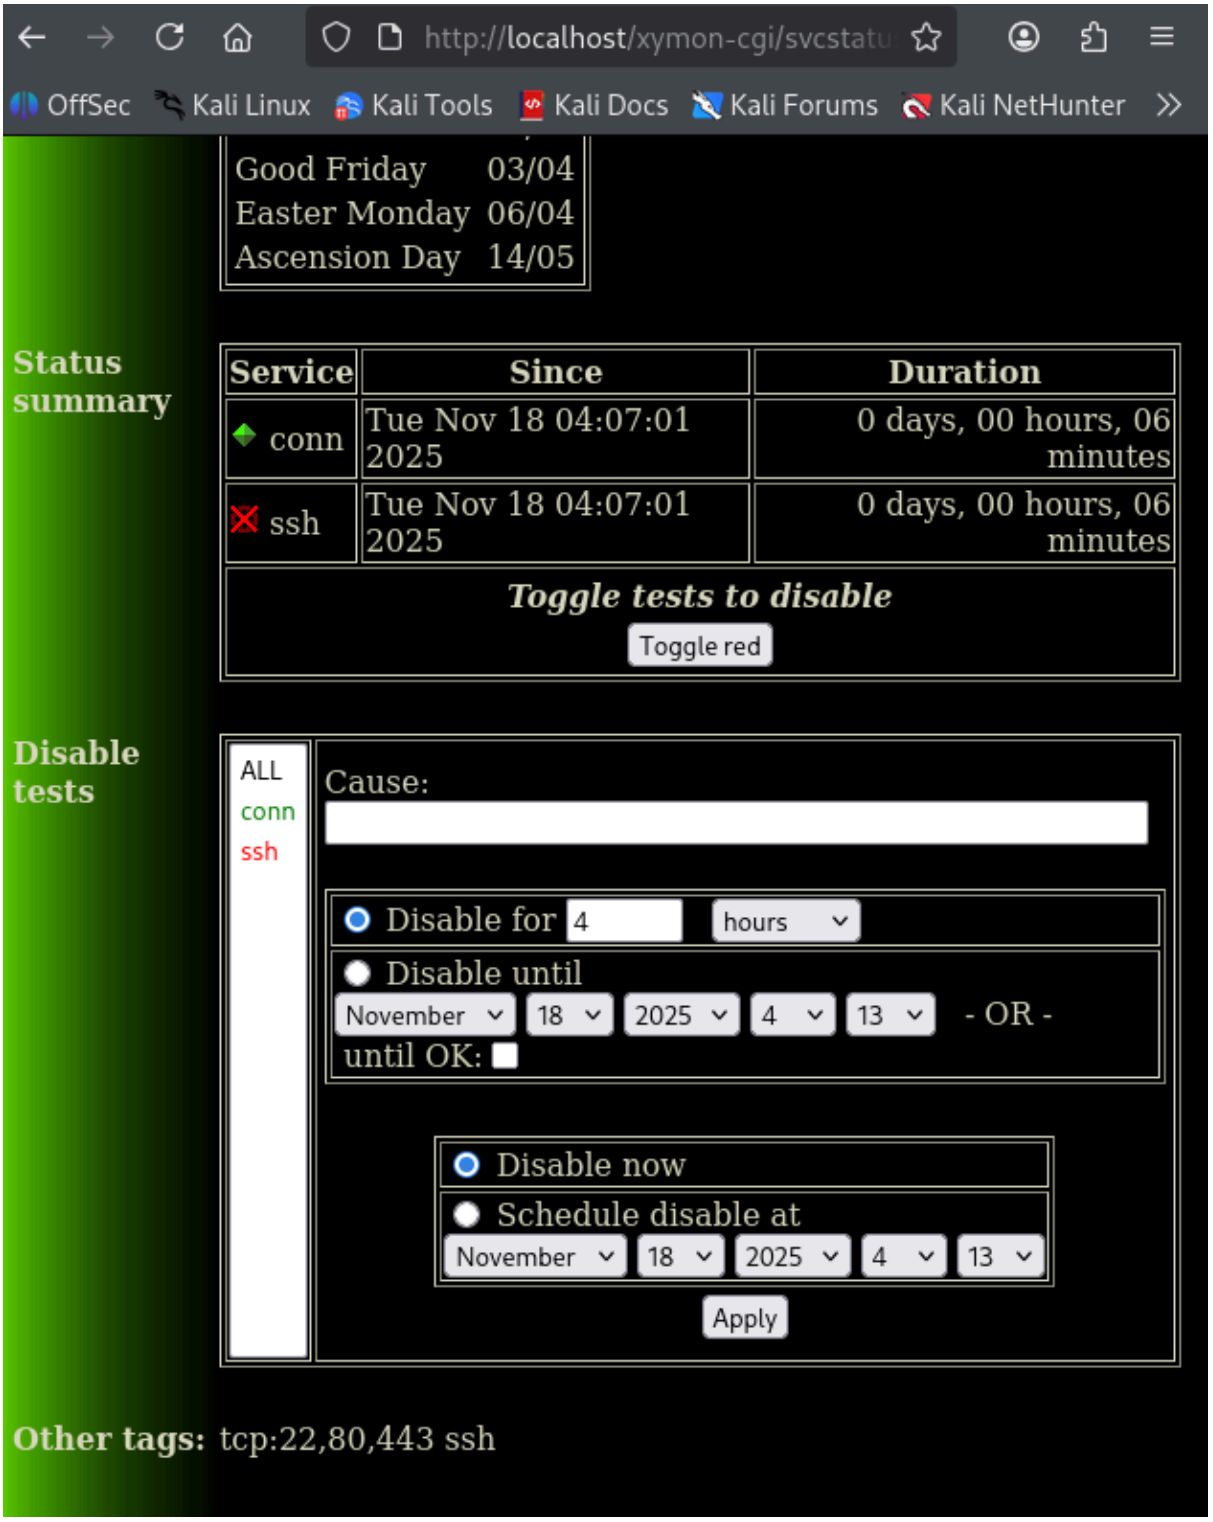
Análisis del Dashboard de Xymon

El *dashboard* muestra claramente el estado de los *hosts* que agregaste a `/etc/xymon/hosts.cfg`:

1. **kali (Tu Servidor Xymon):** La mayoría de las pruebas internas están **Verdes** (OK), aunque el **disco** (`disk`) tiene un **estado de advertencia** (Amarillo 🟡), lo cual es común en sistemas Kali con poco espacio asignado.
2. **localhost (127.0.0.1):** Muestra los servicios de red básicos como **Verdes** (🟢), lo que confirma que el *loopback* y el servidor web están funcionando.
3. **HostVictima (192.168.0.10):**
    - **conn (Conectividad): Verde** (🟢). Esto significa que Xymon puede hacer *ping* al *host* y está activo.
    - **ssh: Rojo** (🔴). Esto es crucial: Xymon no pudo conectarse ni verificar el servicio SSH en el puerto 22 del `192.168.0.10`. Esto podría significar que el servicio SSH está apagado o que un *firewall* lo está bloqueando.


http://localhost/xymon-cgi/svcstatu
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
/iews
Reports
Administration
Help
Xymon
HostVictima - ssh
Tue Nov 18 04:10:51 2025
HISTORY
Tue Nov 18 04:10:51 2025 ssh NOT ok
Service ssh on HostVictima is not OK : Service unavailable (Connection refused)
Seconds: 0.001464000
Status unchanged in 0 hours, 4 minutes
Status message received from 127.0.0.1
HostVictima TCP Connection Times 16/Nov/2025 - 18/Nov/2025
Seconds
1.0
0.8
0.6
0.4
0.2
0.0
Sun 12:00
Mon 00:00
Mon 12:00
Tue 00:00
ssh : -nan (cur) : -nan (max) : -nan (min) : -nan (avg)
Updated: 18-Nov-2025 04:11:38


http://localhost/xymon-cgi/svcstatu
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
iews
Reports
Administration
Help
Xymon
HostVictima - Information
Tue Nov 18 04:13:02 2025
Hostname: HostVictima
IP: 192.168.0.10
Page/ subpage: Top Page
Network tests use: Hostname
Checked with ping: Yes
URL checks:
Alerting:
Service
Recipient
1st Delay
Stop after
Repeat
Time of Day
Colors
No alerts defined
Holidays
Holidays 2025/2026
Christmas Eve 24/12
Christmas Day 25/12
New Year's Eve 31/12
New Year 01/01
Good Friday 03/04

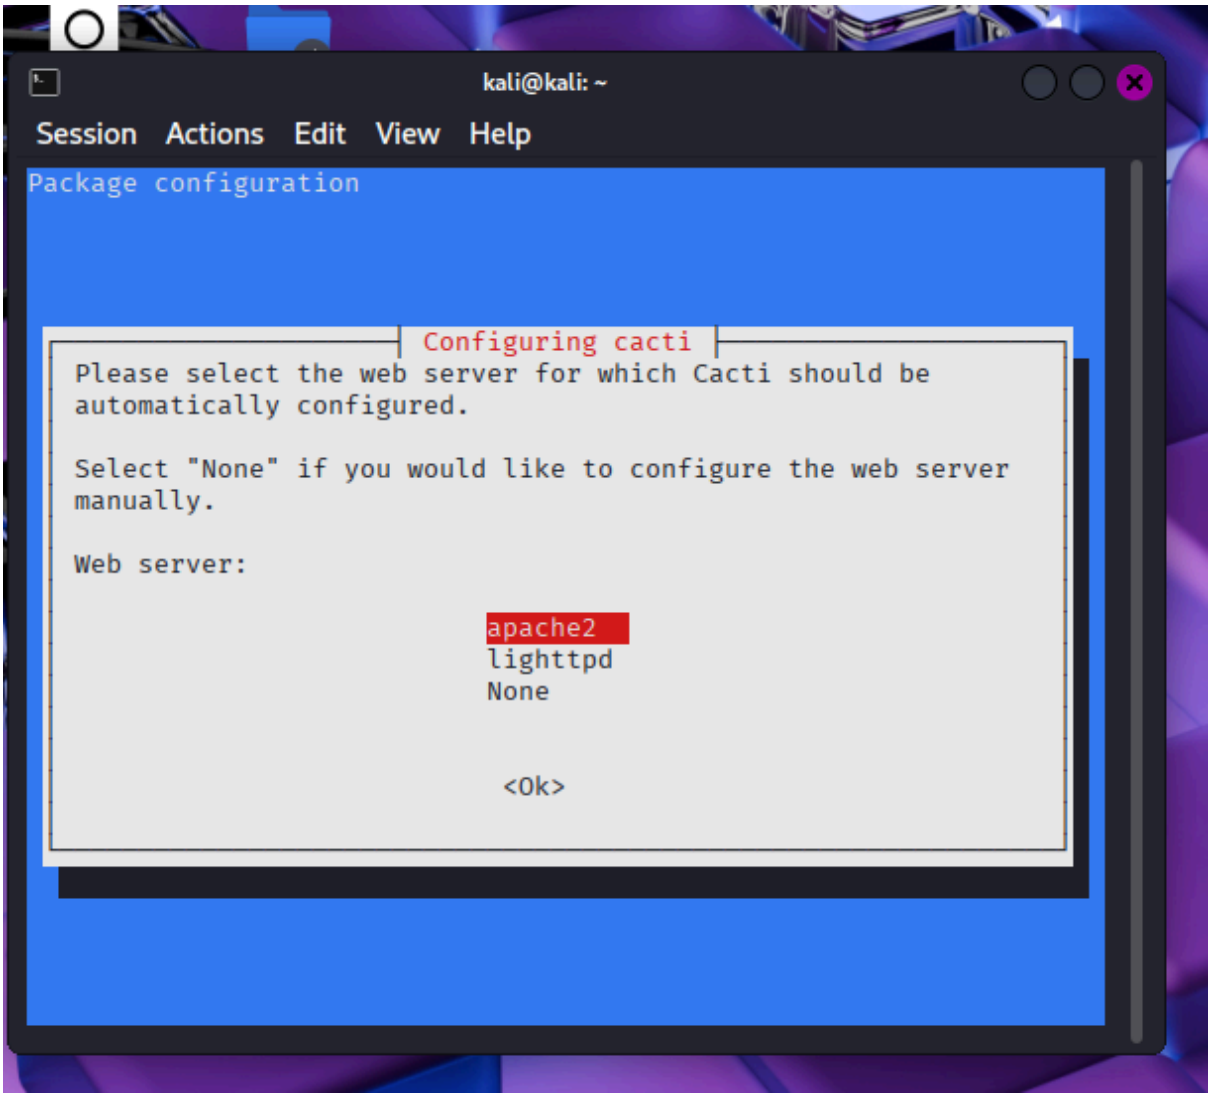


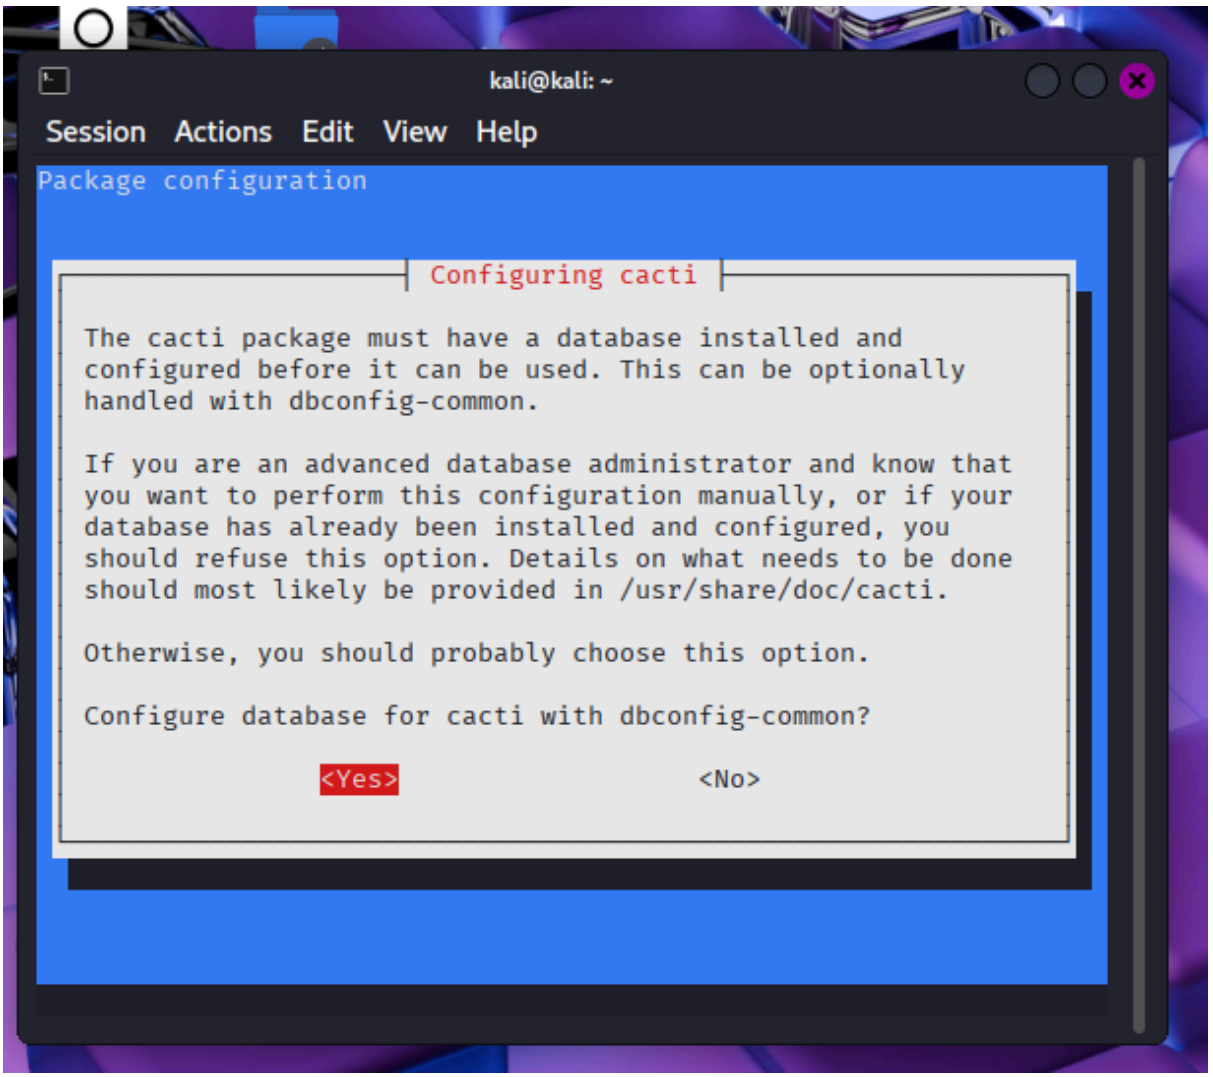
5º INSTALAR CACTI

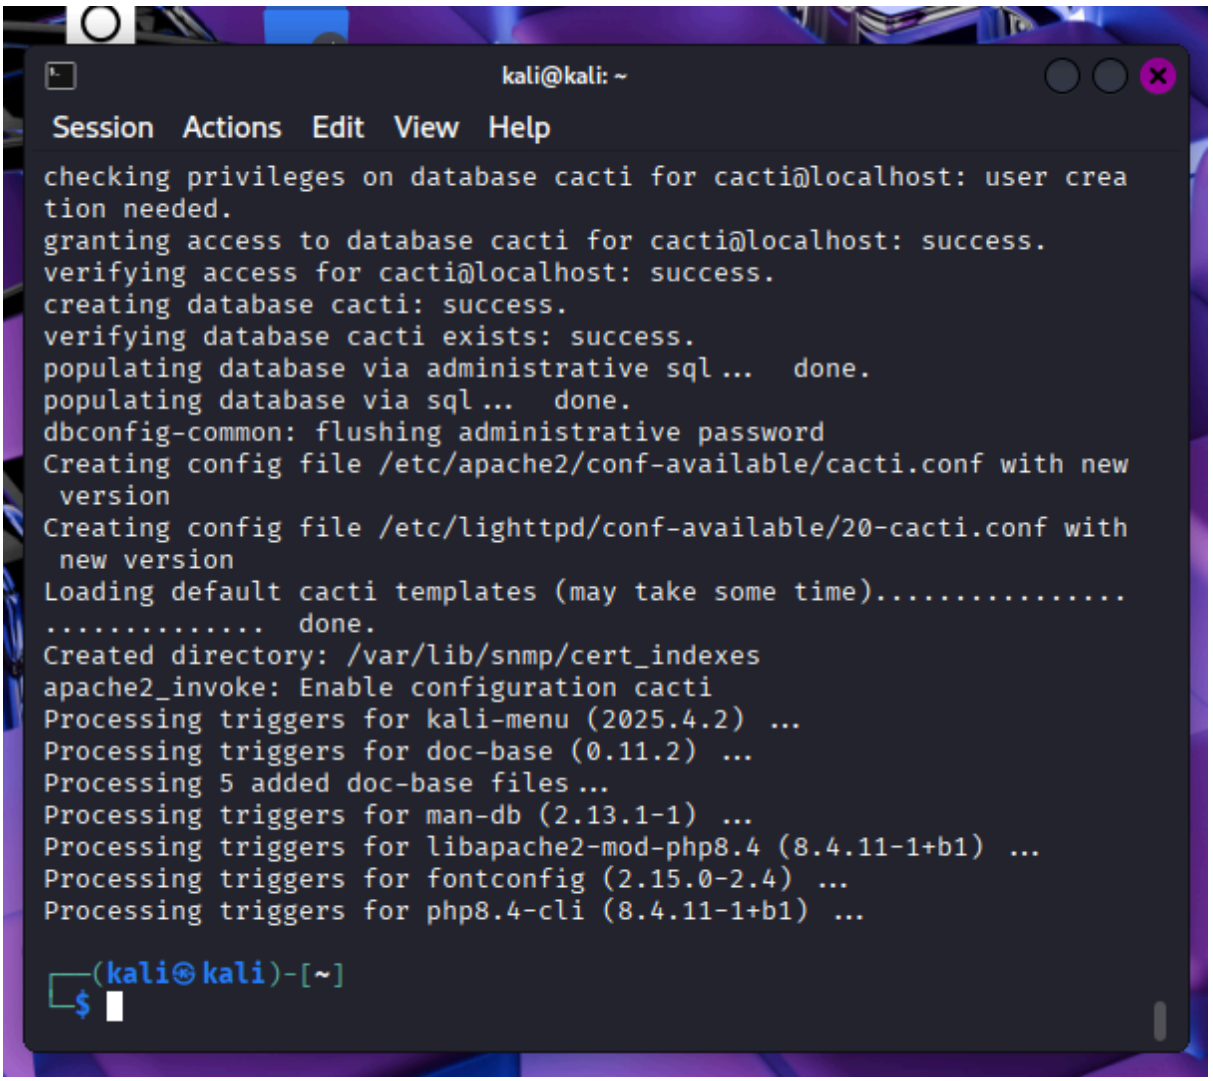
GENERA GRAFICOS DE RENDIMIENTO, TRAFICO DE REDES EN SWITCHES Y ROUTERS, GESTIONA DISPOSITIVOS DE REDES
SNMP

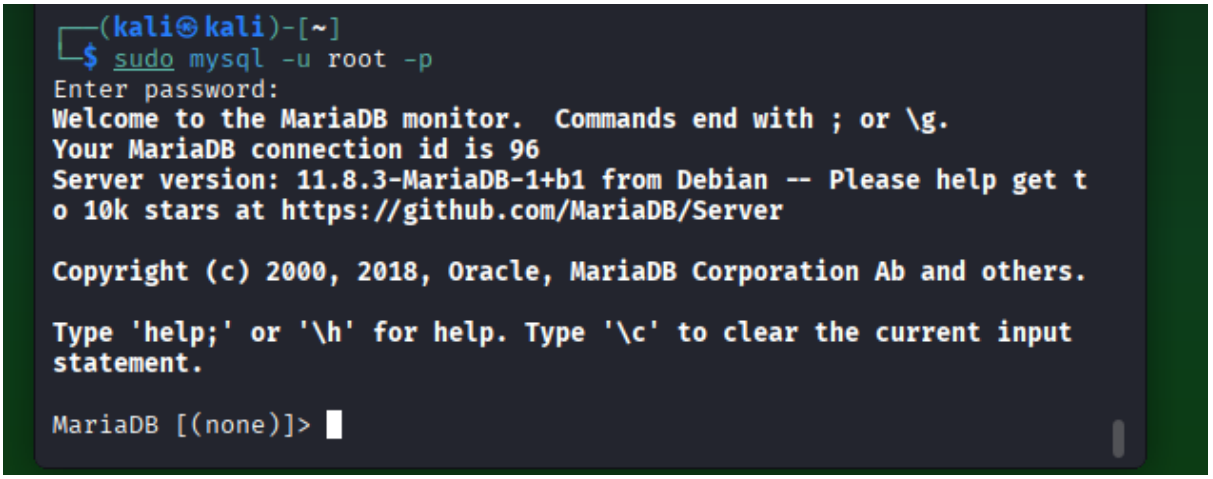
- sudo apt update

- sudo apt install cacti




kali@kali: ~
Session Actions Edit View Help
Package configuration
Configuring cacti
The cacti package must have a database installed and configured before it can be used. This can be optionally handled with dbconfig-common.
If you are an advanced database administrator and know that you want to perform this configuration manually, or if your database has already been installed and configured, you should refuse this option. Details on what needs to be done should most likely be provided in /usr/share/doc/cacti.
Otherwise, you should probably choose this option.
Configure database for cacti with dbconfig-common?
<Yes>
<No>


kali@kali: ~
Session Actions Edit View Help
checking privileges on database cacti for cacti@localhost: user creation needed.
granting access to database cacti for cacti@localhost: success.
verifying access for cacti@localhost: success.
creating database cacti: success.
verifying database cacti exists: success.
populating database via administrative sql ... done.
populating database via sql ... done.
dbconfig-common: flushing administrative password
Creating config file /etc/apache2/conf-available/cacti.conf with new version
Creating config file /etc/lighttpd/conf-available/20-cacti.conf with new version
Loading default cacti templates (may take some time).....
..... done.
Created directory: /var/lib/snmp/cert_indexes
apache2_invoke: Enable configuration cacti
Processing triggers for kali-menu (2025.4.2) ...
Processing triggers for doc-base (0.11.2) ...
Processing 5 added doc-base files ...
Processing triggers for man-db (2.13.1-1) ...
Processing triggers for libapache2-mod-php8.4 (8.4.11-1+b1) ...
Processing triggers for fontconfig (2.15.0-2.4) ...
Processing triggers for php8.4-cli (8.4.11-1+b1) ...
(kali㉿kali)-[~]
$


(kali㉿kali)-[~]
$ sudo mysql -u root -p
Enter password:
Welcome to the MariaDB monitor. Commands end with ; or \g.
Your MariaDB connection id is 96
Server version: 11.8.3-MariaDB-1+b1 from Debian -- Please help get to 10k stars at https://github.com/MariaDB/Server
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
MariaDB [(none)]>

```
┌──(kali㉿kali)-[~]
└─$ sudo mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 96
Server version: 11.8.3-MariaDB-1+b1 from Debian -- Please help get t
o 10k stars at https://github.com/MariaDB/Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input
statement.

MariaDB [(none)]> USE cacti;
```

```
┌──(kali㉿kali)-[~]
└─$ sudo mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 96
Server version: 11.8.3-MariaDB-1+b1 from Debian -- Please help get t
o 10k stars at https://github.com/MariaDB/Server

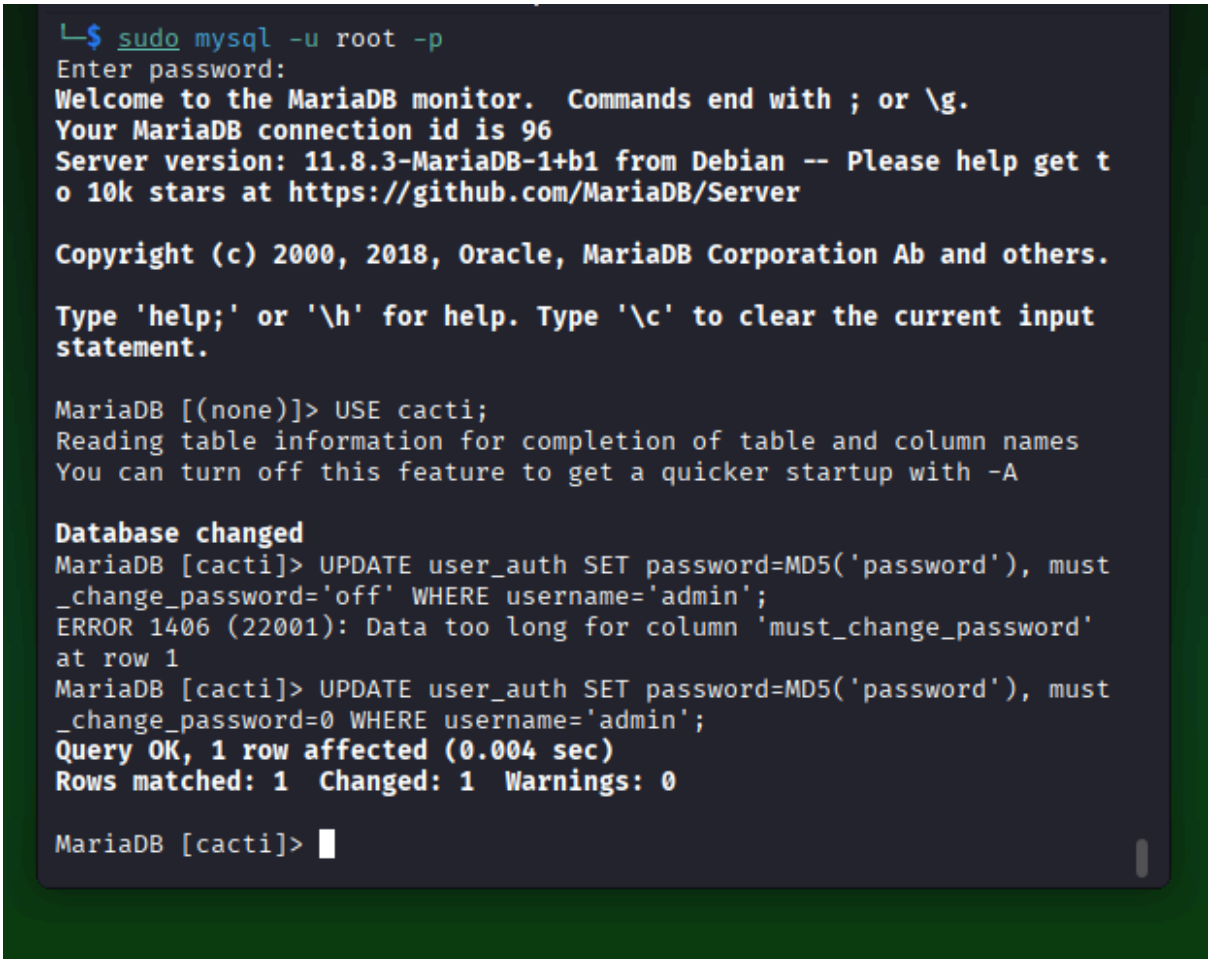
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

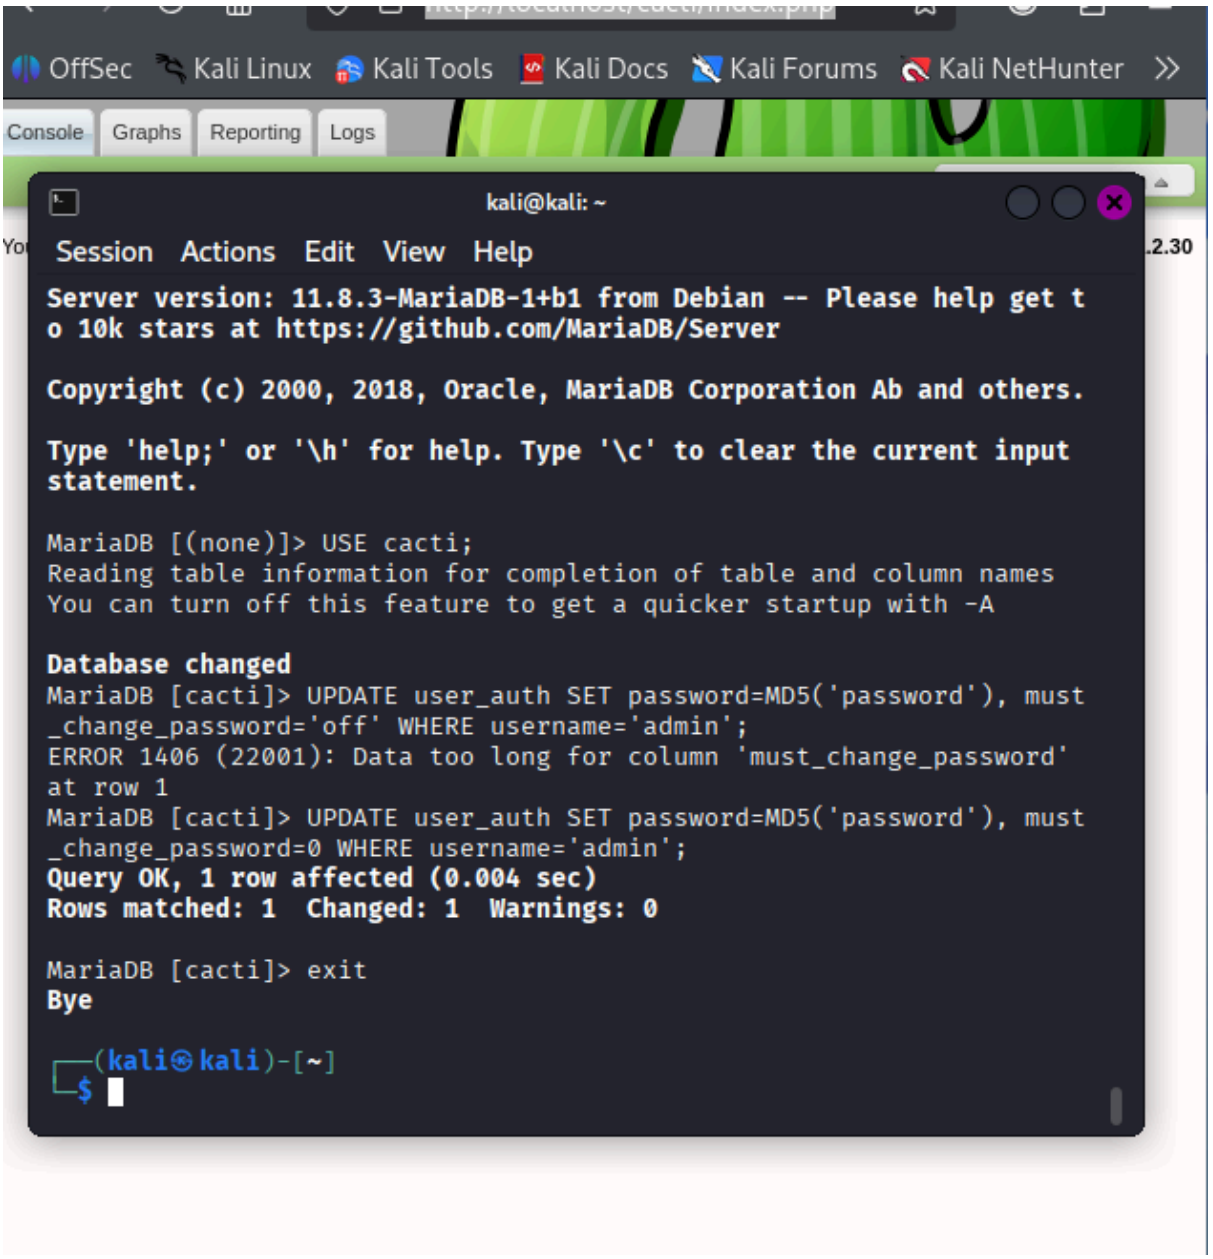
Type 'help;' or '\h' for help. Type '\c' to clear the current input
statement.

MariaDB [(none)]> USE cacti;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

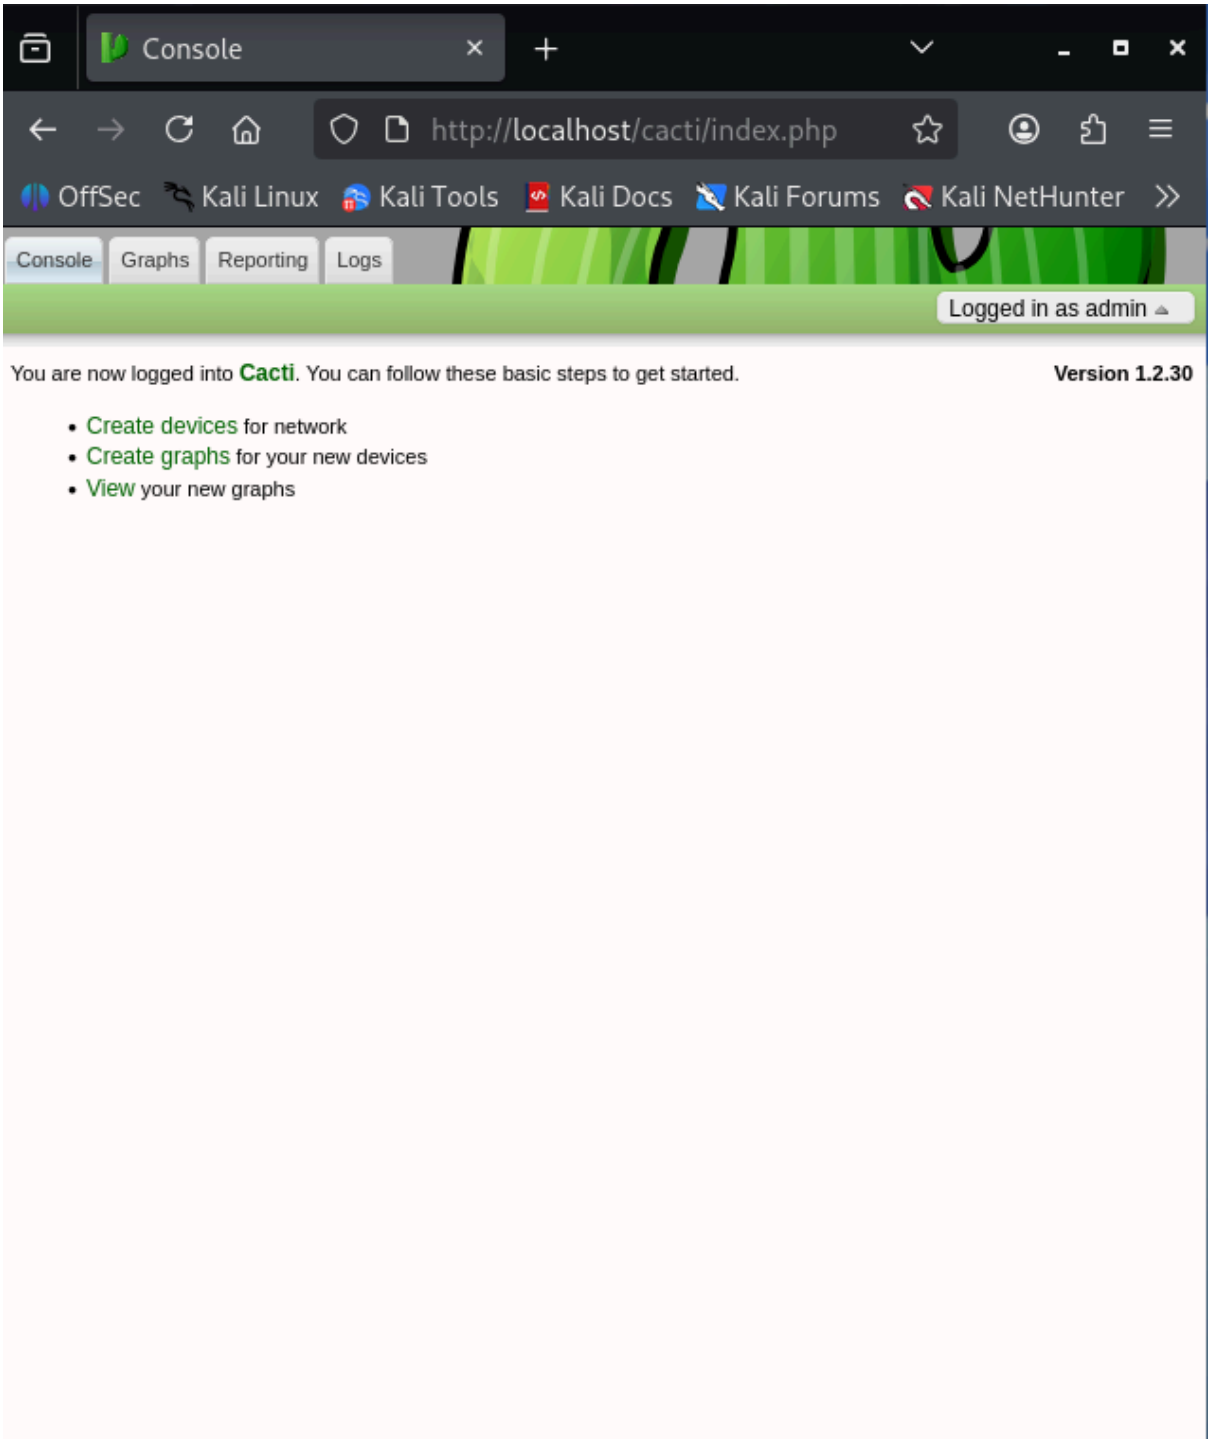
Database changed
MariaDB [cacti]> UPDATE user_auth SET password=MD5('password'), must
_change_password='off' WHERE username='admin';
```

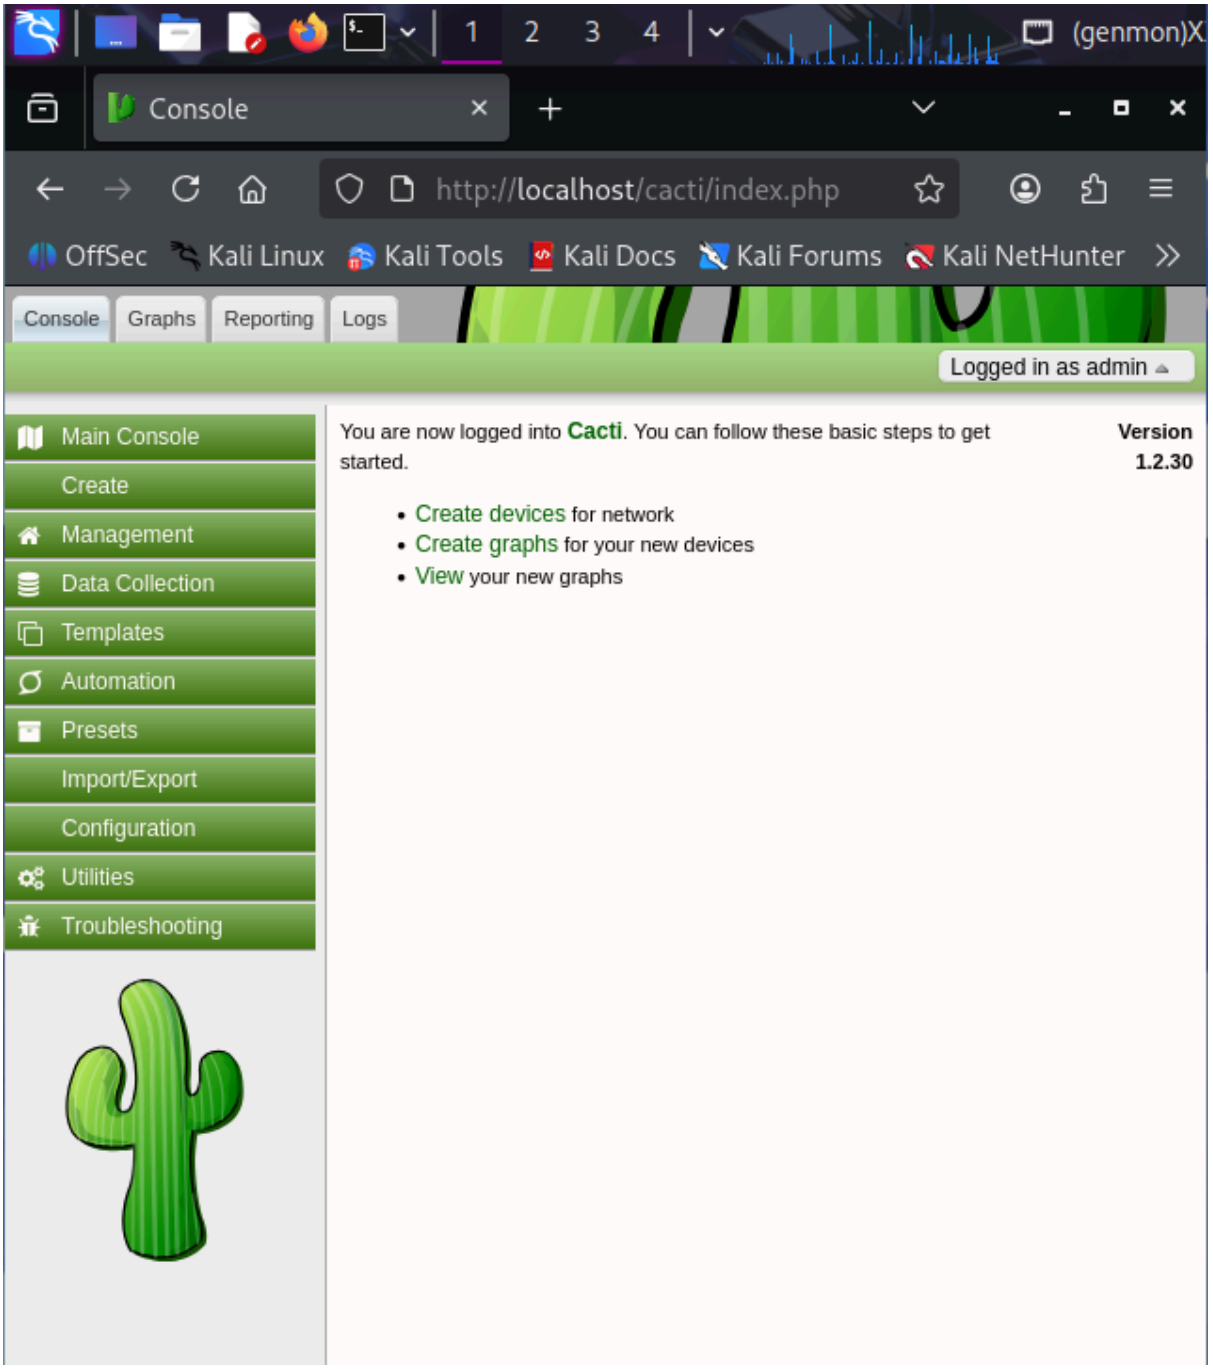
- UPDATE user_auth SET password=MD5('password'), must_change_password=0 WHERE username='admin';

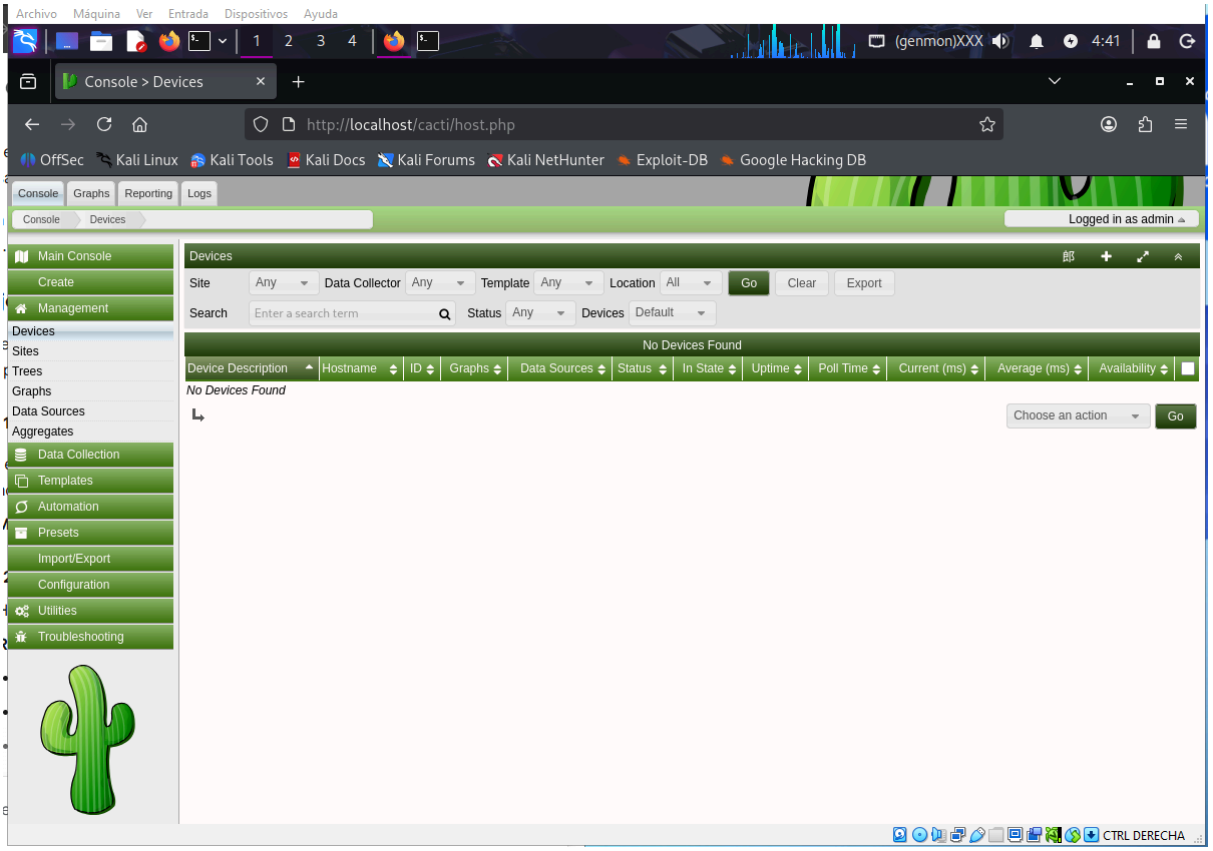

└─$ sudo mysql -u root -p
Enter password:
Welcome to the MariaDB monitor. Commands end with ; or \g.
Your MariaDB connection id is 96
Server version: 11.8.3-MariaDB-1+b1 from Debian -- Please help get t
o 10k stars at https://github.com/MariaDB/Server
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.
Type 'help;' or '\h' for help. Type '\c' to clear the current input
statement.
MariaDB [(none)]> USE cacti;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A
Database changed
MariaDB [cacti]> UPDATE user_auth SET password=MD5('password'), must
_change_password='off' WHERE username='admin';
ERROR 1406 (22001): Data too long for column 'must_change_password'
at row 1
MariaDB [cacti]> UPDATE user_auth SET password=MD5('password'), must
_change_password=0 WHERE username='admin';
Query OK, 1 row affected (0.004 sec)
Rows matched: 1 Changed: 1 Warnings: 0
MariaDB [cacti]>

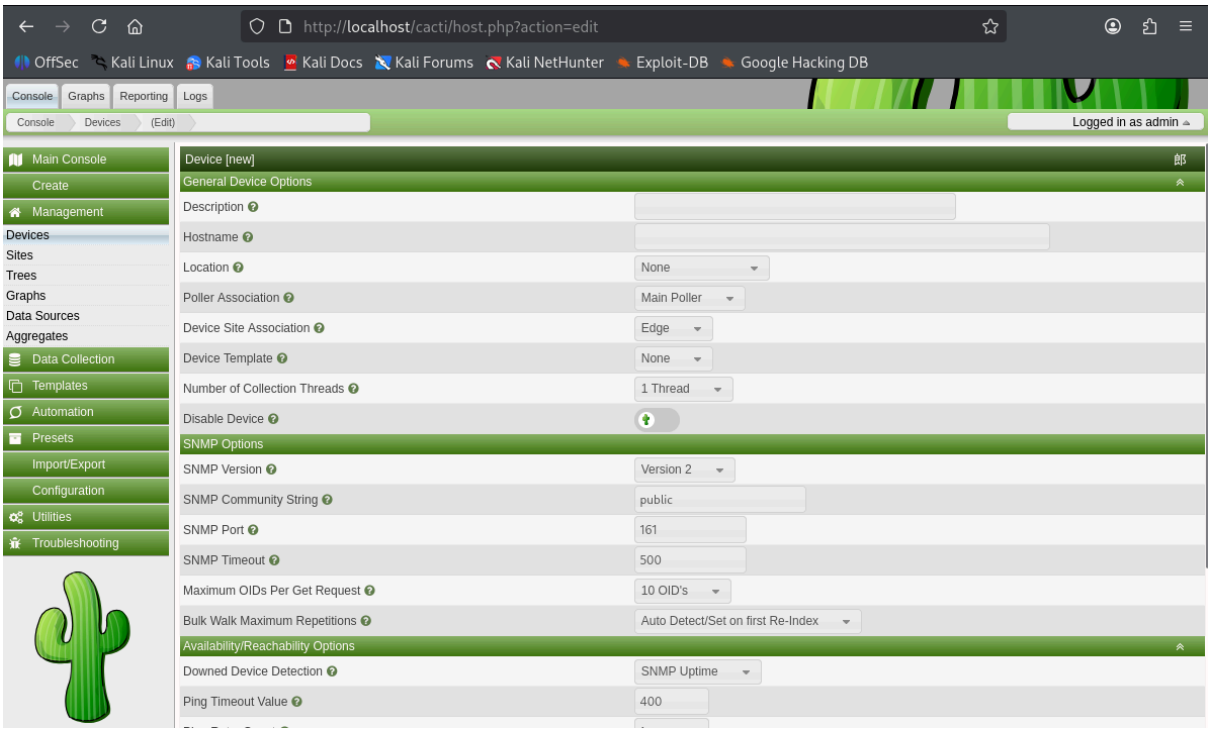


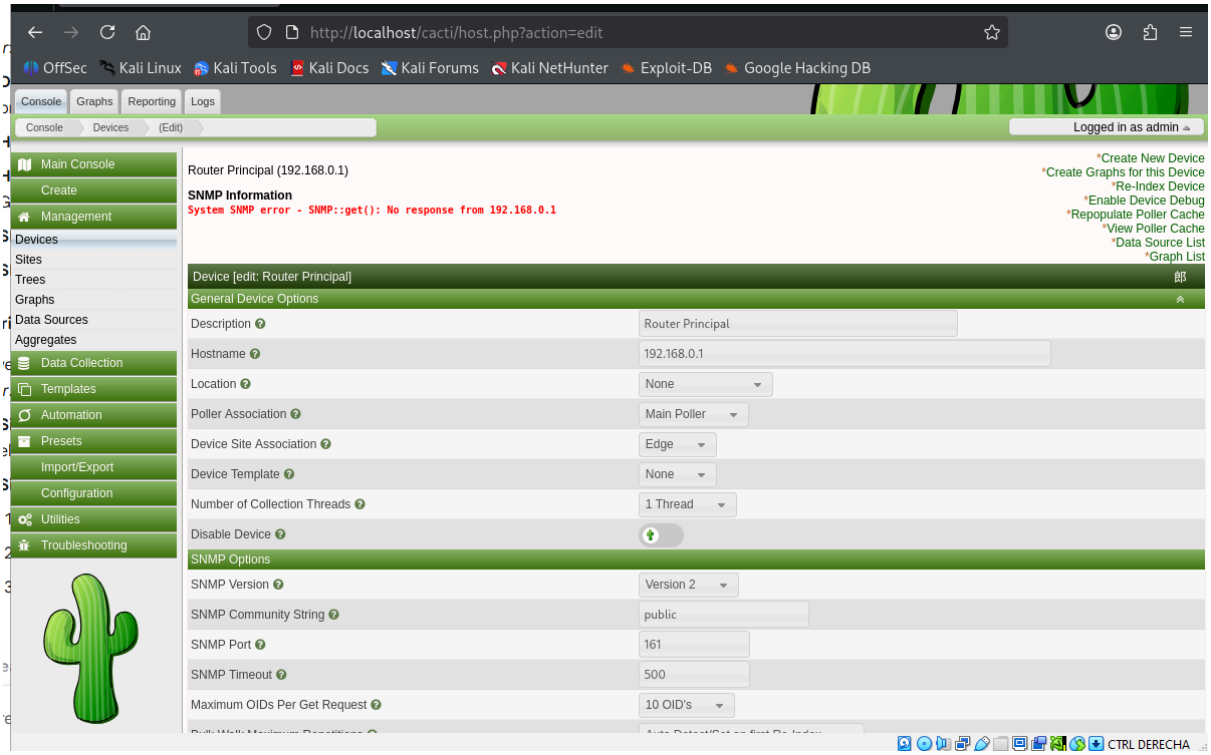
Abre tu navegador y navega a **`http://localhost/cacti/`**.
Inicia sesión con: **Usuario:** `admin`, **Contraseña:** `password`.

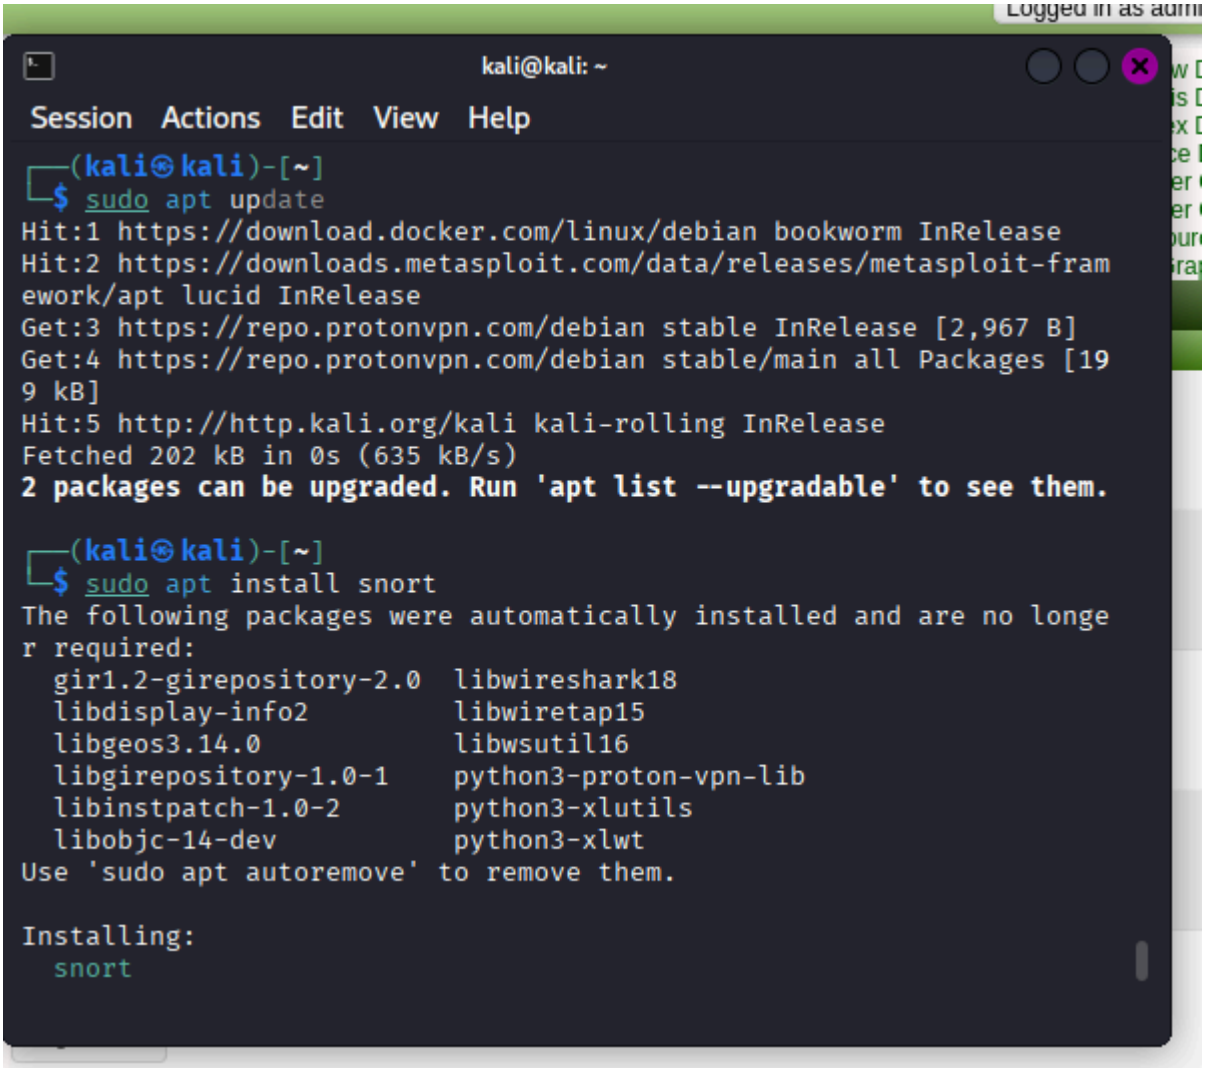

Console
http://localhost/cacti/index.php
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
Console
Graphs
Reporting
Logs
Logged in as admin
You are now logged into Cacti. You can follow these basic steps to get started.
Version 1.2.30
Create devices for network
Create graphs for your new devices
View your new graphs

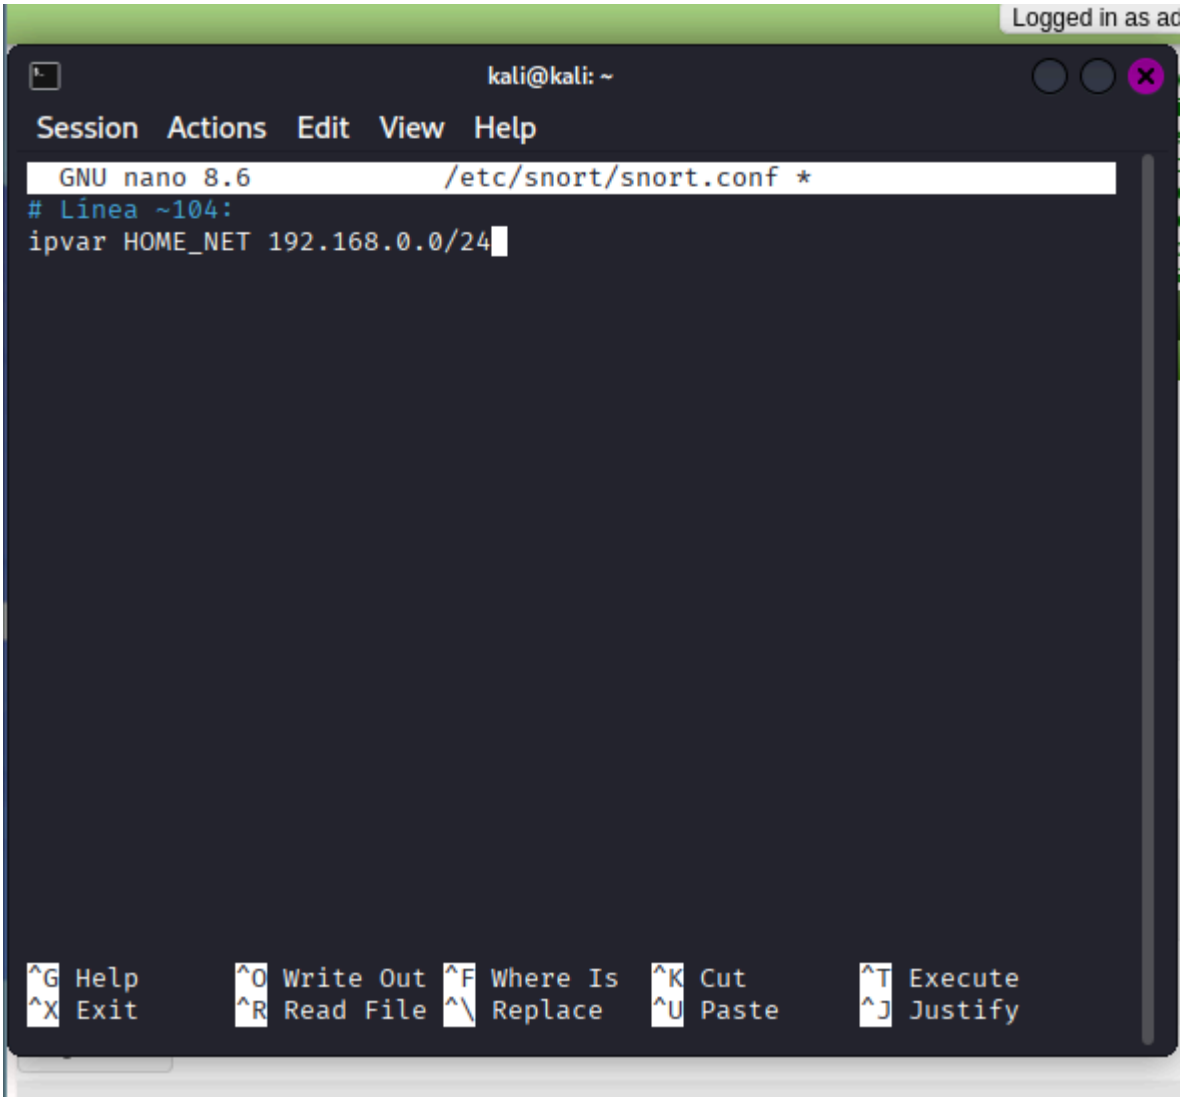

1 2 3 4
(genmon)X
Console
http://localhost/cacti/index.php
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
Console
Graphs
Reporting
Logs
Logged in as admin
Main Console
Create
Management
Data Collection
Templates
Automation
Presets
Import/Export
Configuration
Utilities
Troubleshooting
You are now logged into Cacti. You can follow these basic steps to get started.
Version 1.2.30
Create devices for network
Create graphs for your new devices
View your new graphs


Archivo Máquina Ver Entrada Dispositivos Ayuda
(genmon)XXX 4:41
Console > Devices
http://localhost/cacti/host.php
OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB
Console Graphs Reporting Logs
Console Devices
Logged in as admin
Main Console
Create
Management
Devices
Sites
Trees
Graphs
Data Sources
Aggregates
Data Collection
Templates
Automation
Presets
Import/Export
Configuration
Utilities
Troubleshooting
Devices
Site Any
Data Collector Any
Template Any
Location All
Go
Clear
Export
Search
Enter a search term
Status Any
Devices Default
No Devices Found
Device Description
Hostname
ID
Graphs
Data Sources
Status
In State
Uptime
Poll Time
Current (ms)
Average (ms)
Availability
No Devices Found
Choose an action
Go
CTRL DERECHA


http://localhost/cacti/host.php?action=edit
OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB
Console Graphs Reporting Logs
Console Devices (Edit)
Logged in as admin
Main Console
Create
Management
Devices
Sites
Trees
Graphs
Data Sources
Aggregates
Data Collection
Templates
Automation
Presets
Import/Export
Configuration
Utilities
Troubleshooting
Device [new]
General Device Options
Description
Hostname
Location None
Poller Association Main Poller
Device Site Association Edge
Device Template None
Number of Collection Threads 1 Thread
Disable Device
SNMP Options
SNMP Version Version 2
SNMP Community String public
SNMP Port 161
SNMP Timeout 500
Maximum OIDs Per Get Request 10 OID's
Bulk Walk Maximum Repetitions Auto Detect/Set on first Re-Index
Availability/Reachability Options
Downed Device Detection SNMP Uptime
Ping Timeout Value 400


http://localhost/cacti/host.php?action=edit
OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB
Console Graphs Reporting Logs
Console Devices (Edit)
Logged in as admin
Main Console
Create
Management
Devices
Sites
Trees
Graphs
Data Sources
Aggregates
Data Collection
Templates
Automation
Presets
Import/Export
Configuration
Utilities
Troubleshooting
Router Principal (192.168.0.1)
SNMP Information
System SNMP error - SNMP::get(): No response from 192.168.0.1
*Create New Device
*Create Graphs for this Device
*Re-Index Device
*Enable Device Debug
*Repopulate Poller Cache
*View Poller Cache
*Data Source List
*Graph List
Device [edit: Router Principal]
General Device Options
Description Router Principal
Hostname 192.168.0.1
Location None
Poller Association Main Poller
Device Site Association Edge
Device Template None
Number of Collection Threads 1 Thread
Disable Device
SNMP Options
SNMP Version Version 2
SNMP Community String public
SNMP Port 161
SNMP Timeout 500
Maximum OIDs Per Get Request 10 OID's
CTRL DERECHA


kali@kali: ~
Session Actions Edit View Help
(kali㉿kali)-[~]
$ sudo apt update
Hit:1 https://download.docker.com/linux/debian bookworm InRelease
Hit:2 https://downloads.metasploit.com/data/releases/metasploit-framework/apt lucid InRelease
Get:3 https://repo.protonvpn.com/debian stable InRelease [2,967 B]
Get:4 https://repo.protonvpn.com/debian stable/main all Packages [199 kB]
Hit:5 http://http.kali.org/kali kali-rolling InRelease
Fetched 202 kB in 0s (635 kB/s)
2 packages can be upgraded. Run 'apt list --upgradable' to see them.
(kali㉿kali)-[~]
$ sudo apt install snort
The following packages were automatically installed and are no longer required:
gir1.2-girepository-2.0 libwireshark18
libdisplay-info2 libwiretap15
libgeos3.14.0 libwsutil16
libgirepository-1.0-1 python3-proton-vpn-lib
libinstpatch-1.0-2 python3-xlutils
libobjc-14-dev python3-xlwt
Use 'sudo apt autoremove' to remove them.
Installing:
snort




```
┌──(kali㉿kali)-[~]
└─$ sudo nano /etc/snort/snort.conf

┌──(kali㉿kali)-[~]
└─$ sudo snort -vde -i eth0
ERROR: can't set -v de
ERROR: usage: -v be verbose
FATAL: see prior 2 errors
Fatal Error, Quitting..

┌──(kali㉿kali)-[~]
└─$
```

```
┌──(kali㉿kali)-[~]
└─$ sudo snort -v -d -e -i eth0
--------------------------------------------------
o")~   Snort++ 3.1.82.0
--------------------------------------------------
--------------------------------------------------
Network Policy : policy id 0 :
--------------------------------------------------
Inspection Policy : policy id 0 :
--------------------------------------------------
pcap DAQ configured to passive.
--------------------------------------------------
host_cache
    memcap: 33554432 bytes
Commencing packet processing
++ [0] eth0
Instance 0 daq pool size: 256
Instance 0 daq batch size: 64
```

```
┌──(kali㉿kali)-[~]
└─$ sudo snort -c /etc/snort/snort.conf -i eth0 --alert-mode console

ERROR: unknown option --alert-mode console
FATAL: see prior 1 errors
Fatal Error, Quitting..

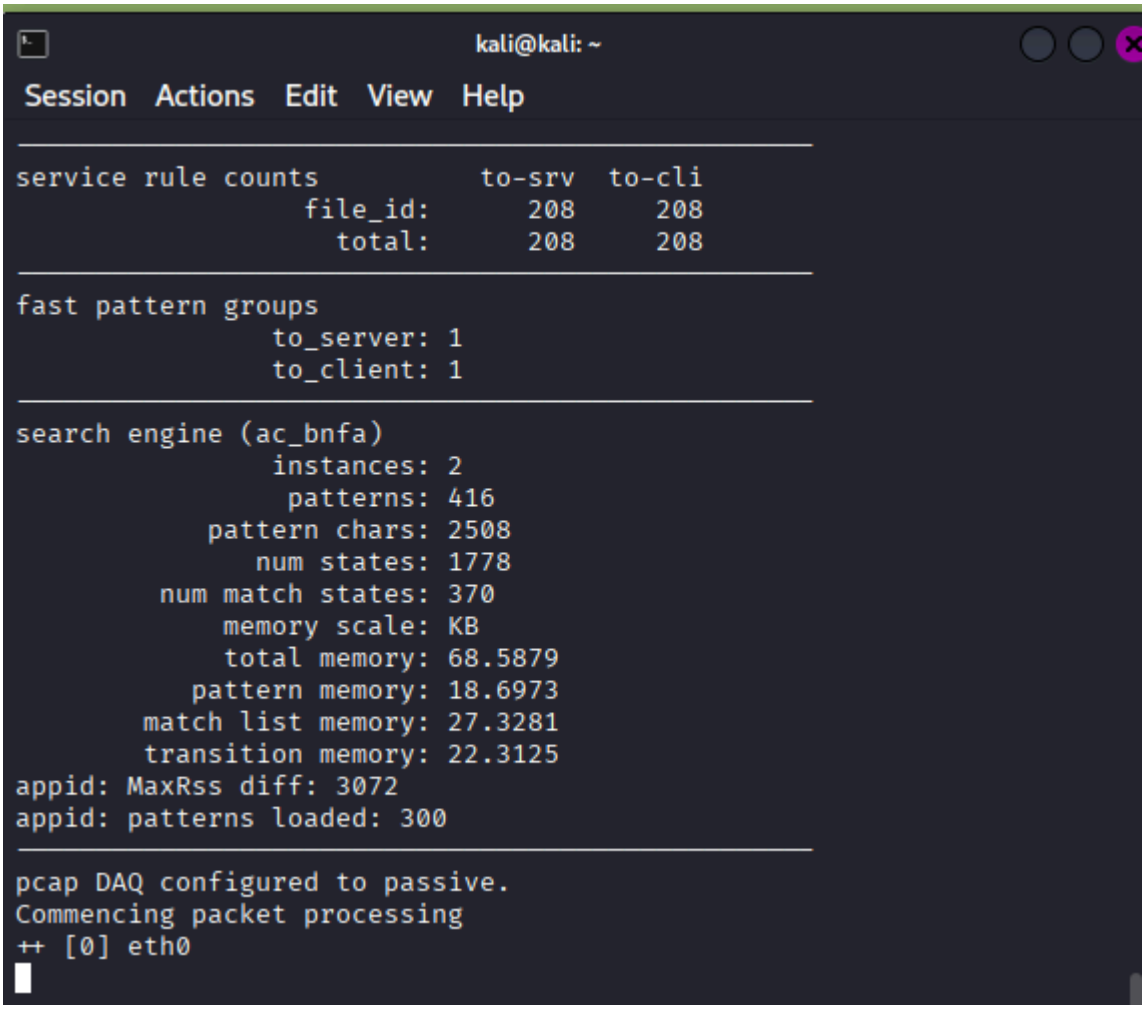
┌──(kali㉿kali)-[~]
└─$
```

- sudo snort -c /etc/snort/snort.lua -i eth0

```
┌──(kali㉿kali)-[~]
└─$ sudo snort -c /etc/snort/snort.lua -i eth0
```

```
o")~   Snort++ 3.1.82.0
```

```
Loading /etc/snort/snort.lua:
Loading snort_defaults.lua:
Finished snort_defaults.lua:
        ips
        file_id
        trace
        ftp_server
        ftp_client
        ftp_data
        http_inspect
        http2_inspect
        file_policy
        appid
        wizard
        binder
        references
        classifications
        js_norm
        smtp
        port_scan
        gtp_inspect
        dce_http_server
```


kali@kali: ~
Session Actions Edit View Help
service rule counts to-srv to-cli
file_id: 208 208
total: 208 208
fast pattern groups
to_server: 1
to_client: 1
search engine (ac_bnfa)
instances: 2
patterns: 416
pattern chars: 2508
num states: 1778
num match states: 370
memory scale: KB
total memory: 68.5879
pattern memory: 18.6973
match list memory: 27.3281
transition memory: 22.3125
appid: MaxRss diff: 3072
appid: patterns loaded: 300
pcap DAQ configured to passive.
Commencing packet processing
++ [0] eth0

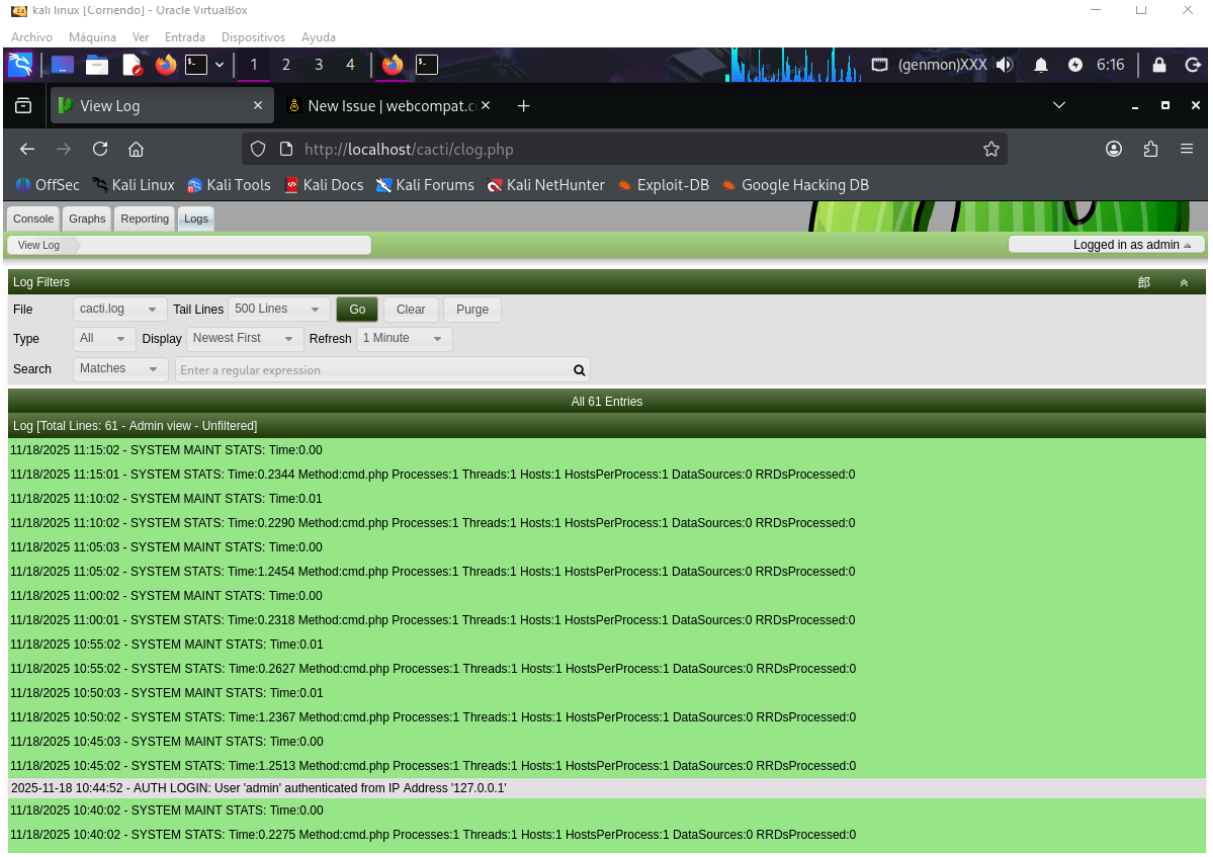
```
Finished /etc/snort/snort.lua:
Loading file_id.rules_file:
Loading file_magic.rules:
Finished file_magic.rules:
Finished file_id.rules_file:
--------------------------------------------------
ips policies rule stats
              id  loaded  shared enabled    file
               0     208       0     208    /etc/snort/snort.lua
--------------------------------------------------
rule counts
       total rules loaded: 208
              text rules: 208
            option chains: 208
            chain headers: 1
--------------------------------------------------
service rule counts          to-srv  to-cli
                  file_id:      208     208
                    total:      208     208
--------------------------------------------------
fast pattern groups
                to_server: 1
                to_client: 1
--------------------------------------------------
search engine (ac_bnfa)
                instances: 2
                 patterns: 416
```

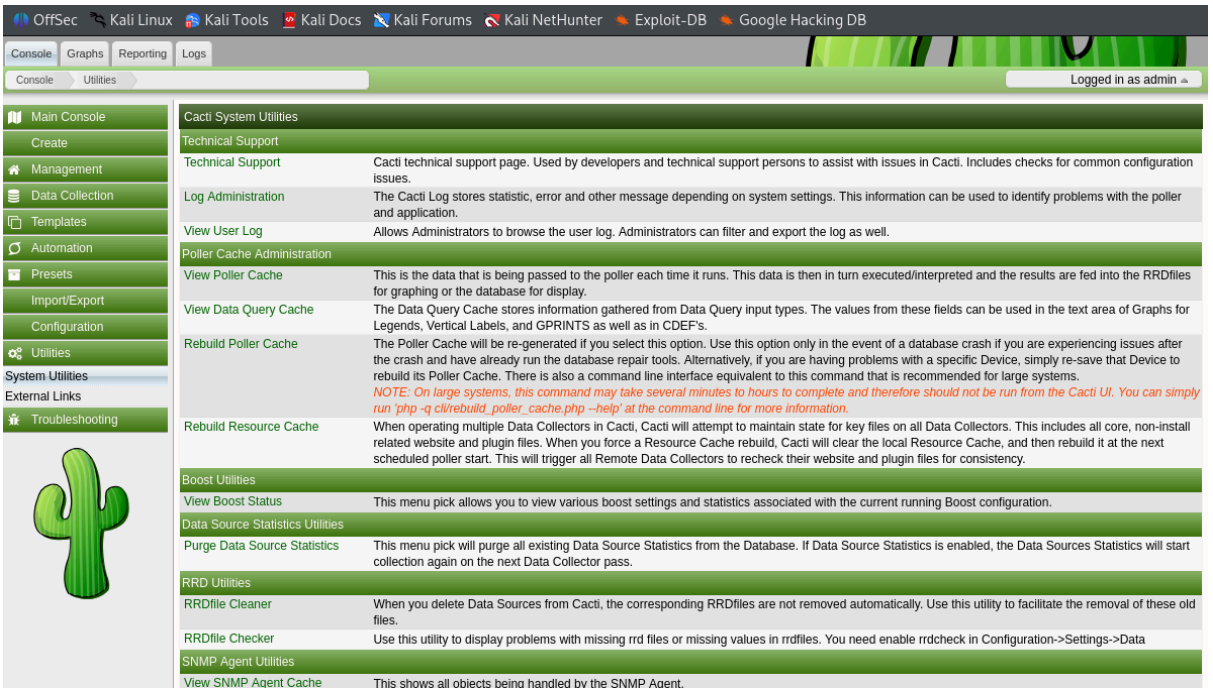
```
       bad_udp4_checksum: 3
--------------------------------------------------
wizard
               udp_scans: 767
              udp_misses: 767
--------------------------------------------------
Appid Statistics
--------------------------------------------------
detected apps and services
             Application: Services   Clients    Users      Payloads
   Misc      Referred
                 unknown: 24         0          0          2
   0         0
--------------------------------------------------
Summary Statistics
--------------------------------------------------
process
                 signals: 1
--------------------------------------------------
timing
                 runtime: 00:03:48
                 seconds: 228.442248
                pkts/sec: 17
o")~   Snort exiting
```

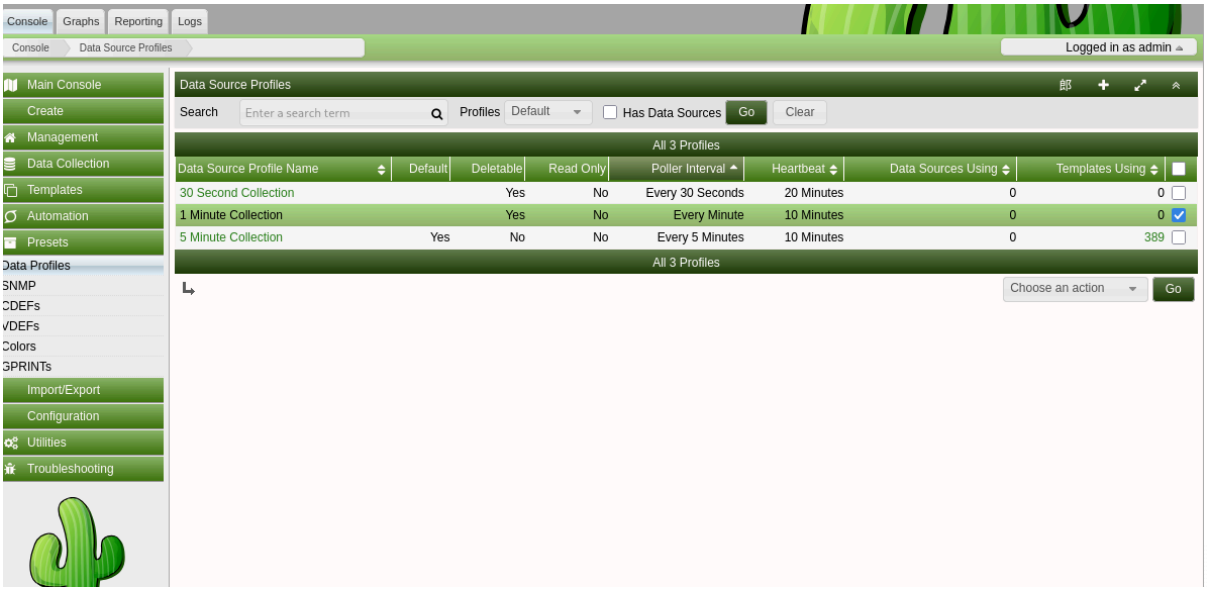
```
┌──(kali㉿kali)-[~]
└─$ sudo ls -l /var/log/snort/
total 0

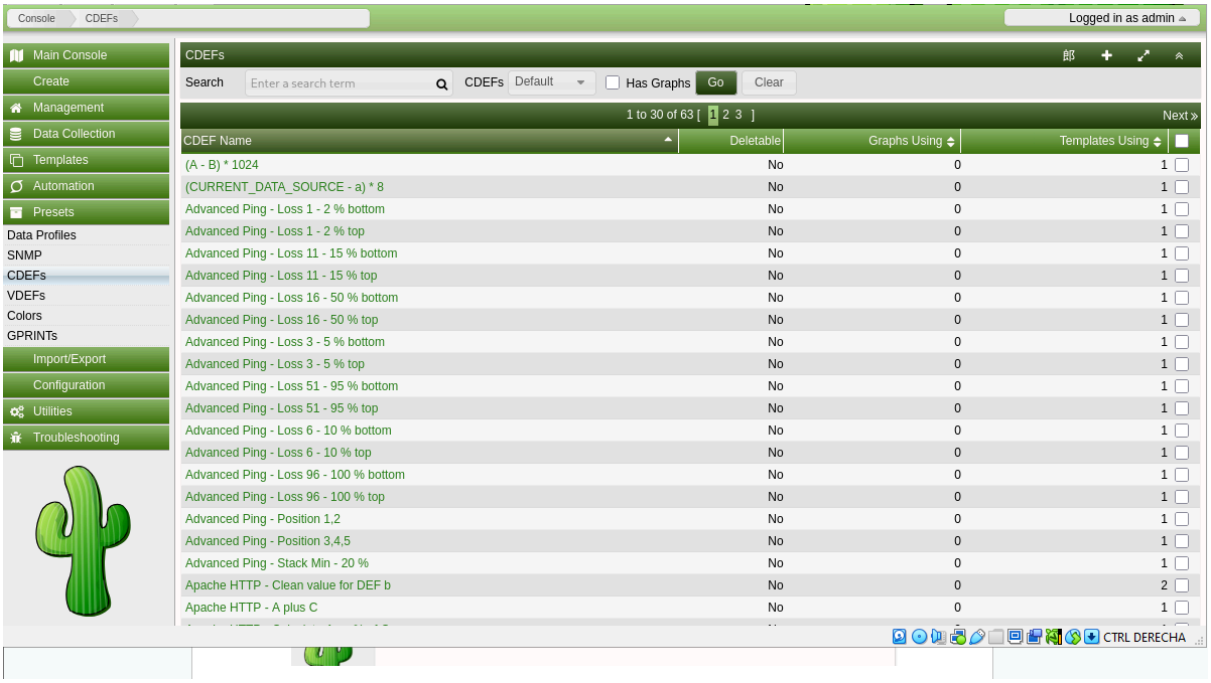
┌──(kali㉿kali)-[~]
└─$
```




kali linux [Corriendo] - Oracle VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda
View Log
New Issue | webcompat.c
http://localhost/cacti/clog.php
OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB
Console Graphs Reporting Logs
View Log
Logged in as admin
Log Filters
File cacti.log Tail Lines 500 Lines Go Clear Purge
Type All Display Newest First Refresh 1 Minute
Search Matches Enter a regular expression
All 61 Entries
Log [Total Lines: 61 - Admin view - Unfiltered]
11/18/2025 11:15:02 - SYSTEM MAINT STATS: Time:0.00
11/18/2025 11:15:01 - SYSTEM STATS: Time:0.2344 Method:cmd.php Processes:1 Threads:1 Hosts:1 HostsPerProcess:1 DataSources:0 RRDsProcessed:0
11/18/2025 11:10:02 - SYSTEM MAINT STATS: Time:0.01
11/18/2025 11:10:02 - SYSTEM STATS: Time:0.2290 Method:cmd.php Processes:1 Threads:1 Hosts:1 HostsPerProcess:1 DataSources:0 RRDsProcessed:0
11/18/2025 11:05:03 - SYSTEM MAINT STATS: Time:0.00
11/18/2025 11:05:02 - SYSTEM STATS: Time:1.2454 Method:cmd.php Processes:1 Threads:1 Hosts:1 HostsPerProcess:1 DataSources:0 RRDsProcessed:0
11/18/2025 11:00:02 - SYSTEM MAINT STATS: Time:0.00
11/18/2025 11:00:01 - SYSTEM STATS: Time:0.2318 Method:cmd.php Processes:1 Threads:1 Hosts:1 HostsPerProcess:1 DataSources:0 RRDsProcessed:0
11/18/2025 10:55:02 - SYSTEM MAINT STATS: Time:0.01
11/18/2025 10:55:02 - SYSTEM STATS: Time:0.2627 Method:cmd.php Processes:1 Threads:1 Hosts:1 HostsPerProcess:1 DataSources:0 RRDsProcessed:0
11/18/2025 10:50:03 - SYSTEM MAINT STATS: Time:0.01
11/18/2025 10:50:02 - SYSTEM STATS: Time:1.2367 Method:cmd.php Processes:1 Threads:1 Hosts:1 HostsPerProcess:1 DataSources:0 RRDsProcessed:0
11/18/2025 10:45:03 - SYSTEM MAINT STATS: Time:0.00
11/18/2025 10:45:02 - SYSTEM STATS: Time:1.2513 Method:cmd.php Processes:1 Threads:1 Hosts:1 HostsPerProcess:1 DataSources:0 RRDsProcessed:0
2025-11-18 10:44:52 - AUTH LOGIN: User 'admin' authenticated from IP Address '127.0.0.1'
11/18/2025 10:40:02 - SYSTEM MAINT STATS: Time:0.00
11/18/2025 10:40:02 - SYSTEM STATS: Time:0.2275 Method:cmd.php Processes:1 Threads:1 Hosts:1 HostsPerProcess:1 DataSources:0 RRDsProcessed:0

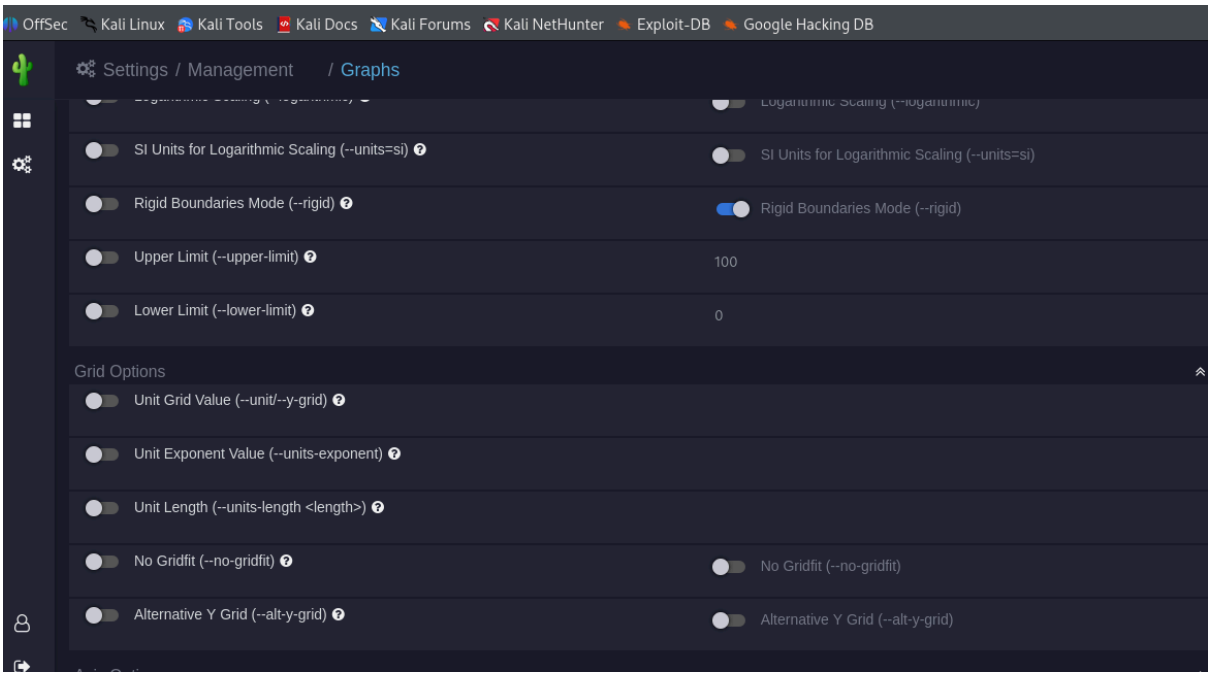

OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB
Console Graphs Reporting Logs
Console Utilities
Logged in as admin
Main Console
Create
Management
Data Collection
Templates
Automation
Presets
Import/Export
Configuration
Utilities
System Utilities
External Links
Troubleshooting
Cacti System Utilities
Technical Support
Technical Support
Cacti technical support page. Used by developers and technical support persons to assist with issues in Cacti. Includes checks for common configuration issues.
Log Administration
The Cacti Log stores statistic, error and other message depending on system settings. This information can be used to identify problems with the poller and application.
View User Log
Allows Administrators to browse the user log. Administrators can filter and export the log as well.
Poller Cache Administration
View Poller Cache
This is the data that is being passed to the poller each time it runs. This data is then in turn executed/interpreted and the results are fed into the RRDfiles for graphing or the database for display.
View Data Query Cache
The Data Query Cache stores information gathered from Data Query input types. The values from these fields can be used in the text area of Graphs for Legends, Vertical Labels, and GPRINTS as well as in CDEF's.
Rebuild Poller Cache
The Poller Cache will be re-generated if you select this option. Use this option only in the event of a database crash if you are experiencing issues after the crash and have already run the database repair tools. Alternatively, if you are having problems with a specific Device, simply re-save that Device to rebuild its Poller Cache. There is also a command line interface equivalent to this command that is recommended for large systems.
NOTE: On large systems, this command may take several minutes to hours to complete and therefore should not be run from the Cacti UI. You can simply run 'php -q cli/rebuild_poller_cache.php --help' at the command line for more information.
Rebuild Resource Cache
When operating multiple Data Collectors in Cacti, Cacti will attempt to maintain state for key files on all Data Collectors. This includes all core, non-install related website and plugin files. When you force a Resource Cache rebuild, Cacti will clear the local Resource Cache, and then rebuild it at the next scheduled poller start. This will trigger all Remote Data Collectors to recheck their website and plugin files for consistency.
Boost Utilities
View Boost Status
This menu pick allows you to view various boost settings and statistics associated with the current running Boost configuration.
Data Source Statistics Utilities
Purge Data Source Statistics
This menu pick will purge all existing Data Source Statistics from the Database. If Data Source Statistics is enabled, the Data Sources Statistics will start collection again on the next Data Collector pass.
RRD Utilities
RRDfile Cleaner
When you delete Data Sources from Cacti, the corresponding RRDfiles are not removed automatically. Use this utility to facilitate the removal of these old files.
RRDfile Checker
Use this utility to display problems with missing rrd files or missing values in rrdfiles. You need enable rrdcheck in Configuration->Settings->Data
SNMP Agent Utilities
View SNMP Agent Cache
This shows all objects being handled by the SNMP Agent.

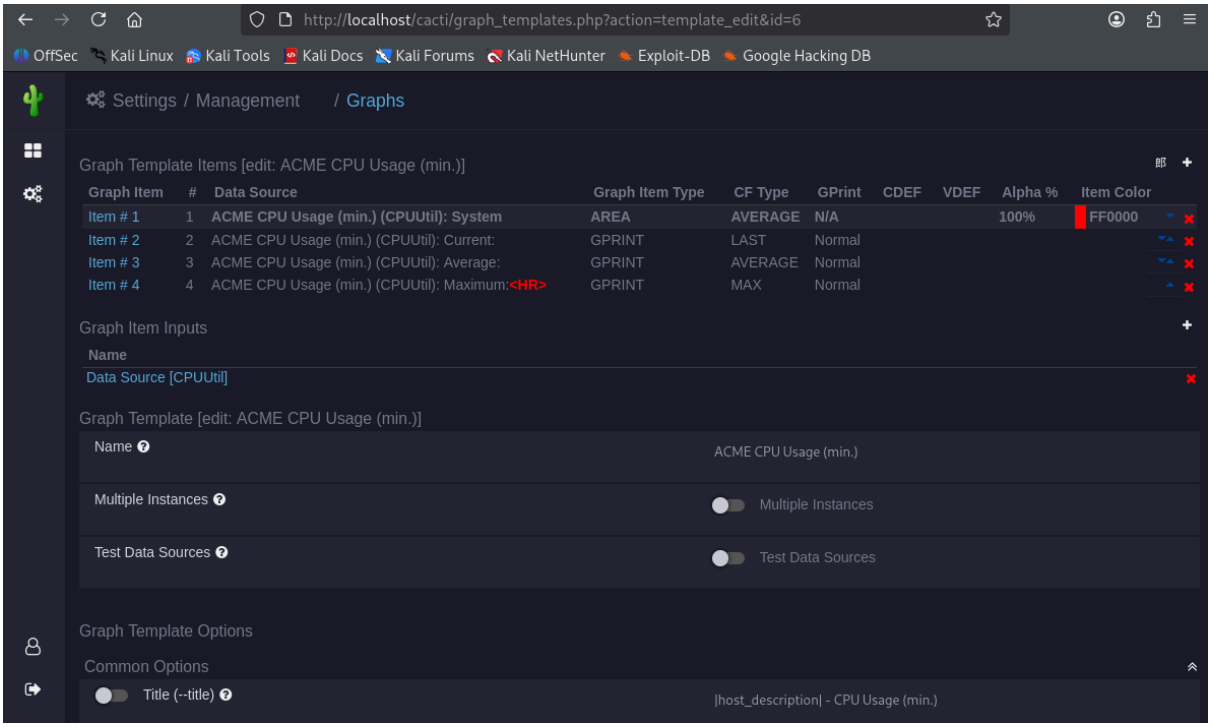

Console
Graphs
Reporting
Logs
Console
Data Source Profiles
Logged in as admin
Main Console
Create
Management
Data Collection
Templates
Automation
Presets
Data Profiles
SNMP
CDEFs
VDEFs
Colors
GPRINTs
Import/Export
Configuration
Utilities
Troubleshooting
Data Source Profiles
Search
Enter a search term
Profiles
Default
Has Data Sources
Go
Clear
All 3 Profiles
Data Source Profile Name
Default
Deletable
Read Only
Poller Interval
Heartbeat
Data Sources Using
Templates Using
30 Second Collection
Yes
No
Every 30 Seconds
20 Minutes
0
0
1 Minute Collection
Yes
No
Every Minute
10 Minutes
0
0
5 Minute Collection
Yes
No
No
Every 5 Minutes
10 Minutes
0
389
All 3 Profiles
Choose an action
Go

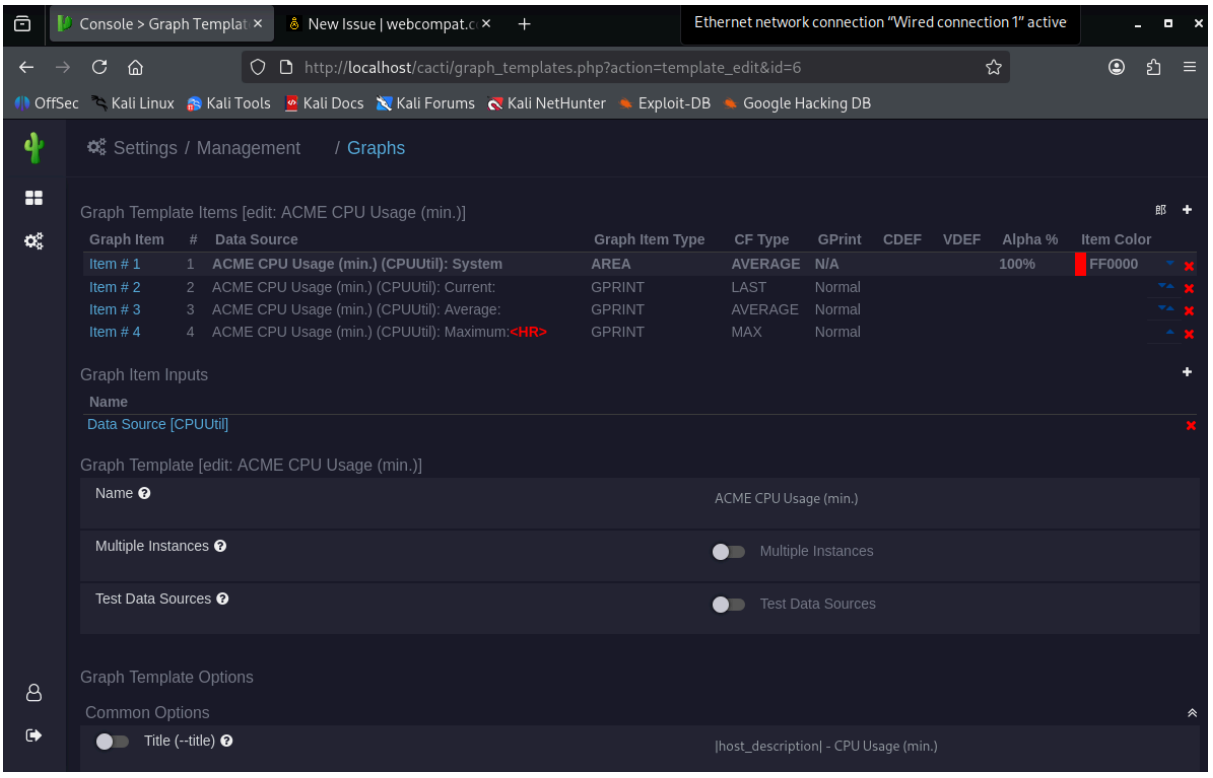

Console
CDEFs
Logged in as admin
Main Console
Create
Management
Data Collection
Templates
Automation
Presets
Data Profiles
SNMP
CDEFs
VDEFs
Colors
GPRINTs
Import/Export
Configuration
Utilities
Troubleshooting
CDEFs
Search
Enter a search term
CDEFs
Default
Has Graphs
Go
Clear
1 to 30 of 63 [1 2 3]
Next »
CDEF Name
Deletable
Graphs Using
Templates Using
(A - B) * 1024
No
0
1
(CURRENT_DATA_SOURCE - a) * 8
No
0
1
Advanced Ping - Loss 1 - 2 % bottom
No
0
1
Advanced Ping - Loss 1 - 2 % top
No
0
1
Advanced Ping - Loss 11 - 15 % bottom
No
0
1
Advanced Ping - Loss 11 - 15 % top
No
0
1
Advanced Ping - Loss 16 - 50 % bottom
No
0
1
Advanced Ping - Loss 16 - 50 % top
No
0
1
Advanced Ping - Loss 3 - 5 % bottom
No
0
1
Advanced Ping - Loss 3 - 5 % top
No
0
1
Advanced Ping - Loss 51 - 95 % bottom
No
0
1
Advanced Ping - Loss 51 - 95 % top
No
0
1
Advanced Ping - Loss 6 - 10 % bottom
No
0
1
Advanced Ping - Loss 6 - 10 % top
No
0
1
Advanced Ping - Loss 96 - 100 % bottom
No
0
1
Advanced Ping - Loss 96 - 100 % top
No
0
1
Advanced Ping - Position 1,2
No
0
1
Advanced Ping - Position 3,4,5
No
0
1
Advanced Ping - Stack Min - 20 %
No
0
1
Apache HTTP - Clean value for DEF b
No
0
2
Apache HTTP - A plus C
No
0
1
CTRL DERECHA

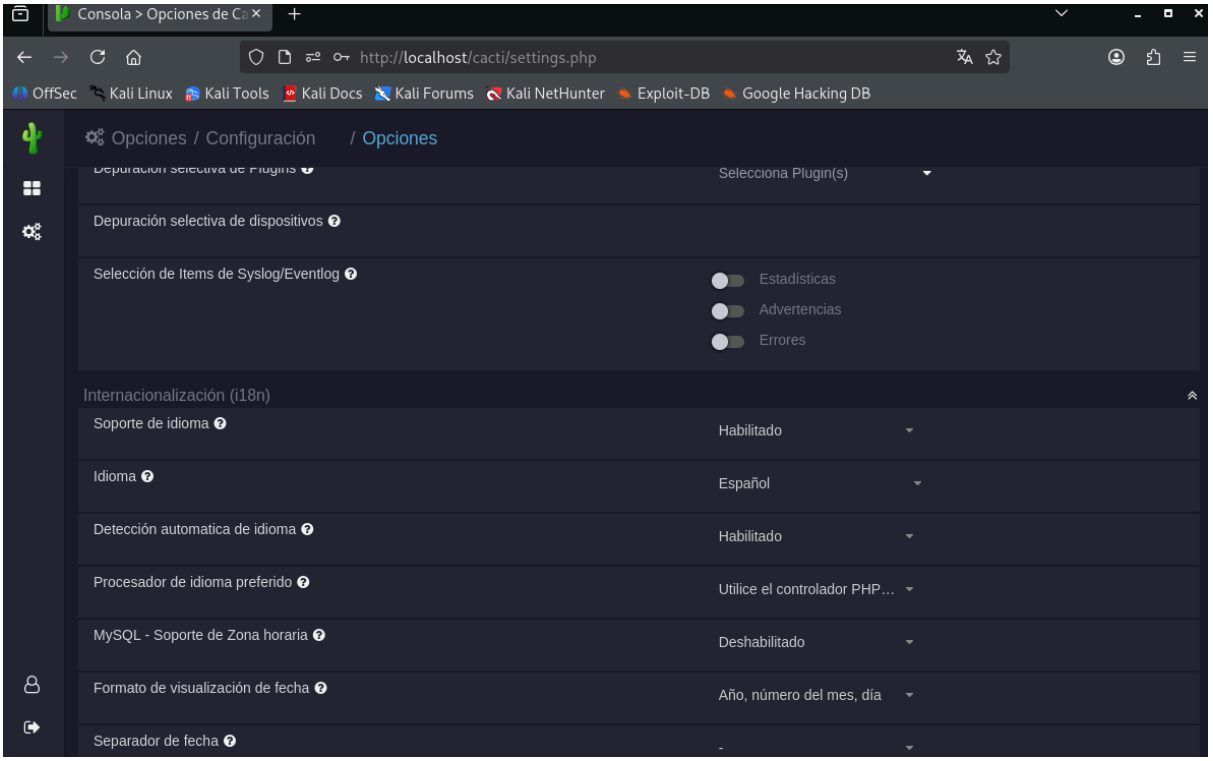


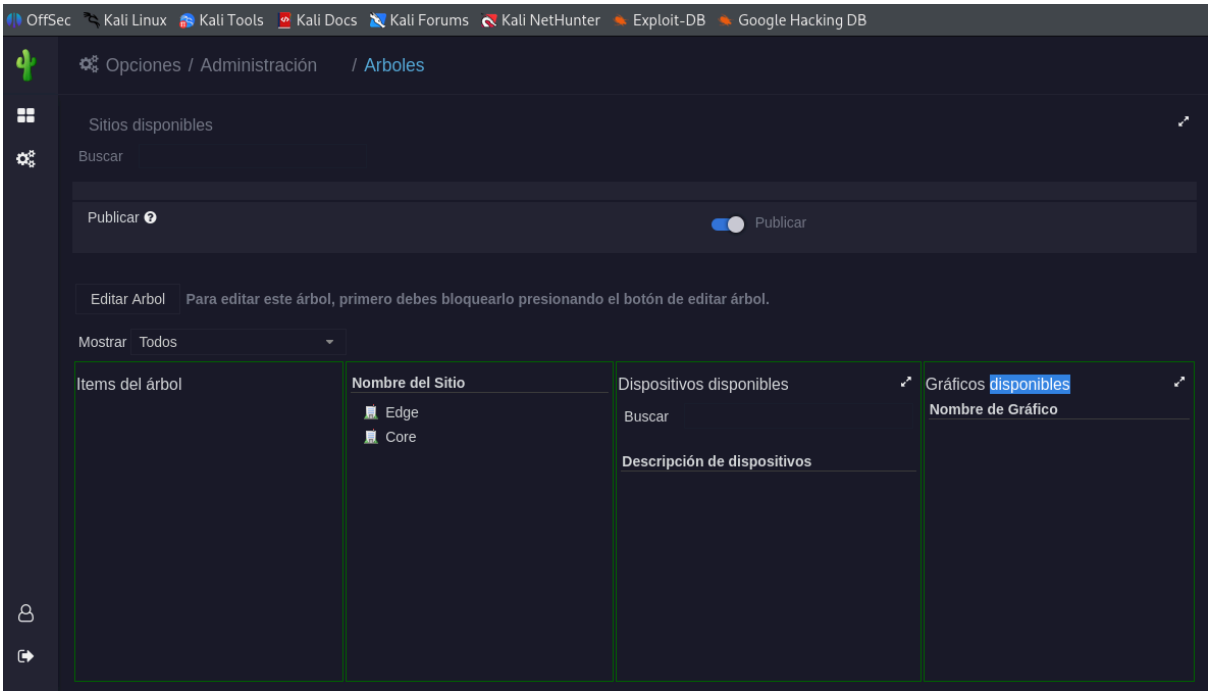
Hex	Color Name	Named Color	Color	Deletable	Graphs Using	Templates Using
64E986	Algae Green	Yes		Yes	0	0
F0F8FF	Alice Blue	Yes		Yes	0	0
6CC417	Alien Green	Yes		Yes	0	0
FAEBD7	Antique White	Yes		Yes	0	0
7FFFD4	Aquamarine	Yes		Yes	0	0
827B60	Army Brown	Yes		Yes	0	0
666362	Ash Gray	Yes		Yes	0	0
B2C248	Avocado Green	Yes		Yes	0	0
893BFF	Aztech Purple	Yes		Yes	0	0
F0FFFF	Azure	Yes		Yes	0	0
95B9C7	Baby Blue	Yes		Yes	0	0
C25283	Bashful Pink	Yes		Yes	0	0
F88158	Basket Ball Orange	Yes		Yes	0	0
848482	Battleship Gray	Yes		Yes	0	0
F75D59	Bean Red	Yes		Yes	0	0
E9AB17	Bee Yellow	Yes		Yes	0	0
FBB117	Beer	Yes		Yes	0	0
4C787E	Beetle Green	Yes		Yes	0	0
F5F5DC	Beige	Yes		Yes	0	0
000000	Black	Yes		No	0	48
413839	Black Cat	Yes		No	0	1
4C4646	Black Cow	Yes		Yes	0	0
463E3F	Black Eel	Yes		Yes	0	0
FFEBCD	Blanched Almond	Yes		Yes	0	0
[illegible]6D9	Blonde	Yes		Yes	0	0




http://localhost/cacti/graph_templates.php?action=template_edit&id=6
OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB
Settings / Management / Graphs
Graph Template Items [edit: ACME CPU Usage (min.)]
Graph Item # Data Source Graph Item Type CF Type GPrint CDEF VDEF Alpha % Item Color
Item # 1 1 ACME CPU Usage (min.) (CPUUtil): System AREA AVERAGE N/A 100% FF0000
Item # 2 2 ACME CPU Usage (min.) (CPUUtil): Current: GPRINT LAST Normal
Item # 3 3 ACME CPU Usage (min.) (CPUUtil): Average: GPRINT AVERAGE Normal
Item # 4 4 ACME CPU Usage (min.) (CPUUtil): Maximum:<HR> GPRINT MAX Normal
Graph Item Inputs
Name
Data Source [CPUUtil]
Graph Template [edit: ACME CPU Usage (min.)]
Name
ACME CPU Usage (min.)
Multiple Instances
Multiple Instances
Test Data Sources
Test Data Sources
Graph Template Options
Common Options
Title (--title)
|host_description| - CPU Usage (min.)


Console > Graph Templat
New Issue | webcompat.c
Ethernet network connection "Wired connection 1" active
http://localhost/cacti/graph_templates.php?action=template_edit&id=6
OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB
Settings / Management / Graphs
Graph Template Items [edit: ACME CPU Usage (min.)]
Graph Item # Data Source Graph Item Type CF Type GPrint CDEF VDEF Alpha % Item Color
Item # 1 1 ACME CPU Usage (min.) (CPUUtil): System AREA AVERAGE N/A 100% FF0000
Item # 2 2 ACME CPU Usage (min.) (CPUUtil): Current: GPRINT LAST Normal
Item # 3 3 ACME CPU Usage (min.) (CPUUtil): Average: GPRINT AVERAGE Normal
Item # 4 4 ACME CPU Usage (min.) (CPUUtil): Maximum:<HR> GPRINT MAX Normal
Graph Item Inputs
Name
Data Source [CPUUtil]
Graph Template [edit: ACME CPU Usage (min.)]
Name
ACME CPU Usage (min.)
Multiple Instances
Multiple Instances
Test Data Sources
Test Data Sources
Graph Template Options
Common Options
Title (--title)
|host_description| - CPU Usage (min.)


Consola > Opciones de Ca
http://localhost/cacti/settings.php
OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB
Opciones / Configuración / Opciones
Selecciona Plugin(s)
Depuración selectiva de dispositivos
Selección de Items de Syslog/Eventlog
Estadísticas
Advertencias
Errores
Internacionalización (i18n)
Soporte de idioma
Habilitado
Idioma
Español
Detección automatica de idioma
Habilitado
Procesador de idioma preferido
Utilice el controlador PHP...
MySQL - Soporte de Zona horaria
Deshabilitado
Formato de visualización de fecha
Año, número del mes, día
Separador de fecha
-


OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB
Opciones / Administración / Arboles
Sitios disponibles
Buscar
Publicar
Publicar
Editar Arbol
Para editar este árbol, primero debes bloquearlo presionando el botón de editar árbol.
Mostrar Todos
Items del árbol
Nombre del Sitio
Edge
Core
Dispositivos disponibles
Buscar
Descripción de dispositivos
Gráficos disponibles
Nombre de Gráfico