✅ EJERCICIOS NIVEL BÁSICO

---

1. Crear una CA con EasyRSA (básico)

Enunciado

Crea la estructura básica para una PKI usando EasyRSA y genera la CA sin contraseña. ¿Qué archivos se generan y para qué sirven?

Solución

sudo apt-get install easy-rsa -y

mkdir ~/easyrsa

cp -r /usr/share/easy-rsa/* ~/easyrsa/

cd ~/easyrsa

./easyrsa init-pki

./easyrsa build-ca nopass

Archivos generados:

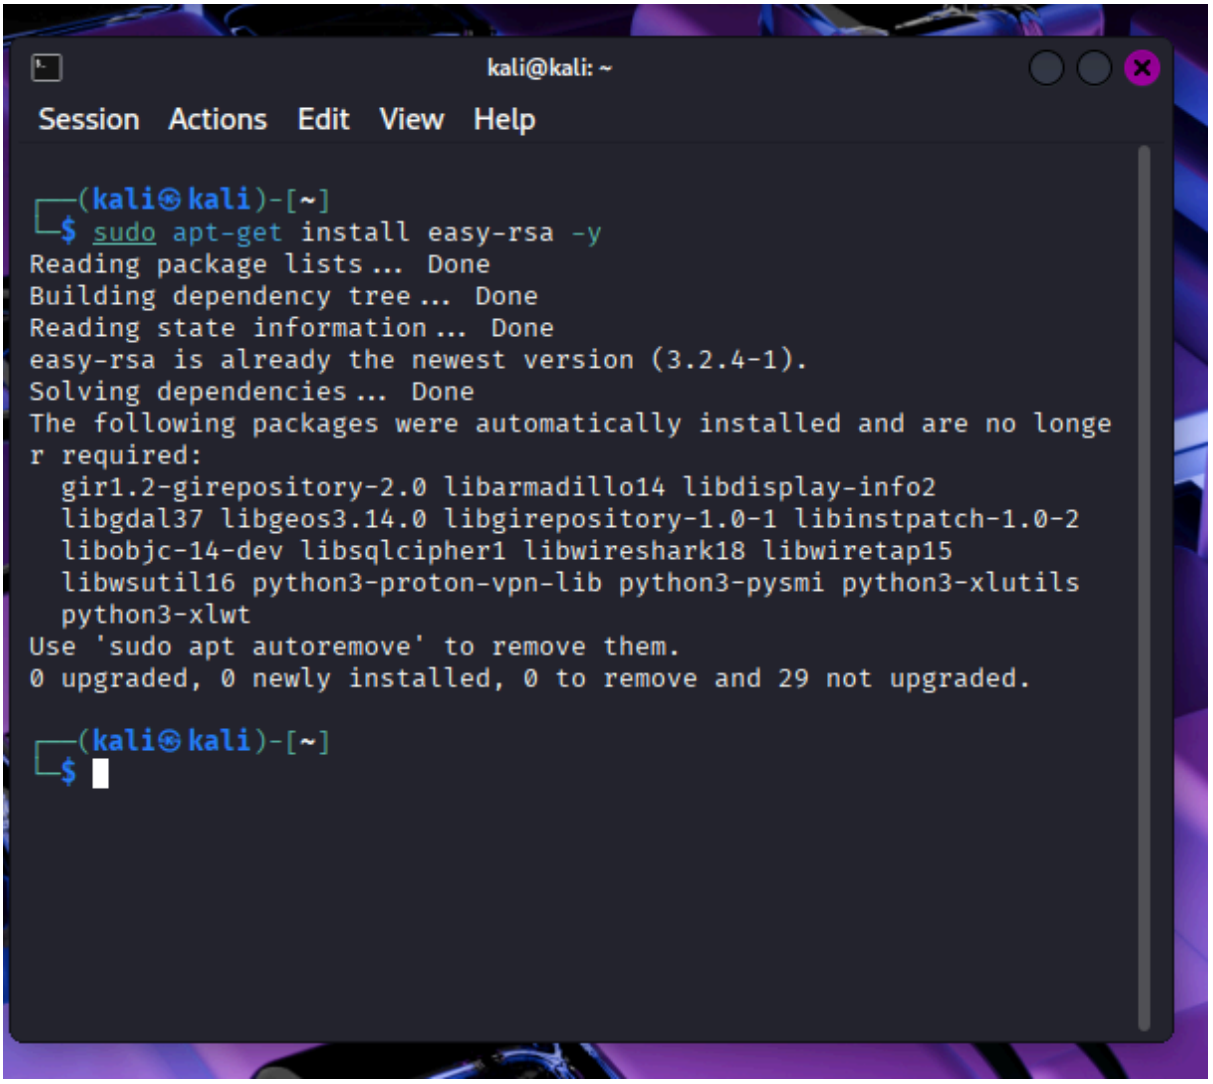
pki/ca.crt

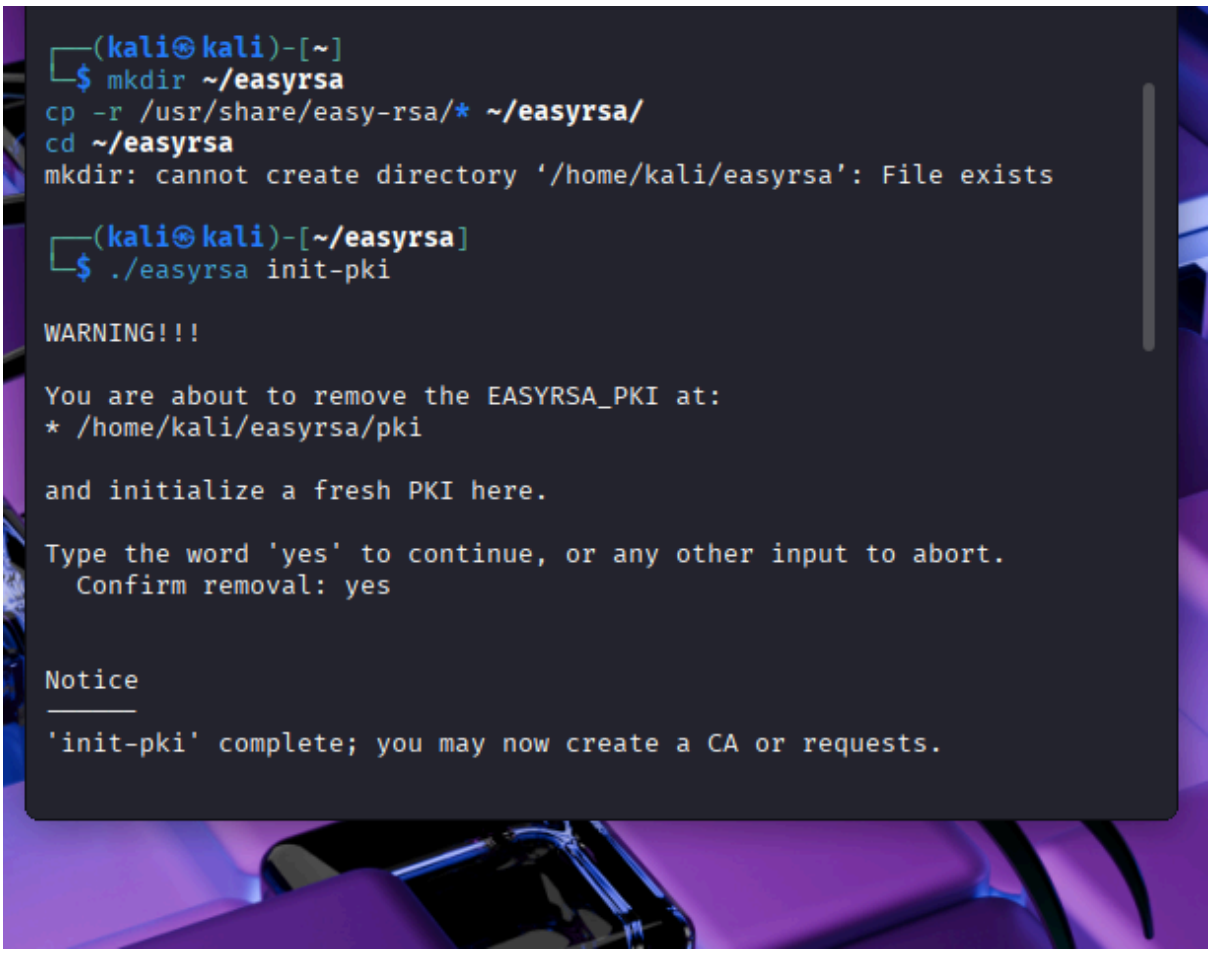
pki/private/ca.key

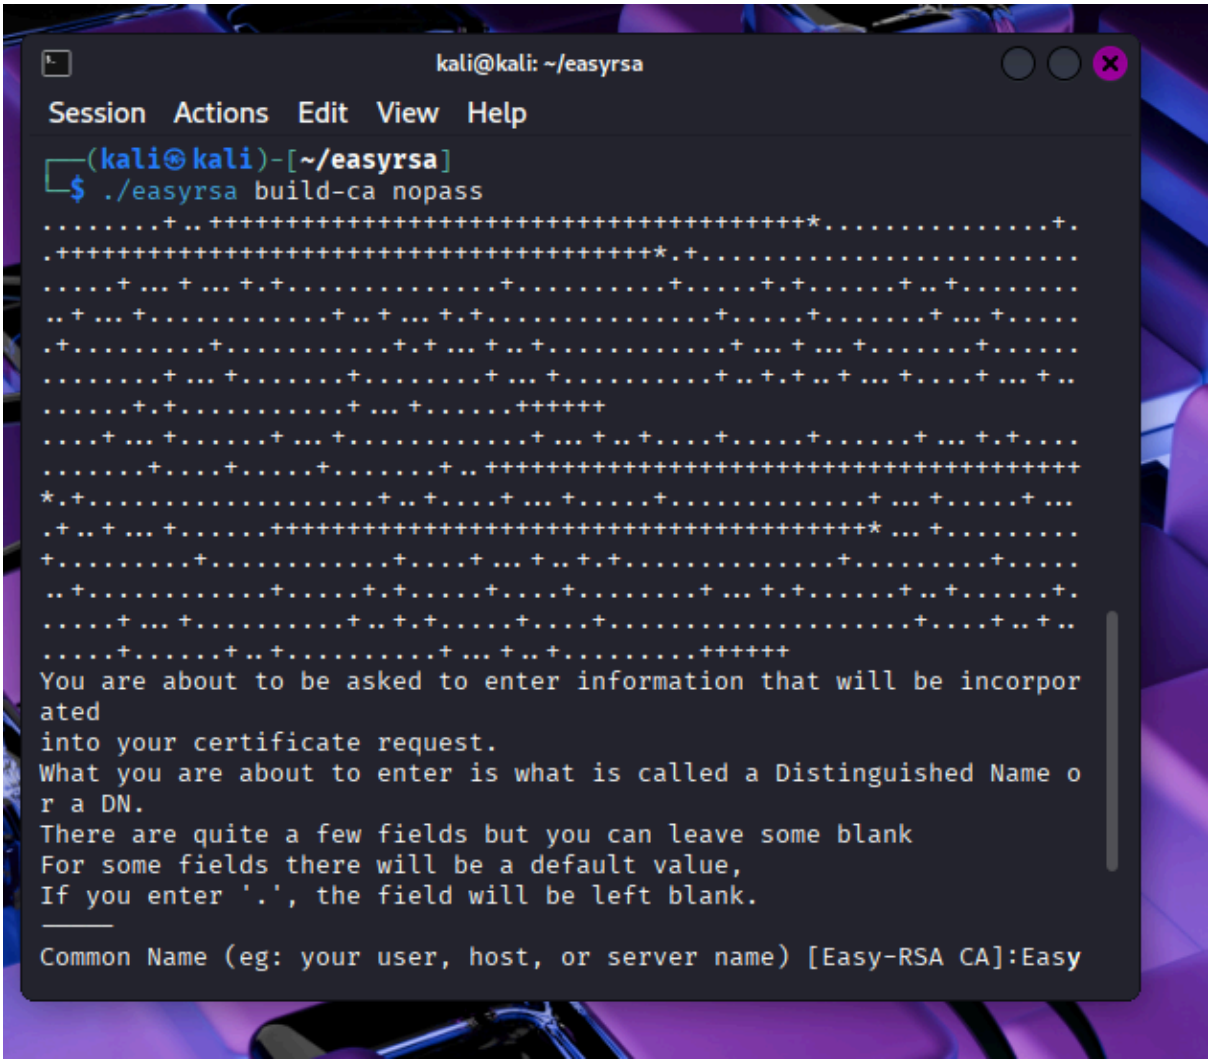
Explicación

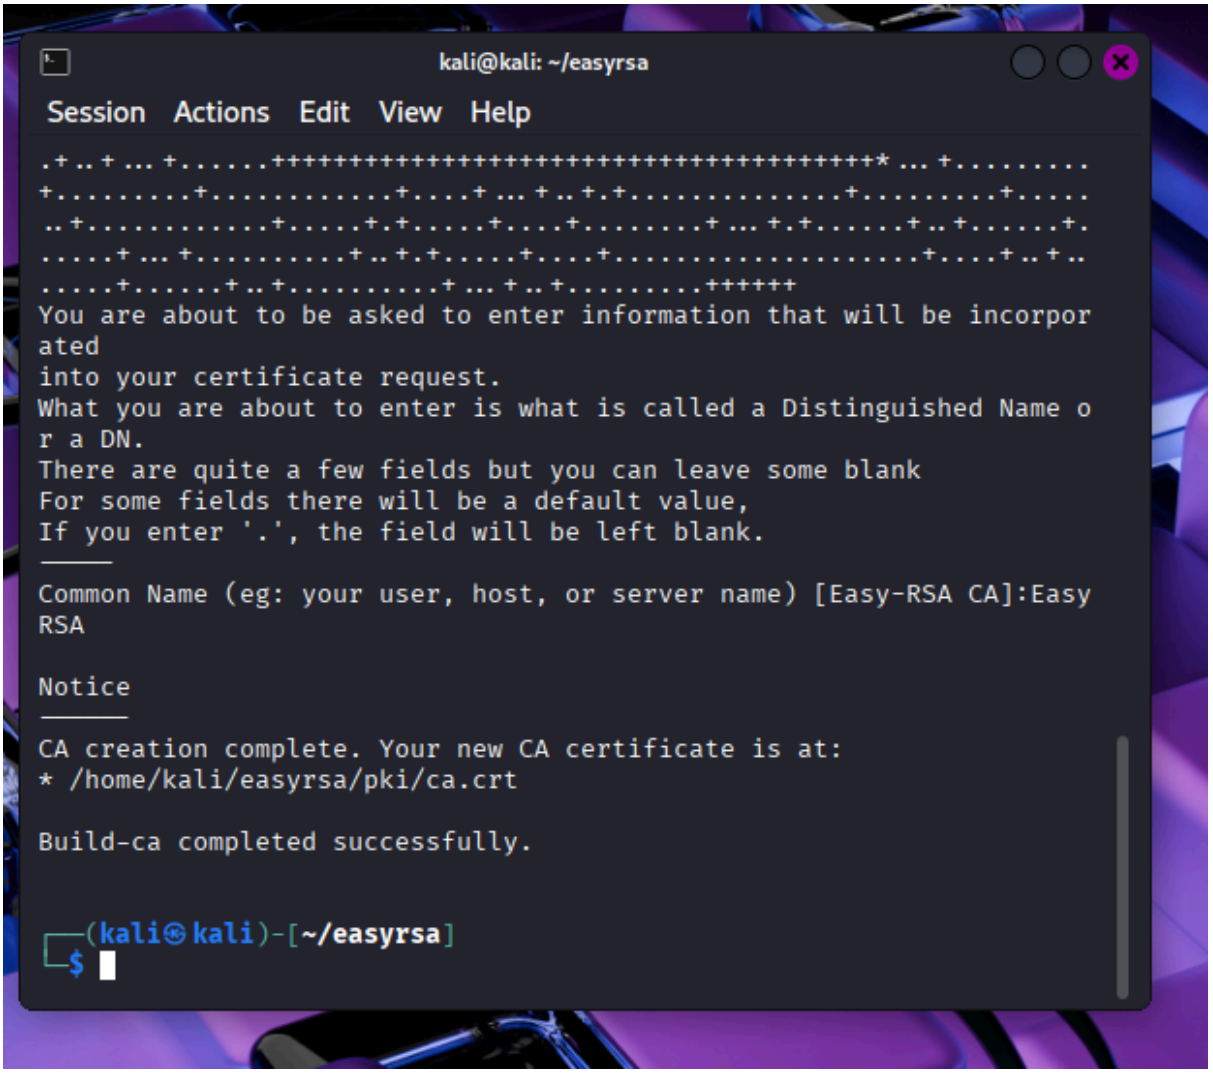
Al inicializar la PKI se crea la estructura donde se guardan claves y certificados.
build-ca genera la **clave privada de la CA** (firma) y el **certificado público** que se distribuye. Esto coincide con tus apuntes: creación de CA y estructura PKI.

Instalacion:


kali@kali: ~
Session Actions Edit View Help
┌──(kali㉿kali)-[~]
└─$ sudo apt-get install easy-rsa -y
Reading package lists ... Done
Building dependency tree ... Done
Reading state information ... Done
easy-rsa is already the newest version (3.2.4-1).
Solving dependencies ... Done
The following packages were automatically installed and are no longe
r required:
gir1.2-girepository-2.0 libarmadillo14 libdisplay-info2
libgdal37 libgeos3.14.0 libgirepository-1.0-1 libinstpatch-1.0-2
libobjc-14-dev libsqlcipher1 libwireshark18 libwiretap15
libwsutil16 python3-proton-vpn-lib python3-pysmi python3-xlutils
python3-xlwt
Use 'sudo apt autoremove' to remove them.
0 upgraded, 0 newly installed, 0 to remove and 29 not upgraded.
┌──(kali㉿kali)-[~]
└─$


┌──(kali㉿kali)-[~]
└─$ mkdir ~/easyrsa
cp -r /usr/share/easy-rsa/* ~/easyrsa/
cd ~/easyrsa
mkdir: cannot create directory ‘/home/kali/easyrsa’: File exists
┌──(kali㉿kali)-[~/easyrsa]
└─$ ./easyrsa init-pki
WARNING!!!
You are about to remove the EASYRSA_PKI at:
* /home/kali/easyrsa/pki
and initialize a fresh PKI here.
Type the word 'yes' to continue, or any other input to abort.
Confirm removal: yes
Notice
'init-pki' complete; you may now create a CA or requests.


kali@kali: ~/easyrsa
Session Actions Edit View Help
┌──(kali㉿kali)-[~/easyrsa]
└─$ ./easyrsa build-ca nopass
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
Common Name (eg: your user, host, or server name) [Easy-RSA CA]:Easy



---

2. Generar un par de claves GPG y cifrar un archivo (básico)

Enunciado

Genera un par de claves GPG con nombre “Carlos Sánchez”, cifra un archivo llamado mensaje.txt y descífralo.

Solución

1. Crear clave:

gpg --full-gen-key

2. Crear archivo:

echo "Mensaje secreto" > mensaje.txt

3. Cifrar:

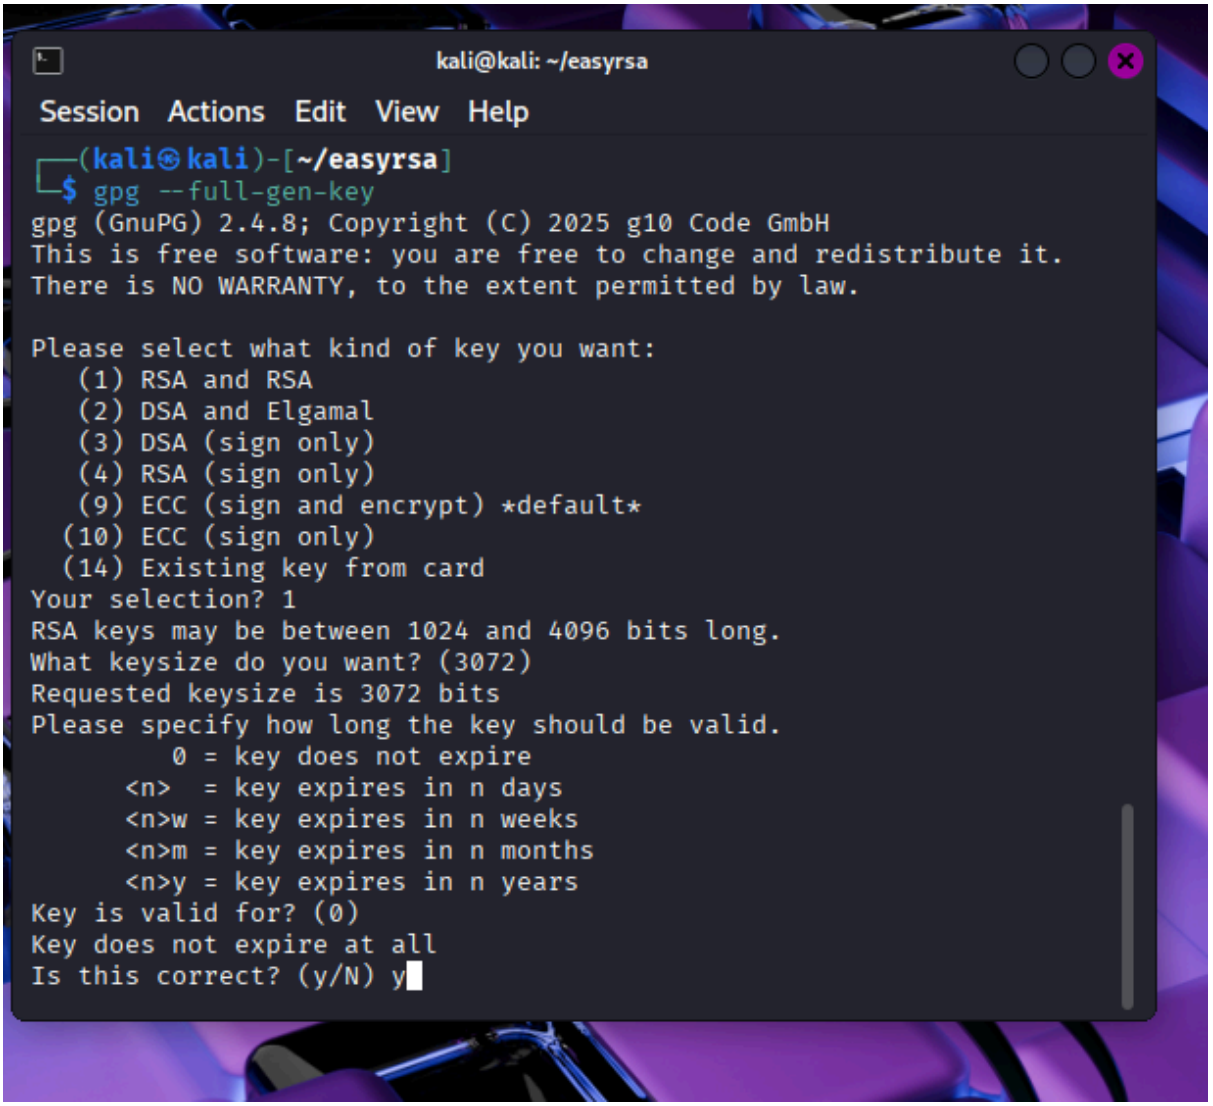
gpg -r carlos@ejemplo.com -e mensaje.txt

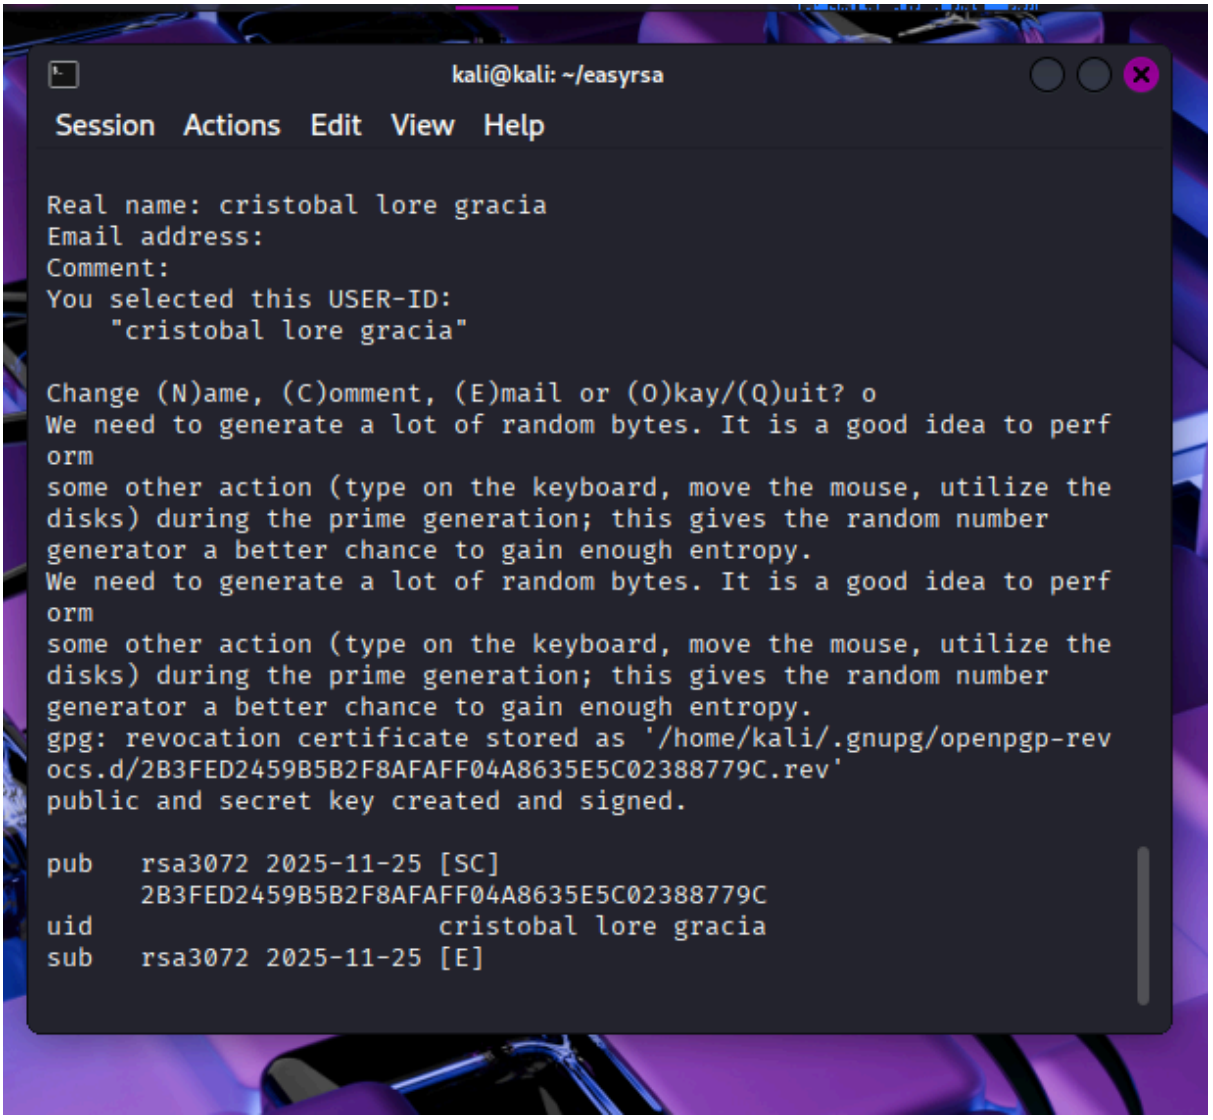
4. Descifrar:

gpg -d mensaje.txt.gpg > mensaje_descifrado.txt

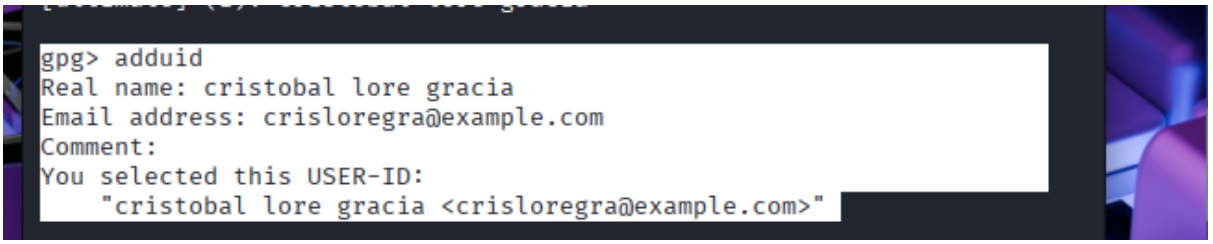
Explicación

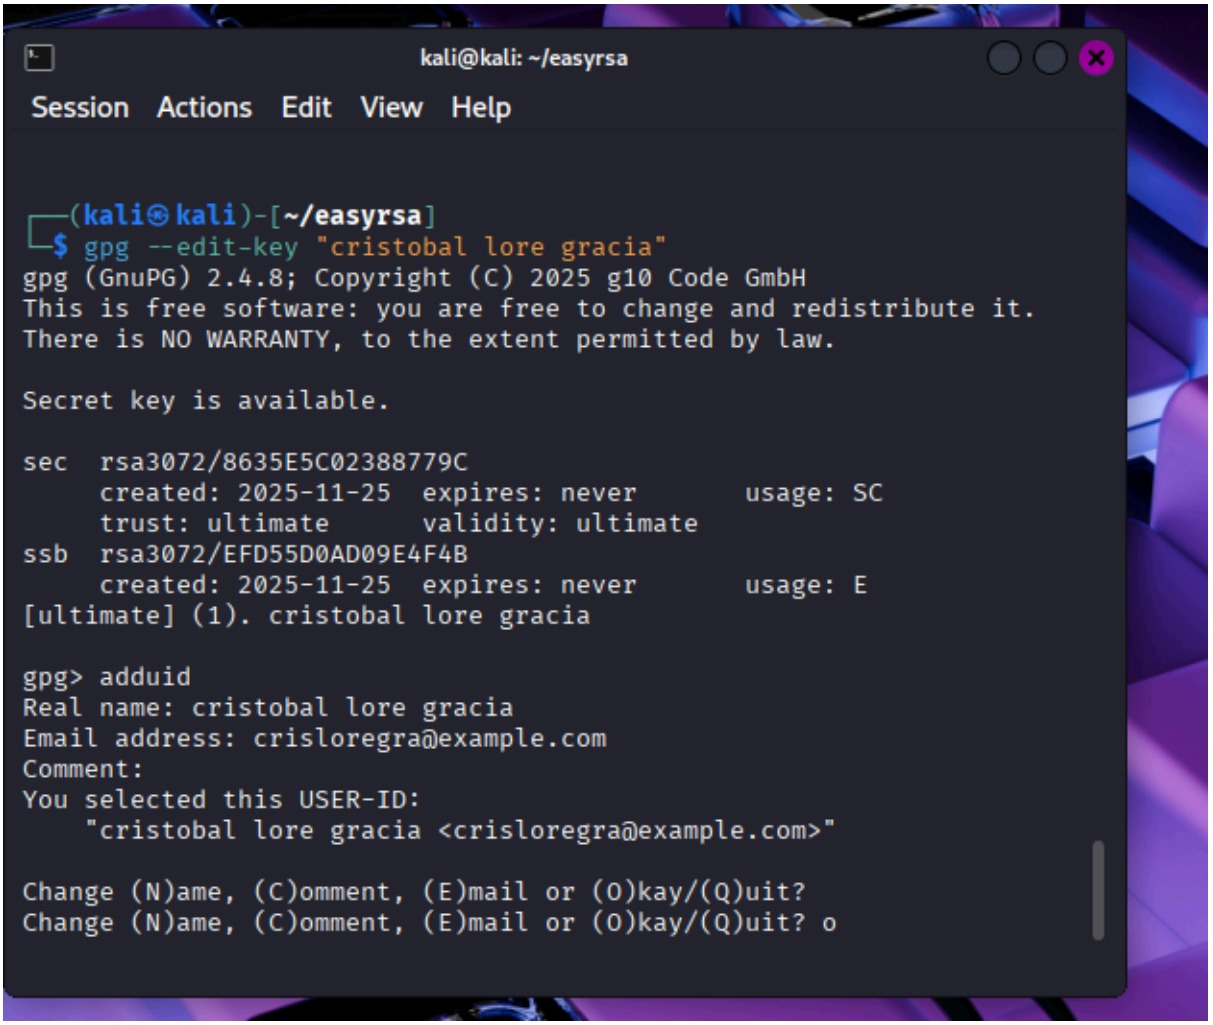
GPG usa la clave pública para cifrar y la privada para descifrar, como explican tus apuntes.

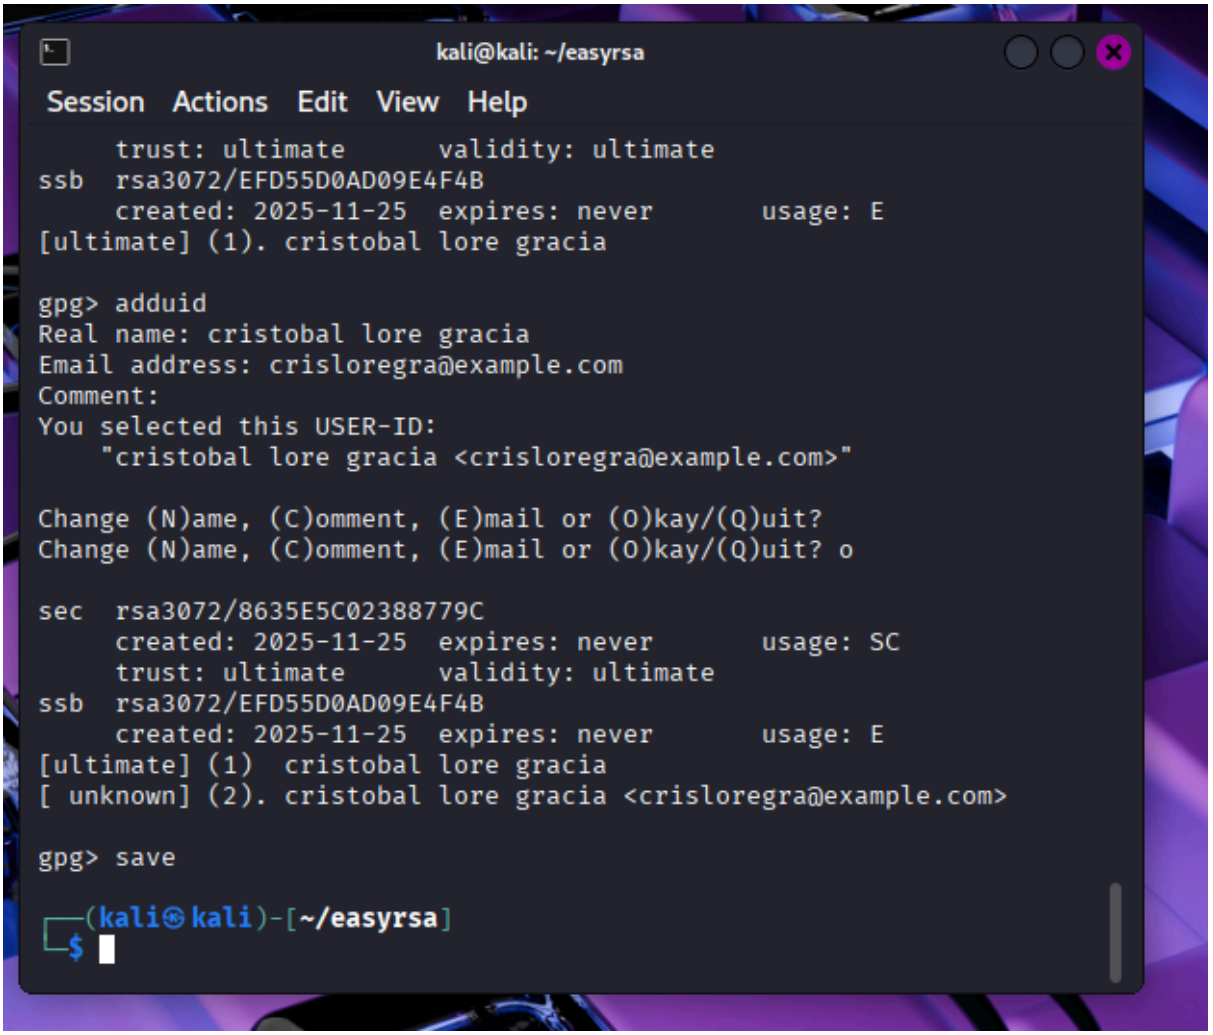


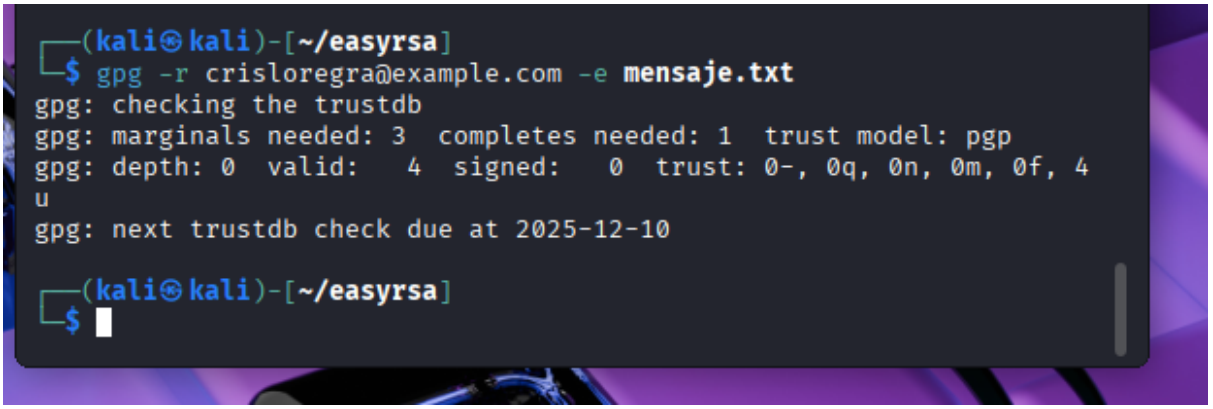


password: clg

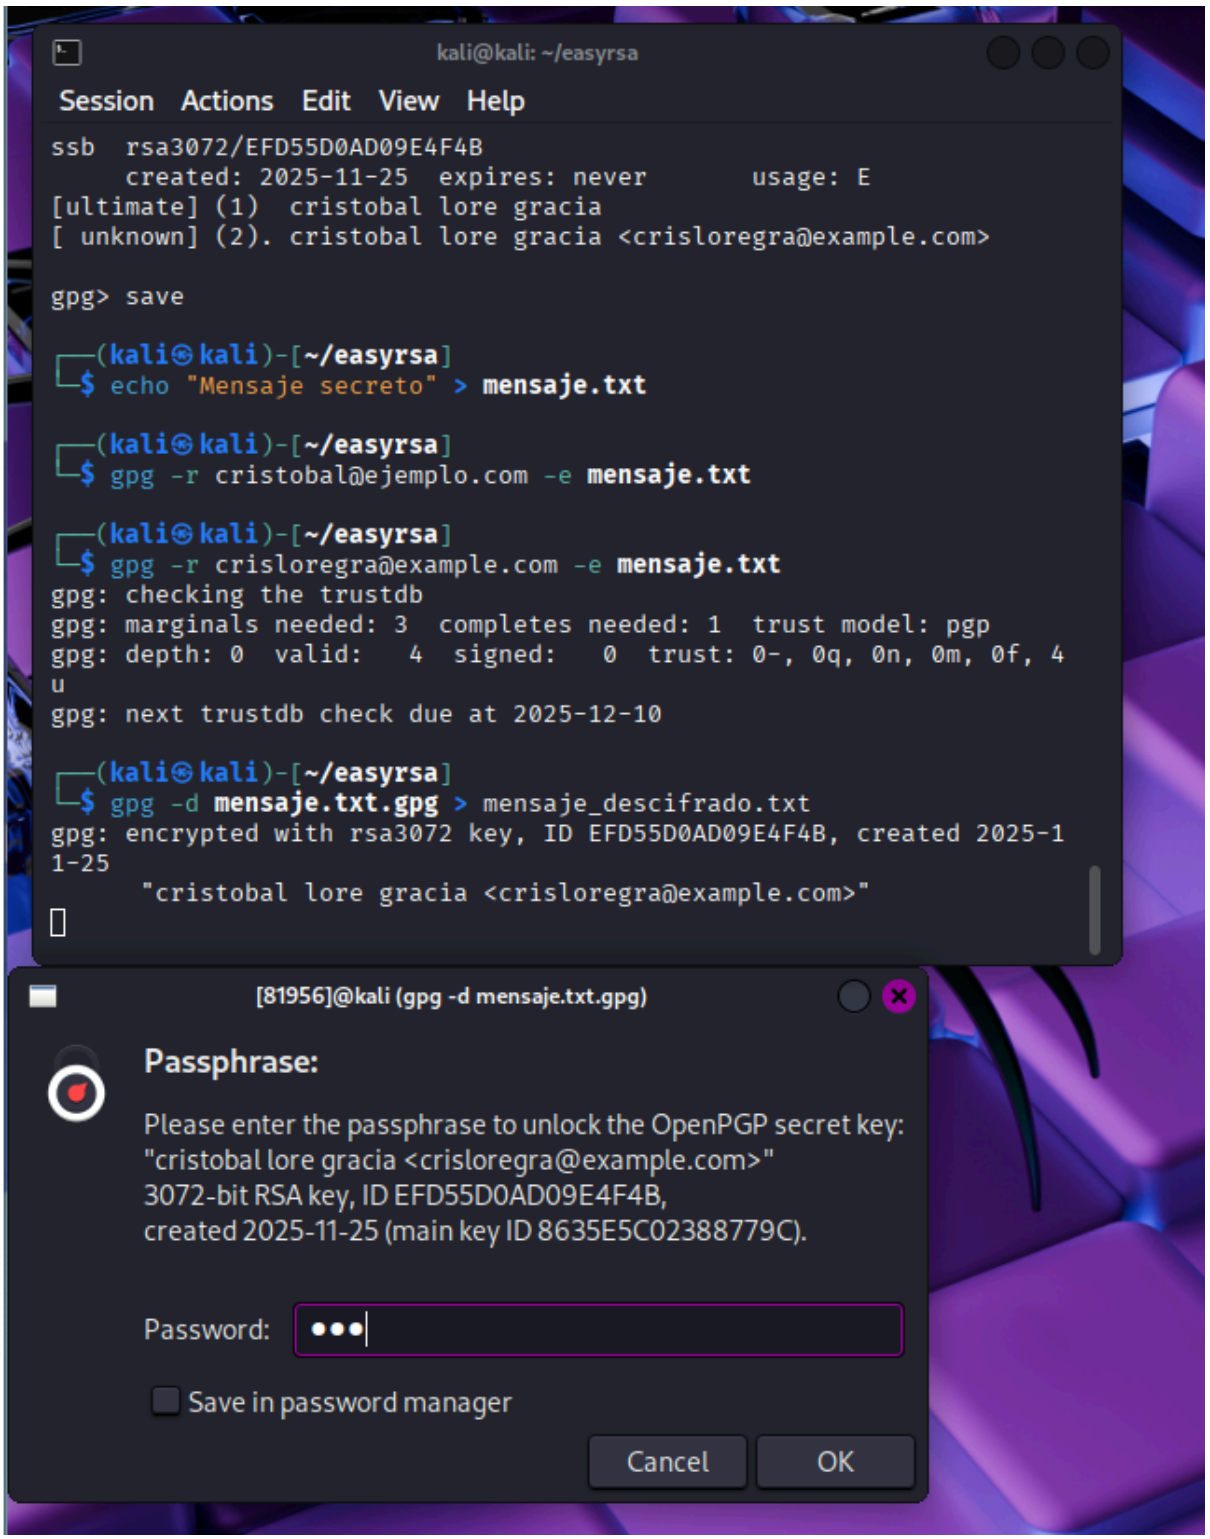



kali@kali: ~/easyrsa
Session Actions Edit View Help
┌──(kali㉿kali)-[~/easyrsa]
└─$ gpg --edit-key "cristobal lore gracia"
gpg (GnuPG) 2.4.8; Copyright (C) 2025 g10 Code GmbH
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law.
Secret key is available.
sec rsa3072/8635E5C02388779C
created: 2025-11-25 expires: never usage: SC
trust: ultimate validity: ultimate
ssb rsa3072/EFD55D0AD09E4F4B
created: 2025-11-25 expires: never usage: E
[ultimate] (1). cristobal lore gracia
gpg> adduid
Real name: cristobal lore gracia
Email address: crisloregra@example.com
Comment:
You selected this USER-ID:
"cristobal lore gracia <crisloregra@example.com>"
Change (N)ame, (C)omment, (E)mail or (O)kay/(Q)uit?
Change (N)ame, (C)omment, (E)mail or (O)kay/(Q)uit? o


kali@kali: ~/easyrsa
Session Actions Edit View Help
trust: ultimate validity: ultimate
ssb rsa3072/EFD55D0AD09E4F4B
created: 2025-11-25 expires: never usage: E
[ultimate] (1). cristobal lore gracia
gpg> adduid
Real name: cristobal lore gracia
Email address: crisloregra@example.com
Comment:
You selected this USER-ID:
"cristobal lore gracia <crisloregra@example.com>"
Change (N)ame, (C)omment, (E)mail or (O)kay/(Q)uit?
Change (N)ame, (C)omment, (E)mail or (O)kay/(Q)uit? o
sec rsa3072/8635E5C02388779C
created: 2025-11-25 expires: never usage: SC
trust: ultimate validity: ultimate
ssb rsa3072/EFD55D0AD09E4F4B
created: 2025-11-25 expires: never usage: E
[ultimate] (1) cristobal lore gracia
[unknown] (2). cristobal lore gracia <crisloregra@example.com>
gpg> save
(kali㉿kali)-[~/easyrsa]
$

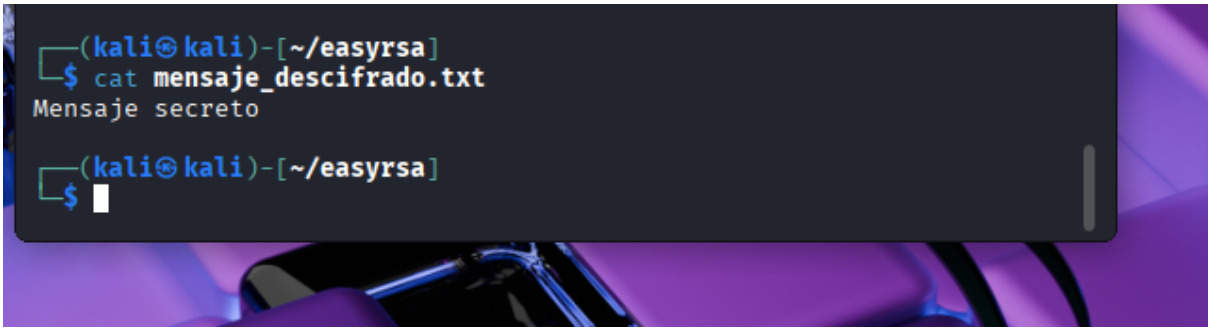

(kali㉿kali)-[~/easyrsa]
$ gpg -r crisloregra@example.com -e mensaje.txt
gpg: checking the trustdb
gpg: marginals needed: 3 completes needed: 1 trust model: pgp
gpg: depth: 0 valid: 4 signed: 0 trust: 0-, 0q, 0n, 0m, 0f, 4
u
gpg: next trustdb check due at 2025-12-10
(kali㉿kali)-[~/easyrsa]
$

descifrar


kali@kali: ~/easyrsa
Session Actions Edit View Help
ssb rsa3072/EFD55D0AD09E4F4B
created: 2025-11-25 expires: never usage: E
[ultimate] (1) cristobal lore gracia
[unknown] (2). cristobal lore gracia <crisloregra@example.com>
gpg> save
(kali㉿kali)-[~/easyrsa]
$ echo "Mensaje secreto" > mensaje.txt
(kali㉿kali)-[~/easyrsa]
$ gpg -r cristobal@ejemplo.com -e mensaje.txt
(kali㉿kali)-[~/easyrsa]
$ gpg -r crisloregra@example.com -e mensaje.txt
gpg: checking the trustdb
gpg: marginals needed: 3 completes needed: 1 trust model: pgp
gpg: depth: 0 valid: 4 signed: 0 trust: 0-, 0q, 0n, 0m, 0f, 4
u
gpg: next trustdb check due at 2025-12-10
(kali㉿kali)-[~/easyrsa]
$ gpg -d mensaje.txt.gpg > mensaje_descifrado.txt
gpg: encrypted with rsa3072 key, ID EFD55D0AD09E4F4B, created 2025-1
1-25
"cristobal lore gracia <crisloregra@example.com>"
[81956]@kali (gpg -d mensaje.txt.gpg)
Passphrase:
Please enter the passphrase to unlock the OpenPGP secret key:
"cristobal lore gracia <crisloregra@example.com>"
3072-bit RSA key, ID EFD55D0AD09E4F4B,
created 2025-11-25 (main key ID 8635E5C02388779C).
Password:
Save in password manager
Cancel
OK



mensaje secreto



---

3. Crear volumen cifrado con LUKS (básico)

Enunciado

Crea un volumen cifrado de 50 MB con LUKS y móntalo en /mnt/luks.

Solución

dd if=/dev/zero of=volumen.img bs=1M count=50

sudo cryptsetup luksFormat volumen.img

sudo cryptsetup luksOpen volumen.img mi_luks

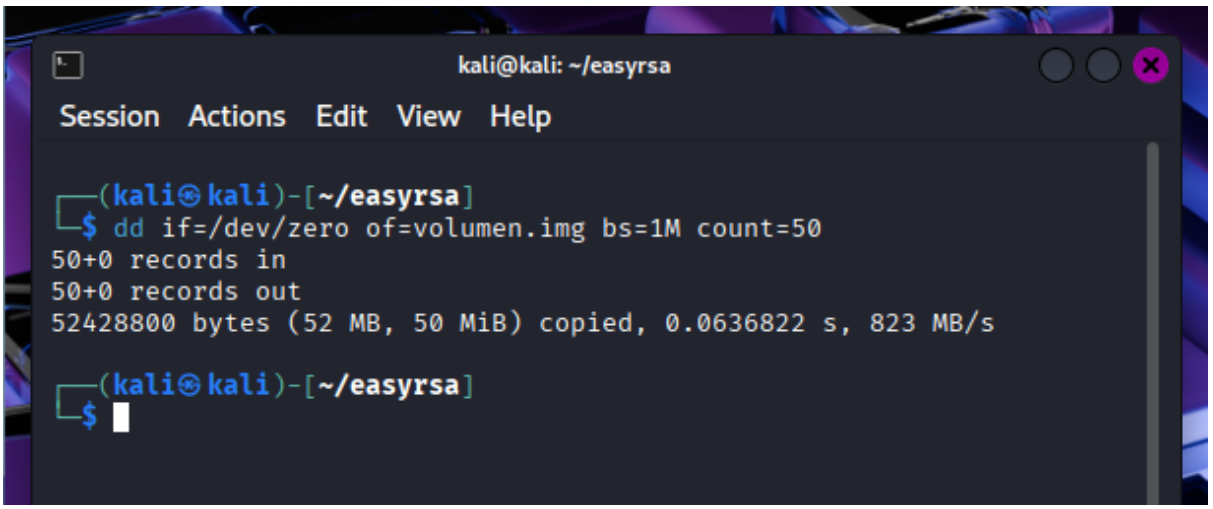
sudo mkfs.ext4 /dev/mapper/mi_luks

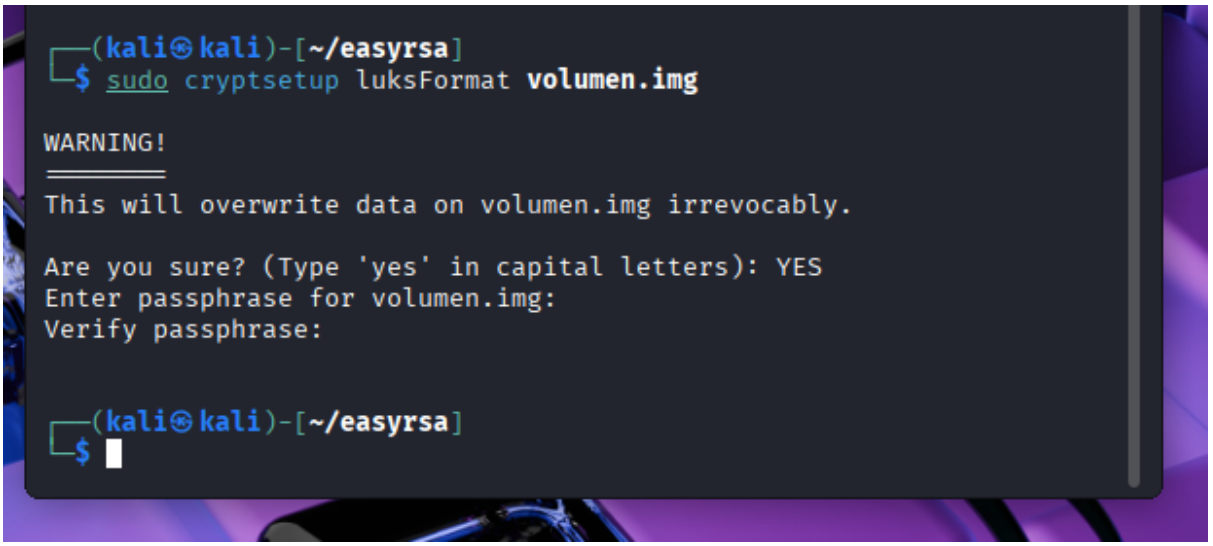
sudo mkdir /mnt/luks

sudo mount /dev/mapper/mi_luks /mnt/luks

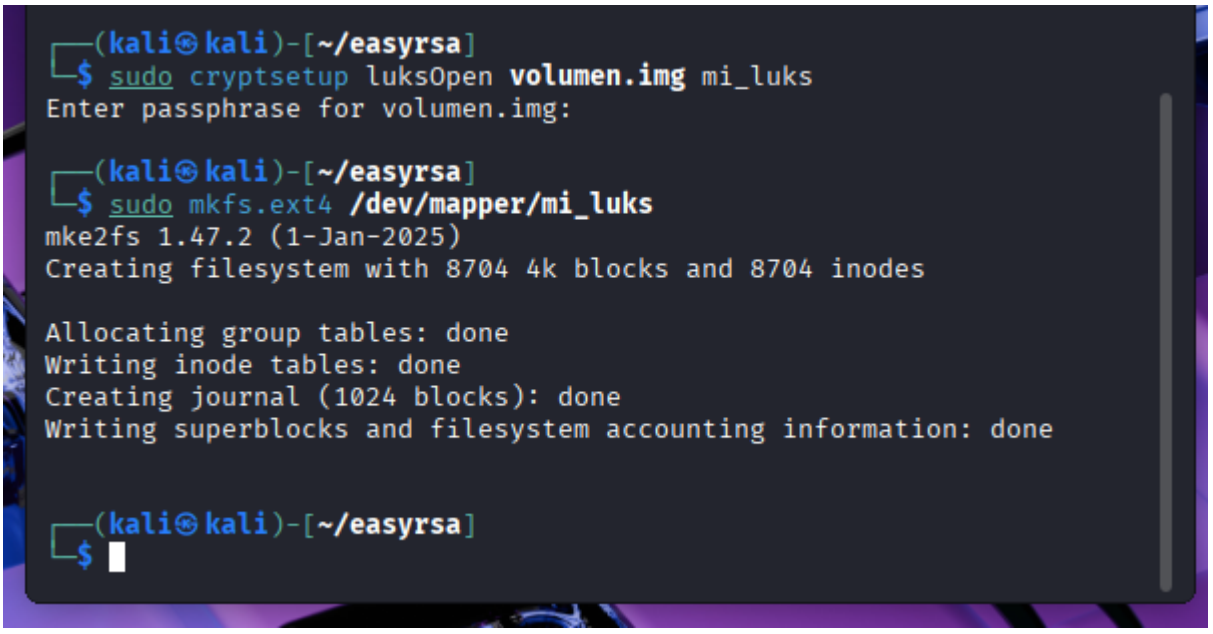
Explicación

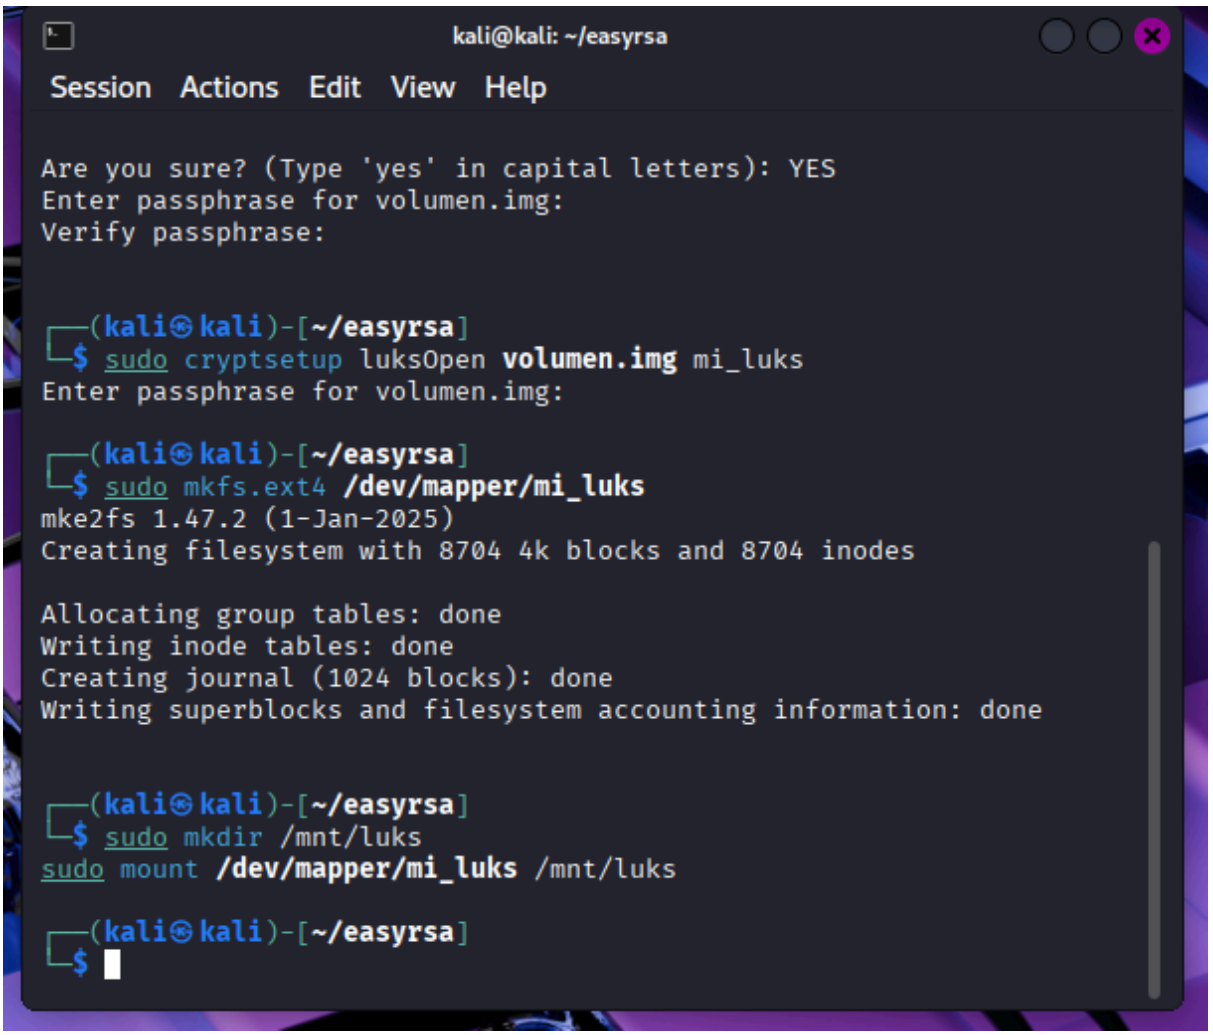
LUKS protege un volumen completo mediante cifrado simétrico con contraseña, igual que en tu documento.





password: 123





✅ EJERCICIOS NIVEL MEDIO

---

4. Emitir certificados de servidor y cliente con EasyRSA (medio)

Enunciado

Crea un certificado de servidor llamado server01 y otro de cliente cliente01. ¿Qué archivos debes copiar al cliente?

Solución

cd ~/easyrsa

./easyrsa gen-req server01 nopass

./easyrsa sign-req server server01

./easyrsa gen-req cliente01 nopass

./easyrsa sign-req client cliente01

Archivos para el cliente:

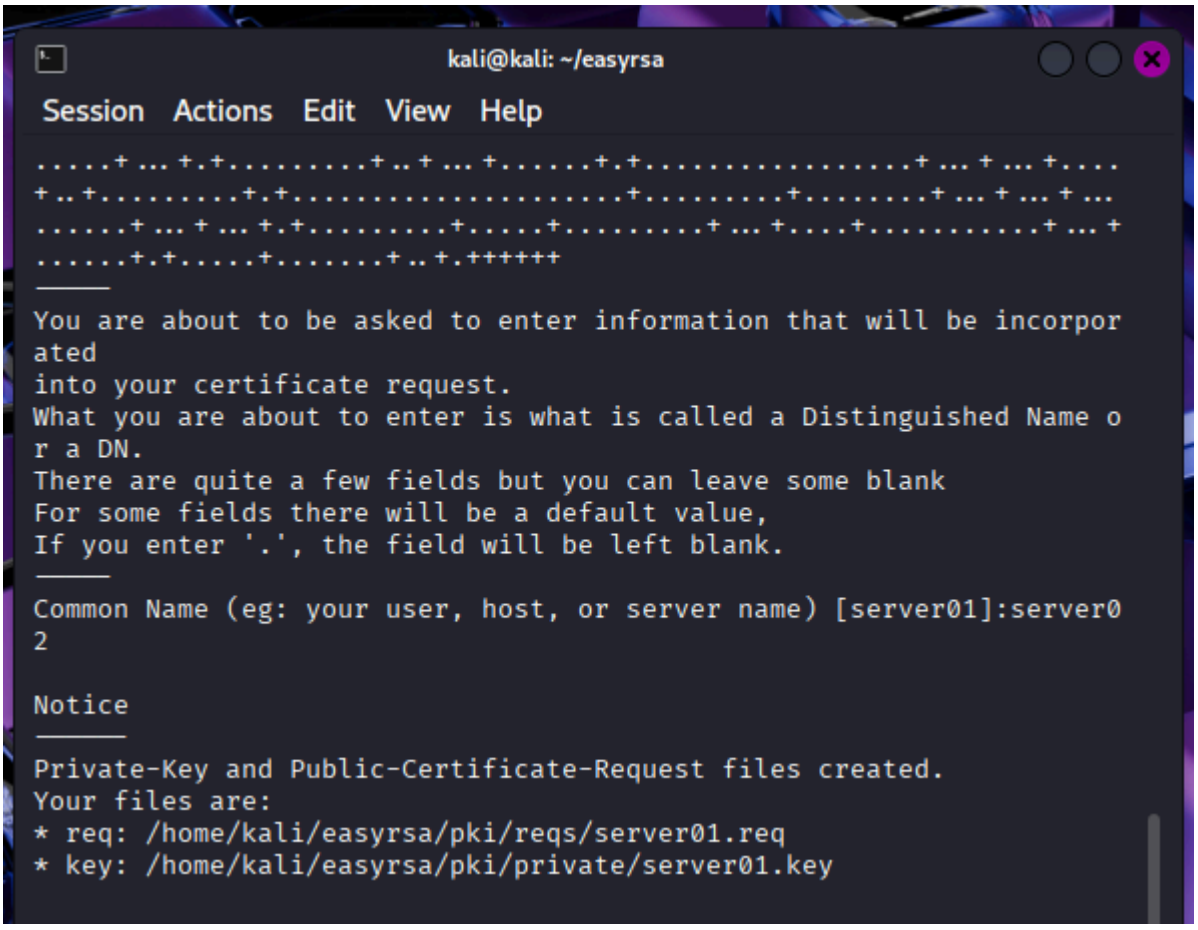
- cliente01.key
- cliente01.crt
- ca.crt

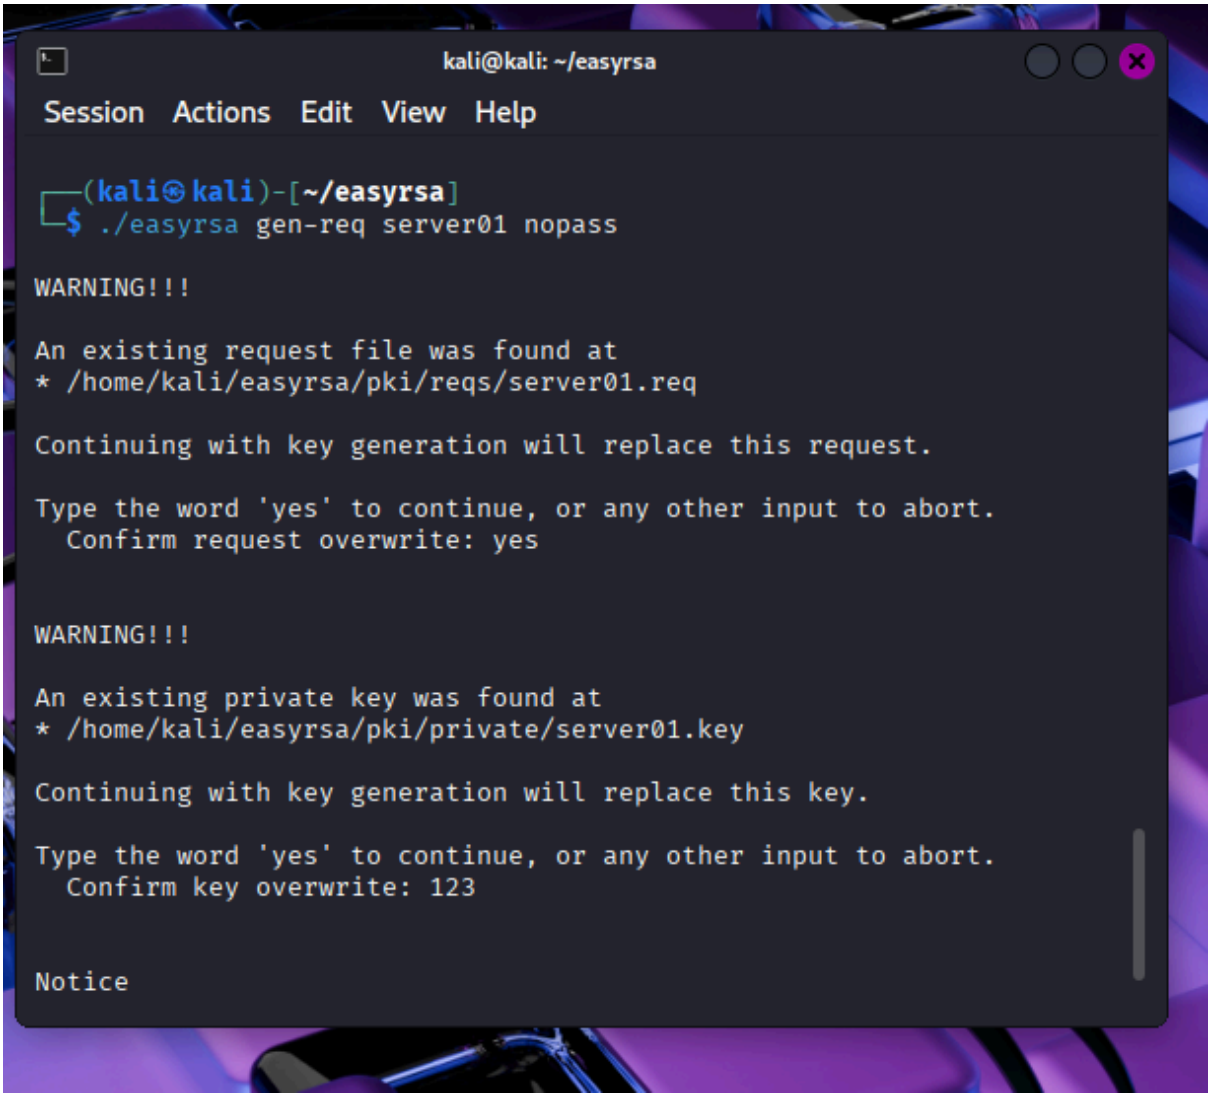
Explicación

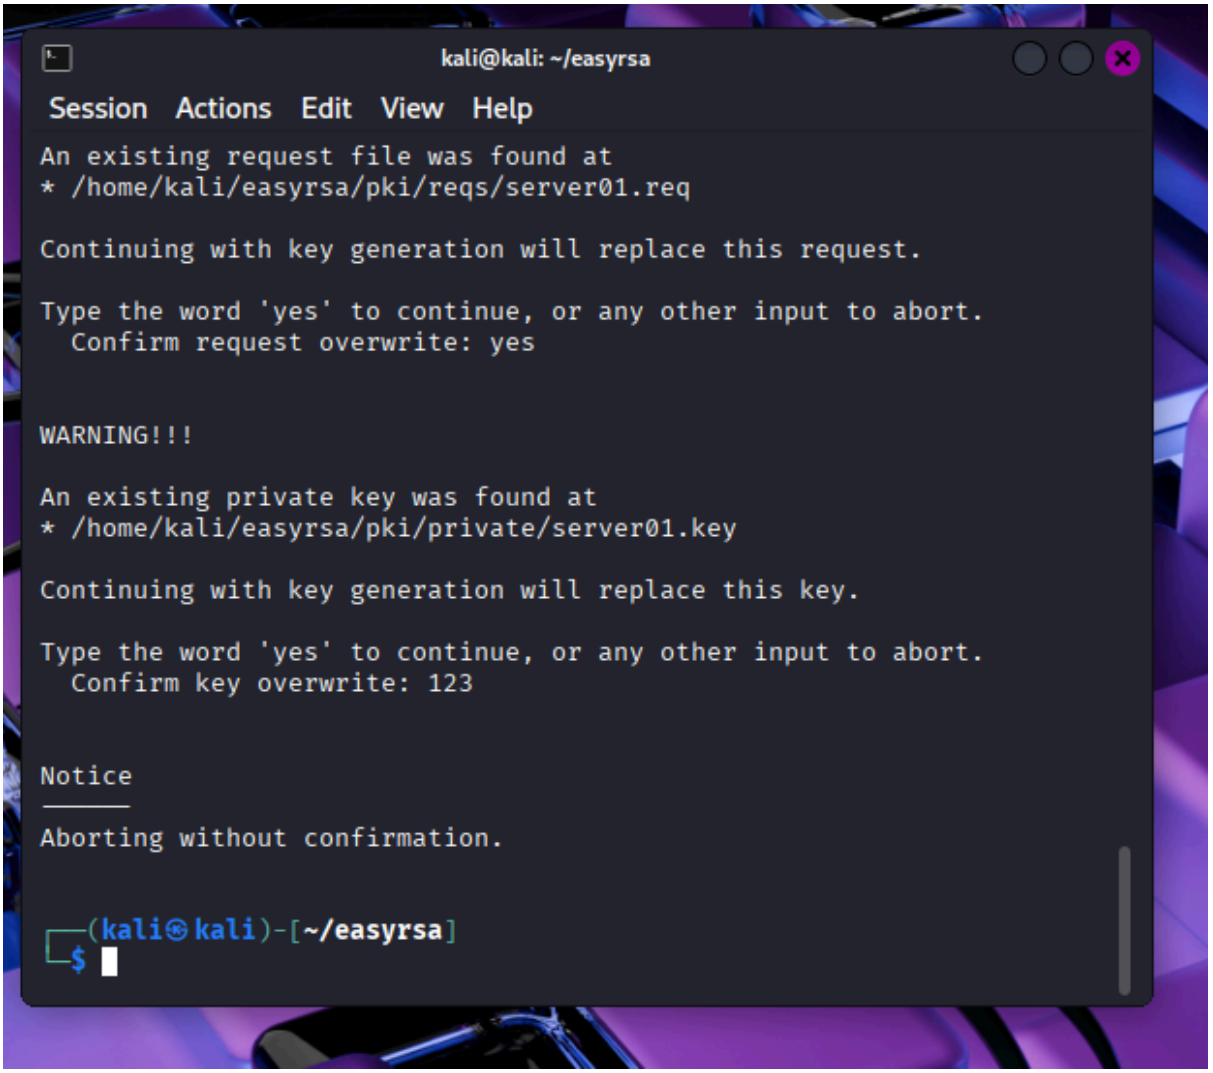
Como señala tu archivo, los clientes necesitan: certificado propio, clave privada y el certificado de la CA para validar al servidor.

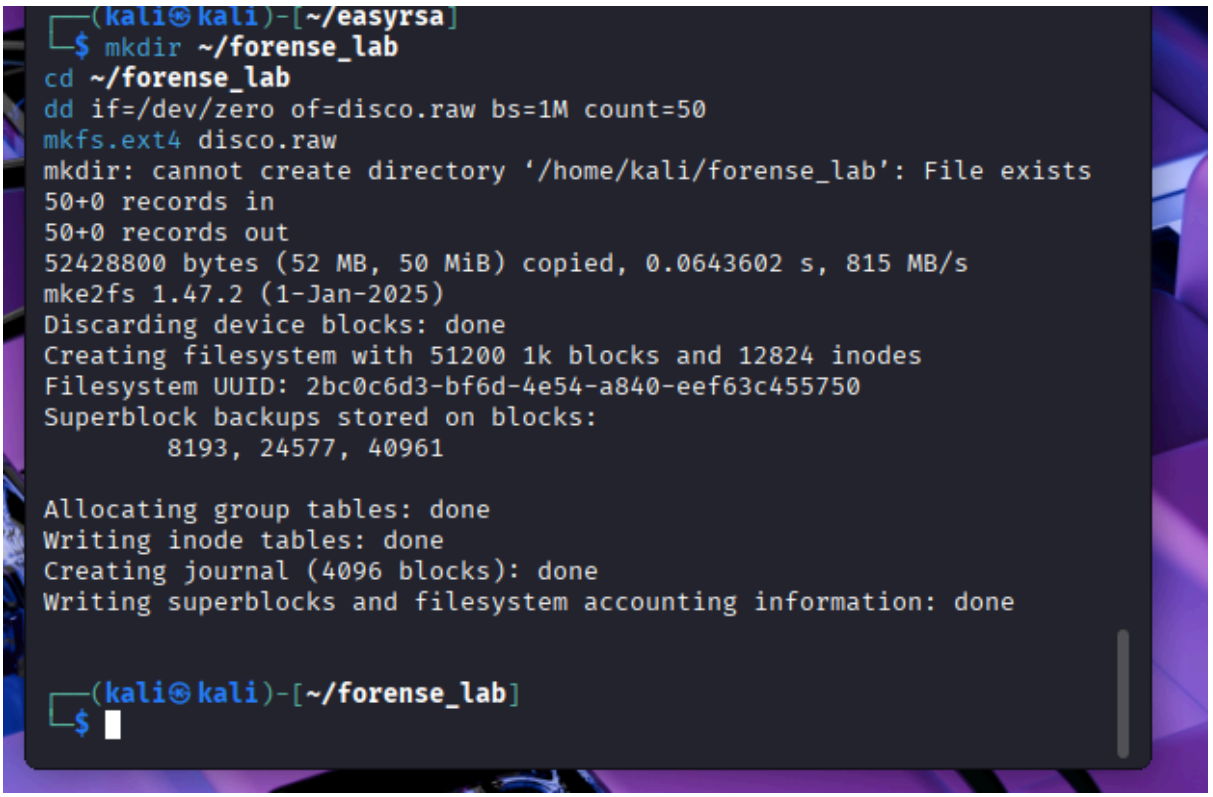



┌──(kali㉿kali)-[~/easyrsa]
└─$ ./easyrsa gen-req server01 nopass


kali@kali: ~/easyrsa
Session Actions Edit View Help
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
Common Name (eg: your user, host, or server name) [server01]:server02
Notice
Private-Key and Public-Certificate-Request files created.
Your files are:
* req: /home/kali/easyrsa/pki/reqs/server01.req
* key: /home/kali/easyrsa/pki/private/server01.key


kali@kali: ~/easyrsa
Session Actions Edit View Help
(kali㉿kali)-[~/easyrsa]
$ ./easyrsa gen-req server01 nopass
WARNING!!!
An existing request file was found at
* /home/kali/easyrsa/pki/reqs/server01.req
Continuing with key generation will replace this request.
Type the word 'yes' to continue, or any other input to abort.
Confirm request overwrite: yes
WARNING!!!
An existing private key was found at
* /home/kali/easyrsa/pki/private/server01.key
Continuing with key generation will replace this key.
Type the word 'yes' to continue, or any other input to abort.
Confirm key overwrite: 123
Notice

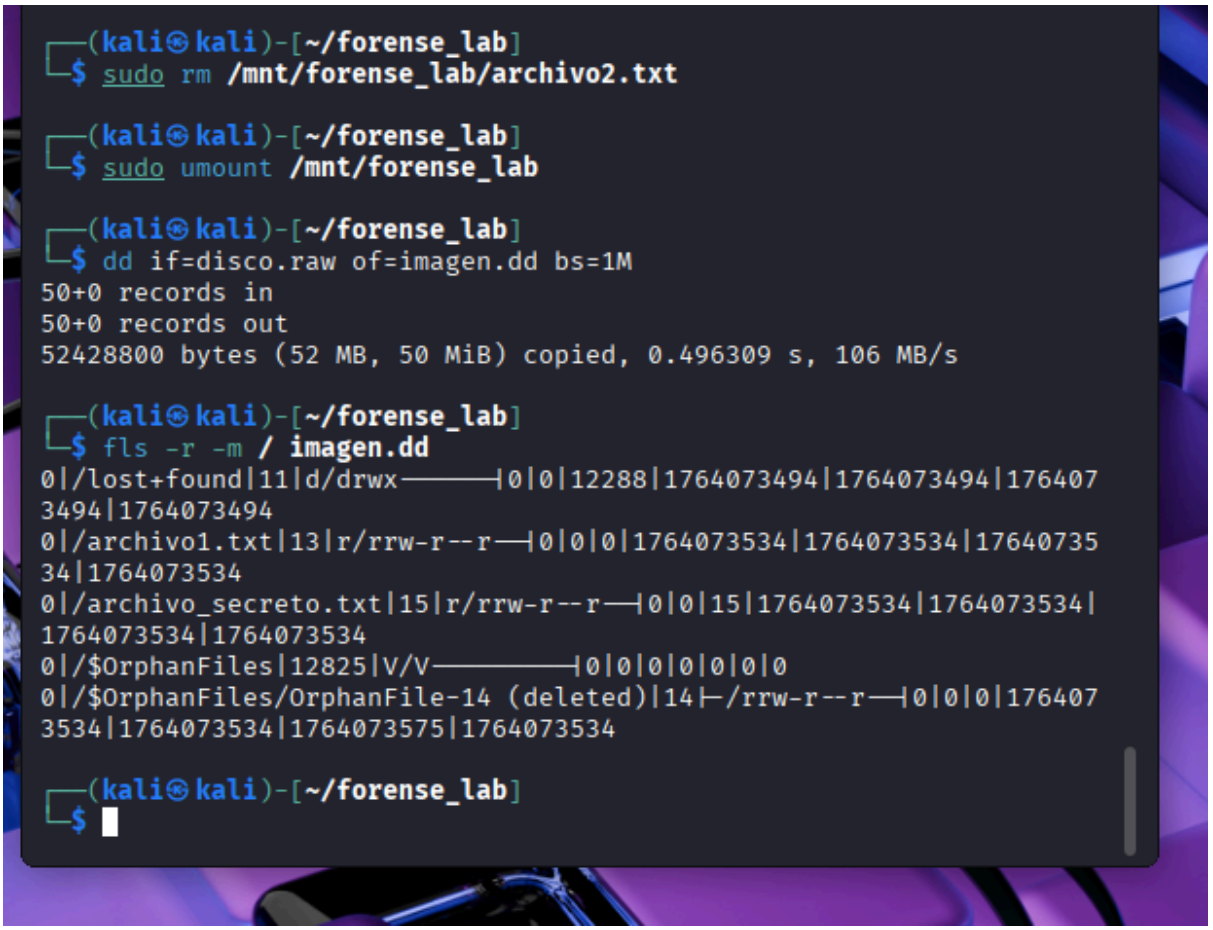

kali@kali: ~/easyrsa
Session Actions Edit View Help
An existing request file was found at
* /home/kali/easyrsa/pki/reqs/server01.req
Continuing with key generation will replace this request.
Type the word 'yes' to continue, or any other input to abort.
Confirm request overwrite: yes
WARNING!!!
An existing private key was found at
* /home/kali/easyrsa/pki/private/server01.key
Continuing with key generation will replace this key.
Type the word 'yes' to continue, or any other input to abort.
Confirm key overwrite: 123
Notice
Aborting without confirmation.
(kali㉿kali)-[~/easyrsa]
$



```
┌──(kali㉿kali)-[~/easyrsa]
└─$ mkdir ~/forense_lab
cd ~/forense_lab
dd if=/dev/zero of=disco.raw bs=1M count=50
mkfs.ext4 disco.raw
mkdir: cannot create directory '/home/kali/forense_lab': File exists
50+0 records in
50+0 records out
52428800 bytes (52 MB, 50 MiB) copied, 0.0643602 s, 815 MB/s
mke2fs 1.47.2 (1-Jan-2025)
Discarding device blocks: done
Creating filesystem with 51200 1k blocks and 12824 inodes
Filesystem UUID: 2bc0c6d3-bf6d-4e54-a840-eef63c455750
Superblock backups stored on blocks:
        8193, 24577, 40961

Allocating group tables: done
Writing inode tables: done
Creating journal (4096 blocks): done
Writing superblocks and filesystem accounting information: done


┌──(kali㉿kali)-[~/forense_lab]
└─$
```



```
┌──(kali㉿kali)-[~/forense_lab]
└─$ sudo rm /mnt/forense_lab/archivo2.txt

┌──(kali㉿kali)-[~/forense_lab]
└─$ sudo umount /mnt/forense_lab

┌──(kali㉿kali)-[~/forense_lab]
└─$ dd if=disco.raw of=imagen.dd bs=1M
50+0 records in
50+0 records out
52428800 bytes (52 MB, 50 MiB) copied, 0.496309 s, 106 MB/s

┌──(kali㉿kali)-[~/forense_lab]
└─$ fls -r -m / imagen.dd
0|/lost+found|11|d/drwx------|0|0|12288|1764073494|1764073494|176407
3494|1764073494
0|/archivo1.txt|13|r/rrw-r--r--|0|0|0|1764073534|1764073534|17640735
34|1764073534
0|/archivo_secreto.txt|15|r/rrw-r--r--|0|0|15|1764073534|1764073534|
1764073534|1764073534
0|/$OrphanFiles|12825|V/V---------|0|0|0|0|0|0|0
0|/$OrphanFiles/OrphanFile-14 (deleted)|14|-/rrw-r--r--|0|0|0|176407
3534|1764073534|1764073575|1764073534

┌──(kali㉿kali)-[~/forense_lab]
└─$
```

5. Configurar una VPN WireGuard punto a punto (medio)

Enunciado

Crea una VPN donde:

- El servidor tenga IP VPN 10.10.0.1/24.
- El cliente tenga 10.10.0.2/24.
  Configura ambos wg0.conf.

Solución

Servidor (/etc/wireguard/wg0.conf)

[Interface]

Address = 10.10.0.1/24

ListenPort = 51820

PrivateKey = <clave_privada_server>

[Peer]

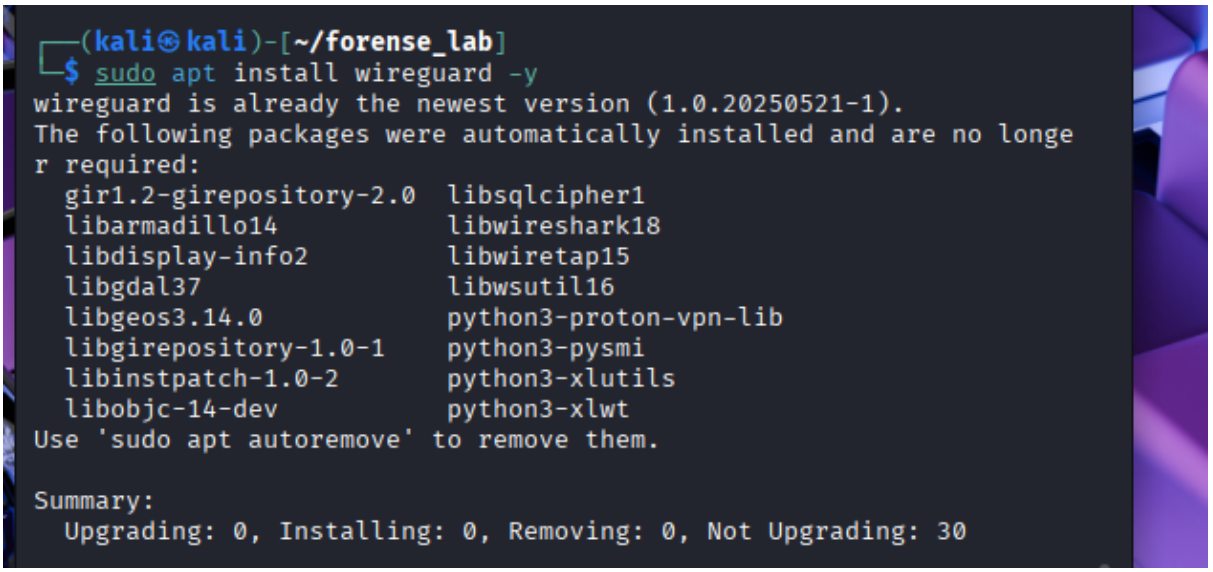
PublicKey = <clave_publica_cliente>

AllowedIPs = 10.10.0.2/32

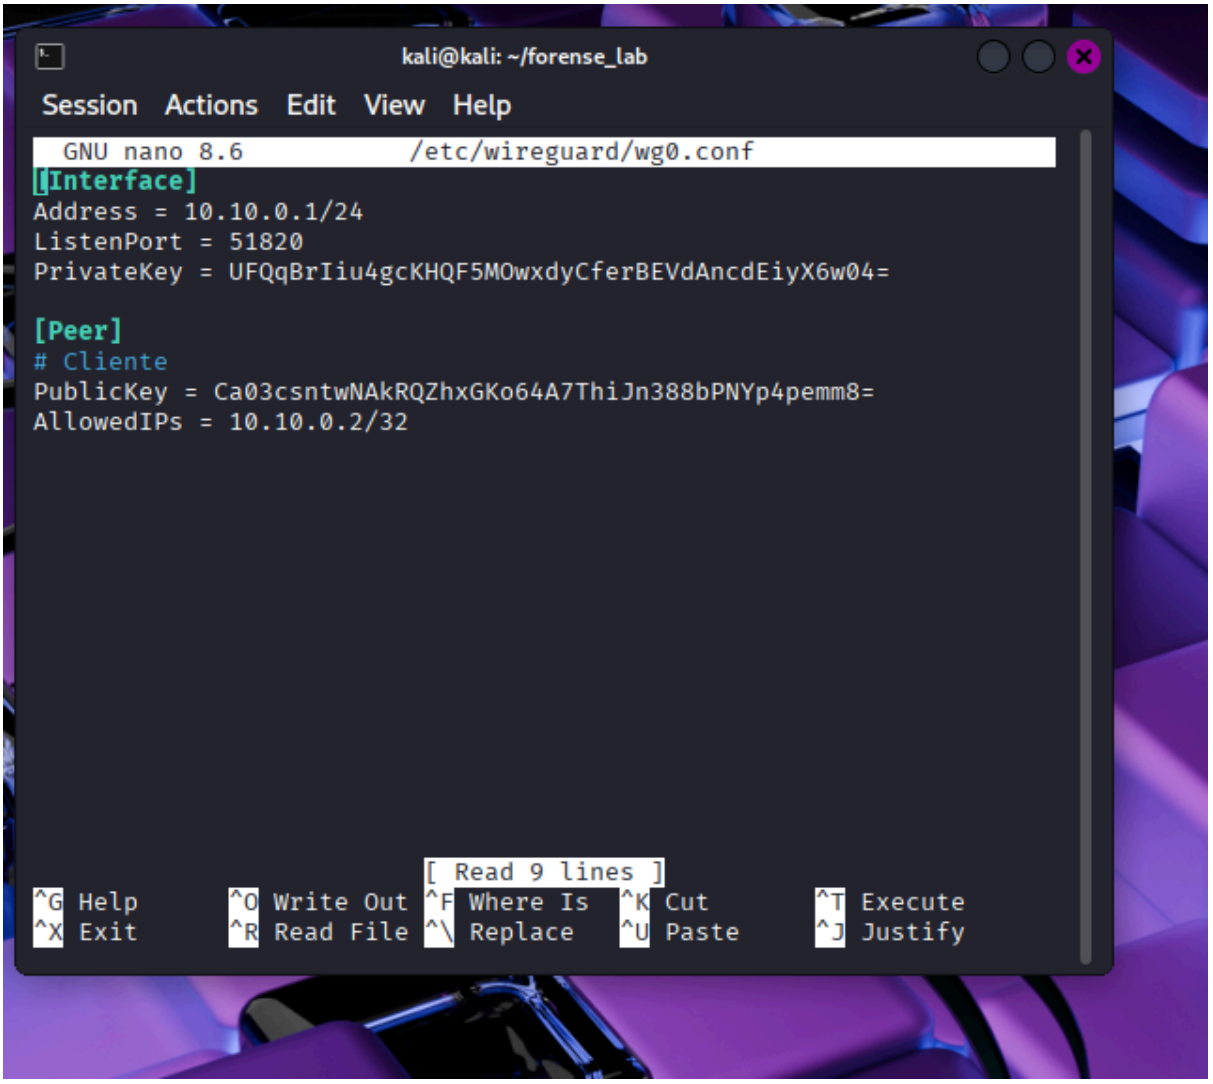
Explicación

WireGuard solo necesita pares de claves y una tabla de pares (peers). Todo coincide con tu documento: claves, interfaces y AllowedIPs.

Servidor:

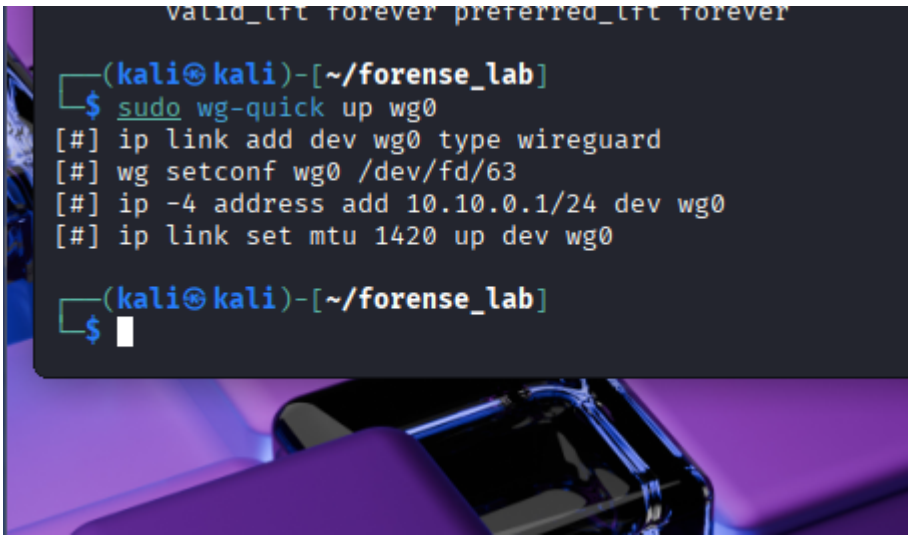

┌──(kali㉿kali)-[~/forense_lab]
└─$ sudo apt install wireguard -y
wireguard is already the newest version (1.0.20250521-1).
The following packages were automatically installed and are no longe
r required:
gir1.2-girepository-2.0 libsqlcipher1
libarmadillo14 libwireshark18
libdisplay-info2 libwiretap15
libgdal37 libwsutil16
libgeos3.14.0 python3-proton-vpn-lib
libgirepository-1.0-1 python3-pysmi
libinstpatch-1.0-2 python3-xlutils
libobjc-14-dev python3-xlwt
Use 'sudo apt autoremove' to remove them.
Summary:
Upgrading: 0, Installing: 0, Removing: 0, Not Upgrading: 30


┌──(kali㉿kali)-[~/forense_lab]
└─$ mkdir ~/keys
┌──(kali㉿kali)-[~/forense_lab]
└─$ wg genkey | tee ~/keys/server_private.key | wg pubkey > ~/keys/s
erver_public.key
┌──(kali㉿kali)-[~/forense_lab]
└─$ wg genkey | tee ~/keys/client_private.key | wg pubkey > ~/keys/c
lient_public.key
┌──(kali㉿kali)-[~/forense_lab]
└─$ /etc/wireguard/wg0.conf
zsh: permission denied: /etc/wireguard/wg0.conf
┌──(kali㉿kali)-[~/forense_lab]
└─$

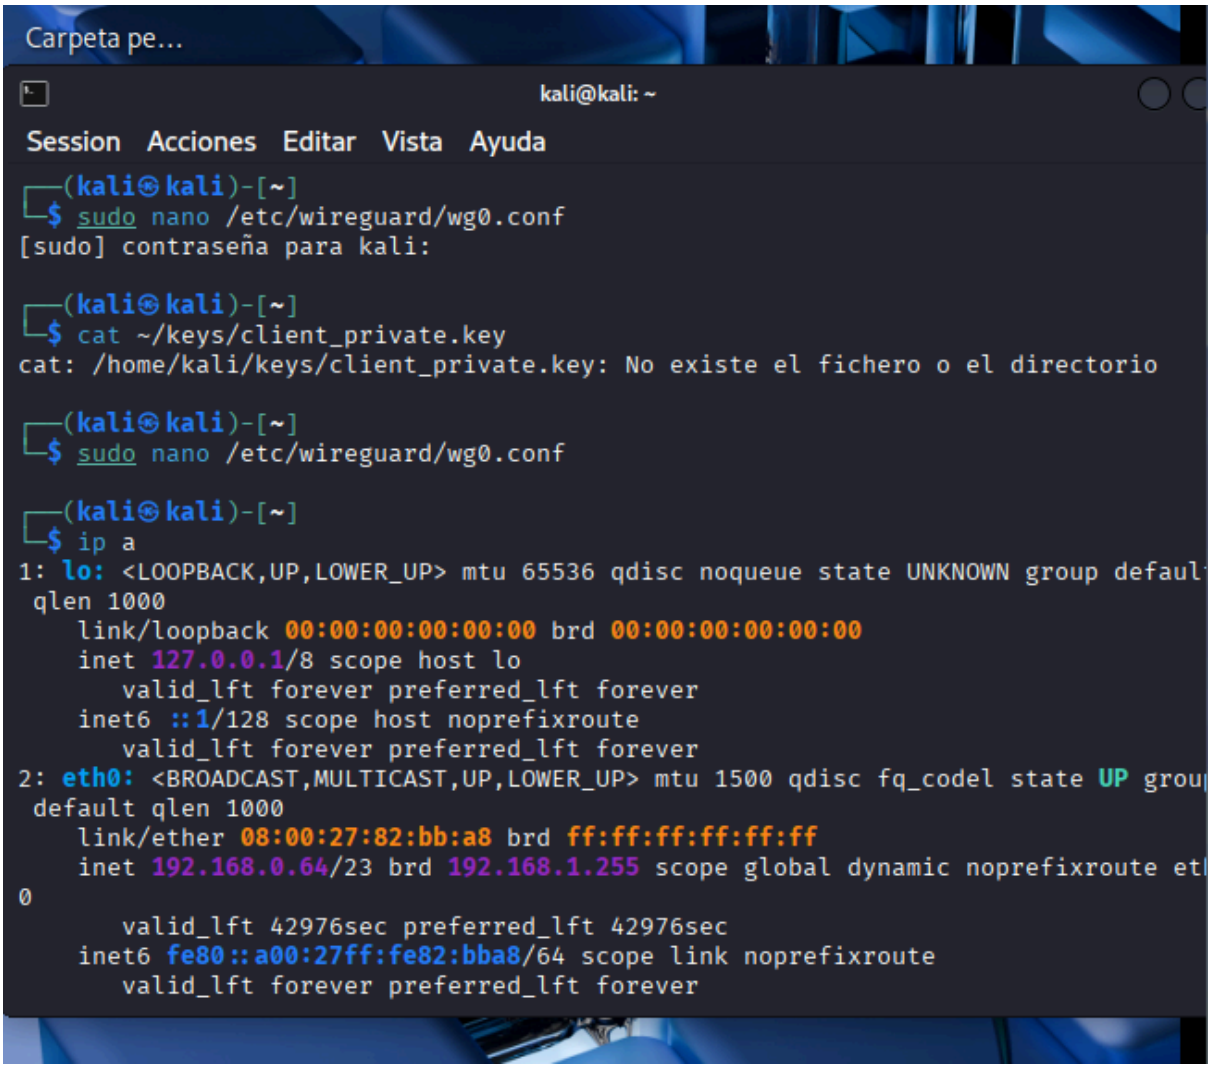


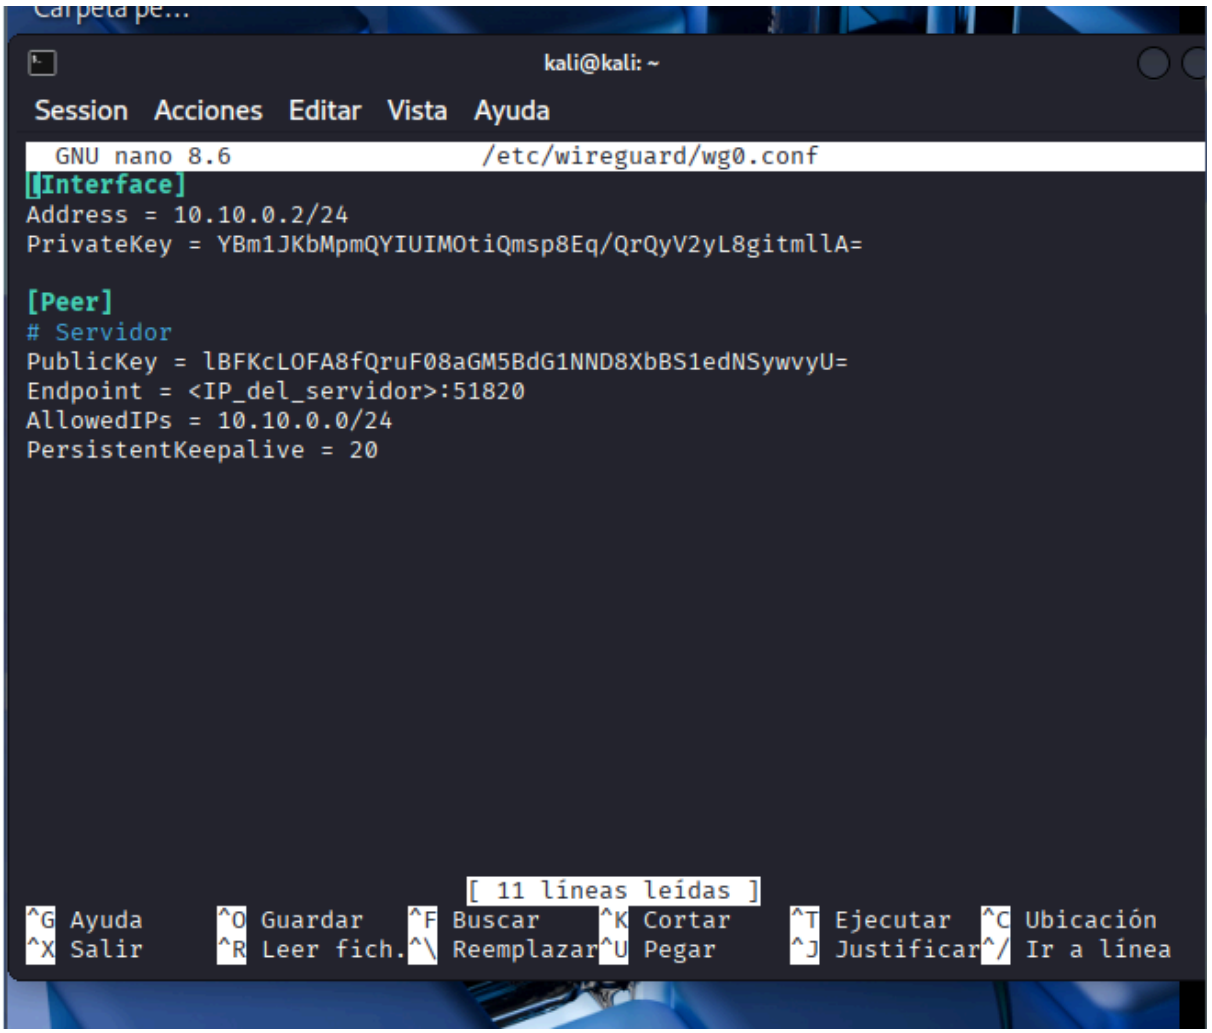

```
┌──(kali㉿kali)-[~/forense_lab]
└─$ /etc/wireguard/wg0.conf
zsh: permission denied: /etc/wireguard/wg0.conf

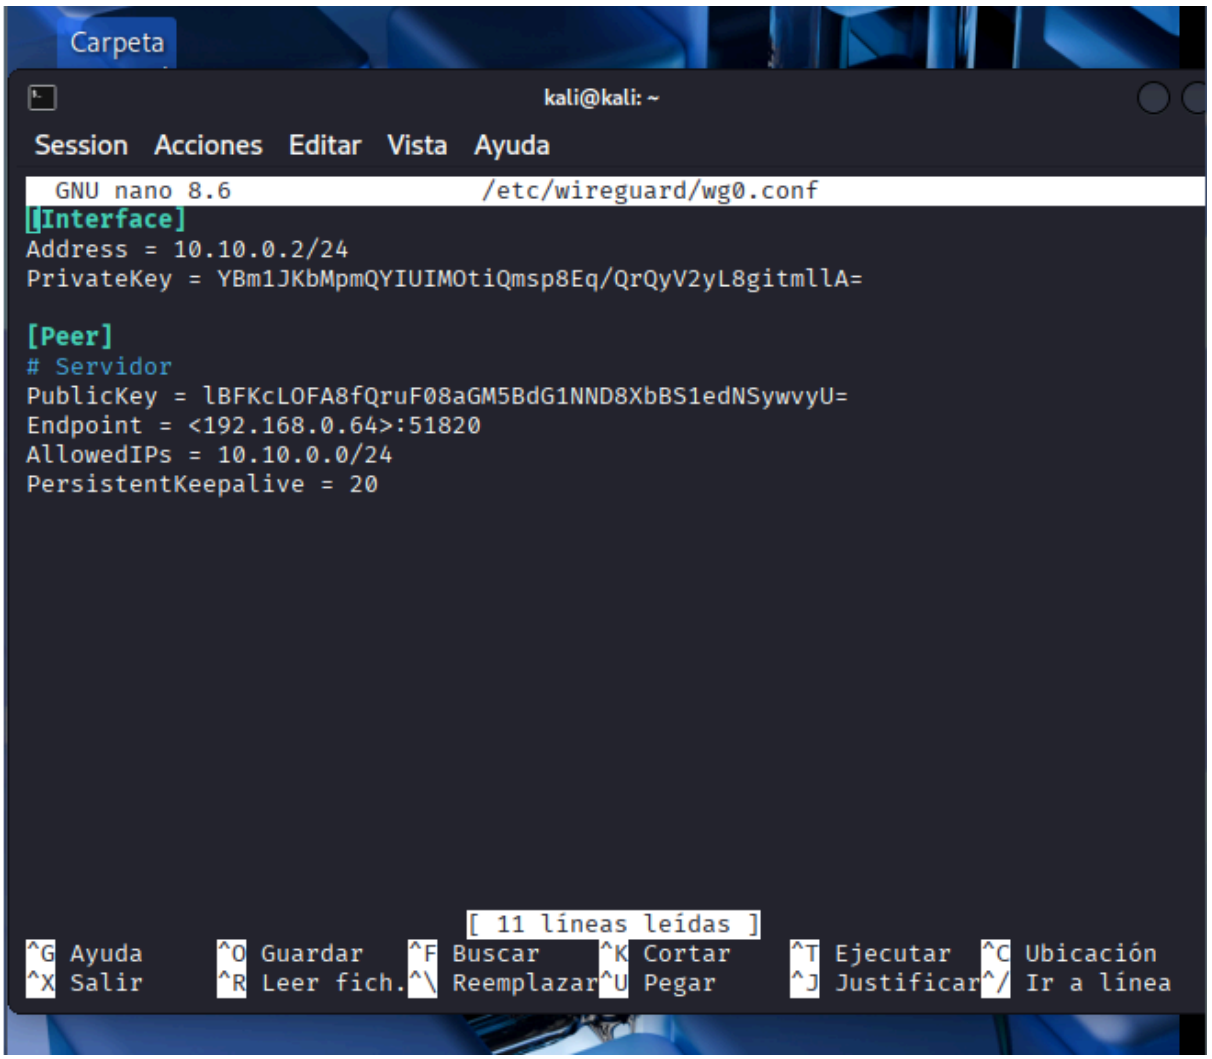
┌──(kali㉿kali)-[~/forense_lab]
└─$ sudo nano /etc/wireguard/wg0.conf
```

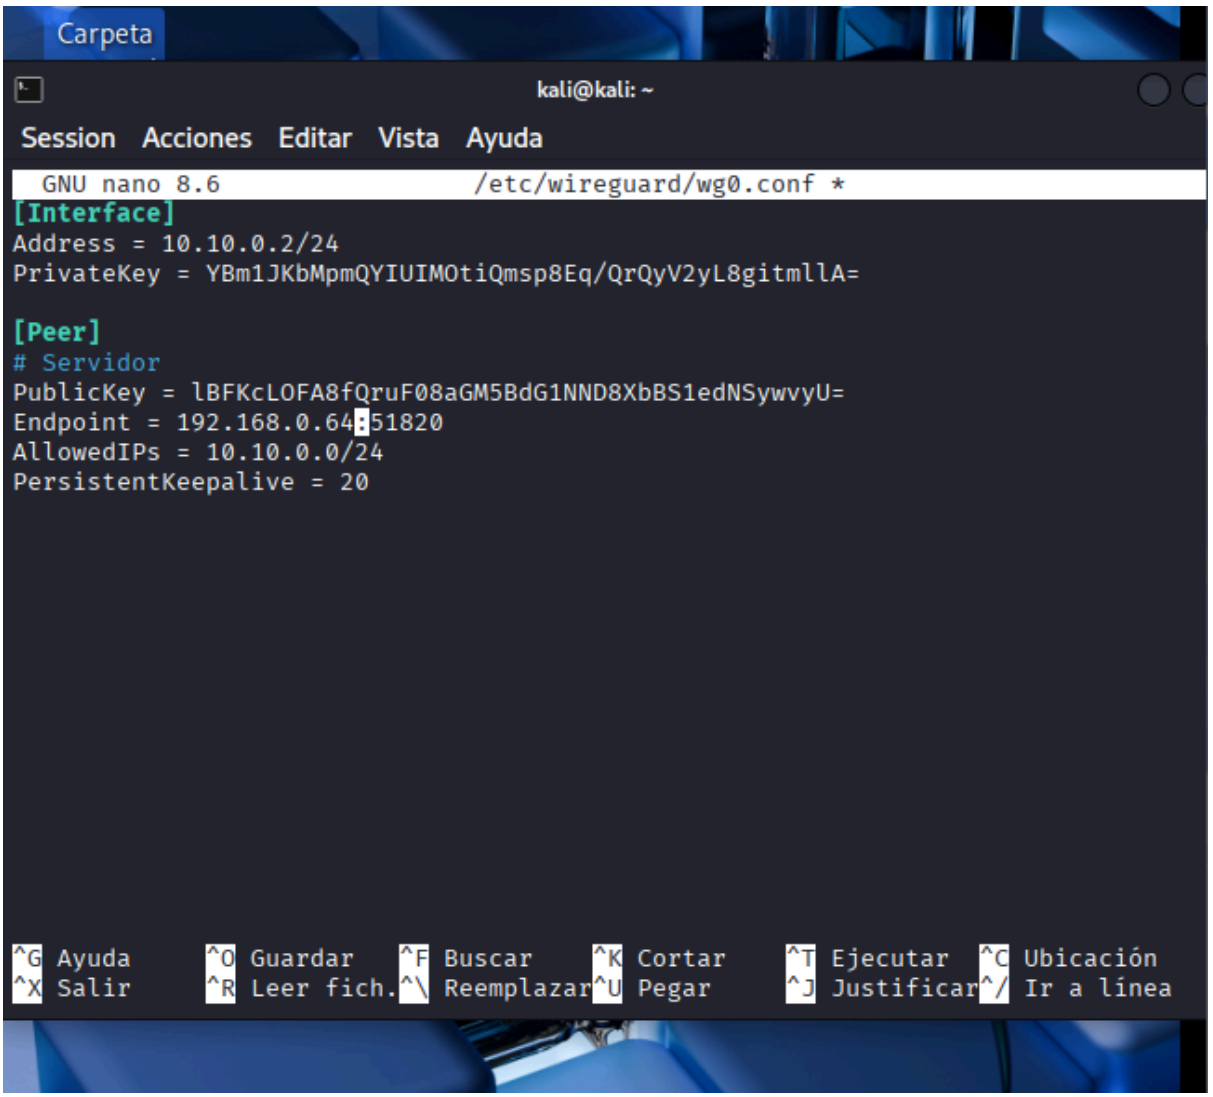

valid_lft forever preferred_lft forever
(kali㉿kali)-[~/forense_lab]
$ sudo wg-quick up wg0
[#] ip link add dev wg0 type wireguard
[#] wg setconf wg0 /dev/fd/63
[#] ip -4 address add 10.10.0.1/24 dev wg0
[#] ip link set mtu 1420 up dev wg0
(kali㉿kali)-[~/forense_lab]
$

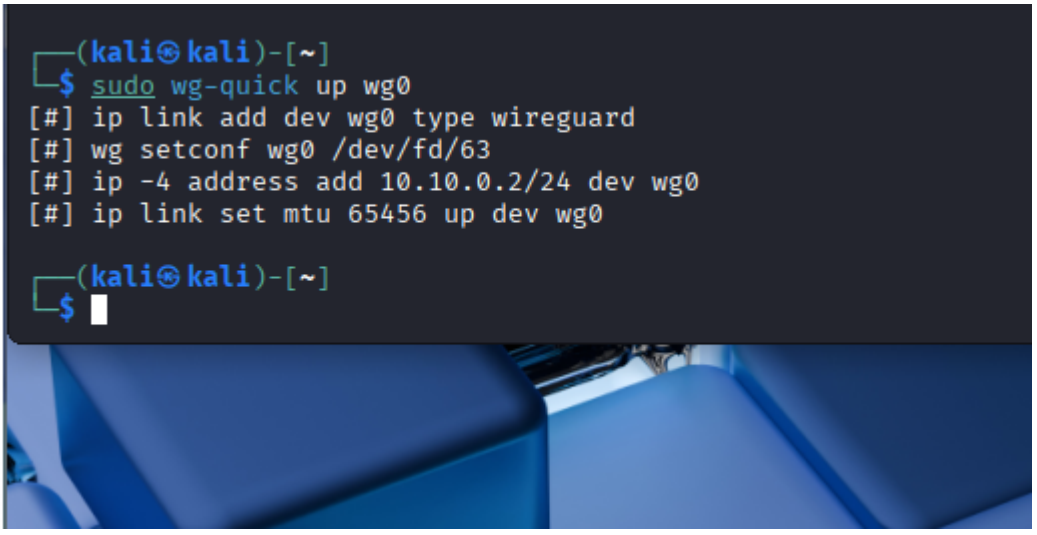
cliente:

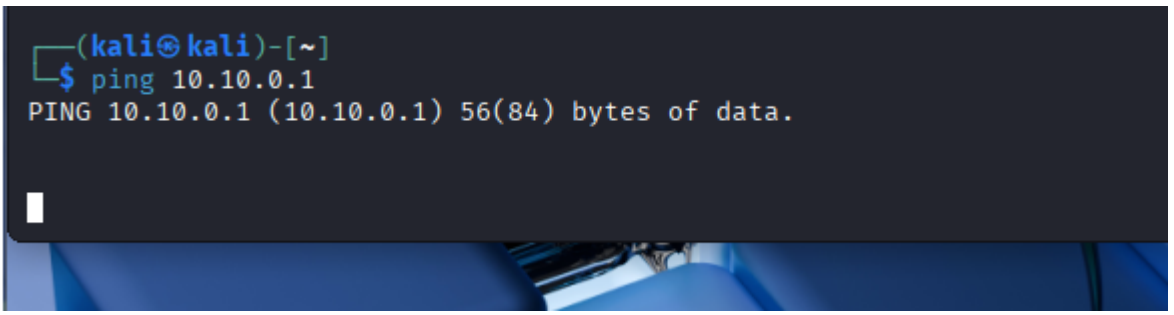

Carpeta pe...
kali@kali: ~
Session Acciones Editar Vista Ayuda
(kali㉿kali)-[~]
$ sudo nano /etc/wireguard/wg0.conf
[sudo] contraseña para kali:
(kali㉿kali)-[~]
$ cat ~/keys/client_private.key
cat: /home/kali/keys/client_private.key: No existe el fichero o el directorio
(kali㉿kali)-[~]
$ sudo nano /etc/wireguard/wg0.conf
(kali㉿kali)-[~]
$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group defaul
qlen 1000
link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
inet 127.0.0.1/8 scope host lo
valid_lft forever preferred_lft forever
inet6 ::1/128 scope host noprefixroute
valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP grou
default qlen 1000
link/ether 08:00:27:82:bb:a8 brd ff:ff:ff:ff:ff:ff
inet 192.168.0.64/23 brd 192.168.1.255 scope global dynamic noprefixroute et
0
valid_lft 42976sec preferred_lft 42976sec
inet6 fe80::a00:27ff:fe82:bba8/64 scope link noprefixroute
valid_lft forever preferred_lft forever

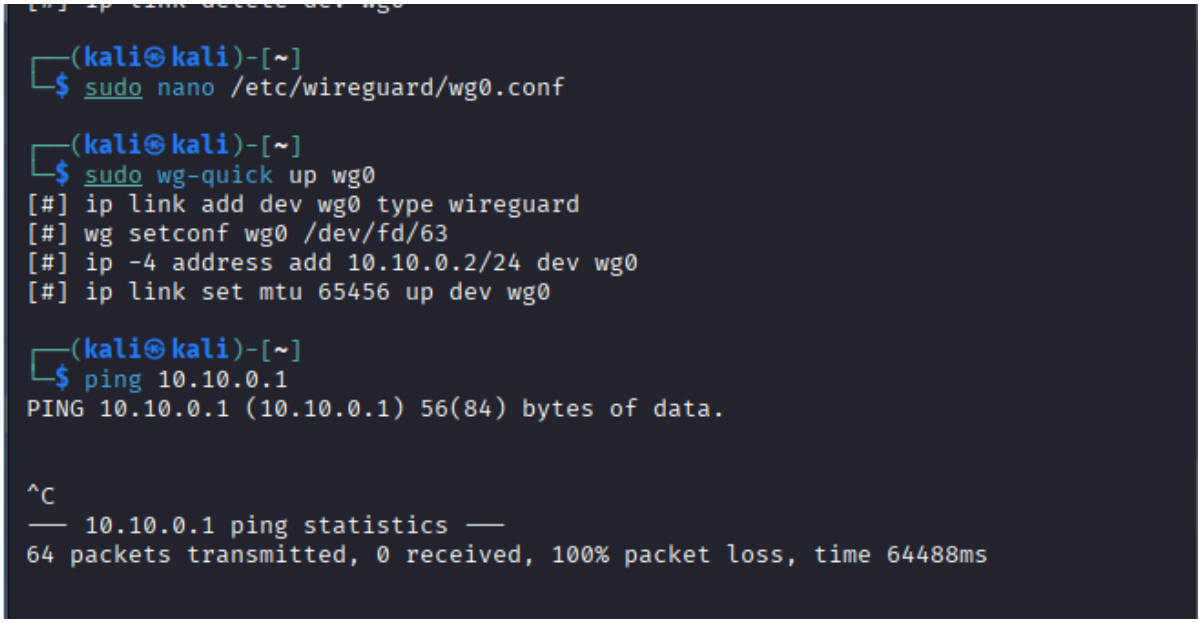

kali@kali: ~
Session Acciones Editar Vista Ayuda
GNU nano 8.6 /etc/wireguard/wg0.conf
[Interface]
Address = 10.10.0.2/24
PrivateKey = YBm1JKbMpmQYIUIMOtiQmsp8Eq/QrQyV2yL8gitmllA=
[Peer]
Servidor
PublicKey = lBFKcLOFA8fQruF08aGM5BdG1NND8XbBS1edNSywvyU=
Endpoint = <IP_del_servidor>:51820
AllowedIPs = 10.10.0.0/24
PersistentKeepalive = 20
[11 líneas leídas]
^G Ayuda ^O Guardar ^F Buscar ^K Cortar ^T Ejecutar ^C Ubicación
^X Salir ^R Leer fich. ^\ Reemplazar ^U Pegar ^J Justificar ^/ Ir a línea


Carpeta
kali@kali: ~
Session Acciones Editar Vista Ayuda
GNU nano 8.6 /etc/wireguard/wg0.conf
[Interface]
Address = 10.10.0.2/24
PrivateKey = YBm1JKbMpmQYIUIMOtiQmsp8Eq/QrQyV2yL8gitmllA=
[Peer]
Servidor
PublicKey = lBFKcLOFA8fQruF08aGM5BdG1NND8XbBS1edNSywvyU=
Endpoint = <192.168.0.64>:51820
AllowedIPs = 10.10.0.0/24
PersistentKeepalive = 20
[11 líneas leídas]
^G Ayuda ^O Guardar ^F Buscar ^K Cortar ^T Ejecutar ^C Ubicación
^X Salir ^R Leer fich. ^\ Reemplazar ^U Pegar ^J Justificar ^/ Ir a línea


Carpeta
kali@kali: ~
Session Acciones Editar Vista Ayuda
GNU nano 8.6 /etc/wireguard/wg0.conf *
[Interface]
Address = 10.10.0.2/24
PrivateKey = YBm1JKbMpmQYIUIMOtiQmsp8Eq/QrQyV2yL8gitmllA=
[Peer]
Servidor
PublicKey = lBFKcLOFA8fQruF08aGM5BdG1NND8XbBS1edNSywvyU=
Endpoint = 192.168.0.64:51820
AllowedIPs = 10.10.0.0/24
PersistentKeepalive = 20
^G Ayuda ^O Guardar ^F Buscar ^K Cortar ^T Ejecutar ^C Ubicación
^X Salir ^R Leer fich. ^\ Reemplazar ^U Pegar ^J Justificar ^/ Ir a línea


┌──(kali㉿kali)-[~]
└─$ sudo wg-quick up wg0
[#] ip link add dev wg0 type wireguard
[#] wg setconf wg0 /dev/fd/63
[#] ip -4 address add 10.10.0.2/24 dev wg0
[#] ip link set mtu 65456 up dev wg0
┌──(kali㉿kali)-[~]
└─$





---

6. Configurar un servidor OpenVPN (medio)

Enunciado

Crea el archivo server.conf para un servidor OpenVPN estándar usando certificados generados con EasyRSA.

Solución

sudo nano /etc/openvpn/server.conf

Contenido:

port 1194

proto udp

dev tun

ca ca.crt

cert server01.crt

key server01.key

dh dh.pem

server 10.8.0.0 255.255.255.0

keepalive 10 120

persist-key

persist-tun

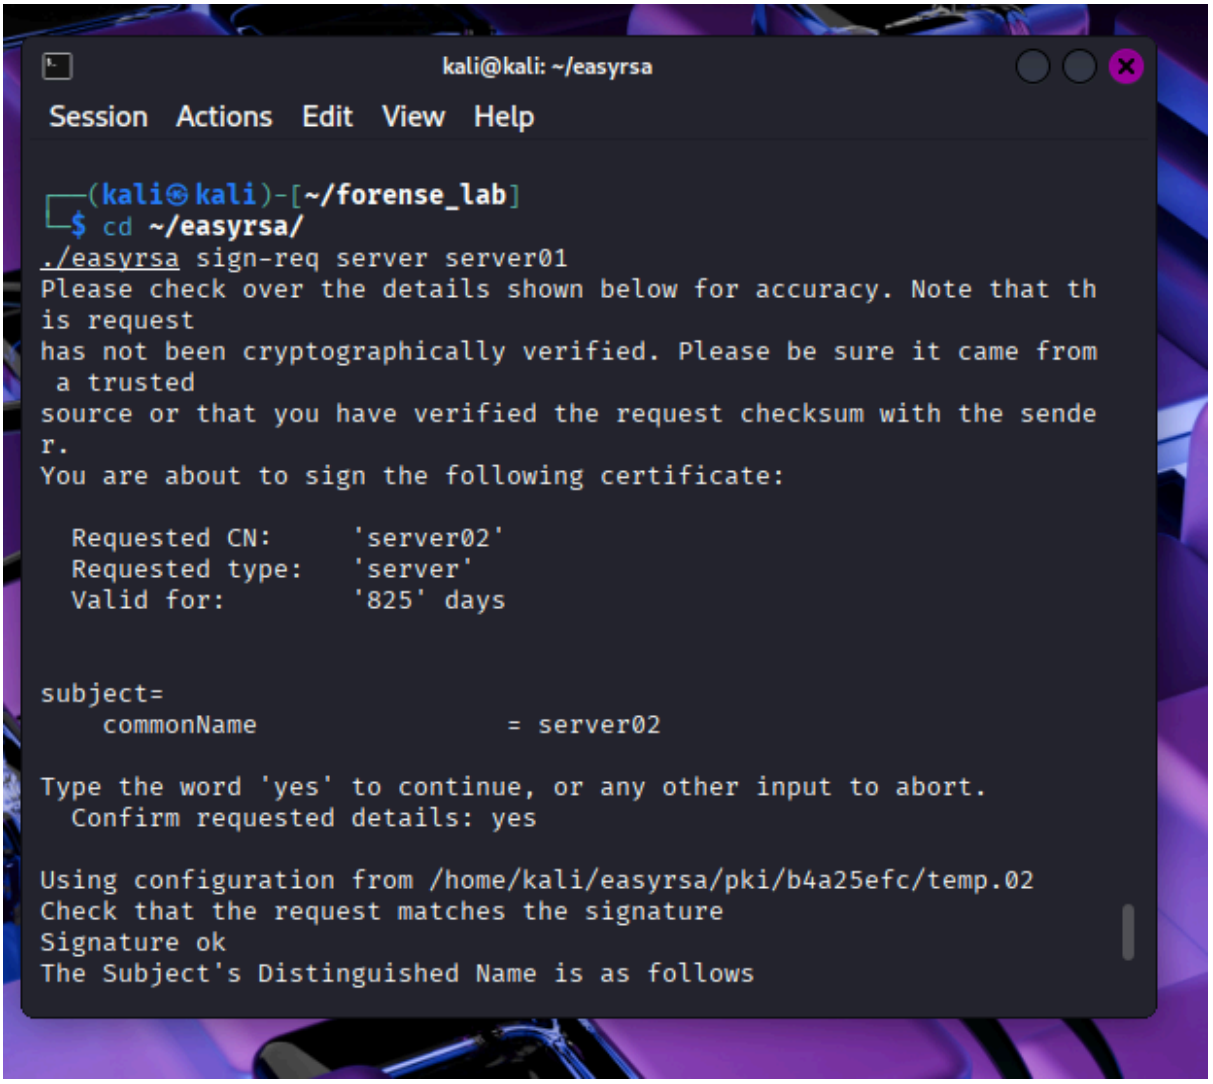
verb 3

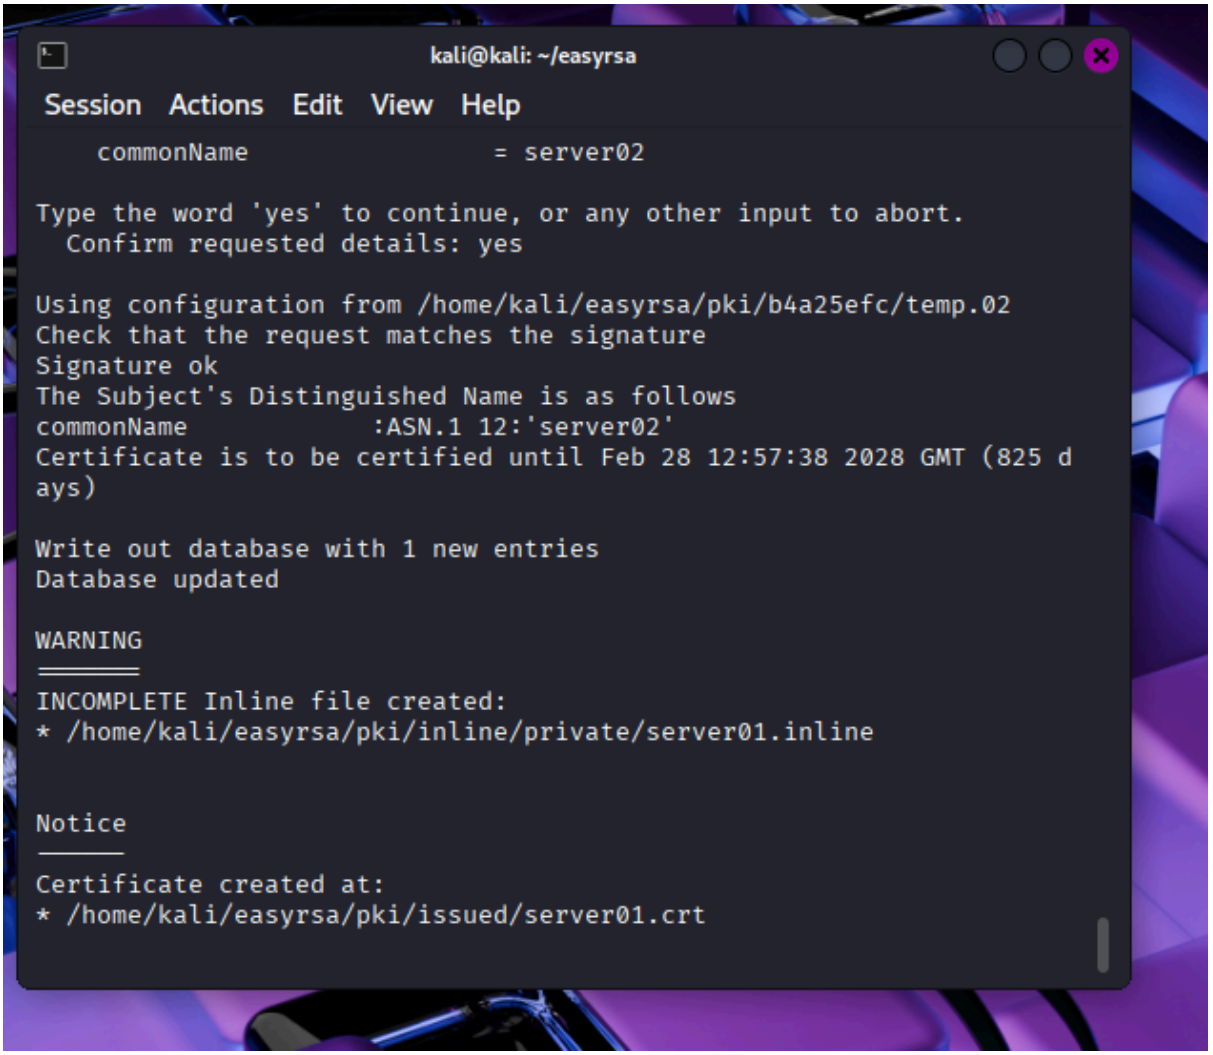
Iniciar:

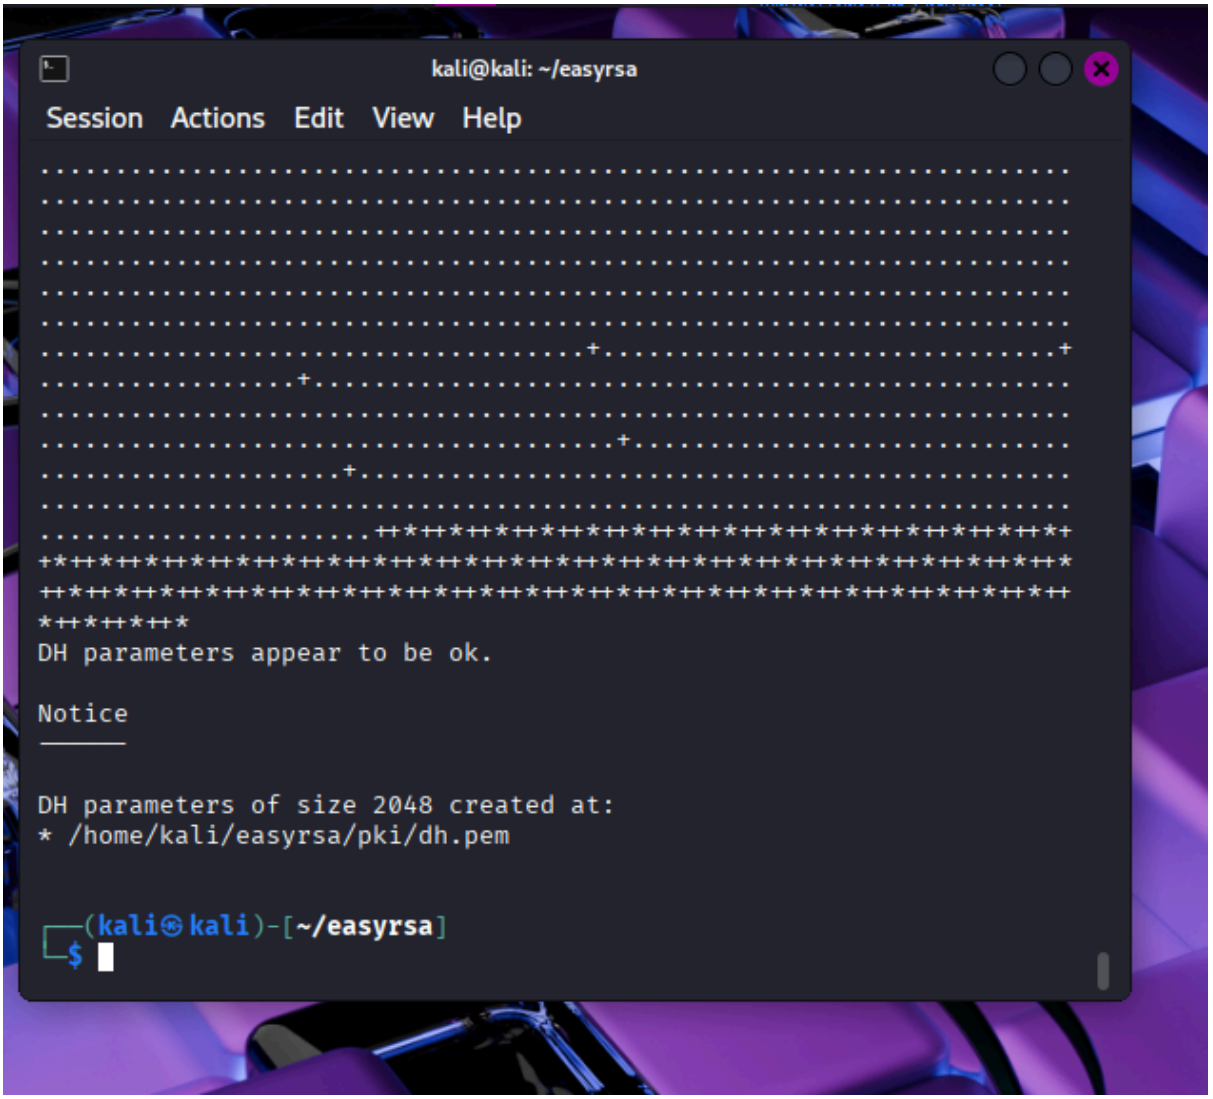
sudo systemctl start openvpn@server

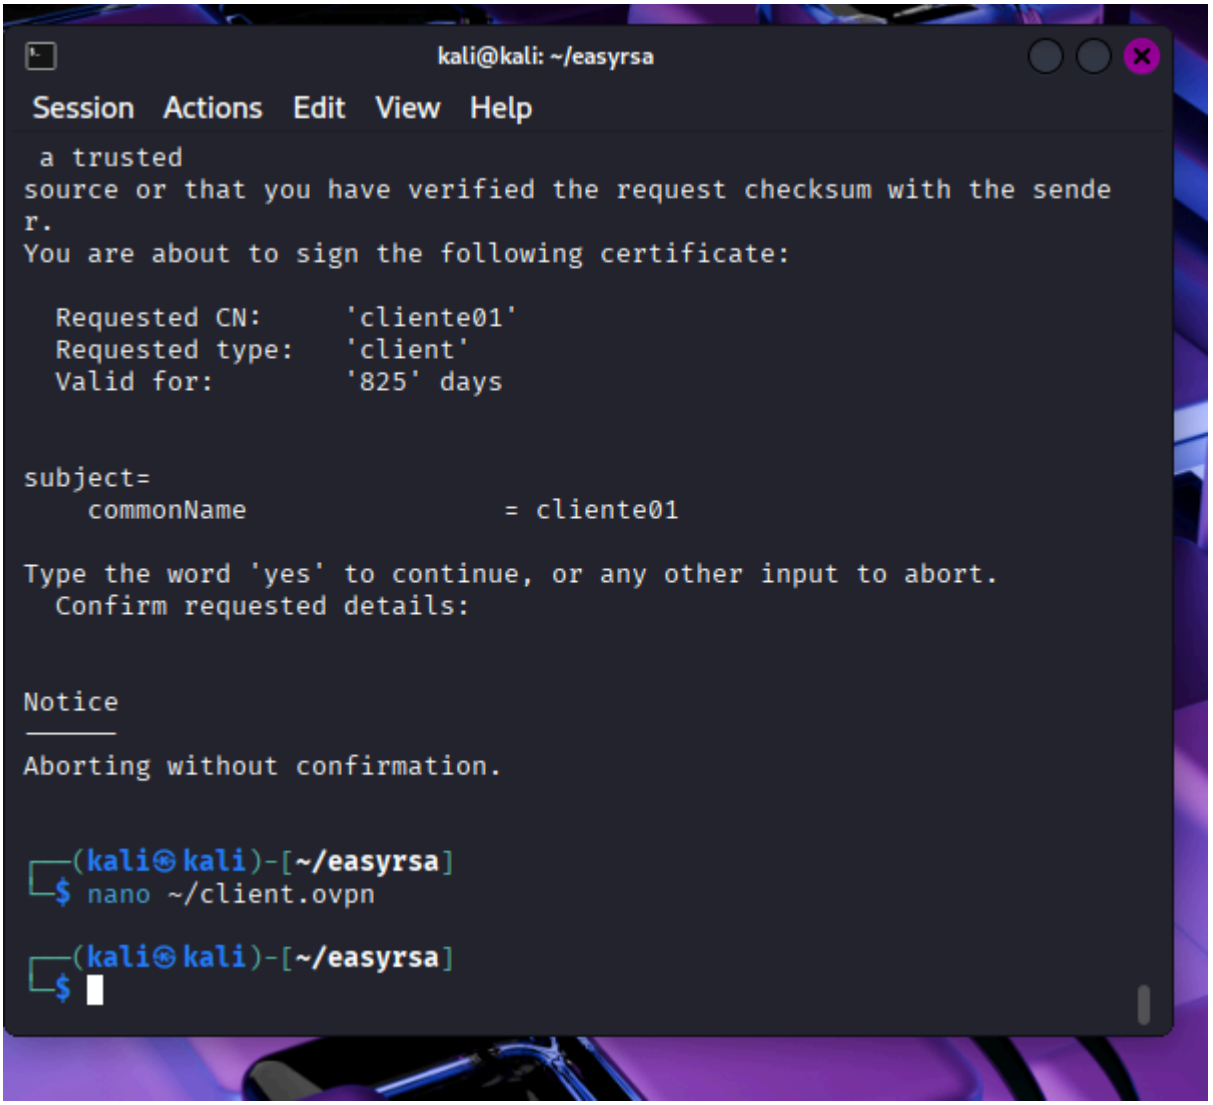
Explicación

El archivo coincide exactamente con el formato que aparece en tus ejercicios de OpenVPN.


kali@kali: ~/easyrsa
Session Actions Edit View Help
┌──(kali㉿kali)-[~/forense_lab]
└─$ cd ~/easyrsa/
./easyrsa sign-req server server01
Please check over the details shown below for accuracy. Note that th
is request
has not been cryptographically verified. Please be sure it came from
a trusted
source or that you have verified the request checksum with the sende
r.
You are about to sign the following certificate:
Requested CN: 'server02'
Requested type: 'server'
Valid for: '825' days
subject=
commonName = server02
Type the word 'yes' to continue, or any other input to abort.
Confirm requested details: yes
Using configuration from /home/kali/easyrsa/pki/b4a25efc/temp.02
Check that the request matches the signature
Signature ok
The Subject's Distinguished Name is as follows


kali@kali: ~/easyrsa
Session Actions Edit View Help
commonName = server02
Type the word 'yes' to continue, or any other input to abort.
Confirm requested details: yes
Using configuration from /home/kali/easyrsa/pki/b4a25efc/temp.02
Check that the request matches the signature
Signature ok
The Subject's Distinguished Name is as follows
commonName :ASN.1 12:'server02'
Certificate is to be certified until Feb 28 12:57:38 2028 GMT (825 d
ays)
Write out database with 1 new entries
Database updated
WARNING
INCOMPLETE Inline file created:
* /home/kali/easyrsa/pki/inline/private/server01.inline
Notice
Certificate created at:
* /home/kali/easyrsa/pki/issued/server01.crt


kali@kali: ~/easyrsa
Session Actions Edit View Help
DH parameters appear to be ok.
Notice
DH parameters of size 2048 created at:
* /home/kali/easyrsa/pki/dh.pem
(kali㉿kali)-[~/easyrsa]
$



---

7. Firmar un correo electrónico con S/MIME (medio)

Enunciado

Crea una CA, genera un certificado S/MIME y configúralo en Thunderbird para firmar correos.

Solución (resumen)

1. Crear CA:

openssl genpkey -algorithm RSA -out private/ca.key

openssl req -new -x509 -key private/ca.key -out ca.crt

2. Crear clave para correo:

openssl genpkey -algorithm RSA -out private/email.key

3. CSR + firma:

openssl req -new -key private/email.key -out email.csr

openssl x509 -req -in email.csr -CA ca.crt -CAkey private/ca.key -out email.crt

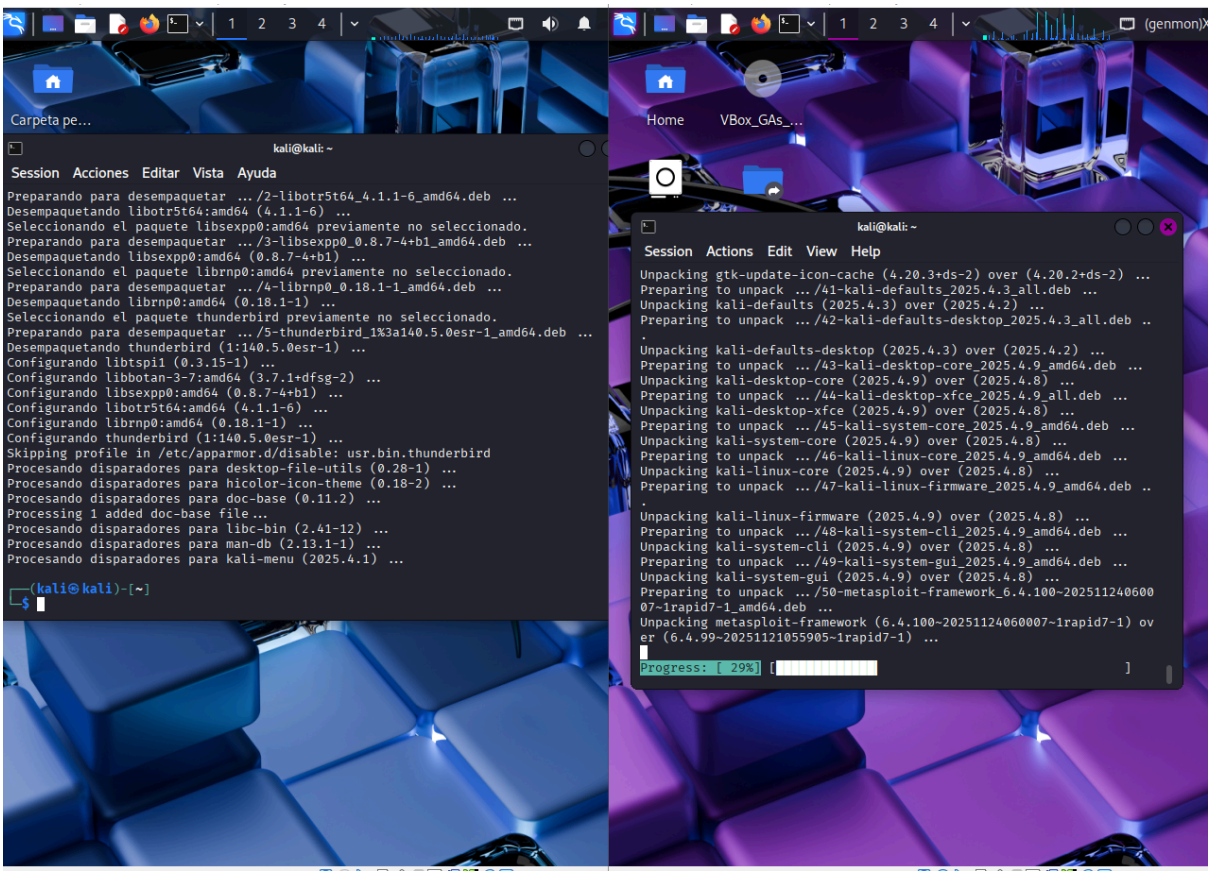
4. PKCS12:

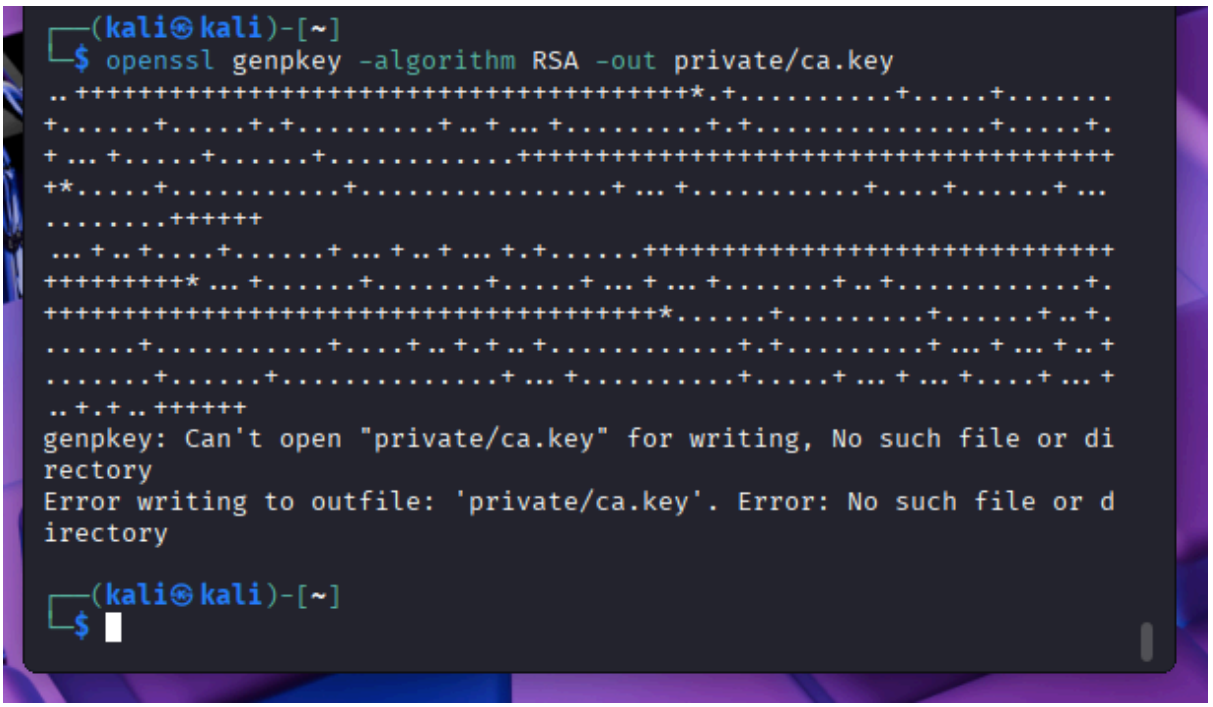
openssl pkcs12 -export -out email.p12 -inkey private/email.key -in email.crt

5. Importar en Thunderbird → Seguridad → Certificados.

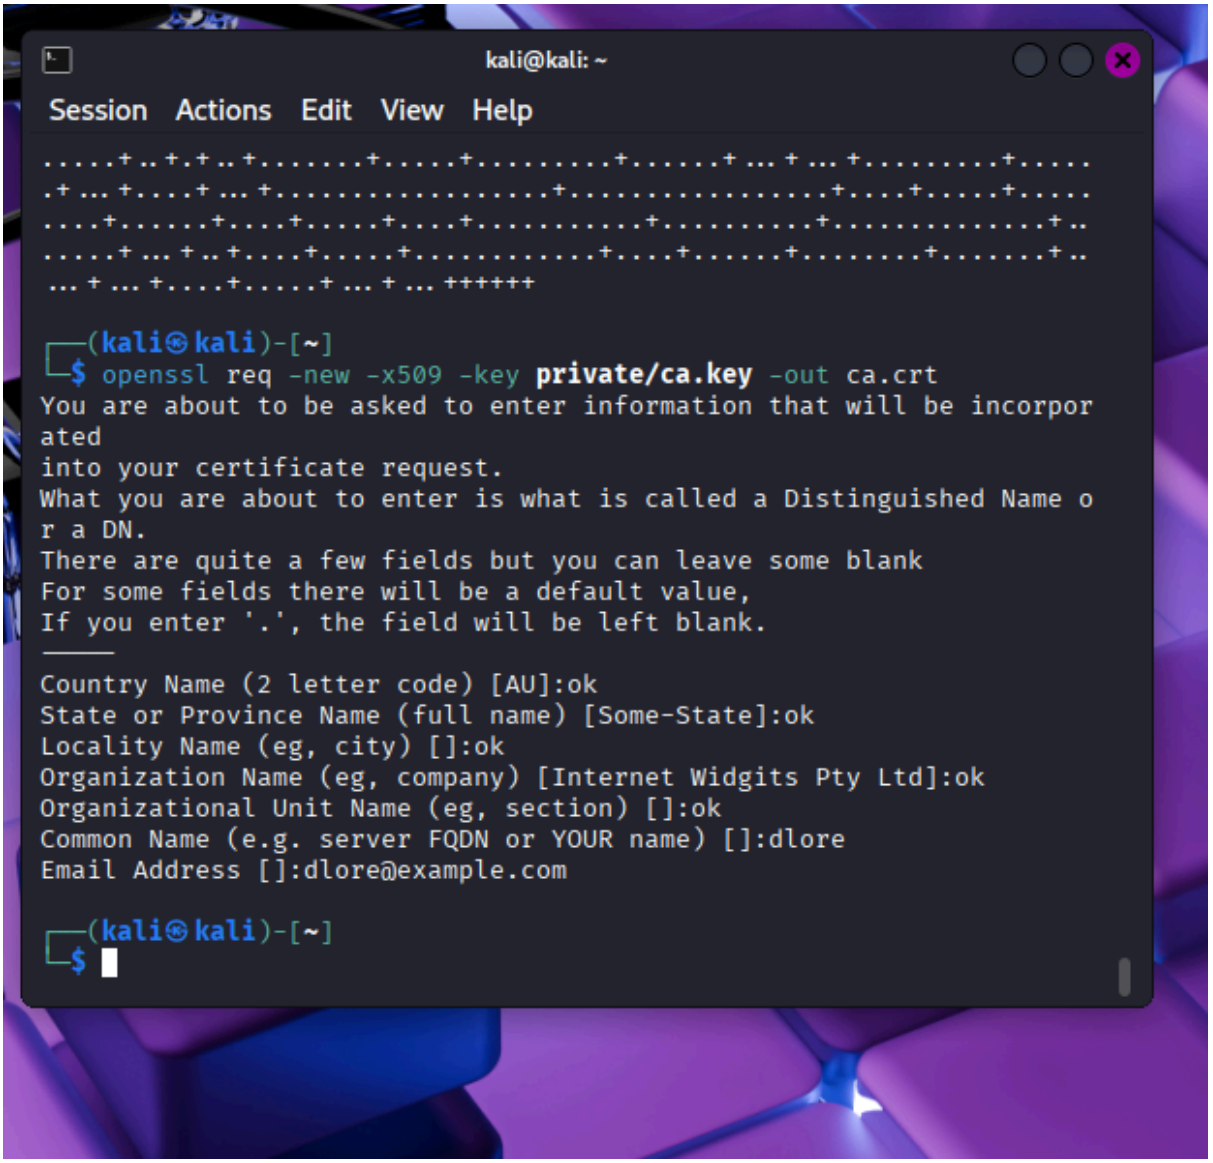
Explicación

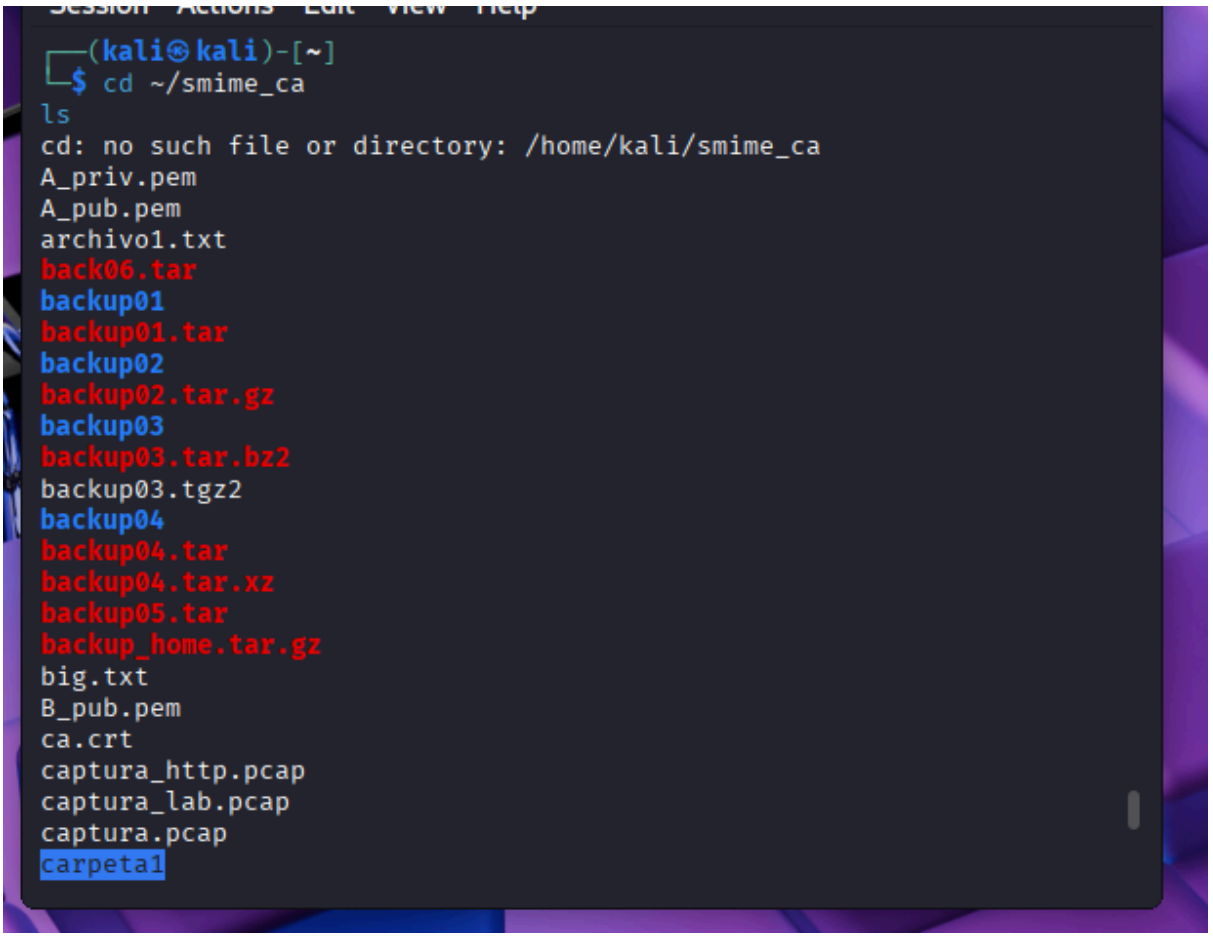
Tus apuntes describen exactamente este flujo: CA → clave → CSR → certificado → importación en Thunderbird.

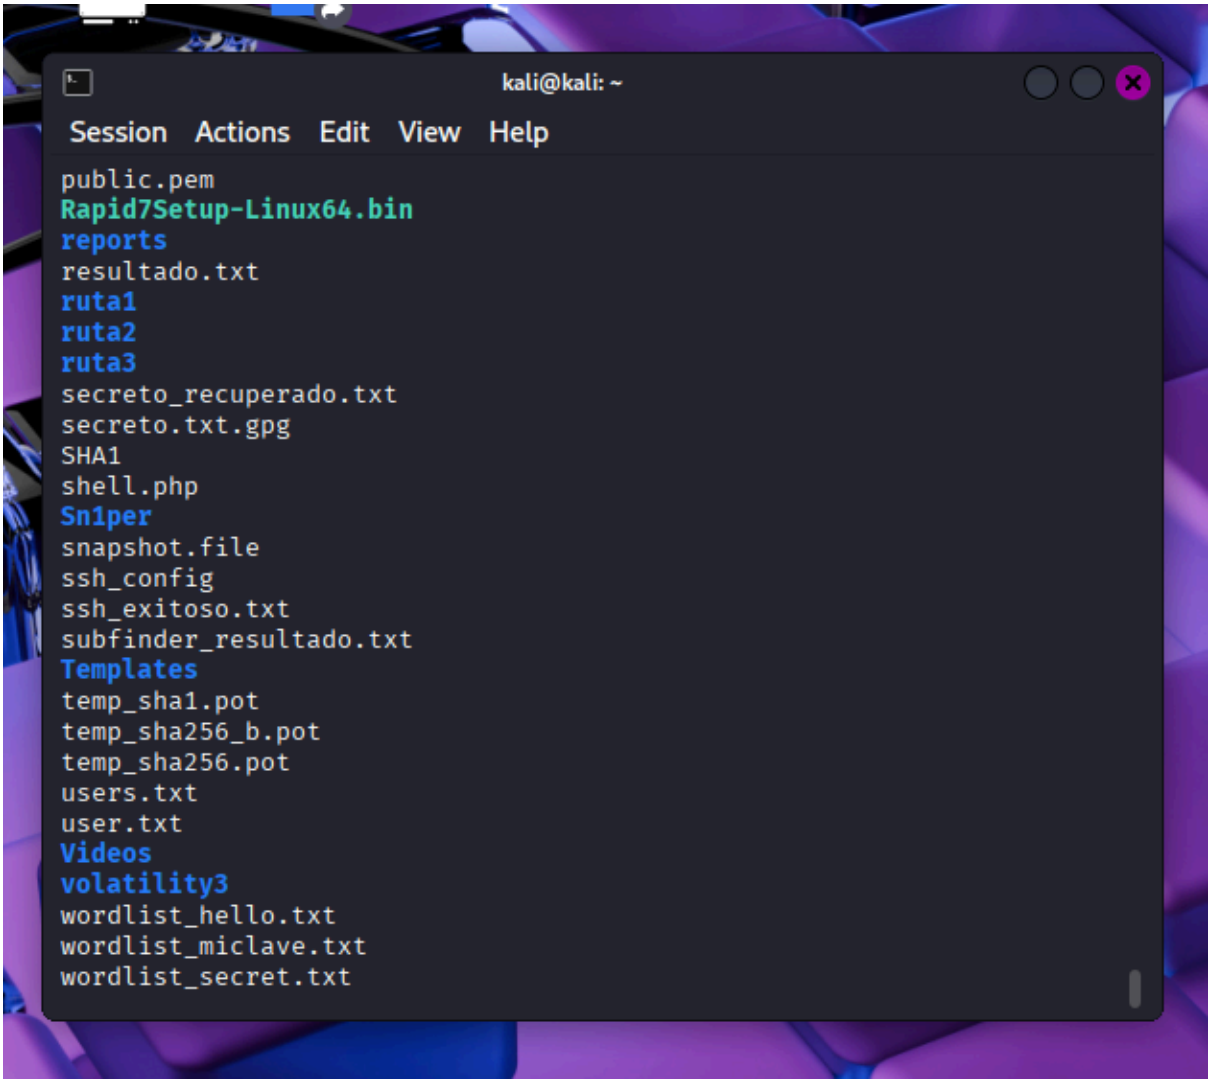


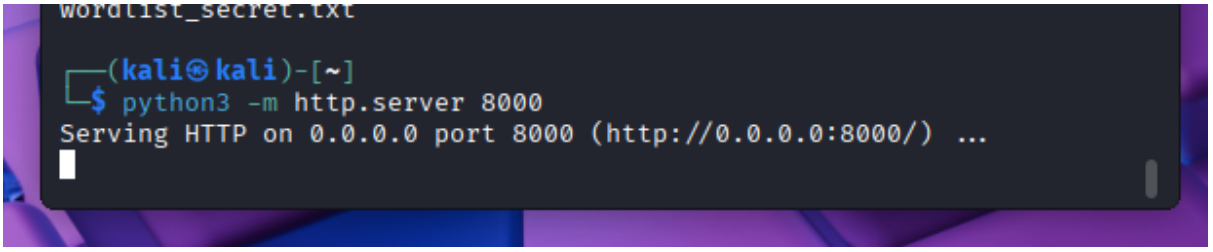

┌──(kali㉿kali)-[~]
└─$ openssl genpkey -algorithm RSA -out private/ca.key
genpkey: Can't open "private/ca.key" for writing, No such file or di
rectory
Error writing to outfile: 'private/ca.key'. Error: No such file or d
irectory
┌──(kali㉿kali)-[~]
└─$

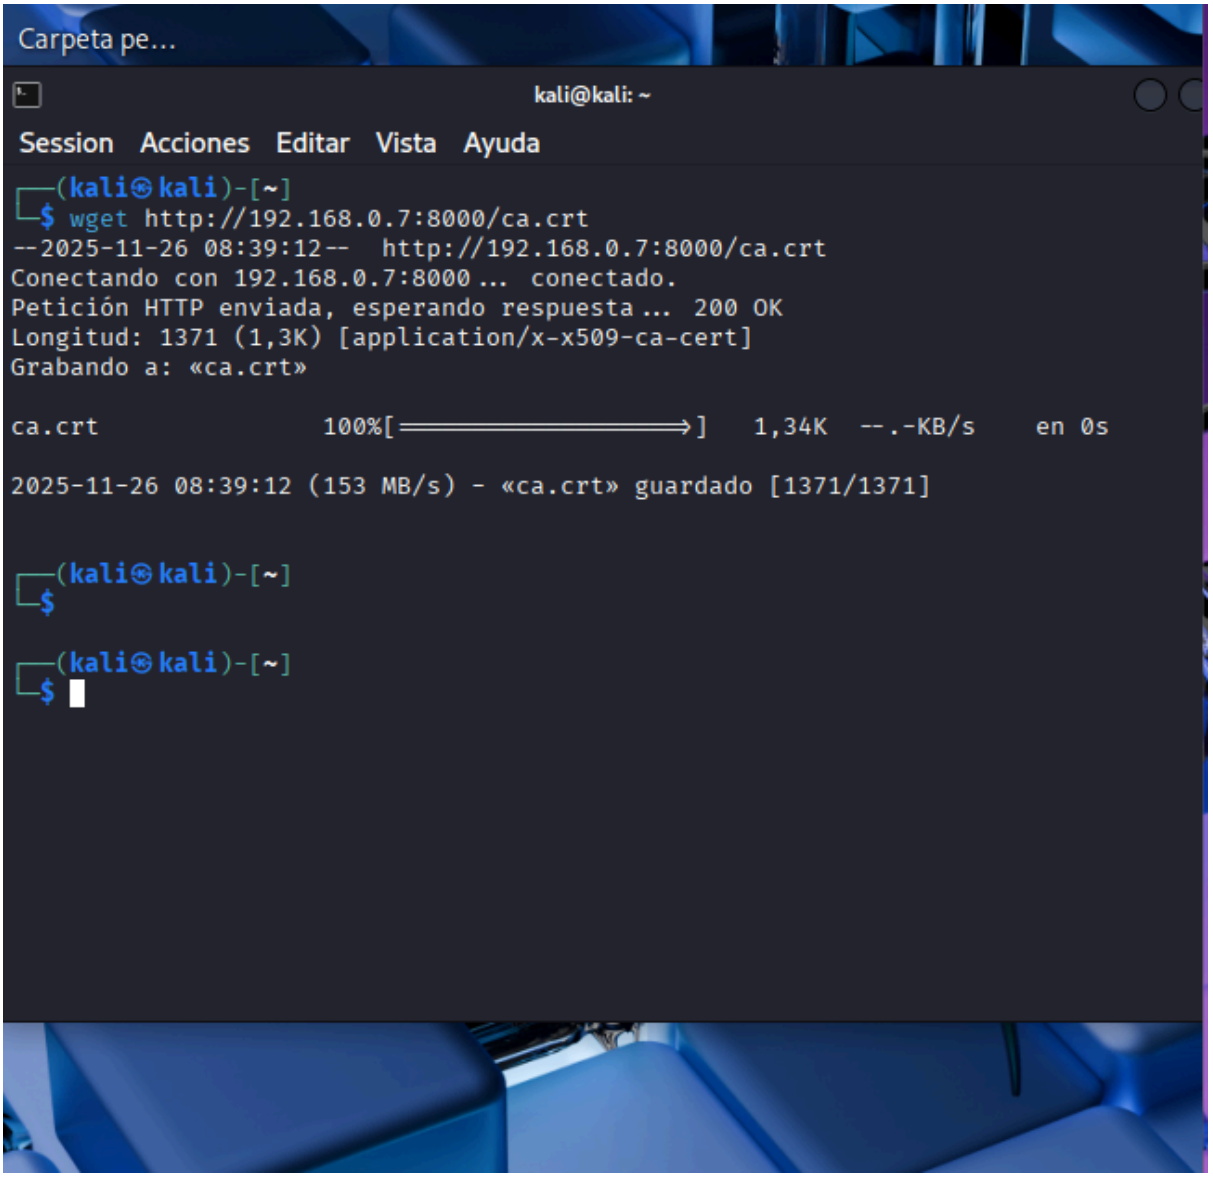

┌──(kali㉿kali)-[~]
└─$ mkdir private
┌──(kali㉿kali)-[~]
└─$ openssl genpkey -algorithm RSA -out private/ca.key

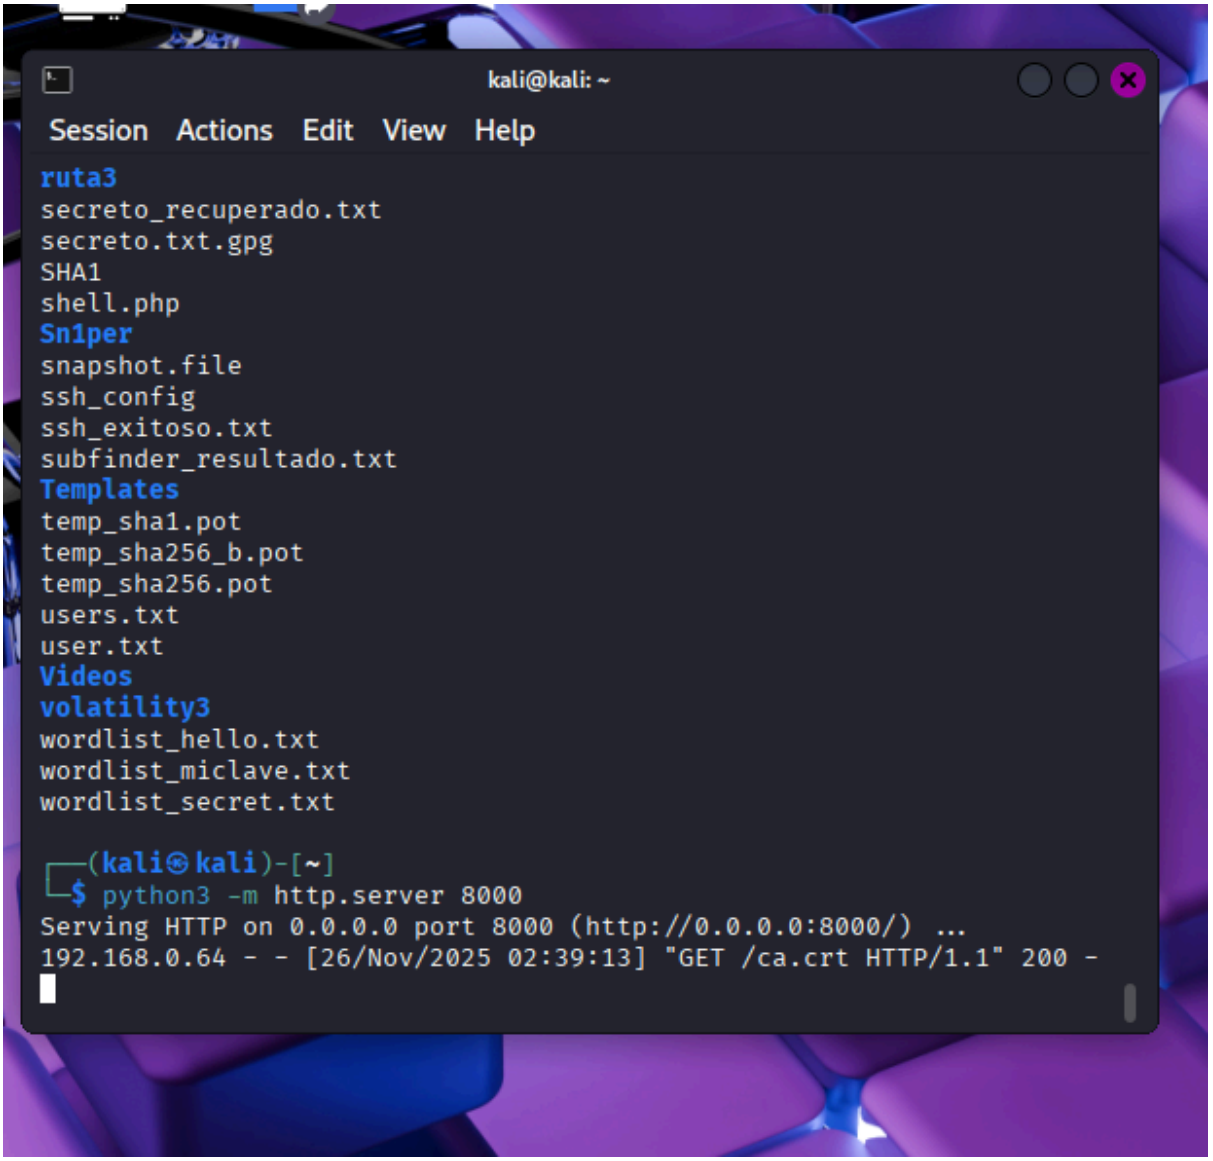

kali@kali: ~
Session Actions Edit View Help
.....+..+.+..+.......+.....+.........+......+...+...+.........+.....
.+...+....+...+..................+..............+....+.....+.....
....+......+....+.....+....+..........+.........+............+..
.....+...+..+....+.....+............+....+......+........+.......+..
...+...+....+.....+...+...++++++
(kali㉿kali)-[~]
$ openssl req -new -x509 -key private/ca.key -out ca.crt
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
Country Name (2 letter code) [AU]:ok
State or Province Name (full name) [Some-State]:ok
Locality Name (eg, city) []:ok
Organization Name (eg, company) [Internet Widgits Pty Ltd]:ok
Organizational Unit Name (eg, section) []:ok
Common Name (e.g. server FQDN or YOUR name) []:dlore
Email Address []:dlore@example.com
(kali㉿kali)-[~]
$

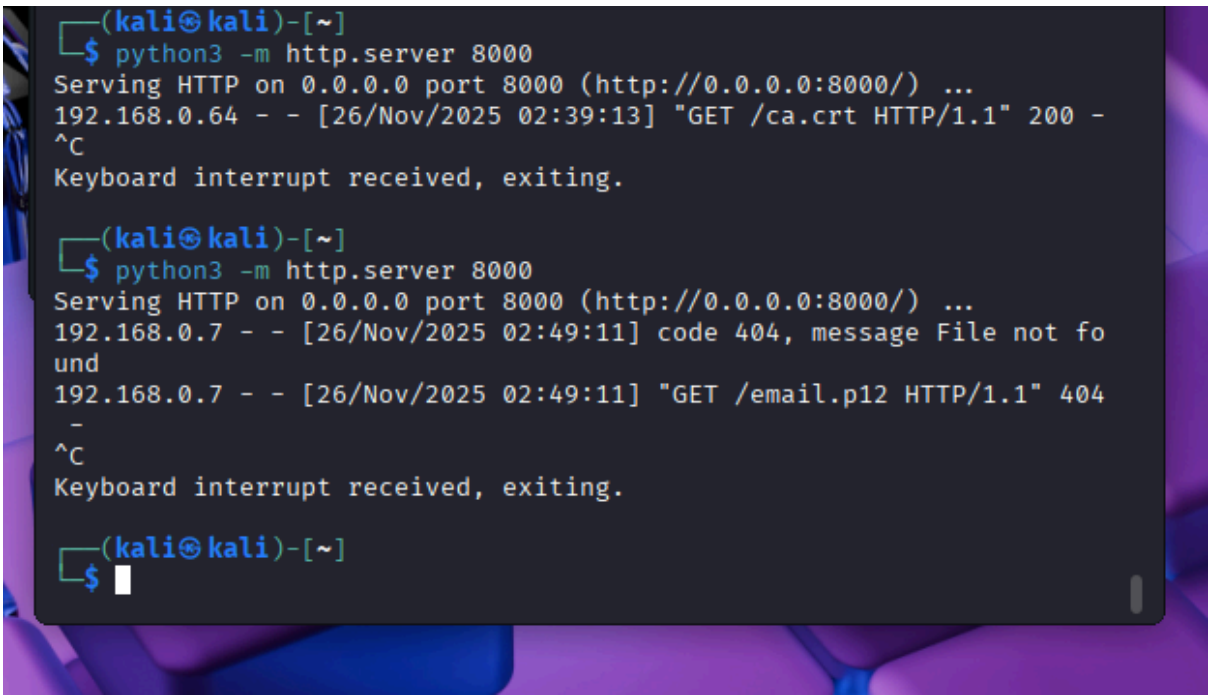

Session Actions Edit View Help
┌──(kali㉿kali)-[~]
└─$ cd ~/smime_ca
ls
cd: no such file or directory: /home/kali/smime_ca
A_priv.pem
A_pub.pem
archivo1.txt
back06.tar
backup01
backup01.tar
backup02
backup02.tar.gz
backup03
backup03.tar.bz2
backup03.tgz2
backup04
backup04.tar
backup04.tar.xz
backup05.tar
backup_home.tar.gz
big.txt
B_pub.pem
ca.crt
captura_http.pcap
captura_lab.pcap
captura.pcap
carpeta1


kali@kali: ~
Session Actions Edit View Help
public.pem
Rapid7Setup-Linux64.bin
reports
resultado.txt
ruta1
ruta2
ruta3
secreto_recuperado.txt
secreto.txt.gpg
SHA1
shell.php
Sn1per
snapshot.file
ssh_config
ssh_exitoso.txt
subfinder_resultado.txt
Templates
temp_sha1.pot
temp_sha256_b.pot
temp_sha256.pot
users.txt
user.txt
Videos
volatility3
wordlist_hello.txt
wordlist_miclave.txt
wordlist_secret.txt


wordlist_secret.txt
(kali㉿kali)-[~]
$ python3 -m http.server 8000
Serving HTTP on 0.0.0.0 port 8000 (http://0.0.0.0:8000/) ...


Carpeta pe...
kali@kali: ~
Session Acciones Editar Vista Ayuda
┌──(kali㉿kali)-[~]
└─$ wget http://192.168.0.7:8000/ca.crt
--2025-11-26 08:39:12-- http://192.168.0.7:8000/ca.crt
Conectando con 192.168.0.7:8000... conectado.
Petición HTTP enviada, esperando respuesta... 200 OK
Longitud: 1371 (1,3K) [application/x-x509-ca-cert]
Grabando a: «ca.crt»
ca.crt 100%[==========>] 1,34K --.-KB/s en 0s
2025-11-26 08:39:12 (153 MB/s) - «ca.crt» guardado [1371/1371]
┌──(kali㉿kali)-[~]
└─$
┌──(kali㉿kali)-[~]
└─$


kali@kali: ~
Session Actions Edit View Help
ruta3
secreto_recuperado.txt
secreto.txt.gpg
SHA1
shell.php
Sn1per
snapshot.file
ssh_config
ssh_exitoso.txt
subfinder_resultado.txt
Templates
temp_sha1.pot
temp_sha256_b.pot
temp_sha256.pot
users.txt
user.txt
Videos
volatility3
wordlist_hello.txt
wordlist_miclave.txt
wordlist_secret.txt
(kali㉿kali)-[~]
$ python3 -m http.server 8000
Serving HTTP on 0.0.0.0 port 8000 (http://0.0.0.0:8000/) ...
192.168.0.64 - - [26/Nov/2025 02:39:13] "GET /ca.crt HTTP/1.1" 200 -


┌──(kali㉿kali)-[~]
└─$ python3 -m http.server 8000
Serving HTTP on 0.0.0.0 port 8000 (http://0.0.0.0:8000/) ...
192.168.0.64 - - [26/Nov/2025 02:39:13] "GET /ca.crt HTTP/1.1" 200 -
^C
Keyboard interrupt received, exiting.
┌──(kali㉿kali)-[~]
└─$ python3 -m http.server 8000
Serving HTTP on 0.0.0.0 port 8000 (http://0.0.0.0:8000/) ...
192.168.0.7 - - [26/Nov/2025 02:49:11] code 404, message File not fo
und
192.168.0.7 - - [26/Nov/2025 02:49:11] "GET /email.p12 HTTP/1.1" 404
-
^C
Keyboard interrupt received, exiting.
┌──(kali㉿kali)-[~]
└─$