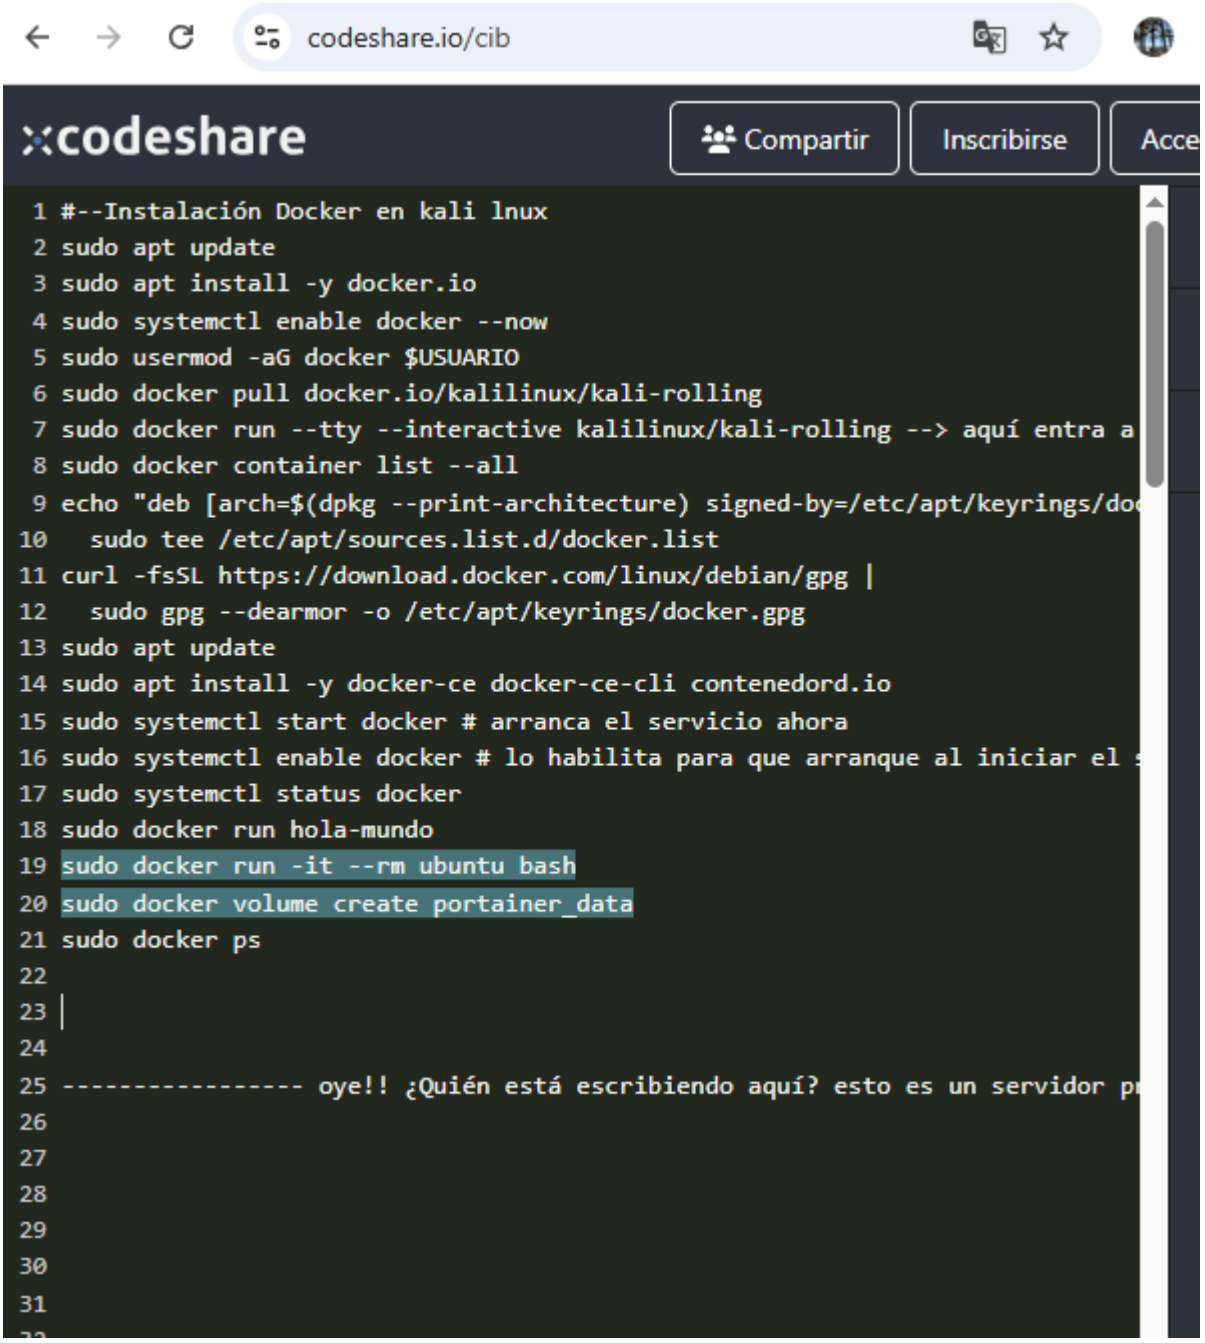


1️⃣ Actualiza los repositorios

sudo apt update

2️⃣ Instala Docker desde Kali

sudo apt install -y docker.io

Esto instala tanto el **daemon** como el **cliente**, y es suficiente para correr contenedores como Postgres.

3️⃣ Arranca el servicio de Docker

sudo systemctl start docker

sudo systemctl enable docker

4️⃣ (Opcional) Ejecutar Docker sin sudo

sudo usermod -aG docker usuario

Luego cierra sesión y vuelve a entrar.

5️⃣ Verifica que Docker funciona

docker --version

docker info

Si ves información del daemon, ya puedes correr tu contenedor de Postgres con:

docker run --name mi_postgres -e POSTGRES_USER=usuario -e POSTGRES_PASSWORD=clave -e POSTGRES_DB=midb -p 5432:5432 -d postgres

Por ejemplo, tu contenedor de PostgreSQL se puede levantar así:

docker run --name mi_postgres \

-e POSTGRES_USER=usuario \

-e POSTGRES_PASSWORD=clave \

-e POSTGRES_DB=midb \

-p 5432:5432 \

-d *postgres*

Comprobaciones útiles después de arrancar el contenedor

1. **Ver contenedores en ejecución:**

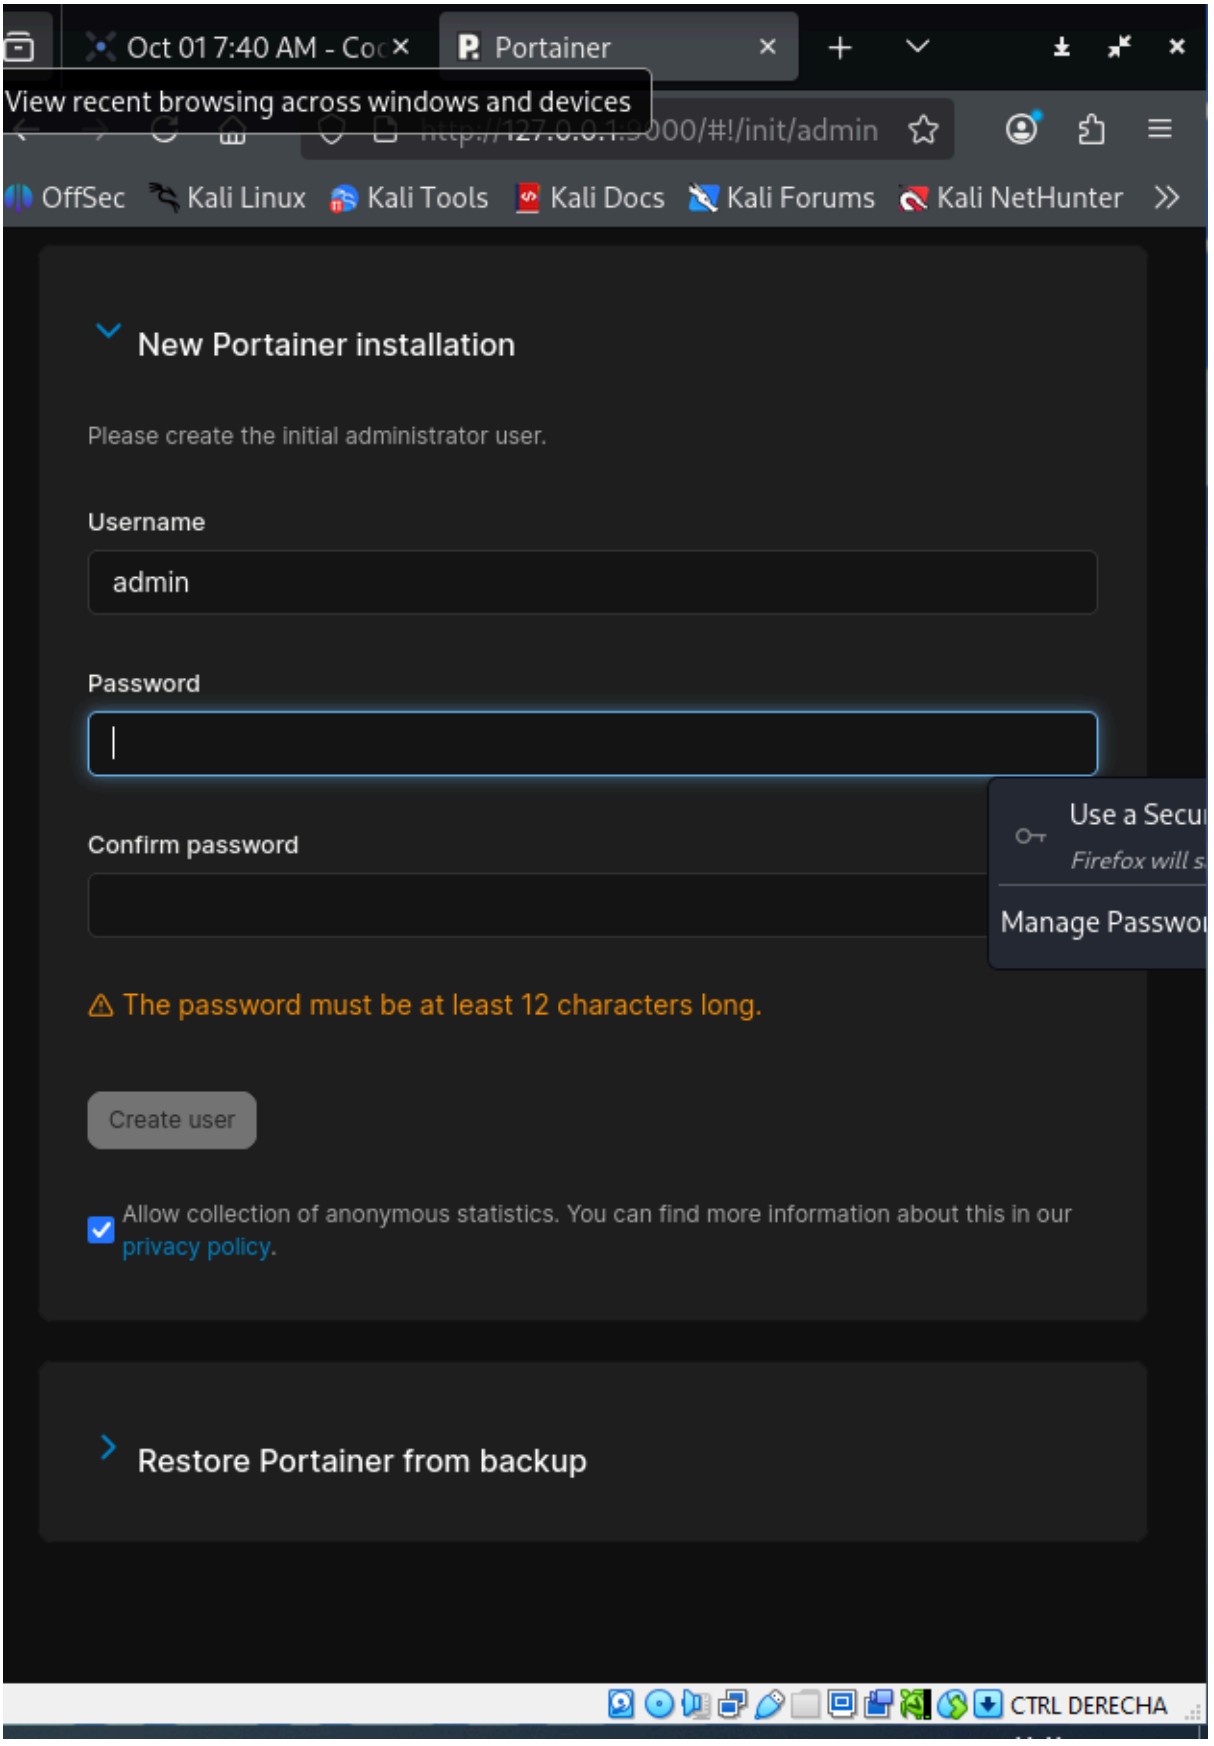
   docker ps

2. **Ver todos los contenedores (incluso detenidos):**

   docker ps -a

3. **Conectarse a la base de datos Postgres dentro del contenedor:**

   docker exec -it mi_postgres psql -U usuario -d midb


Oct 01 7:40 AM - Co
Portainer
View recent browsing across windows and devices
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
New Portainer installation
Please create the initial administrator user.
Username
admin
Password
Confirm password
Use a Secu
Firefox will s
Manage Passwo
The password must be at least 12 characters long.
Create user
Allow collection of anonymous statistics. You can find more information about this in our privacy policy.
Restore Portainer from backup
CTRL DERECHA



pasos

#--Instalación Docker en kali lnux

sudo apt update

sudo apt install -y docker.io

sudo systemctl enable docker --now

sudo usermod -aG docker $USER

sudo docker pull docker.io/kalilinux/kali-rolling

sudo docker run --tty --interactive kalilinux/kali-rolling --> aqui entra a root y le sales --> Exit

sudo docker container list --all

```
echo "deb [arch=$(dpkg --print-architecture) signed-by=/etc/apt/keyrings/docker.gpg] https://download.docker.com/linux/debian bookworm stable" | \
  sudo tee /etc/apt/sources.list.d/docker.list
curl -fsSL https://download.docker.com/linux/debian/gpg |
  sudo gpg --dearmor -o /etc/apt/keyrings/docker.gpg
sudo apt update
sudo apt install -y docker-ce docker-ce-cli containerd.io
sudo systemctl start docker        # arranca el servicio ahora
sudo systemctl enable docker       # lo habilita para que arranque al iniciar el sistema
sudo systemctl status docker
sudo docker run hello-world
sudo docker run -it --rm ubuntu bash
sudo docker volume create portainer_data
sudo docker ps

sudo docker logs portainer
sudo ufw allow 9000/tcp
sudo netstat -tulnp | grep 9000
sudo docker ps -a
sudo docker start portainer --> si da error, copia lo siguienete:
# 1. Borrar el contenedor fallido
sudo docker rm portainer
Crear el volumen (si no existe)
sudo docker volume create portainer_data

# 3. Ejecutar Portainer solo con el puerto 9000
sudo docker run -d \
```

```
  -p 9000:9000 \
  --name portainer \
  --restart=always \
  -v /var/run/docker.sock:/var/run/docker.sock \
  -v portainer_data:/data \
  portainer/portainer-ce:latest
```

portainer

portainer_data

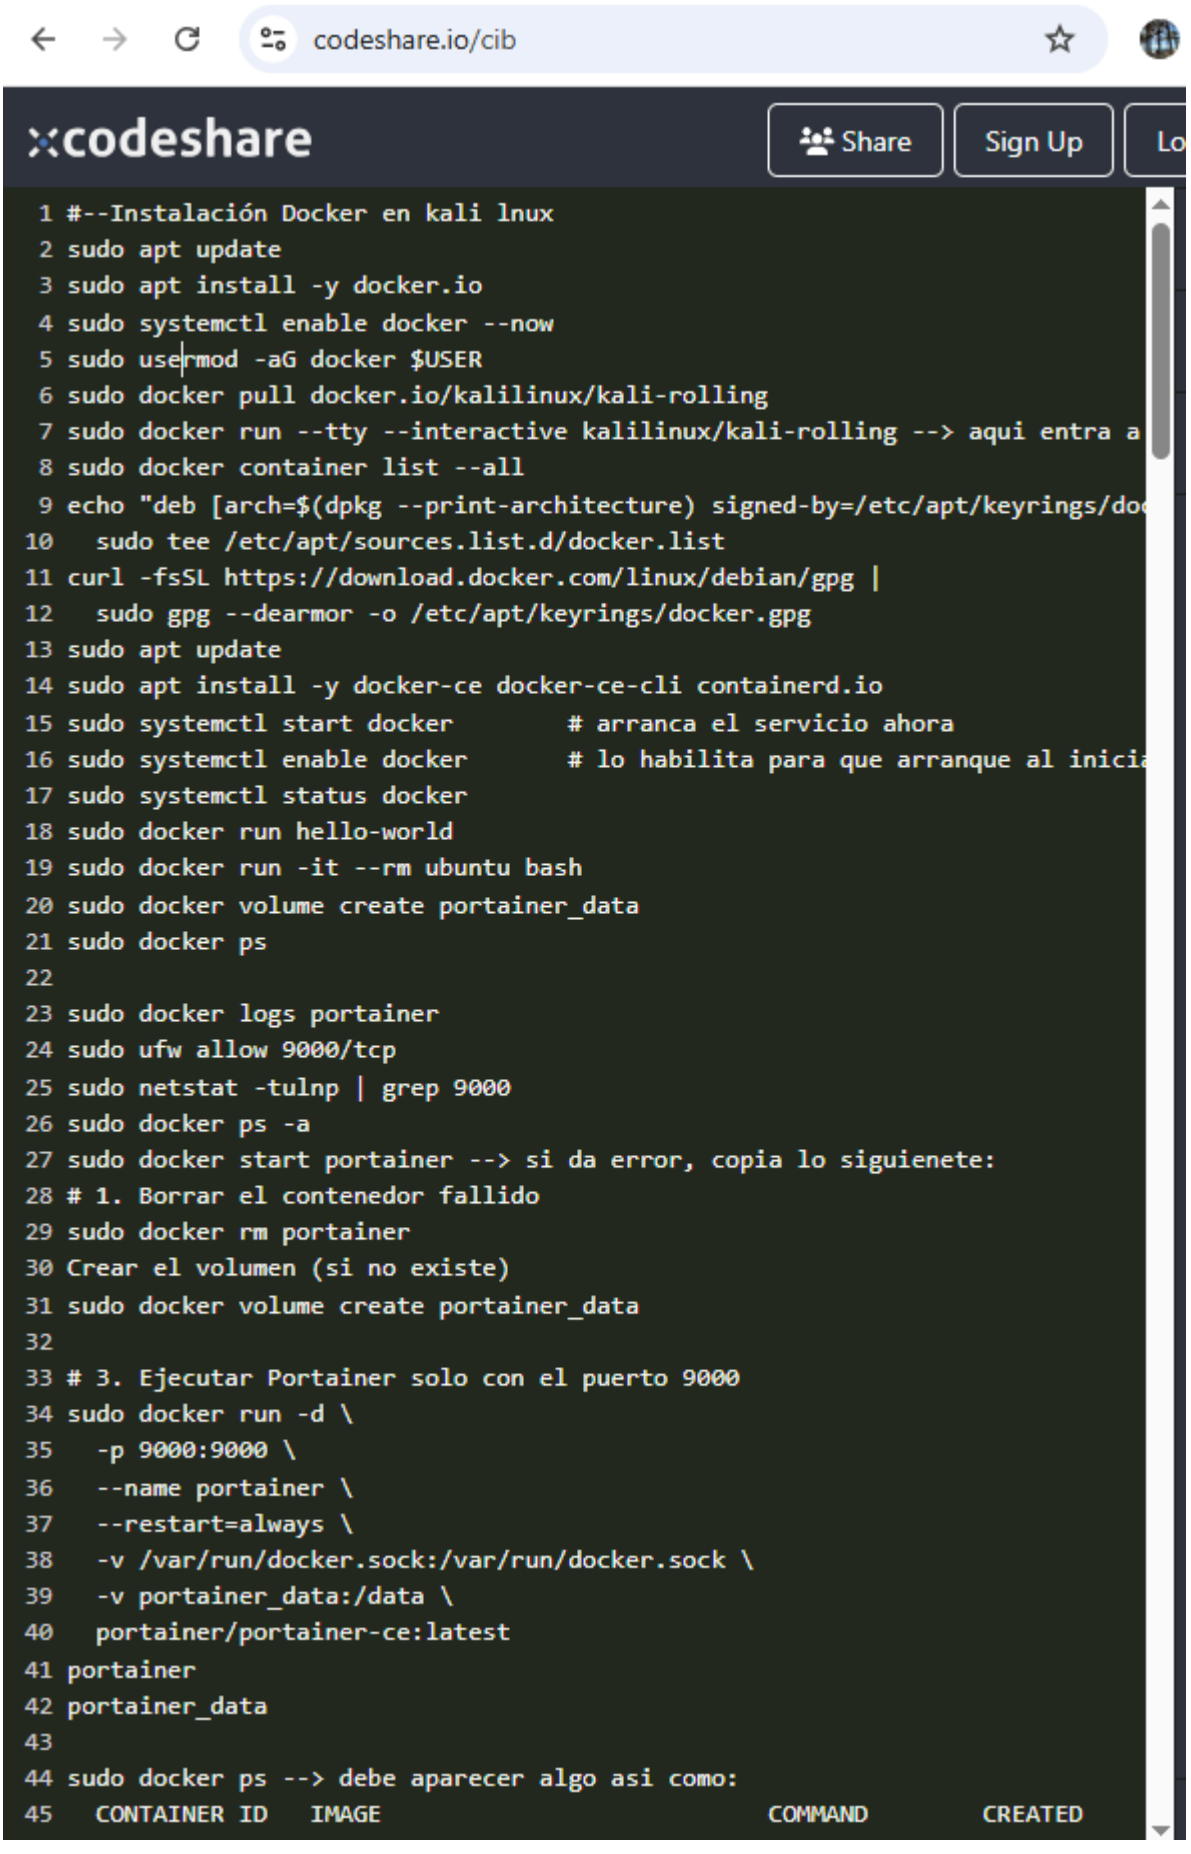
sudo docker ps --> debe aparecer algo asi como:

```
CONTAINER ID   IMAGE                           COMMAND        CREATED
STATUS          PORTS                                                 NAMES
```

```
b1af799932bd   portainer/portainer-ce:latest   "/portainer"   11 seconds ago   Up 10
seconds   8000/tcp, 9443/tcp, 0.0.0.0:9000->9000/tcp, [::]:9000->9000/tcp   portainer
```

Abre el navegador y pega:

http://127.0.0.1:9000


codeshare.io/cib
codeshare
Share
Sign Up
Lo
#--Instalación Docker en kali lnux
sudo apt update
sudo apt install -y docker.io
sudo systemctl enable docker --now
sudo usermod -aG docker $USER
sudo docker pull docker.io/kalilinux/kali-rolling
sudo docker run --tty --interactive kalilinux/kali-rolling --> aqui entra a
sudo docker container list --all
echo "deb [arch=$(dpkg --print-architecture) signed-by=/etc/apt/keyrings/doc
sudo tee /etc/apt/sources.list.d/docker.list
curl -fsSL https://download.docker.com/linux/debian/gpg |
sudo gpg --dearmor -o /etc/apt/keyrings/docker.gpg
sudo apt update
sudo apt install -y docker-ce docker-ce-cli containerd.io
sudo systemctl start docker # arranca el servicio ahora
sudo systemctl enable docker # lo habilita para que arranque al inicia
sudo systemctl status docker
sudo docker run hello-world
sudo docker run -it --rm ubuntu bash
sudo docker volume create portainer_data
sudo docker ps
sudo docker logs portainer
sudo ufw allow 9000/tcp
sudo netstat -tulnp | grep 9000
sudo docker ps -a
sudo docker start portainer --> si da error, copia lo siguienete:
1. Borrar el contenedor fallido
sudo docker rm portainer
Crear el volumen (si no existe)
sudo docker volume create portainer_data
3. Ejecutar Portainer solo con el puerto 9000
sudo docker run -d \
-p 9000:9000 \
--name portainer \
--restart=always \
-v /var/run/docker.sock:/var/run/docker.sock \
-v portainer_data:/data \
portainer/portainer-ce:latest
portainer
portainer_data
sudo docker ps --> debe aparecer algo asi como:
CONTAINER ID IMAGE COMMAND CREATED