OPCIÓN 1: Instalar Autopsy en Ubuntu o Debian (recomendado)

🔧 Requisitos previos

Instalar Java, SleuthKit y dependencias necesarias:

```
sudo apt update

sudo apt install sleuthkit openjdk-11-jdk unzip wget -y
```

```
┌──(kali㉿kali)-[~]
└─$ sudo apt install sleuthkit openjdk-11-jdk unzip wget -y
sleuthkit is already the newest version (4.12.1+dfsg-0kali6).
unzip is already the newest version (6.0-29).
wget is already the newest version (1.25.0-2).
The following package was automatically installed and is no longer r
equired:
  python3-proton-vpn-lib
Use 'sudo apt autoremove' to remove it.

Installing:
  openjdk-11-jdk

Installing dependencies:
  openjdk-11-jdk-headless  openjdk-11-jre-headless
  openjdk-11-jre

Suggested packages:
  openjdk-11-demo    fonts-ipafont-gothic  | fonts-wqy-zenhei
  openjdk-11-source  fonts-ipafont-mincho  fonts-indic
  visualvm           fonts-wqy-microhei
```

📥 1. Descargar Autopsy

```
cd /opt

sudo wget
https://github.com/sleuthkit/autopsy/releases/download/autopsy-4.21.0/autopsy
-4.21.0.zip

sudo unzip autopsy-4.21.0.zip

sudo chmod -R +x autopsy-4.21.0
```

📌 Puedes consultar la [última versión en GitHub]

```
┌──(kali㉿kali)-[~]
└─$ cd /opt

┌──(kali㉿kali)-[/opt]
└─$ sudo wget https://github.com/sleuthkit/autopsy/releases/download
/autopsy-4.21.0/autopsy-4.21.0.zip
--2025-11-05 02:39:27--  https://github.com/sleuthkit/autopsy/releas
es/download/autopsy-4.21.0/autopsy-4.21.0.zip
Resolving github.com (github.com)... 140.82.121.4
Connecting to github.com (github.com)|140.82.121.4|:443... connected
.
HTTP request sent, awaiting response... 302 Found
Location: https://release-assets.githubusercontent.com/github-produc
tion-release-asset/2516243/ddd7f2af-f742-4a14-b9c6-0d59bd9432e5?sp=r
&sv=2018-11-09&sr=b&spr=https&se=2025-11-05T08%3A27%3A07Z&rscd=attac
hment%3B+filename%3Dautopsy-4.21.0.zip&rsct=application%2Foctet-stre
am&skoid=96c2d410-5711-43a1-aedd-ab1947aa7ab0&sktid=398a6654-997b-47
e9-b12b-9515b896b4de&skt=2025-11-05T07%3A27%3A05Z&ske=2025-11-05T08%
3A27%3A07Z&sks=b&skv=2018-11-09&sig=%2B2add0ny8FMO2uSXoDe%2F9osVnuFi
TOYEKmZ3ivtrGng%3D&jwt=eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJpc3Mi
OiJnaXRodWIuY29tIiwiYXVkIjoicmVsZWFzZS1hc3NldHMuZ2l0aHVidXNlcmNvbnRl
bnQuY29tIiwia2V5Ijoia2V5MSIsImV4cCI6MTc2MjMzMTk1MiwibmJmIjoxNzYyMzI4
MzUyLCJwYXRoIjoicmVsZWFzZWFzc2V0cHJvZHVjdGlvbi5ibG9iLmNvcmUud2luZG93
cy5uZXQifQ.O5iDMIUdJqZ2Tm-HbLhMdHRLscVPI7lsdlRIQjMcIug&response-cont
ent-disposition=attachment%3B%20filename%3Dautopsy-4.21.0.zip&respon
se-content-type=application%2Foctet-stream [following]
```

```
dows.xml
  inflating: autopsy-4.21.0/unix_setup.

┌──(kali㉿kali)-[/opt]
└─$ sudo chmod -R +x autopsy-4.21.0
```

```
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-fil
esystems-nb.xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-fil
esystems.xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-io.
xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-loa
ders.xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-mod
ules.xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-nod
es.xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-opt
ions.xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-tex
t.xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-uti
l-lookup.xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-uti
l-ui-svg.xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-uti
l-ui.xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-uti
l.xml
  inflating: autopsy-4.21.0/platform/update_tracking/org-openide-win
dows.xml
  inflating: autopsy-4.21.0/unix_setup.sh
```

▶️ 2. Ejecutar Autopsy

```
cd /opt/autopsy-4.21.0/bin


./autopsy
```

🔗 Se abrirá un servidor local y te mostrará una URL como:

Starting Autopsy...

Open your browser to http://localhost:9999/autopsy

📎 Abre esa URL en tu navegador y ¡listo!

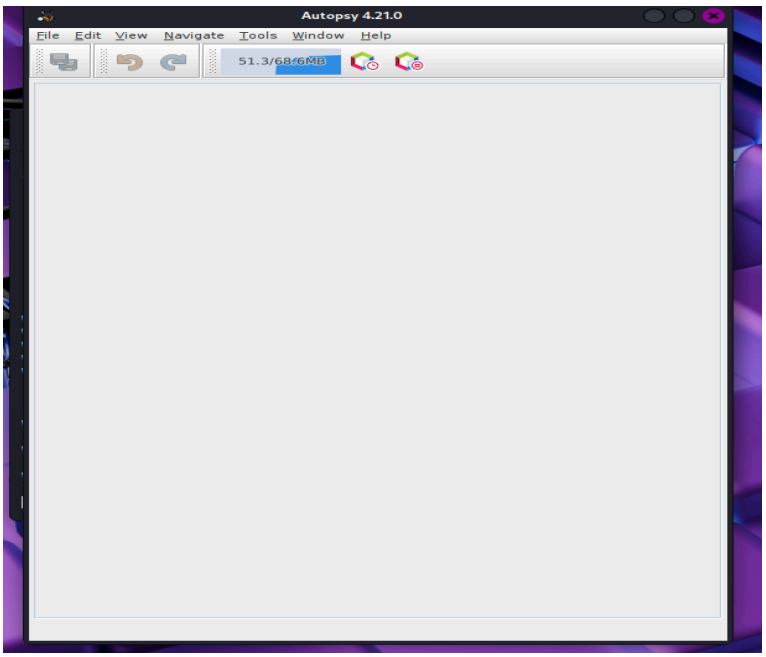

WARNING: Your browser currently has Java Script enabled.

You do not need Java Script to use Autopsy and it is recommended that it be turned off for security reasons.

Autopsy Forensic Browser 2.24



http://www.sleuthkit.org/autopsy/

OPEN CASE | NEW CASE | HELP

🖥️ ¿Quieres un acceso directo en el escritorio?

Crea un lanzador .desktop:

```
nano ~/.local/share/applications/autopsy.desktop
```

Y pega:

```
[Desktop Entry]

Name=Autopsy

Exec=/opt/autopsy-4.21.0/bin/autopsy


Icon=utilities-terminal


Terminal=true

Type=Application

Categories=Utility;

Guarda con CTRL+O y sal con CTRL+X.
```

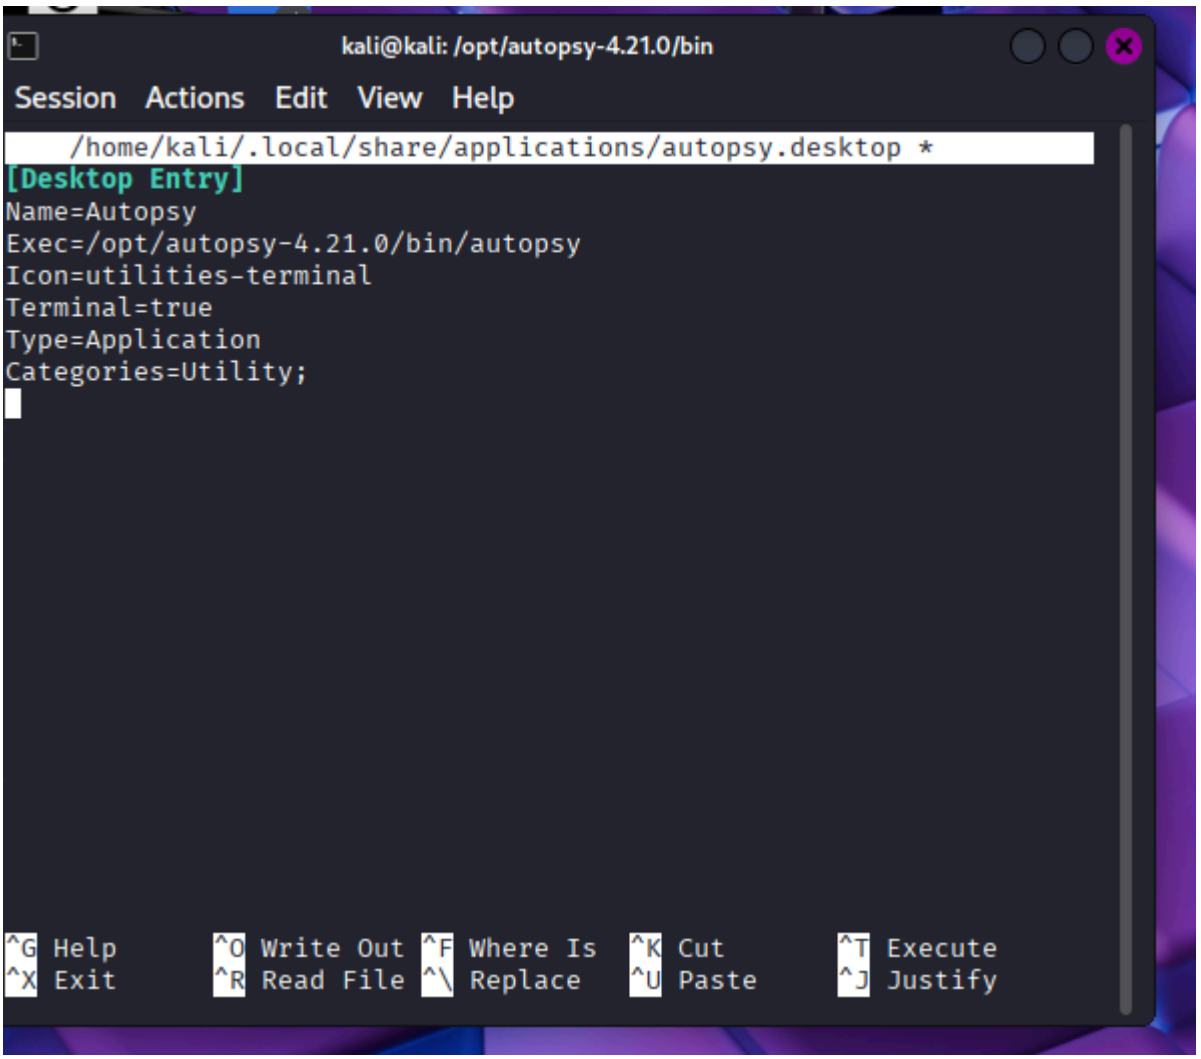

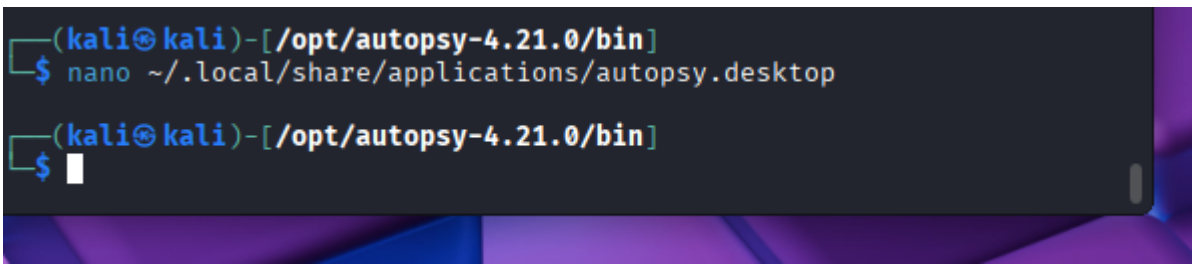

✅ OPCIÓN 2 (alternativa): Ejecutar con Docker

Si no quieres instalar nada en el sistema:

```
docker pull rmoriz/autopsy


docker run -it -p 9999:9999 rmoriz/autopsy

Luego abre en navegador: http://localhost:9999/autopsy
```

UNA VEZ CREADO EL CASO

EL SIGUIENTE PASO

Rellenamos con estos datos

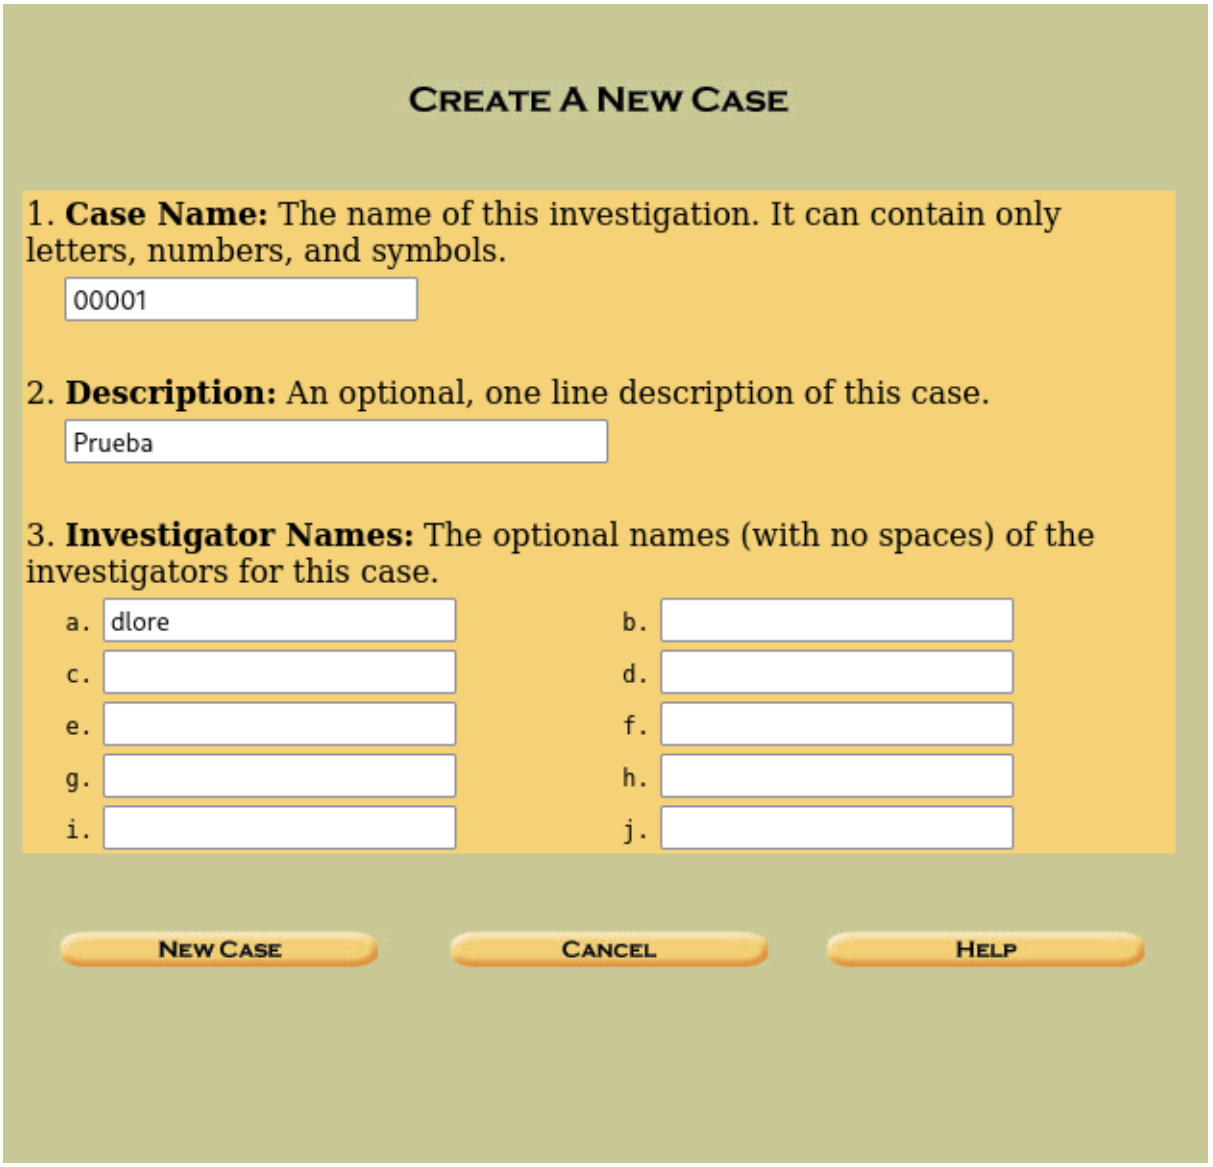

Case: 00001

ADD A NEW HOST

1. **Host Name:** The name of the computer being investigated. It can contain only letters, numbers, and symbols.

host1

2. **Description:** An optional one-line description or note about this computer.

3. **Time zone:** An optional timezone value (i.e. EST5EDT). If not given, it defaults to the local setting. A list of time zones can be found in the help files.

4. **Timeskew Adjustment:** An optional value to describe how many seconds this computer's clock was out of sync. For example, if the computer was 10 seconds fast, then enter -10 to compensate.

0

5. **Path of Alert Hash Database:** An optional hash database of known bad files.

6. **Path of Ignore Hash Database:** An optional hash database of known good files.

ADD HOST CANCEL HELP

An investigator must be selected

Select one of the following: dlore

OK

Case: 00001
Host: host1

ADD A NEW IMAGE

1. **Location**
Enter the full path (starting with /) to the image f
If the image is split (either raw or EnCase), then
extension.

/home/kali/lab.img

2. **Type**
Please select if this image file is for a disk or a si

(•) Disk ( ) Partition

3. **Import Method**
To analyze the image file, it must be located in th
can be imported from its current location using a
copying it, or by moving it. Note that if a system
the move, then the image could become corrupt.

(•) Symlink ( ) Copy

NEXT

CANCEL

Warning: Autopsy could not determine the volume system type for the image (i.e. the type of partition table).
Please select the type from the list below or reclassify the image as a volume image instead of as a disk image.

Disk Image ○ Volume Image ◉

Volume System Type (disk image only): dos

OK

Image File Details

Local Name: images/lab.img

Data Integrity: An MD5 hash can be used to verify the integrity of the image. (With split images, this hash is for the full image file)

- ◉ Ignore the hash value for this image.
- ○ Calculate the hash value for this image.
- ○ Add the following MD5 hash value for this image:

☐ Verify hash after importing?

File System Details

Analysis of the image file shows the following partitions:

Partition 1 (Type: ext4)

Mount Point: /1/ File System Type: ext

ADD CANCEL HELP

Testing partitions
Linking image(s) into evidence locker
Image file added with ID `img1`

Volume image (0 to 0 - ext - /1/) added with ID `vol1`

OK ADD IMAGE

Case: 00001
Host: host1

Select a volume to analyze or add a new image file.

CASE GALLERY HOST GALLERY HOST MANAGER

	mount	name	fs type	
◉	/1/	lab.img-0-0	ext	details

ANALYZE ADD IMAGE FILE CLOSE HOST
HELP

FILE ACTIVITY TIME LINES IMAGE INTEGRITY HASH DATABASES
VIEW NOTES EVENT SEQUENCER

Directory Seek

Enter the name of a directory that you want to view.
/1/

VIEW

File Name Search

Enter a Perl regular expression for the file names you want to find.

SEARCH

ALL DELETED FILES

EXPAND DIRECTORIES

Current Directory: /1/


ADD NOTE | GENERATE MD5 LIST OF FILES


DEL	Type dir / in	NAME	WRITTEN	ACCESSED
Error Parsing File (Invalid Characters?): V/V 25585: $OrphanFiles 0000-00-00 00:00:00 (UTC) 0000-00-00 00:00:00 (UTC) 0000-00-00 00:00:00 (UTC) 0 0 0				
	d / d	../	2025-11-05 03:02:56 (EST)	2025-11-0 03:02:56 (
	d / d	./	2025-11-05 03:02:56 (EST)	2025-11-0 03:02:56 (
	d / d	lost+found/	2025-11-05 03:02:56 (EST)	2025-11-0 03:02:56 (

File Browsing Mode

In this mode, you can view file and directory contents.

File contents will be shown in this window.
More file details can be found using the Metadata link at the end of the list (on the right).
You can also sort the files using the column headers

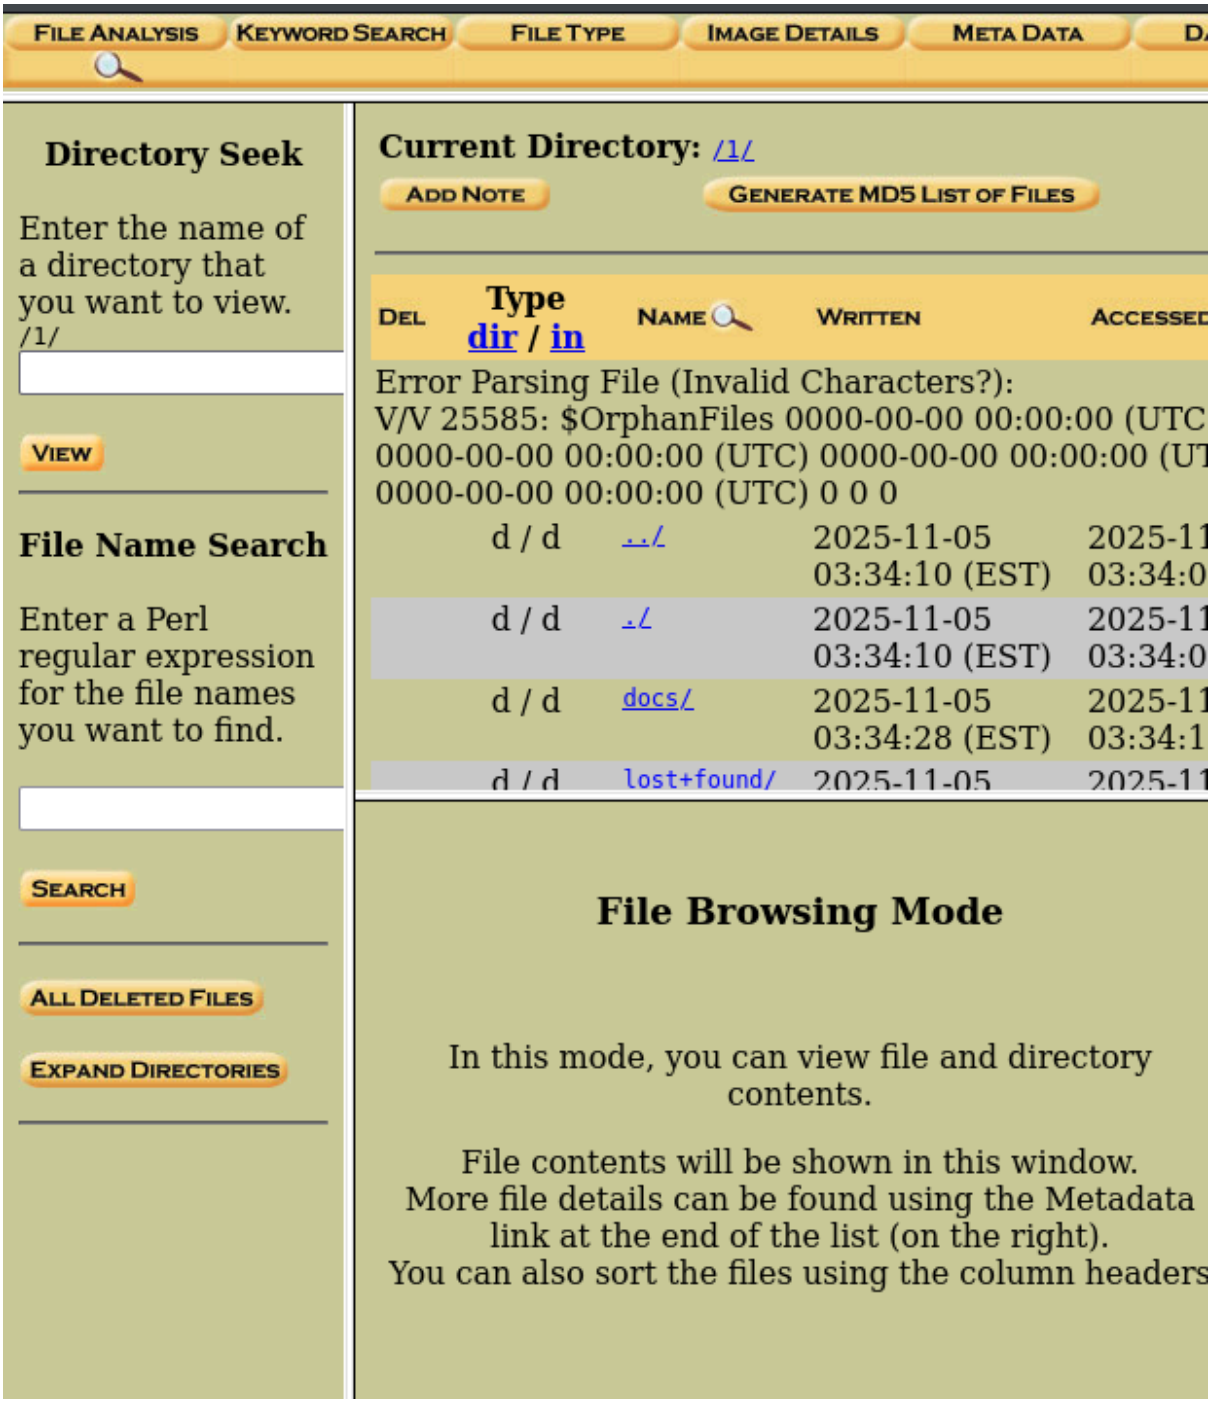
File Analysis
Keyword Search
File Type
Image Details
Meta Data
Directory Seek
Enter the name of a directory that you want to view.
/1/
View
File Name Search
Enter a Perl regular expression for the file names you want to find.
Search
All Deleted Files
Expand Directories
Current Directory: /1/
Add Note
Generate MD5 List of Files
Del
Type dir / in
Name
Written
Accessed
Error Parsing File (Invalid Characters?):
V/V 25585: $OrphanFiles 0000-00-00 00:00:00 (UTC
0000-00-00 00:00:00 (UTC) 0000-00-00 00:00:00 (UT
0000-00-00 00:00:00 (UTC) 0 0 0
d / d ../ 2025-11-05 03:34:10 (EST) 2025-11 03:34:0
d / d ./ 2025-11-05 03:34:10 (EST) 2025-11 03:34:0
d / d docs/ 2025-11-05 03:34:28 (EST) 2025-11 03:34:1
d / d lost+found/ 2025-11-05 2025-11
File Browsing Mode
In this mode, you can view file and directory contents.
File contents will be shown in this window.
More file details can be found using the Metadata link at the end of the list (on the right).
You can also sort the files using the column headers

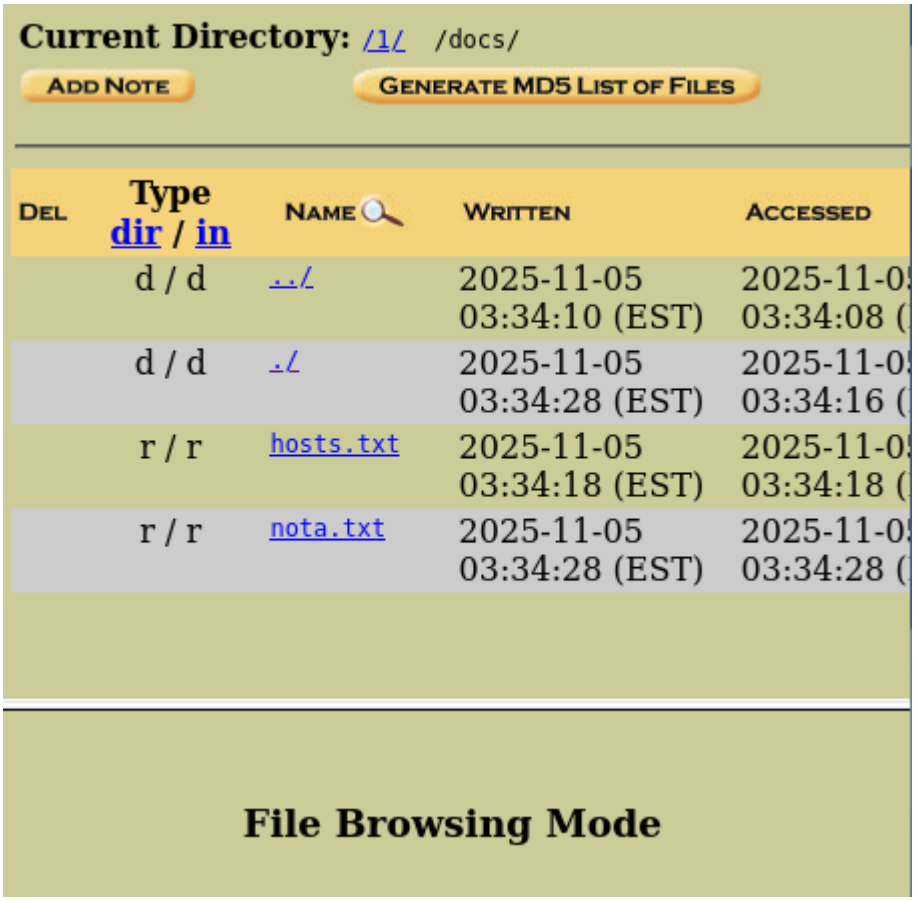
Current Directory: /1/ /docs/
ADD NOTE
GENERATE MD5 LIST OF FILES
DEL
Type
dir / in
NAME
WRITTEN
ACCESSED
d / d
../
2025-11-05 03:34:10 (EST)
2025-11-05 03:34:08 (
d / d
./
2025-11-05 03:34:28 (EST)
2025-11-05 03:34:16 (
r / r
hosts.txt
2025-11-05 03:34:18 (EST)
2025-11-05 03:34:18 (
r / r
nota.txt
2025-11-05 03:34:28 (EST)
2025-11-05 03:34:28 (
File Browsing Mode

Directory Seek

Enter the name of a directory that you want to view.
/1/

VIEW

File Name Search

Enter a Perl regular expression for the file names you want to find.

SEARCH

ALL DELETED FILES

EXPAND DIRECTORIES

Current Directory: /1/ /docs/


ADD NOTE GENERATE MD5 LIST OF FILES

DEL	Type dir / in	NAME	WRITTEN	ACCESSED
	d / d	../	2025-11-05 03:34:10 (EST)	2025-11-0 03:34:08 (
	d / d	./	2025-11-05 03:34:28 (EST)	2025-11-0 03:34:16 (
	r / r	hosts.txt	2025-11-05 03:34:18 (EST)	2025-11-0 03:34:18 (
	r / r	nota.txt	2025-11-05 03:34:28 (EST)	2025-11-0 03:34:28 (

ASCII (display - * Hex (display - * ASCII Strings (display - * Export * Add Note

Contents Of File: /1/docs/nota.txt

nota secreta

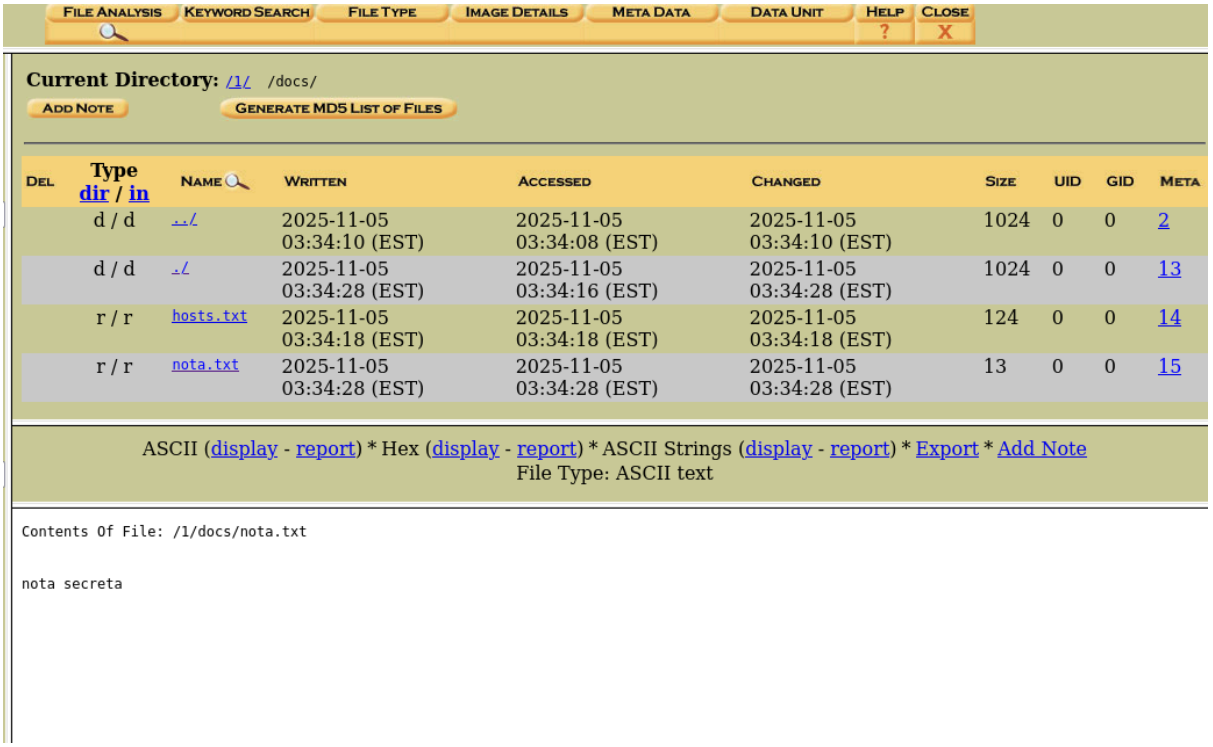

Relleno rápido recomendado (para empezar ya)

- **Host Name:** host1
- **Description:** práctica de laboratorio
- **Time zone:** *(vacío)* o UTC
- **Timeskew:** 0
- **Alert Hash DB:** *(vacío)*
- **Ignore Hash DB:** *(vacío)*

Luego **Create Host** → y en el siguiente paso añades la **imagen forense** (Add Image), eliges el **tipo** (raw/dd/E01), marcas **verify** si quieres, y continúas con el análisis (File Analysis, Keyword Search, Timeline, etc.).

Ahora añadimos una imagen

Puedes descargar imágenes de disco o crear una, por ejemplo:

```
# 1) Crear un "disco" vacío de 100 MB

dd if=/dev/zero of=lab.img bs=1M count=100



# 2) Formatearlo (ext4; vale cualquier FS que quieras probar)

mkfs.ext4 lab.img
```

```
# 3) Montarlo en loop y meter "evidencias"

sudo mkdir -p /mnt/labimg

sudo mount -o loop lab.img /mnt/labimg



sudo mkdir -p /mnt/labimg/docs

sudo cp /etc/hosts /mnt/labimg/docs/hosts.txt

echo "nota secreta" | sudo tee /mnt/labimg/docs/nota.txt >/dev/null



# 4) Desmontar

sudo umount /mnt/labimg



# (Opcional) Calcular hashes para la cadena de custodia

md5sum lab.img

sha1sum lab.img
```

y ahora

Haz clic en el botón **“Add Image File”**
(justo en el centro de la pantalla que muestras).

En la nueva ventana que aparece:

- **Image Type:** selecciona
  👉 Single, raw (dd)
  (porque creaste una imagen con dd, que es formato raw)
- **Image File Path:**
  pulsa el botón **Browse** y selecciona tu archivo lab.img.
  📁 Si lo hiciste en tu carpeta personal, estará en:
- /home/tu_usuario/lab.img

(ajusta el nombre del usuario según corresponda).

Pulsamos en volumen image

Pulsa en add

Elegimos el tipo de análisis

SOLUCIONES SI DA PROBLEMAS EL LOG

1) Diagnóstico rápido (ejecuta en la misma terminal donde lanzaste Autopsy)

¿Dónde estás ejecutando Autopsy?

pwd

¿qué usuario eres?

whoami

listar permisos del directorio donde está el binario/los scripts

ls -ld /usr/share/autopsy

ls -l /usr/share/autopsy/autopsy.log 2>/dev/null

comprobar permisos del Evidence Locker (ya lo muestra el arranque)

ls -ld /var/lib/autopsy

Si ls -l /usr/share/autopsy/autopsy.log muestra “No such file or directory” o el directorio /usr/share/autopsy no es escribible por tu usuario, ahí está el problema.

---

2) Solución 1 — Crear el fichero de log y dar permisos (rápido y seguro)


Si quieres que el log exista en /usr/share/autopsy (donde parece buscarlo):

sudo touch /usr/share/autopsy/autopsy.log

sudo chown $(whoami):$(whoami) /usr/share/autopsy/autopsy.log

sudo chmod 644 /usr/share/autopsy/autopsy.log

Después reinicia Autopsy (o vuelve a lanzar el comando que usaste). Si el proceso corre como root, podrías en su lugar asignarlo al usuario que ejecute Autopsy.

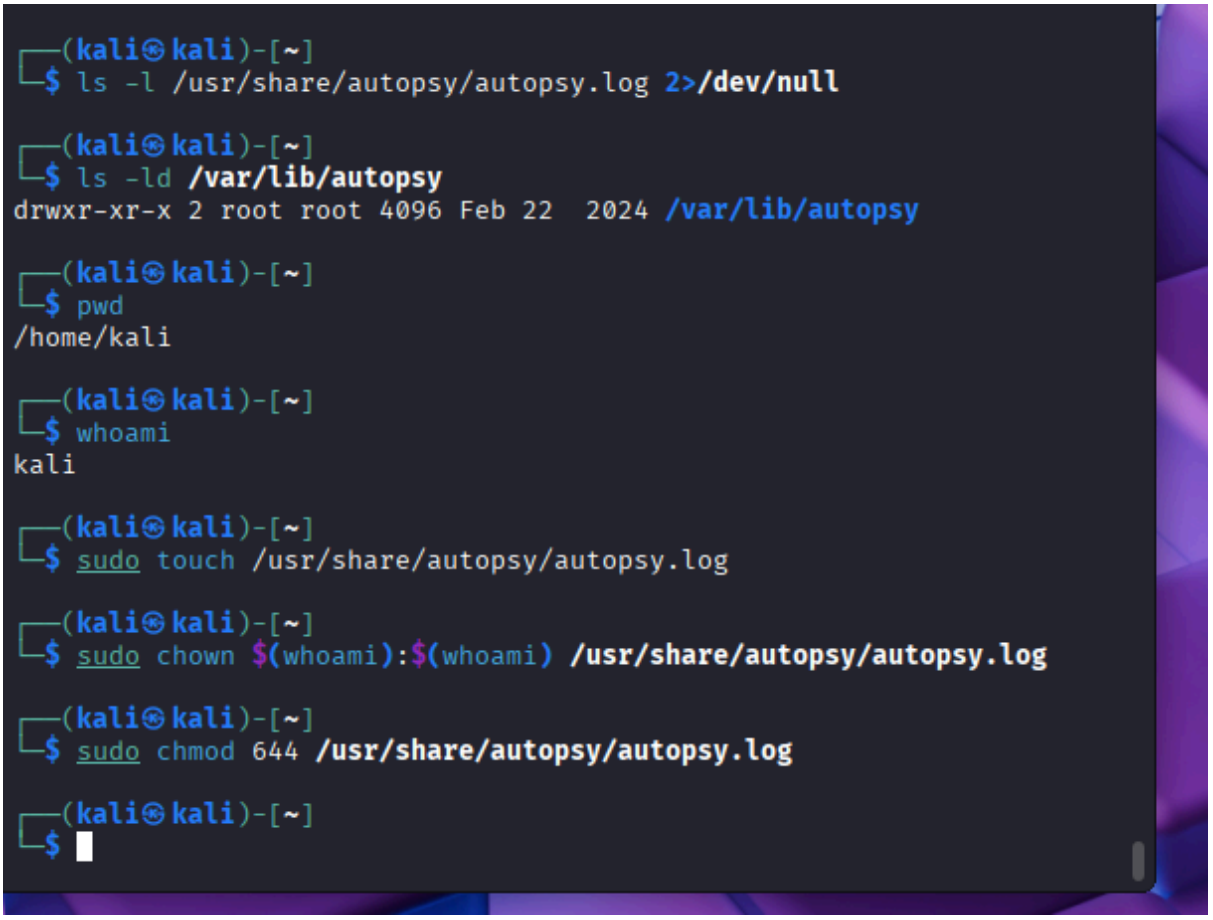

---

3) Solución 2 — Ejecutar Autopsy con privilegios (si estás en entorno de pruebas)

Si no te importa ejecutar como root (solo en laboratorio):

sudo autopsy

o si lo lanzaste con java:

sudo java -jar /usr/share/autopsy/bin/autopsy.jar

```
┌──(kali㉿kali)-[~]
└─$ sudo autopsy

═══════════════════════════════════════════════════════════════════════
═══════

                    Autopsy Forensic Browser
                http://www.sleuthkit.org/autopsy/
                           ver 2.24

═══════════════════════════════════════════════════════════════════════
═══════
Evidence Locker: /var/lib/autopsy
Start Time: Wed Nov  5 03:07:14 2025
Remote Host: localhost
Local Port: 9999

Open an HTML browser on the remote host and paste this URL in it:

    http://localhost:9999/autopsy

Keep this process running and use <ctrl-c> to exit
```

timeline

