
Ejercicios de Nmap (Redes y Seguridad Informática)

📘 1. Comprobar conectividad básica y escaneo simple

nmap 192.168.1.143


- Escanea el host con IP 192.168.1.143 para detectar puertos abiertos comunes.

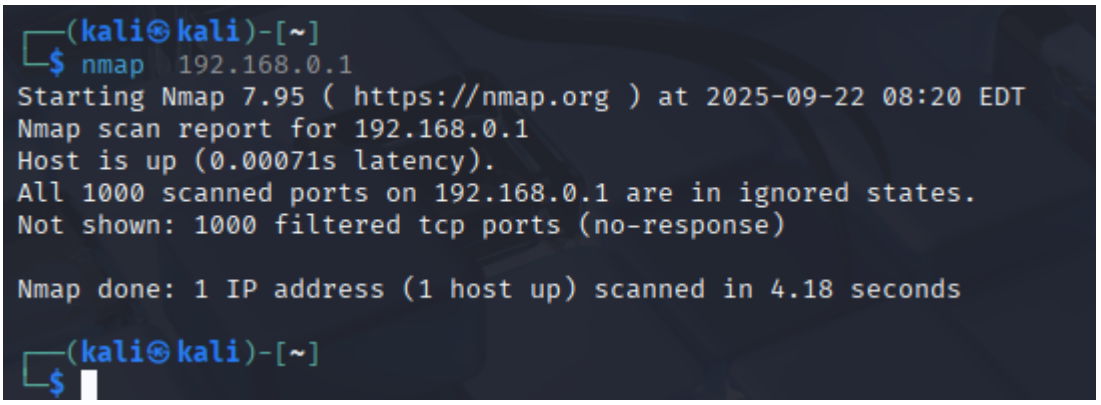

📘 2. Escaneo de un rango de IP

nmap 192.168.1.1-254

- Escanea todas las direcciones IP del rango 192.168.1.1 a 192.168.1.254.

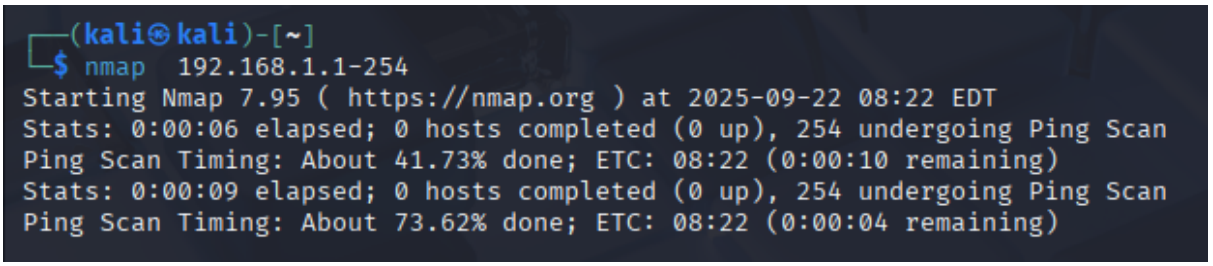

📘 3. Escaneo de varias direcciones IP específicas

nmap 192.168.1.1 192.168.1.4 192.168.1.43

- Escanea múltiples IP individuales especificadas manualmente.

```
┌──(kali㉿kali)-[~]
└─$ nmap  192.168.0.1.4 192.168.1.43
Starting Nmap 7.95 ( https://nmap.org ) at 2025-09-22 08:24 EDT
Failed to resolve "192.168.0.1.4".
Nmap scan report for 192.168.1.43
Host is up (0.00064s latency).
All 1000 scanned ports on 192.168.1.43 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)

Nmap done: 1 IP address (1 host up) scanned in 4.24 seconds
```

📘 4. Escaneo de puertos específicos

nmap -p 1042 192.168.1.143

- Escanea solo el puerto 1042 en la IP dada.

```
┌──(kali㉿kali)-[~]
└─$ nmap -p 80  192.168.0.1
Starting Nmap 7.95 ( https://nmap.org ) at 2025-09-22 08:27 EDT
Nmap scan report for 192.168.0.1
Host is up (0.00056s latency).

PORT   STATE    SERVICE
80/tcp filtered http

Nmap done: 1 IP address (1 host up) scanned in 0.34 seconds
```

📘 5. Escaneo de puertos UDP

nmap -sU -p 7 11 15 18 19 20 21 22 51 143 514 8080 192.168.1.143

- Escaneo en modo UDP de puertos específicos.
- El parámetro -sU indica que se trata de un escaneo de puertos UDP.

```
┌──(kali㉿kali)-[~]
└─$ nmap -sU -p 7 11 15 18 19 20 21 22 51 143 514 8080 192.168.0.1
Starting Nmap 7.95 ( https://nmap.org ) at 2025-09-22 08:28 EDT
Nmap scan report for 11 (0.0.0.11)
Host is up (0.0019s latency).

PORT  STATE    SERVICE
7/udp filtered echo

Nmap scan report for 15 (0.0.0.15)
Host is up (0.0017s latency).

PORT  STATE    SERVICE
7/udp filtered echo

Nmap scan report for 18 (0.0.0.18)
Host is up (0.0013s latency).

PORT  STATE    SERVICE
7/udp filtered echo

Nmap scan report for 19 (0.0.0.19)
Host is up (0.0010s latency).

PORT  STATE    SERVICE
7/udp filtered echo

Nmap scan report for 20 (0.0.0.20)
```

📘 6. Escaneo del sistema operativo

nmap -O -osscan-guess localhost

- Detecta el sistema operativo del host local.
- El parámetro --osscan-guess permite adivinar el sistema si no se reconoce con certeza.


```
┌──(kali㉿kali)-[~]
└─$ nmap -O -osscan-guess localhost
Starting Nmap 7.95 ( https://nmap.org ) at 2025-09-22 08:29 EDT
Nmap scan report for localhost (127.0.0.1)
Host is up (0.000060s latency).
Other addresses for localhost (not scanned): ::1
All 1000 scanned ports on localhost (127.0.0.1) are in ignored states.
Not shown: 1000 closed tcp ports (reset)
Too many fingerprints match this host to give specific OS details
Network Distance: 0 hops

OS detection performed. Please report any incorrect results at https://nmap.o
rg/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 1.67 seconds
```

📘 7. Mostrar versión de los servicios


nmap -sV -version-all localhost

- Muestra la versión de los servicios detectados en el host local.

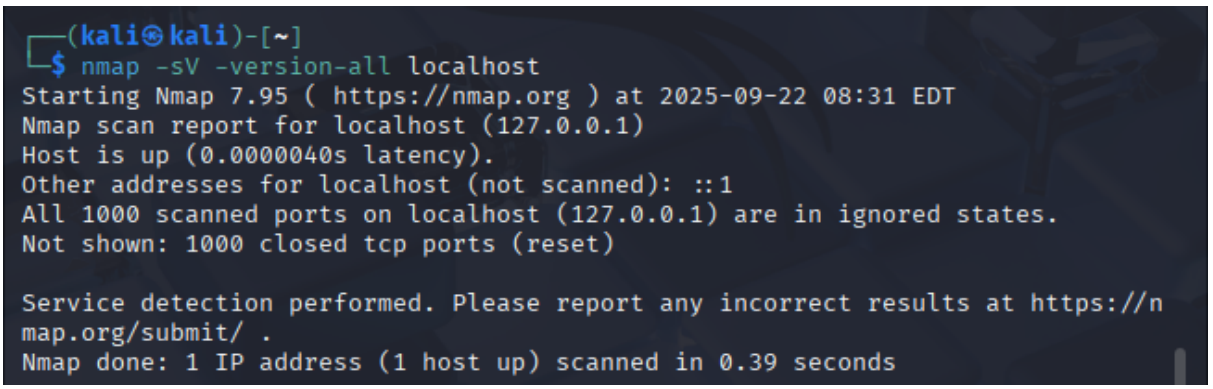


📘 8. Mostrar información del sistema Nmap instalado

nmap -SV --version-1ll localhost

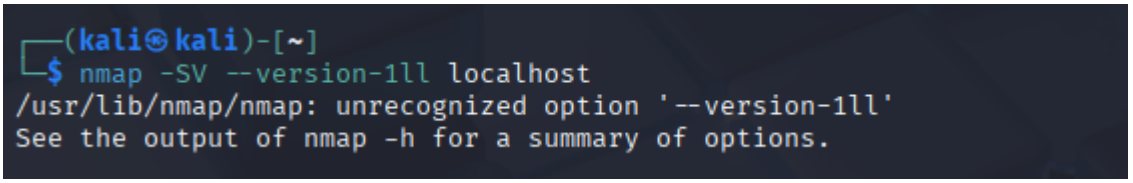

- Posible errata tipográfica, probablemente se refiere a:


nmap -sV --version-intensity 9 localhost

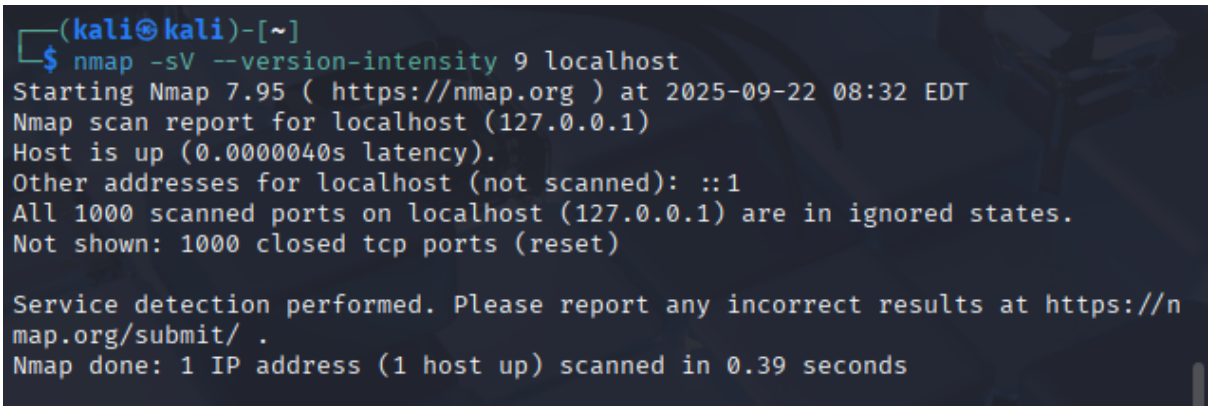

📘 9. Ver interfaces de red

nmap --iflist localhost


- Muestra todas las interfaces de red y rutas de la máquina local.

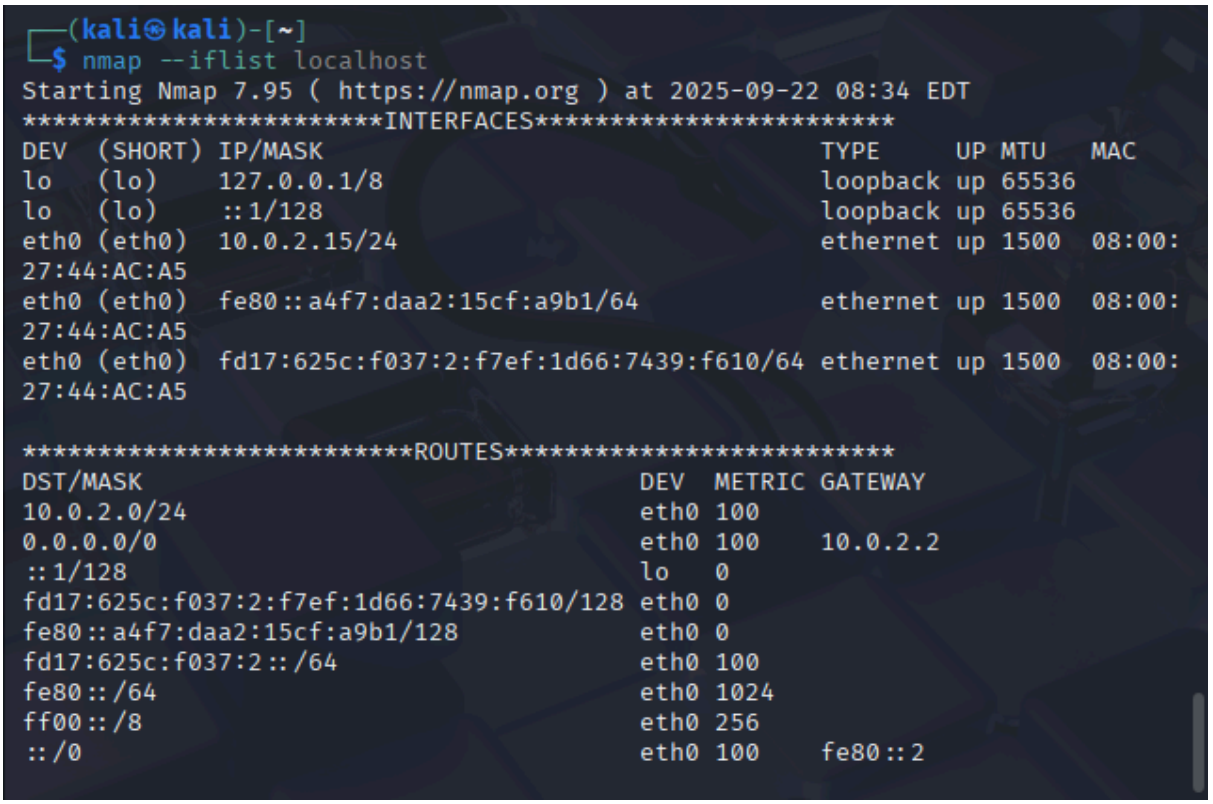

📘 10. Enviar paquetes TCP ACK

nmap -sA 192.168.1.143

- Escanea con paquetes TCP ACK para detectar hosts activos incluso tras firewall.

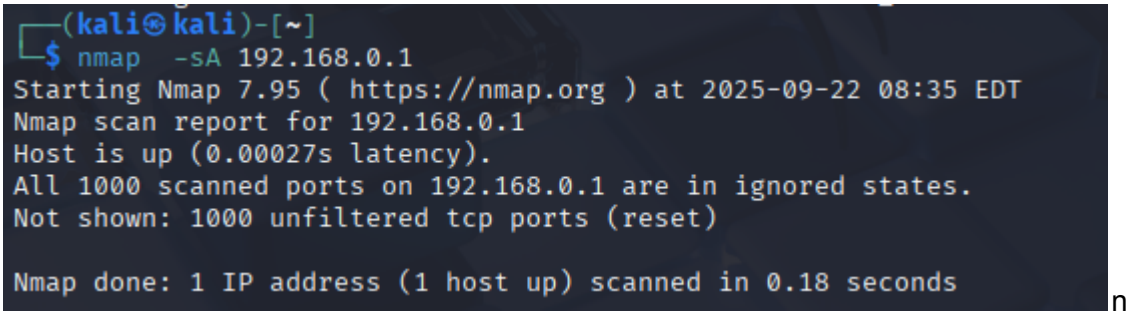


nma

📘 11. Actividad propuesta 1.9: Zenmap GUI para Nmap

🧩Instrucciones del ejercicio:

Instala **Zenmap** (entorno gráfico para Nmap) en tu máquina Windows.

Investiga y explica **la utilidad de las diferentes pestañas** que ofrece la aplicación.

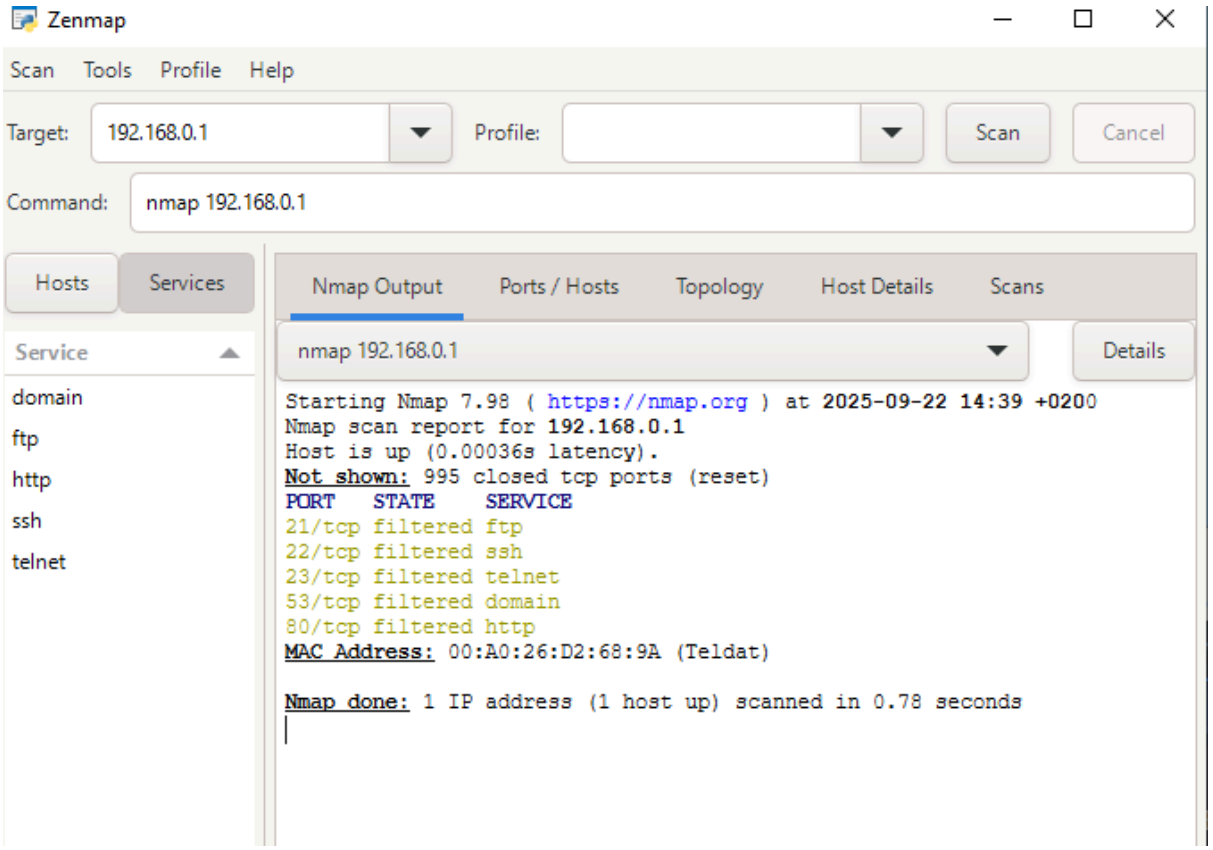

📘 12. Otros comandos avanzados (mencionados en la imagen):

- Detección de DNS inverso:

nmap -sL 192.168.43.0/24

```
┌──(kali㉿kali)-[~]
└─$ nmap  -sL 192.168.0/24
Starting Nmap 7.95 ( https://nmap.org ) at 2025-09-22 08:37 EDT
Nmap scan report for 192.168.0 (192.168.0.0)
Nmap scan report for 192.168.0.1
Nmap scan report for 192.168.0.2
Nmap scan report for 192.168.0.3
Nmap scan report for 192.168.0.4
Nmap scan report for 192.168.0.5
Nmap scan report for 192.168.0.6
Nmap scan report for 192.168.0.7
Nmap scan report for 192.168.0.8
Nmap scan report for 192.168.0.9
Nmap scan report for 192.168.0.10
Nmap scan report for 192.168.0.11
Nmap scan report for 192.168.0.12
Nmap scan report for 192.168.0.13
Nmap scan report for 192.168.0.14
Nmap scan report for 192.168.0.15
Nmap scan report for 192.168.0.16
```

- Escaneo de versión con --version-trace
- Exclusión de host:

nmap 192.168.1.0/24 --exclude 192.168.1.1

```
┌──(kali㉿kali)-[~]
└─$ nmap 192.168.0/24 --exclude 192.168.0.1
Starting Nmap 7.95 ( https://nmap.org ) at 2025-09-22 08:38 EDT
```