Ejercicios prácticos de Captura de Información (Tema 1.7)

Ejercicio 1 – Uso de Dmitry

Objetivo: Capturar información básica de un dominio.

1. Abre una terminal en Kali Linux.
2. Ejecuta el comando:
3. dmitry -s -e -o /home/usuario/dmitry_resultado.txt parainfo.es
    - -s: busca subdominios.
    - -e: busca direcciones de correo.
    - -o: guarda los resultados en un archivo.

Pregunta para reflexionar:
¿Qué tipo de información aparece en el archivo de salida?

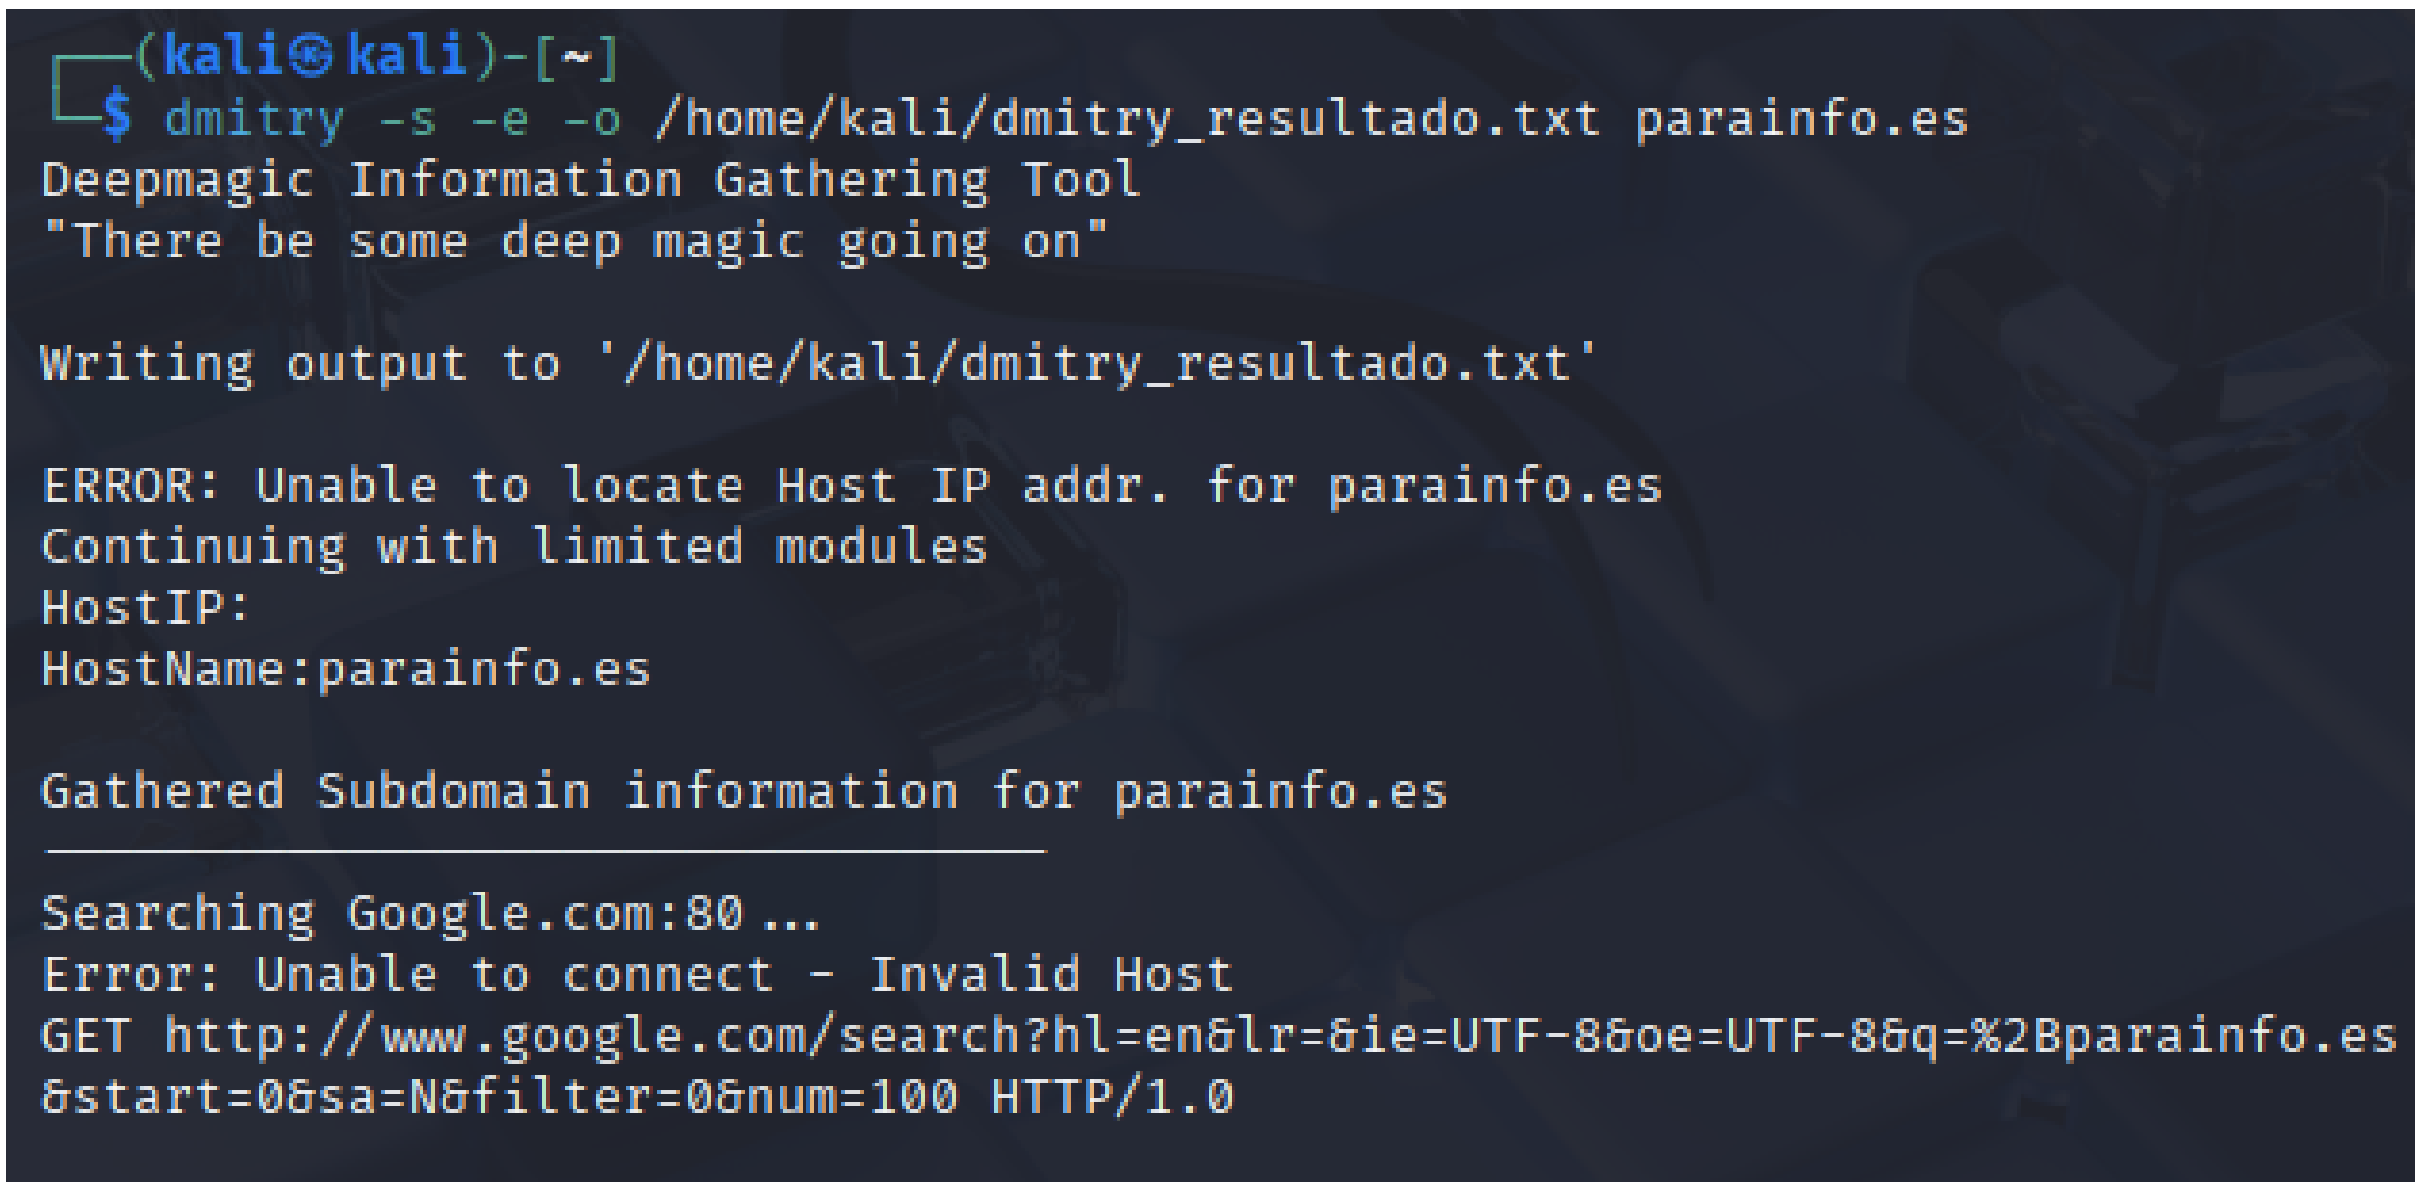

```
┌──(kali㉿kali)-[~]
└─$ dmitry -s -e -o /home/kali/dmitry_resultado.txt parainfo.es
Deepmagic Information Gathering Tool
"There be some deep magic going on"

Writing output to '/home/kali/dmitry_resultado.txt'

ERROR: Unable to locate Host IP addr. for parainfo.es
Continuing with limited modules
HostIP:
HostName:parainfo.es

Gathered Subdomain information for parainfo.es
─────────────────────────────────
Searching Google.com:80...
Error: Unable to connect - Invalid Host
GET http://www.google.com/search?hl=en&lr=&ie=UTF-8&oe=UTF-8&q=%2Bparainfo.es
&start=0&sa=N&filter=0&num=100 HTTP/1.0
```

Ejercicio 2 – Uso de DNSenum

Objetivo: Enumerar información de DNS.

1. En la terminal, escribe:
2. dnsenum --enum -f /usr/share/dnsenum/dns.txt -o /home/usuario/dnsenum_resultado.xml parainfo.es
    - --enum: enumera información del dominio.
    - -f: fichero de subdominios.
    - -o: salida en XML.

Pregunta para reflexionar:
¿Qué registros DNS (A, MX, NS…) aparecen en el informe?

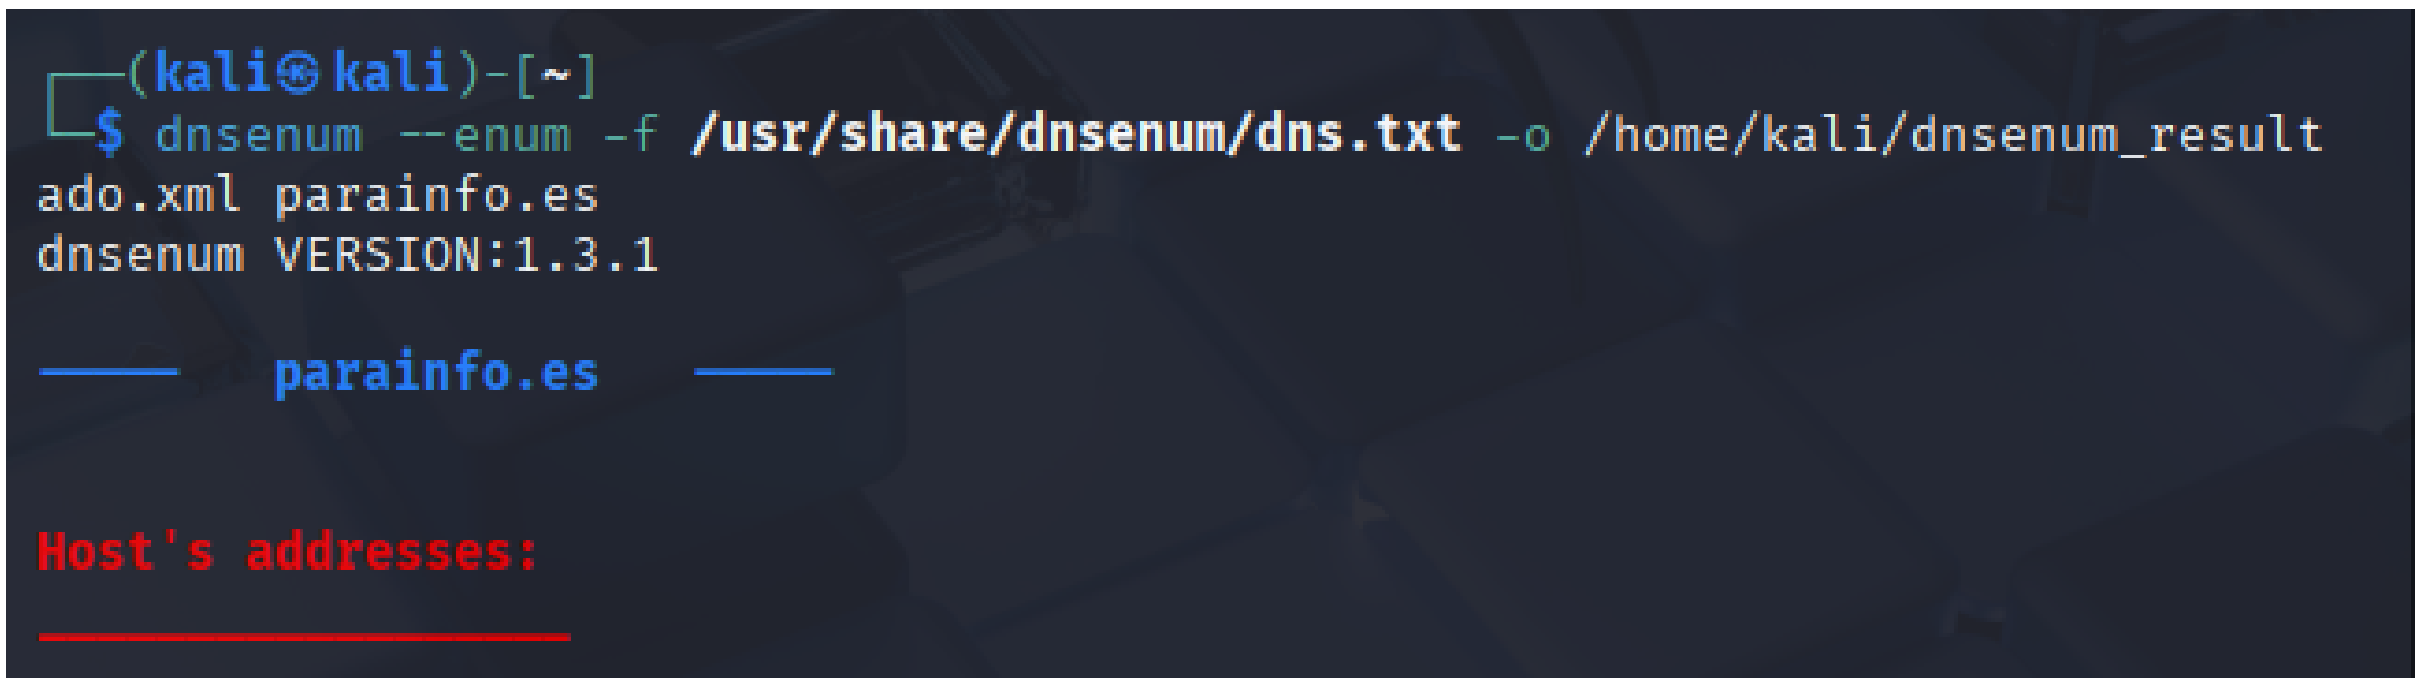

```
┌──(kali㉿kali)-[~]
└─$ dnsenum --enum -f /usr/share/dnsenum/dns.txt -o /home/kali/dnsenum_result
ado.xml parainfo.es
dnsenum VERSION:1.3.1

-----   parainfo.es   -----

Host's addresses:
__________________
```

🔹 Ejercicio 3 – Uso de Fierce

Objetivo: Detectar subdominios y hosts relacionados.

1. Ejecuta el comando:

   fierce --dnsserver dns.informatica-parainfo.es --dns parainfo.es --wordlist /usr/share/wordlists/dnsmap.txt -file /home/usuario/fierce_resultado.txt

   - --dnsserver: servidor DNS usado.
   - --dns: dominio a escanear.
   - --wordlist: lista de subdominios.
   - -file: guarda resultados.

Pregunta para reflexionar:
¿Se han detectado subdominios activos?

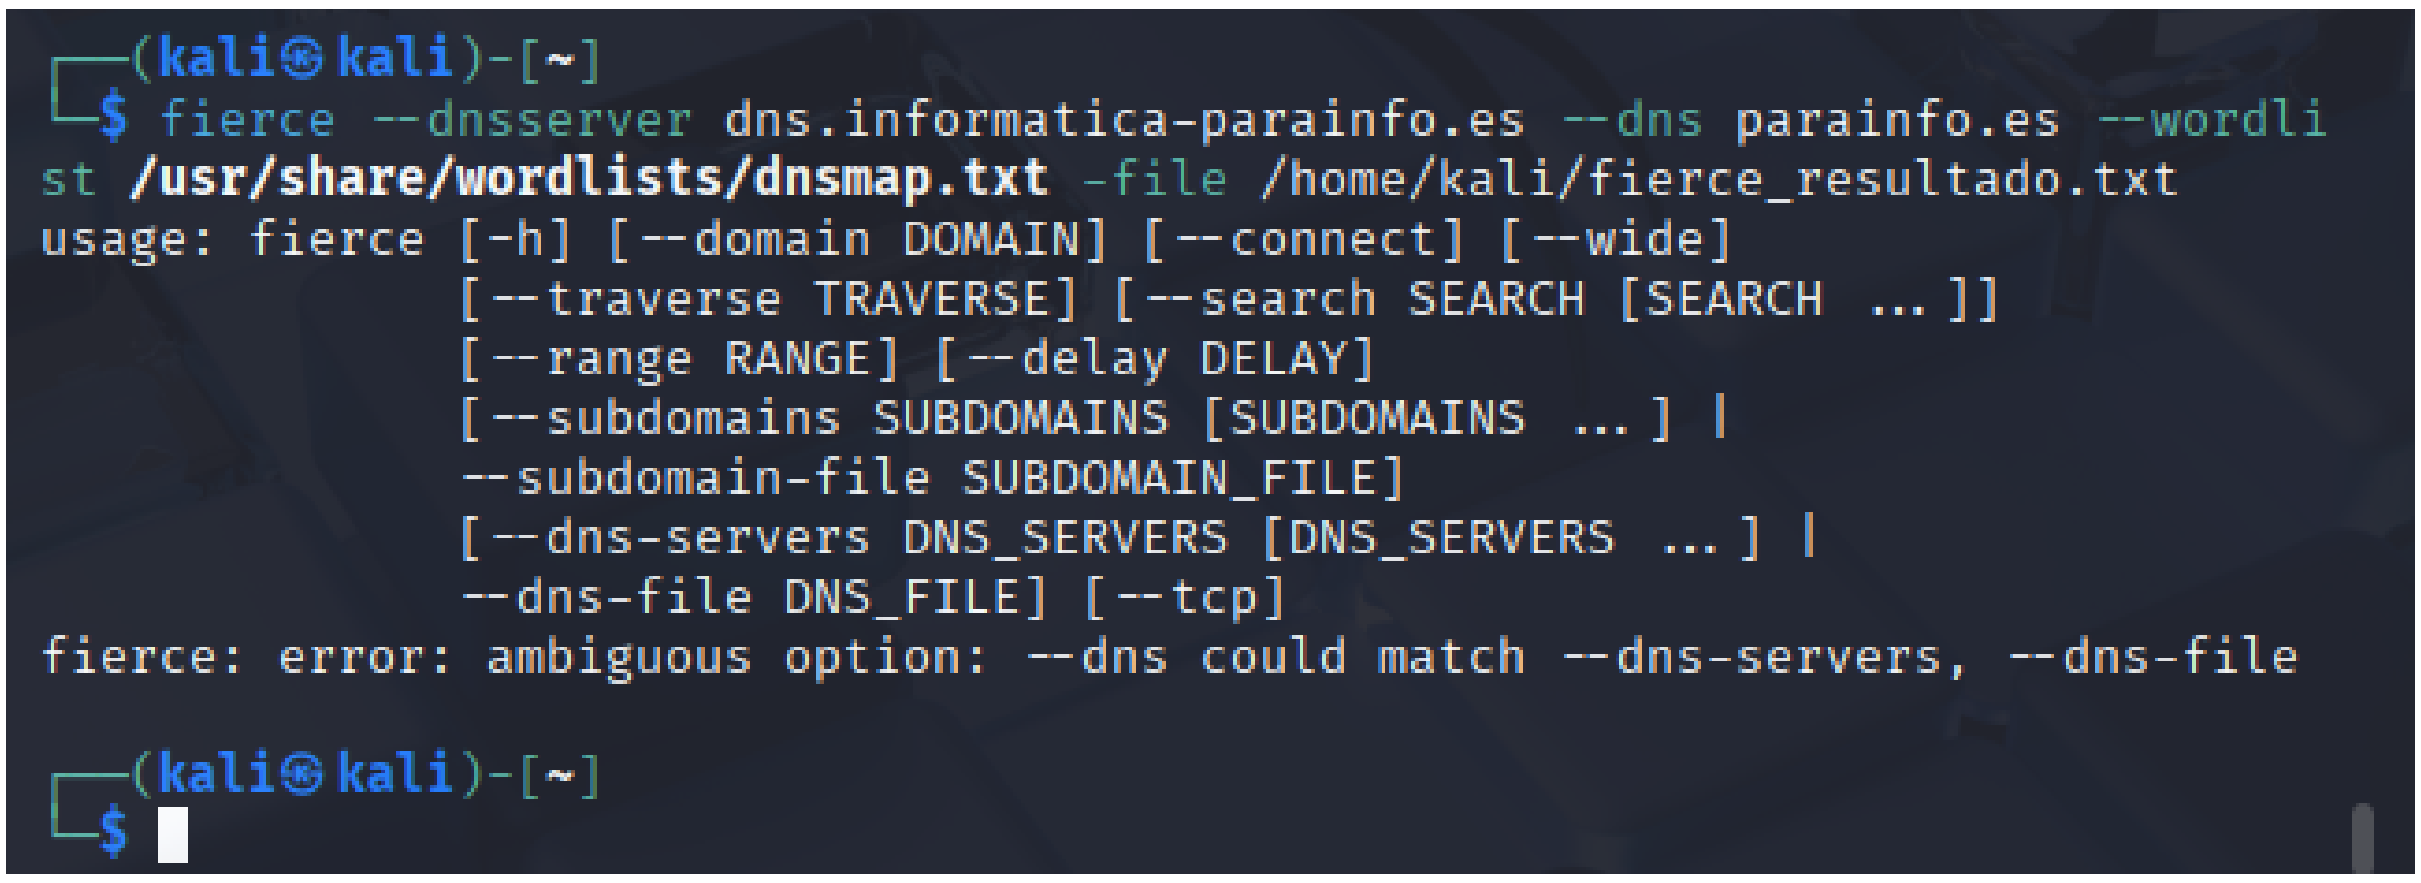

```
┌──(kali㉿kali)-[~]
└─$ fierce --dnsserver dns.informatica-parainfo.es --dns parainfo.es --wordli
st /usr/share/wordlists/dnsmap.txt -file /home/kali/fierce_resultado.txt
usage: fierce [-h] [--domain DOMAIN] [--connect] [--wide]
              [--traverse TRAVERSE] [--search SEARCH [SEARCH ...]]
              [--range RANGE] [--delay DELAY]
              [--subdomains SUBDOMAINS [SUBDOMAINS ...] |
              --subdomain-file SUBDOMAIN_FILE]
              [--dns-servers DNS_SERVERS [DNS_SERVERS ...] |
              --dns-file DNS_FILE] [--tcp]
fierce: error: ambiguous option: --dns could match --dns-servers, --dns-file

┌──(kali㉿kali)-[~]
└─$ 
```

Actualmente se emplean mejor:

Alternativas modernas a considerar (más potentes para subdomain enumeration)

- amass:

amass enum -d parainfo.es -o /home/kali/amass_resultado.txt

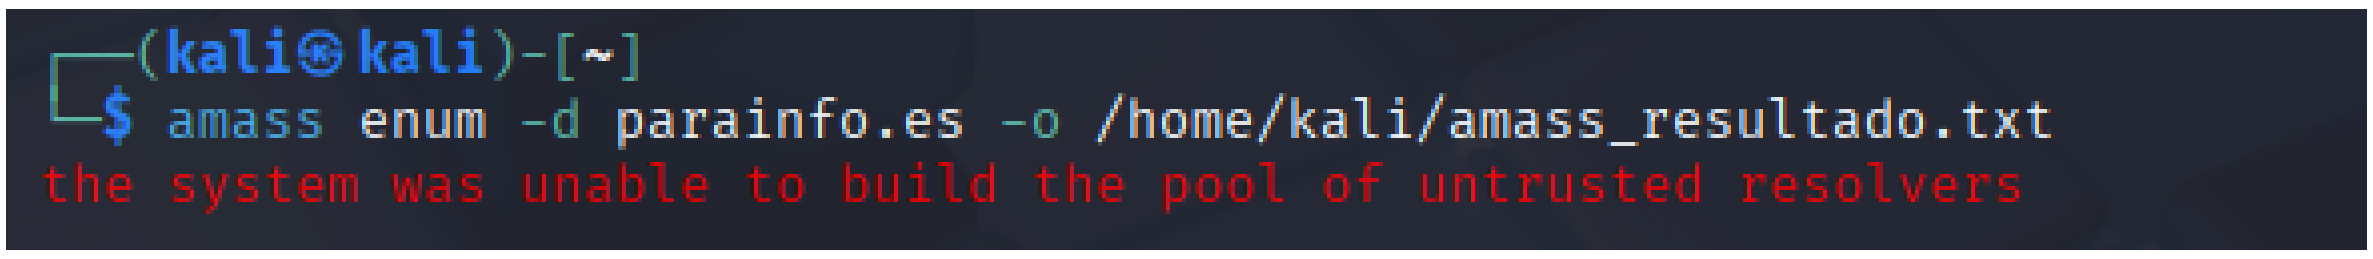

```
┌──(kali㉿kali)-[~]
└─$ amass enum -d parainfo.es -o /home/kali/amass_resultado.txt
the system was unable to build the pool of untrusted resolvers
```

- subfinder:

subfinder -d parainfo.es -o /home/kali/subfinder_resultado.txt

Este último funciona, hay que instalarlo, mejor usar kali

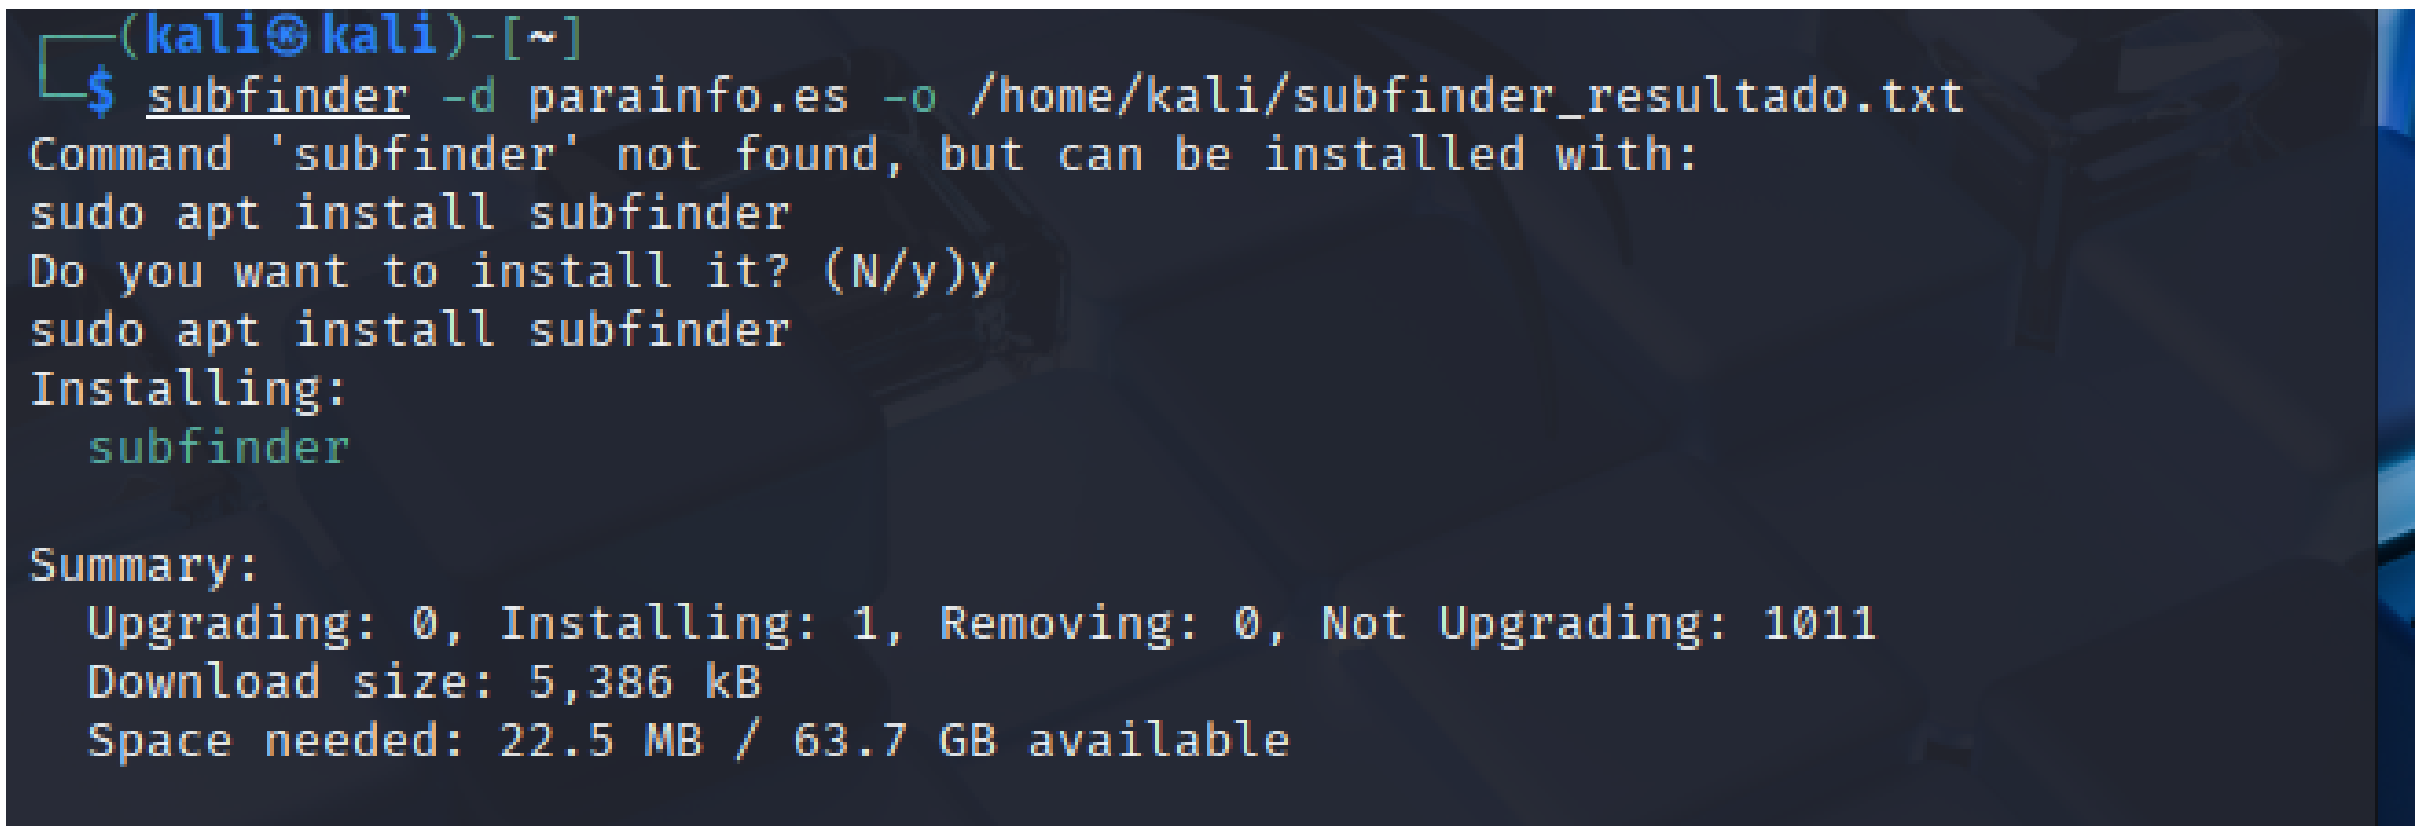

```
┌──(kali㉿kali)-[~]
└─$ subfinder -d parainfo.es -o /home/kali/subfinder_resultado.txt
Command 'subfinder' not found, but can be installed with:
sudo apt install subfinder
Do you want to install it? (N/y)y
sudo apt install subfinder
Installing:
  subfinder

Summary:
  Upgrading: 0, Installing: 1, Removing: 0, Not Upgrading: 1011
  Download size: 5,386 kB
  Space needed: 22.5 MB / 63.7 GB available
```

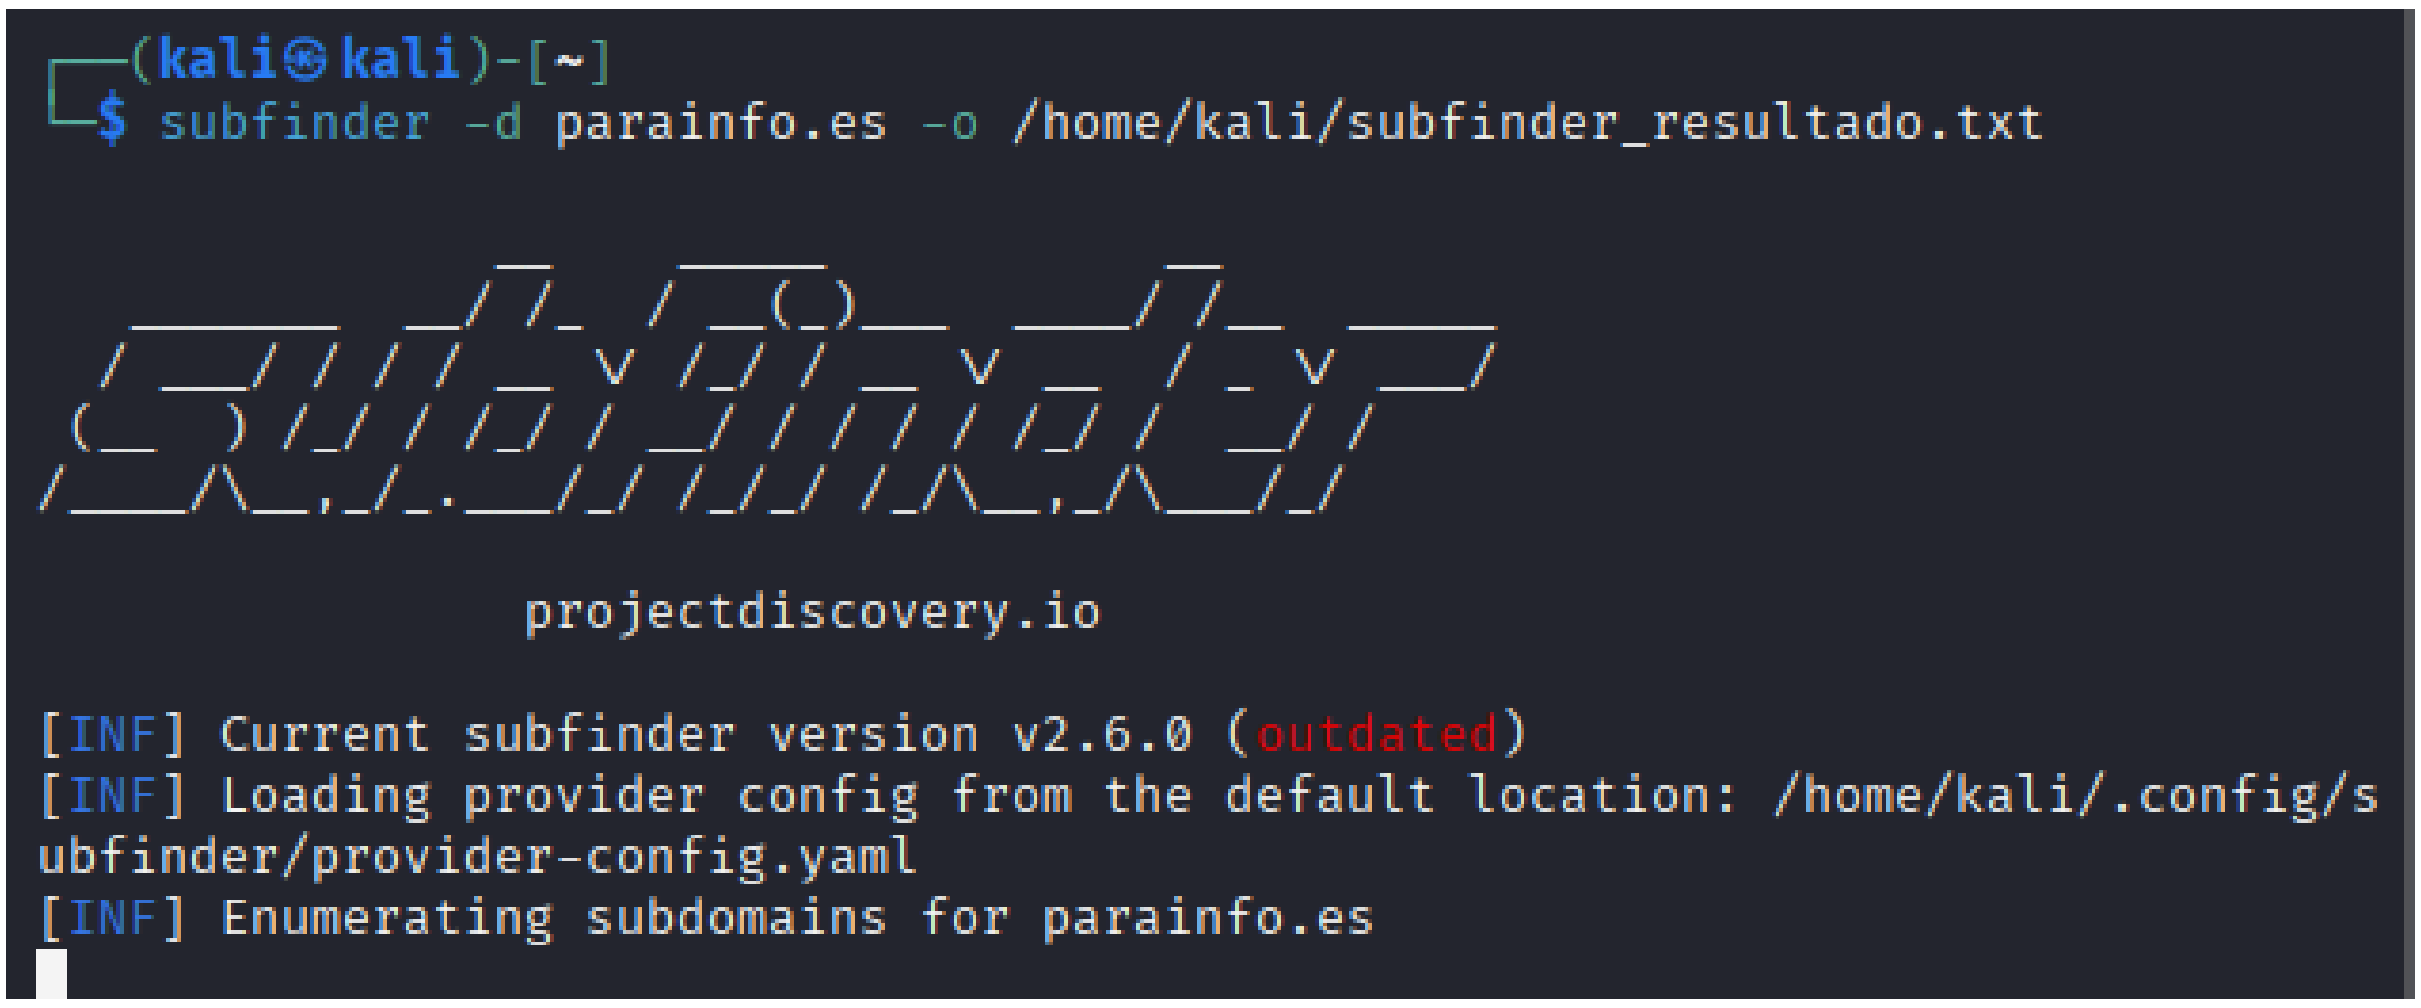

```
┌──(kali㉿kali)-[~]
└─$ subfinder -d parainfo.es -o /home/kali/subfinder_resultado.txt

               __    _____           __
   _______  __/ /_  / __(_)___  ____/ /__  _____
  / ___/ / / / __ \/ /_/ / __ \/ __  / _ \/ ___/
 (__  ) /_/ / /_/ / __/ / / / / /_/ /  __/ /
/____/\__,_/_.___/_/ /_/_/ /_/\__,_/\___/_/

                projectdiscovery.io

[INF] Current subfinder version v2.6.0 (outdated)
[INF] Loading provider config from the default location: /home/kali/.config/s
ubfinder/provider-config.yaml
[INF] Enumerating subdomains for parainfo.es
```

🔹 Ejercicio 4 – Uso de Metagoofil

Objetivo: Extraer metadatos de documentos públicos.

1. Escribe:
2. metagoofil -d parainfo.es -t pdf,doc -l 30 -n 10 -o /home/usuario/goofil -f /home/usuario/goofil/resultados.html
    - -d: dominio a analizar.
    - -t: tipo de archivo (pdf, doc, ppt…).
    - -l: número de resultados de búsqueda.
    - -n: número de archivos a descargar.

- -o: directorio de salida.
- -f: informe en HTML.

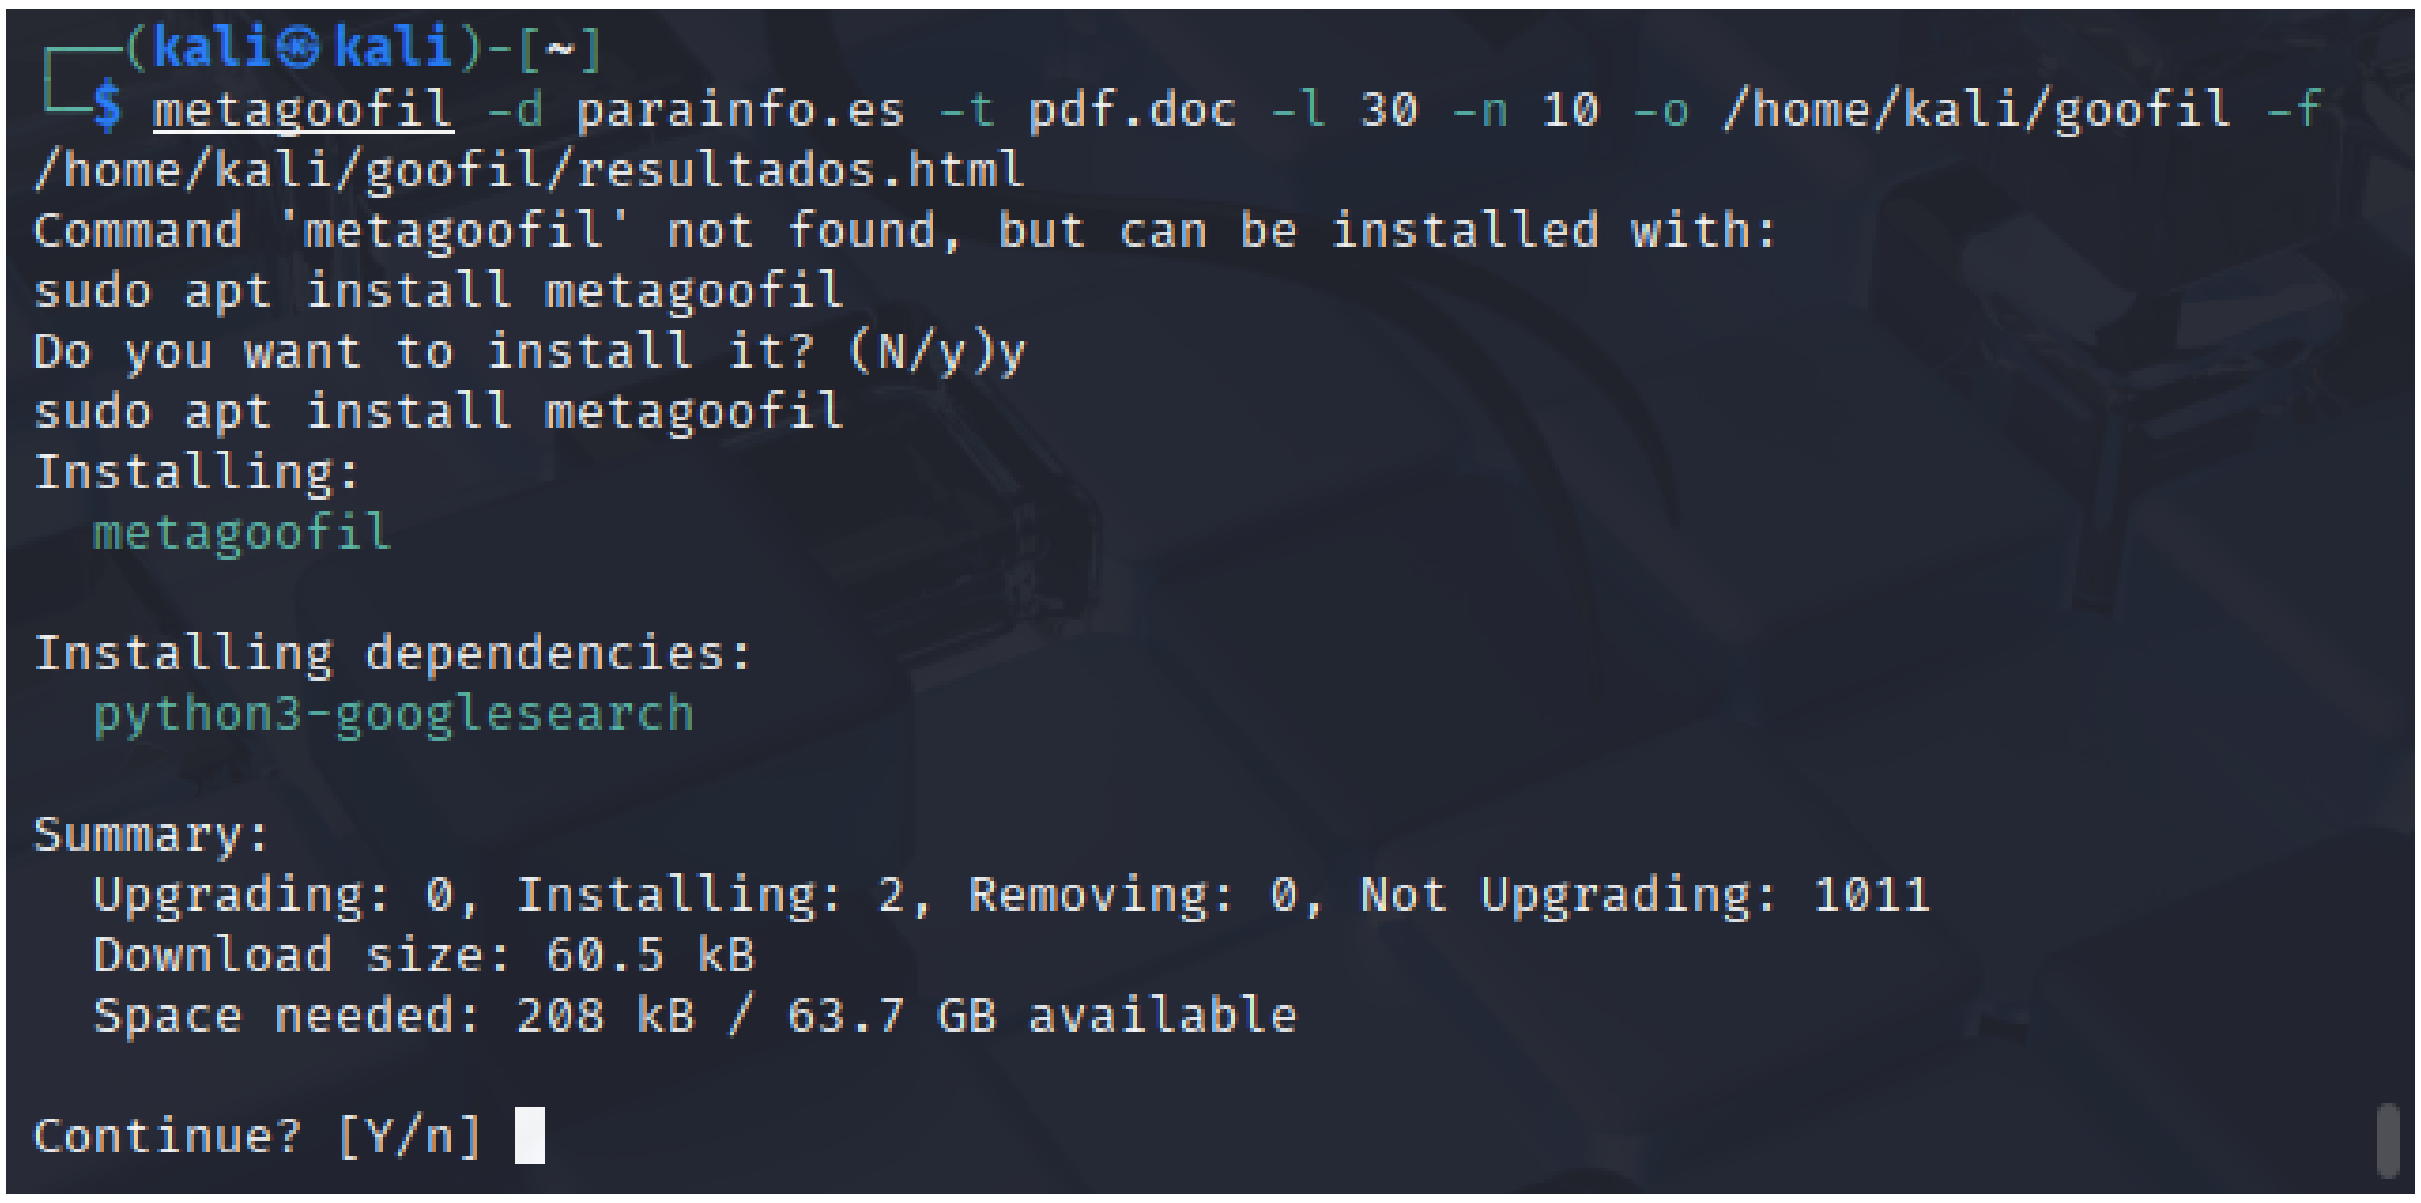

```
┌──(kali㉿kali)-[~]
└─$ metagoofil -d parainfo.es -t pdf.doc -l 30 -n 10 -o /home/kali/goofil -f
/home/kali/goofil/resultados.html
Command 'metagoofil' not found, but can be installed with:
sudo apt install metagoofil
Do you want to install it? (N/y)y
sudo apt install metagoofil
Installing:
  metagoofil

Installing dependencies:
  python3-googlesearch

Summary:
  Upgrading: 0, Installing: 2, Removing: 0, Not Upgrading: 1011
  Download size: 60.5 kB
  Space needed: 208 kB / 63.7 GB available

Continue? [Y/n]
```

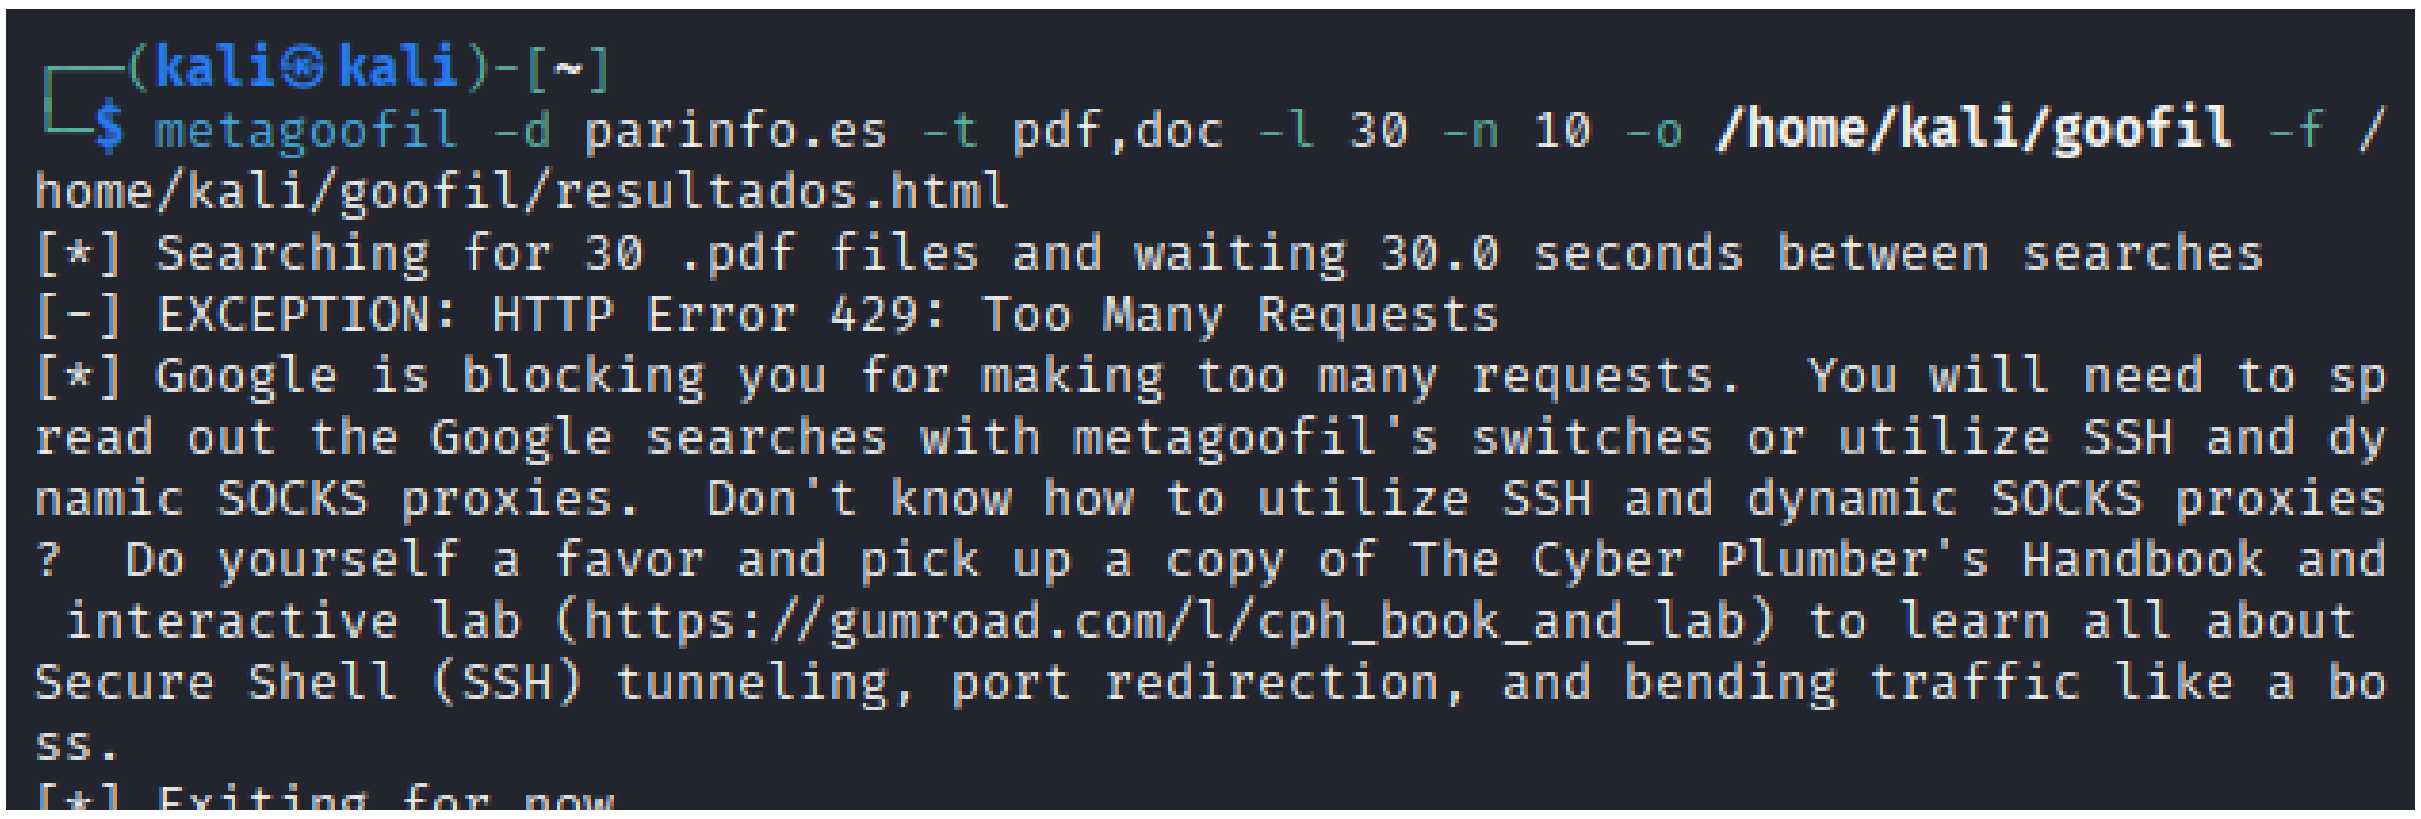

```
┌──(kali㉿kali)-[~]
└─$ metagoofil -d parinfo.es -t pdf,doc -l 30 -n 10 -o /home/kali/goofil -f /
home/kali/goofil/resultados.html
[*] Searching for 30 .pdf files and waiting 30.0 seconds between searches
[-] EXCEPTION: HTTP Error 429: Too Many Requests
[*] Google is blocking you for making too many requests.  You will need to sp
read out the Google searches with metagoofil's switches or utilize SSH and dy
namic SOCKS proxies.  Don't know how to utilize SSH and dynamic SOCKS proxies
?  Do yourself a favor and pick up a copy of The Cyber Plumber's Handbook and
 interactive lab (https://gumroad.com/l/cph_book_and_lab) to learn all about
Secure Shell (SSH) tunneling, port redirection, and bending traffic like a bo
ss.
[*] Exiting for now
```