




Методический материал

РАБОТА С РАСШИРЕННЫМ ПРИМЕРОМ ИСПОЛЬЗОВАНИЯ ANSIBLE И DOCKER

Урок 7.

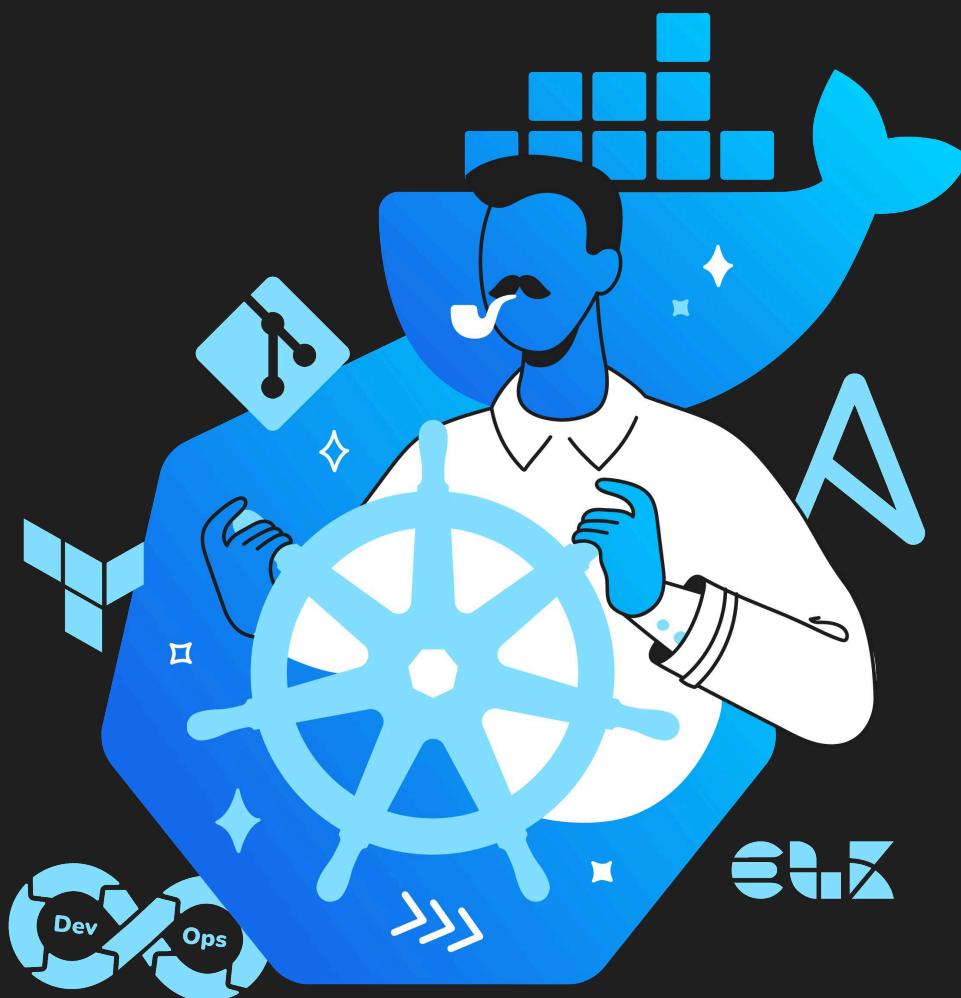



Создадим плейбук "Pull_and_run_image.yml" со следующим содержимым:

```
- hosts: localhost
  gather_facts: no
  vars:
    img_names:
      - nginx
      - redis
      - alpine
  tasks:

- name: pull images (using mirrors)
  community.docker.docker_image:
    name: "{{ item }}"
    source: pull
    loop: "{{ img_names }}"

- name: run containers
  community.docker.docker_container:
    name: "{{ item }}"
    image: "{{ item }}"
    state: started
    loop: "{{ img_names }}"

$ nano pull_and_run_image.yml
```



```
GNU nano 7.2                                pull_and_run_image.yml *
```

```
- hosts: localhost
gather_facts: no
vars:
  img_names:
    - nginx
    - redis
    - alpine
tasks:
  - name: pull images (using mirrors)
    community.docker.docker_image:
      name: "{{ item }}"
      source: pull
      loop: "{{ img_names }}"

  - name: run containers
    community.docker.docker_container:
      name: "{{ item }}"
      image: "{{ item }}"
      state: started
      loop: "{{ img_names }}"
```

В данном плейбуке будет производиться скачивание образов Docker с их последующим запуском (при желании, запуск контейнеров на основе скачанных образов можно удалить).



Для запуска плейбука выполните команду:

```
$ ansible-playbook pull_and_run_image.yml
```

```
fllipp@user-IdeaPad-3-15IAU7:~/compose-project$ ansible-playbook pull_and_run_image.yml
[WARNING]: No inventory was parsed, only implicit localhost is available
[WARNING]: provided hosts list is empty, only localhost is available. Note that the implicit
localhost does not match 'all'

PLAY [localhost] *****
***

TASK [Pull images through configured mirrors] *****
***
changed: [localhost] => (item=nginx)
changed: [localhost] => (item=redis)
changed: [localhost] => (item=alpine)

TASK [Run containers] *****
***
changed: [localhost] => (item=nginx)
changed: [localhost] => (item=redis)
changed: [localhost] => (item=alpine)

PLAY RECAP *****
***
localhost : ok=2 changed=2 unreachable=0 failed=0 skipped=0 r
escaped=0 ignored=0
```

Для проверки успешности запуска контейнеров выполните команду:

```
$ docker ps
```

```
fllipp@user-IdeaPad-3-15IAU7:~/compose-project$ docker ps
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS        PORTS
NAMES
d50c0a81bb2b   redis    "docker-entrypoint.s..." 27 seconds ago Up 26 seconds 6379/tcp
redis
9943e19cac3f   nginx    "/docker-entrypoint...." 28 seconds ago Up 27 seconds 80/tcp
nginx
```



Модифицируем плейбук, добавив в него еще один образ (например, Traefik):

```
GNU nano 7.2 pull_and_run_image.yml
- hosts: localhost
  gather_facts: no
  vars:
    img_names:
      - nginx
      - redis
      - alpine
      - traefik
  tasks:
    - name: pull images (using mirrors)
      community.docker.docker_image:
        name: "{{ item }}"
        source: pull
        loop: "{{ img_names }}"

    - name: run containers
      community.docker.docker_container:
        name: "{{ item }}"
        image: "{{ item }}"
        state: started
        loop: "{{ img_names }}"
```



Повторим команду запуска плейбука:

```
$ ansible-playbook pull_and_run_image.yml
```

```
filipp@user-IdeaPad-3-15IAU7:~/compose-project$ ansible-playbook pull_and_run_image.yml
[WARNING]: No inventory was parsed, only implicit localhost is available
[WARNING]: provided hosts list is empty, only localhost is available. Note that the implicit
localhost does not match 'all'

PLAY [localhost] *****

TASK [pull images (using mirrors)] *****
ok: [localhost] => (item=nginx)
ok: [localhost] => (item=redis)
ok: [localhost] => (item=alpine)
changed: [localhost] => (item=traefik)

TASK [run containers] *****
ok: [localhost] => (item=nginx)
ok: [localhost] => (item=redis)
changed: [localhost] => (item=alpine)
changed: [localhost] => (item=traefik)

PLAY RECAP *****
localhost                : ok=2    changed=2    unreachable=0    failed=0    skipped=0    r
escued=0    ignored=0
```



Обратите внимание, что произведен запуск контейнера с Nginx.

Для проверки корректности запуска выполните команду:

```
$ docker ps
```

```
filipp@user-IdeaPad-3-15IAU7:~/compose-project$ docker ps
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS        PORTS
eabf258413c2   traefik   "/entrypoint.sh traefik" 3 seconds ago  Up 3 seconds  80/tcp
d50c0a81bb2b   redis    "docker-entrypoint.s..." 9 minutes ago  Up 9 minutes  6379/tcp
9943e19cac3f   nginx    "/docker-entrypoint..." 9 minutes ago  Up 9 minutes  80/tcp
```

Все контейнеры успешно запущены.



Для завершения работы можно остановить и удалить контейнеры вместе с используемыми образами:

```
$ docker stop traefik redis nginx
$ docker rm traefik redis nginx
$ docker rmi traefik redis nginx
```

```
filipp@user-IdeaPad-3-15IAU7:~/compose-project$ docker stop traefik redis nginx
traefik
redis
nginx
filipp@user-IdeaPad-3-15IAU7:~/compose-project$ docker rm traefik redis nginx
traefik
redis
nginx
filipp@user-IdeaPad-3-15IAU7:~/compose-project$ docker rmi traefik redis nginx
Untagged: traefik:latest
Untagged: traefik@sha256:104204dadedf5d1284f8ef8f97f705649ac81aa6f7a6c9abf13e2c59245b8abc
Deleted: sha256:66c037adf0b4eeeb4b1dbcbfc7520eae76ce967e73f02e1d569808930129ab3b
Deleted: sha256:843917976d7dc1dc01f78367cd09e758331ea9bbc8cb62befe00e62425c7ff86
Deleted: sha256:f60235bed4ac92909b8b320bad07d5f24ea2b73084f0610e750e14dc85222730
Deleted: sha256:f2f8a2388b1d54c2b2101b6be990a51a8a09e1467010c8b2a8e1090c6303e9d8
Untagged: redis:latest
Untagged: redis@sha256:fbdbaea47b9ae4ecc2082ecdb4e1cea81e32176ffb1dcf643d422ad07427e5d9
Deleted: sha256:65750d044ac86b73a473c01a854d5f7f2b55a77b43f007d0e10a5db5dd1d926f
Deleted: sha256:49cd550fc30bccf84f1f236a79253f001a3a9f3a1b02f0cc740f1398d76b8533
Deleted: sha256:e0690ddc013eedc562d913a51bc89341d373a52ad53470ecf6ecb8f0b1b5ffb5
Deleted: sha256:cb189b5d5dd0ce60f0025de7c92b8896a5ee1f6ac6f90d373ef478c74049ecef
Deleted: sha256:9085c007f78efd29de83469622ccd6f977bc9acafdf6998f5f7b9dff95f9bba
Deleted: sha256:37036292b6f5df827b4c76531dad2cf87031eabeffa12bd353c91d66d18cf917
Deleted: sha256:52aab82e9b8bb9c9277f4c34a7c4fdf4bccc50a612cd0483dffddbad5b5cab5b4d
Deleted: sha256:7de9d31c8a5b5a2f3ea465f8944b69877612aa0f52c32bc08e7be014ce58d441
Untagged: nginx:latest
Untagged: nginx@sha256:5ed8fcc66f4ed123c1b2560ed708dc148755b6e4cbd8b943fab094f2c6bfa91e
Deleted: sha256:4e1b6bae1e48cdbde8e6ec3e6ee42d86ad4780156e75790465bf6fb16c551c27
Deleted: sha256:54e3ab6292c032a67a0b40e4efb1d1103fc0cf511adc81d76d3a38b95346f723
Deleted: sha256:a0d2387b1619ddad596155d0d9b898e646b267dfdf3cbe7771cb0cdadd5d15b5
Deleted: sha256:7f2e29110e65e19a2fd3fb6f692345c62d9d1d45fccc69f0f2e4e5282bf5a153
Deleted: sha256:6326ba543c8ab9588de067410d5ad23828fcf83d5d04719a1f88c02c9118ccfa
Deleted: sha256:164dfb151284668c54c8259d6a82900f19b157b655deafc294db044ee4da219e
Deleted: sha256:6a2a04bbab5eca06a23a05254ed5166c9a548245861f9db0e23796fb87d490a3
Deleted: sha256:ea680fbff095473bb8a6c867938d6d851e11ef0c177fce983ccc83440172bd72
```

Контейнеры и образы успешно удалены.