




Методический материал

РАБОТА С РАСШИРЕННЫМ ПРИМЕРОМ ПРОЕКТА DOCKER- COMPOSE

Урок 7.

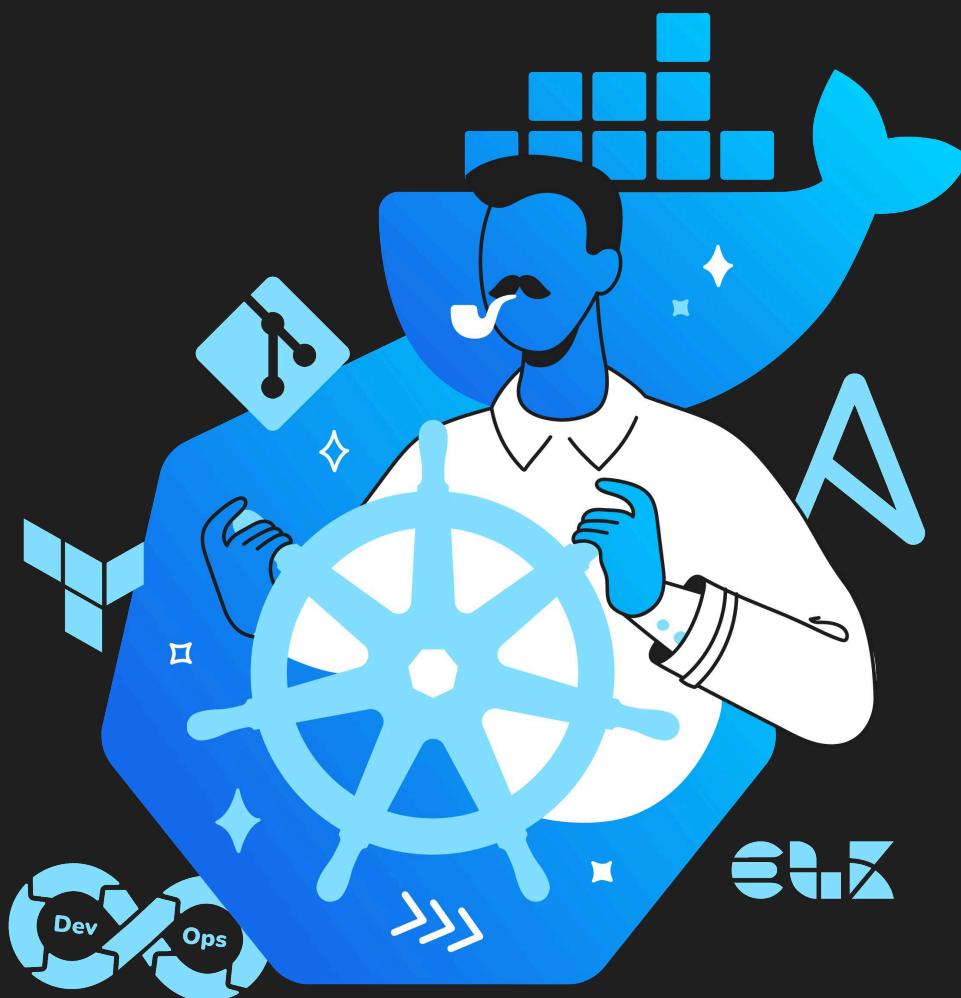



Для использования приведенного примера со сложным проектом Docker- compose можно использовать следующий репозиторий:

https://github.com/Beastlex/diplom_project/tree/devel (ветка Devel).

Для запуска Docker-compose перейдем в директорию с проектом "Compose- project" и выполним команду:


```
$ docker-compose up --build
```

```
frontend-1 | 2025/04/18 10:37:50 [notice] 1#1: start worker process 34
frontend-1 | 2025/04/18 10:37:50 [notice] 1#1: start worker process 35
db-1       |
db-1       | PostgreSQL Database directory appears to contain a database; Skipping initiali
zation
db-1       |
db-1       | 2025-04-18 10:37:50.947 UTC [1] LOG:  listening on IPv4 address "0.0.0.0", por
t 5432
db-1       | 2025-04-18 10:37:50.947 UTC [1] LOG:  listening on IPv6 address "::", port 543
2
db-1       | 2025-04-18 10:37:50.949 UTC [1] LOG:  listening on Unix socket "/var/run/postg
resql/.s.PGSQL.5432"
db-1       | 2025-04-18 10:37:50.959 UTC [21] LOG:  database system was shut down at 2025-0
4-18 10:35:52 UTC
db-1       | 2025-04-18 10:37:50.961 UTC [1] LOG:  database system is ready to accept conne
ctions
migration-1 |
migration-1 | > backend@1.0.0 migrate
migration-1 | > cd src && ./migrate.sh
migration-1 |
migration-1 | sh: ./migrate.sh: Permission denied
migration-1 exited with code 126
backend-1   |
backend-1   | > backend@1.0.0 start
backend-1   | > node src/index.js
backend-1   |
reverseproxy-1 | time="2025-04-18T10:37:51Z" level=info msg="Configuration loaded from file: /e
tc/traefik/traefik.toml"
reverseproxy-1 | time="2025-04-18T10:37:51Z" level=info msg="Traefik version 2.2.11 built on 20
20-09-07T14:12:48Z"
reverseproxy-1 | time="2025-04-18T10:37:51Z" level=info msg="\nStats collection is disabled.\nH
elp us improve Traefik by turning this feature on :)\nMore details on: https://docs.traefik.io/c
ontributing/data-collection/\n"
reverseproxy-1 | time="2025-04-18T10:37:51Z" level=info msg="Starting provider aggregator.Provi
derAggregator {}"
reverseproxy-1 | time="2025-04-18T10:37:51Z" level=info msg="Starting provider *docker.Provider
{"watch\":true,\"endpoint\": \"unix:///var/run/docker.sock\", \"defaultRule\": \"Host(`{{ normali
ze .Name }}`)\"}, \"swarmModeRefreshSeconds\":15000000000}"
reverseproxy-1 | time="2025-04-18T10:37:51Z" level=info msg="Starting provider *traefik.Provide
r {}"
backend-1   | Server is live at localhost:5000
█
w Enable Watch
```



После успешного запуска проекта можем перейти в браузер и ознакомиться с функционалом самого приложения (<http://localhost:8000>) и с его метриками (<http://localhost:8080>).

Сборщик метрик приложения работоспособен и доступен для работы:

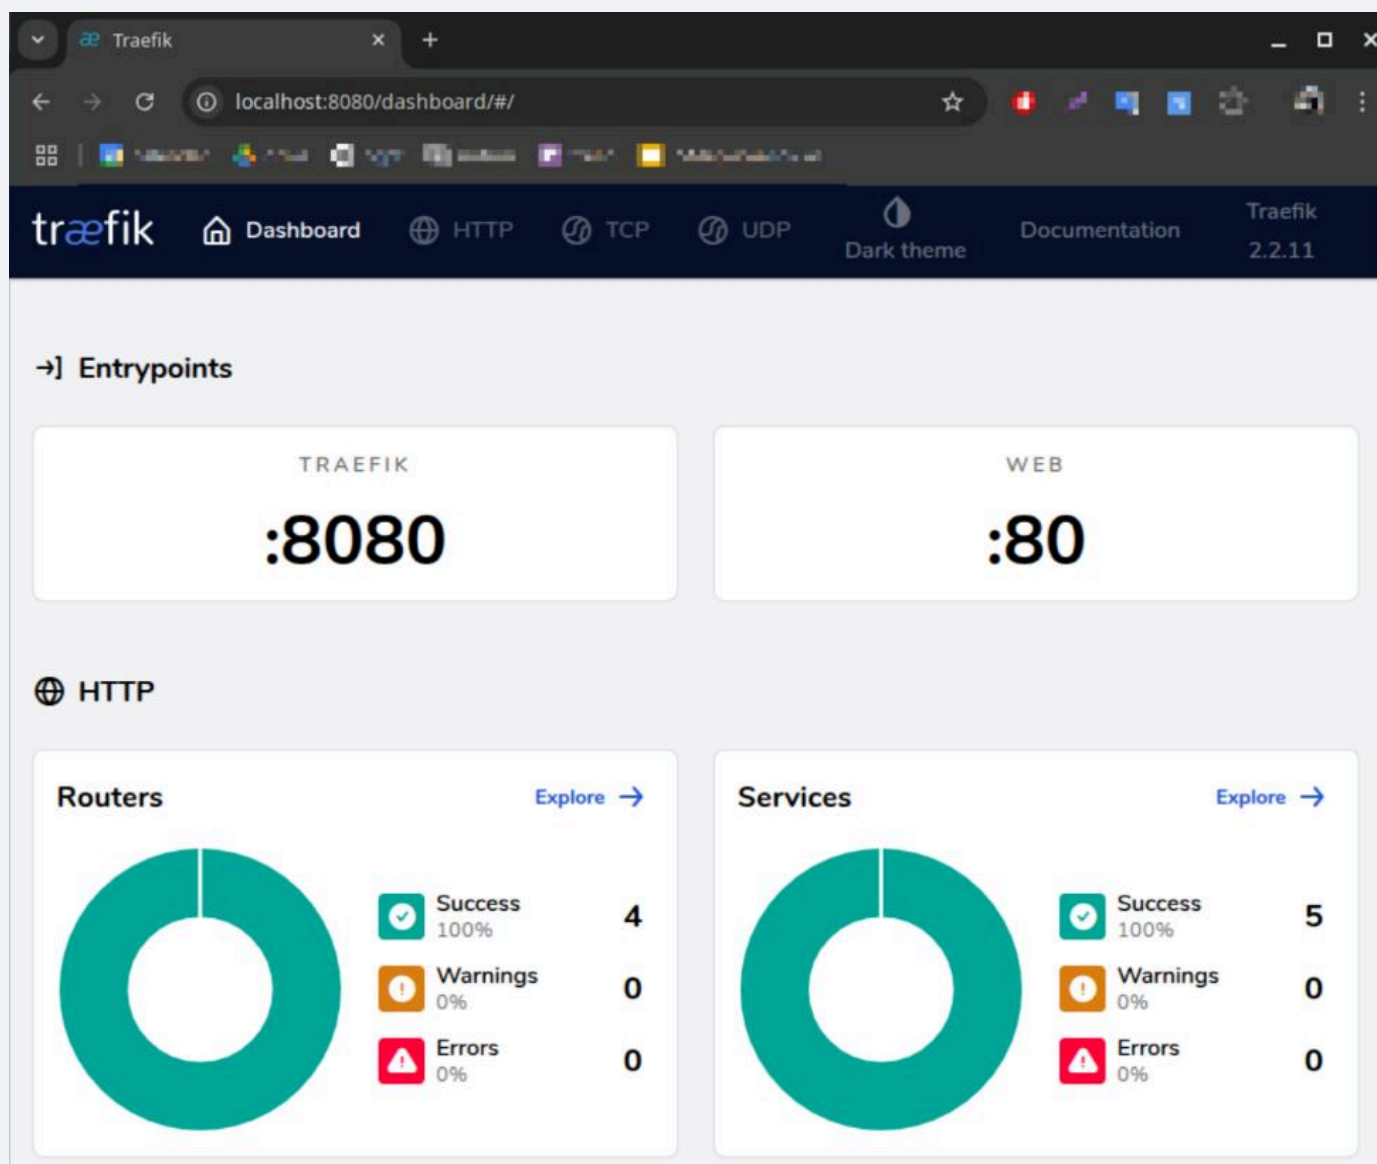



Также можно выбирать и работать со статистическими данными:

Статистические данные

localhost:8000

Обновить данные

Дата последнего обновления
undefined

Обновить

Отобразить данные

Выберите страну

По смертности

Ok

Статистические данные:

COVID-19 Statistics

Date Country code Confirmed Deaths Stringency actual Stringency



Для корректного завершения работы с проектом остановите контейнеры сочетанием клавиш "CTRL+C" и затем выполните команду:

```
$ docker-compose down
```

```
filipp@user-IdeaPad-3-15IAU7:~/compose-project$ docker-compose down
WARN[0000] /home/filipp/compose-project/docker-compose.yaml: the attribute `version` is obsolete
, it will be ignored, please remove it to avoid potential confusion
[+] Running 6/6
✓ Container compose-project-reverseproxy-1   Removed      0.0s
✓ Container compose-project-backend-1        Remo...       0.0s
✓ Container compose-project-frontend-1        Rem...       0.0s
✓ Container compose-project-migration-1        Re...        0.0s
✓ Container compose-project-db-1              Removed      0.0s
✓ Network compose-project_default             Removed      0.2s
filipp@user-IdeaPad-3-15IAU7:~/compose-project$
```